



Thank you for giving UL the opportunity to partner with you.

Please note, Follow-Up Procedure Revisions or Report Revisions do not include Authorization Pages, Indices, Section General, and/or Appendices unless revisions were required or requested.

Should you have any questions, after reviewing the material, or need to report any inaccuracies, please reach out to your UL representative or find UL contact details for your local Customer Service Department at <https://www.ul.com/about/locations>.

Please find attached the related material on Project

For your convenience, the below describes the related updates:

E158873-A6277-DescriptionUL
Figure-11-Total

This material is provided on behalf of UL LLC (UL) or any authorized licensee of UL.

Times change, Trust Remains™

UL TEST REPORT AND PROCEDURE

Standard:	UL 62368-1, 3rd Ed, 2021-10-22 (Audio/video, information and communication technology equipment Part 1: Safety requirements) CAN/CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22 (Audio/video, information and communication technology equipment Part 1: Safety requirements)
Certification Type:	Listing
CCN:	AZOT, AZOT7 (Audio/video, Information and Communication Technology Equipment)
Complementary CCN:	N/A
Product:	LENS MODULE
Model:	SLA-F2480DA, SLA-F2480DSA
Rating:	5 Vdc, 0.25 A
Applicant Name and Address:	HANWHA VISION CO LTD 6, PANGYO-RO 319BEON-GIL, BUNDANG-GU SEONGNAM-SI GYEONGGI-DO 13488 KOREA

This is to certify that representative samples of the products covered by this Test Report have been investigated in accordance with the above referenced Standards. The products have been found to comply with the requirements covering the category and the products are judged to be eligible for Follow-Up Service under the indicated Test Procedure. The manufacturer is authorized to use the UL Mark on such products which comply with this Test Report and any other applicable requirements of UL LLC ('UL') in accordance with the Follow-Up Service Agreement. Only those products which properly bear the UL Mark are considered as being covered by UL's Follow-Up Service under the indicated Test Procedure.

The applicant is authorized to reproduce the referenced Test Report provided it is reproduced in its entirety.

UL authorizes the applicant to reproduce the latest pages of the referenced Test Report consisting of the first page of the Specific Technical Criteria through to the end of the Conditions of Acceptability.

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL.

Prepared By: Lawrence Lee / Project Handler Reviewed By: SeungTae Kim / Reviewer

Supporting Documentation

The following documents located at the beginning of this Procedure supplement the requirements of this Test Report:

A. Authorization - The Authorization page may include additional Factory Identification Code markings.

B. Generic Inspection Instructions -

- i. Part AC details important information which may be applicable to products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of this Test Report.
- ii. Part AE details any requirements which may be applicable to all products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of each Test Report.
- iii. Part AF details the requirements for the UL Certification Mark which is not controlled by the technical standard used to investigate these products. Products are permitted to bear only the Certification Mark(s) corresponding to the countries for which it is certified, as indicated in each Test Report.

Product Description

LENS MODULE consists of lens and cable part and covered plastic enclosure.

Model Differences

SLA-F2480DA is basic model.

SLA-F2480DSA is identical to basic model except model designation.

Test Item Particulars

Product group	built-in component
Classification of use by	Ordinary person
Supply Connection	not mains connected: ES1
Supply tolerance	None
Supply connection – type	Not directly connected to the mains
Considered current rating of protective device	N/A
Equipment mobility	movable
Over voltage category (OVC)	OVC I
Class of equipment	Class III
Special installation location	N/A
Pollution degree (PD)	PD 2
Manufacturer's specified Tma (°C)	55
IP protection class	IPX0
Power systems	not AC mains
Altitude during operation (m)	2000 m or less
Altitude of test laboratory (m)	2000 m or less
Mass of equipment (kg)	0.10

Technical Considerations

- The product was submitted and evaluated for use at the maximum ambient temperature (Tma) permitted by the manufacturer's specification of : 55 °C
- The product is intended for use on the following power systems : No direct connection
- Considered current rating of protective device as part of the building installation (A) : N/A
- Mains supply tolerance (%) or absolute mains supply : No direct connection

Additional Information 4791942495 - Maximum Normal Load: Continuous operation (Operate the camera through networked equipment.)	
Additional Standards The product fulfills the requirements of: N/A	
Markings and Instructions	
Clause Title	Marking or Instruction Details
Equipment identification marking – Manufacturer identification	Listee's or Recognized Company's name, Trade Name, Trademark or File Number
Equipment identification marking – model identification	Model Number
Equipment rating marking – ratings	Input Ratings (voltage, current)
Hard Copy	A. IMPORTANT or ATTENTION or similar wording B. Please check 'Manuals' from our website, before connecting to the supply. C. Company website URL (https://www.~~) or QR code.
Manual	This product is intended to be supplied by a UL Listed Power Supply Unit marked "Class 2" or "LPS" or "PS2" and rated from 5 Vdc, 0.25 A.
SCC requirement	If the signal words DANGER, WARNING, and CAUTION are included, a French manual is provided.
Special Instructions to UL Representative N/A	

BD1.0	TABLE: Production-Line Testing Requirements					
BD1.1	Electric Strength Test Special Constructions – Refer to Generic Inspection Instructions, Part AC for further information.					
Model	Component	Removable parts	Test probe location	Test V rms	Test V dc	Test Time, s
N/A	N/A	N/A	N/A	N/A	N/A	N/A
BD1.2	Earthing Continuity Test Exemptions – This test is not required for the following models:					
	All model					
BD1.3	Electric Strength Test Exemptions – This test is not required for the following models:					
	All model					
BD1.4	Electric Strength Test Component Exemptions – The following solid-state components may be disconnected from the remainder of the circuitry during the performance of this test.					
	All model					

BE1.0	Sample and Test Specifics for Follow-Up Tests at UL				
Model	Component	Material	Test	Sample (s)	Test Specifics
N/A	N/A	N/A	N/A	N/A	N/A

4.1.2	TABLE: List of critical components					Pass
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Product Category CCN(s)	Mark(s) of conformity	Supplement ID
Front Enclosure (Plastic)	LOTTE CHEMICAL CORPORATION	HN-1068(f1)	Min. 1.5 mm thickness, rated Min. V-0, 130 deg. C	QMFZ2	UL (E115797)	
Bottom Enclosure (Plastic)	LOTTE CHEMICAL CORPORATION	HN-1068(f1)	Min. 1.5 mm thickness, rated Min. V-0, 130 deg. C	QMFZ2	UL (E115797)	
Window Enclosure (Plastic)	LOTTE CHEMICAL CORPORATION	QC-1220UR(f1)	Min. 1.6 mm thickness, rated Min. V-2, 125 deg. C	QMFZ2	UL (E115797)	
Case outer Enclosure (Plastic)for SLA- F2480DSA model	LOTTE CHEMICAL CORPORATION	HN-1068(f1)	Min. 1.5 mm thickness, rated Min. V-0, 130 deg. C	QMFZ2	UL (E115797)	
Internal Plastic	LOTTE CHEMICAL CORPORATION	HN-1068(f1)	Min. 1.5 mm thickness, rated Min. V-0, 130 deg. C	QMFZ2	UL (E115797)	
Internal Plastic- Alternate	Interchangeable	Interchangeable	Min. 1.5 mm thickness, rated Min. V-2, 130 deg. C	QMFZ2	UL	
PWB	Interchangeable	Interchangeable	Min. V-0, 130 deg. c	ZPMV2	UL	
Label	Interchangeable	Interchangeable	Min. 55 deg. C if max. surface temperature not specified.	PGDQ2 or PGJ12	UL	

Enclosures

Type	Supplement Id	Description
Photographs	03-01	External View - 1
Photographs	03-02	External View - 2
Photographs	03-03	Internal View - 1
Photographs	03-04	Internal View - 2
Photographs	03-05	Internal View - 3
Photographs	03-06	Sensor Board - Top
Photographs	03-07	Sensor Board - Bottom
Manuals	06-01	Manual
Miscellaneous	07-01	Enclosure Drawing (model SLA-F2480DA)
Miscellaneous	07-02	Enclosure Drawing (model SLA-F2480DSA)
Miscellaneous	07-03	Label

The following Page(s) are related to Manuals-01. The next supplement, if applicable, will be identified with a new Supplement Page Heading.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean the contaminated area on the product surface with a soft, dry cloth or a damp cloth.
(Do not use a detergent or cosmetic products that contain alcohol, solvents or surfactants or oil constituents as they may deform or cause damage to the product.)
7. Do not block any ventilation openings, Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/ accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



13. Unplug this apparatus during lighting storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. This product is intended to be supplied by a UL Listed Power Supply Unit marked "Class 2" or "LPS" or "PS2" and rated from 5 Vdc, 0.25 A.



Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.






This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

COMPONENT


As for each sales country, accessories are not the same.

- SLA-F2480DSA/SLA-F2480DA




INSTALLATION

1

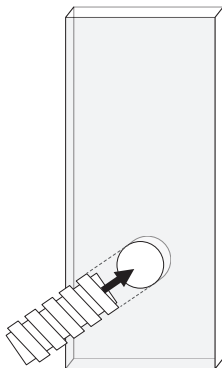


2

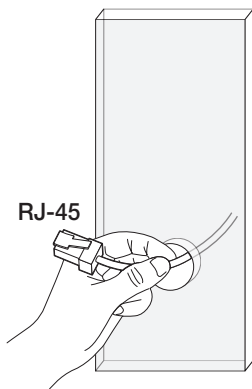


INSTALLATION

3

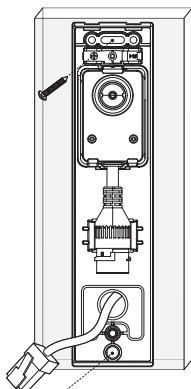


4

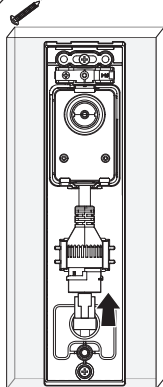


INSTALLATION

5

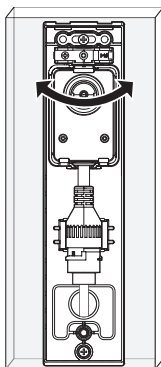

6


- SLA-T4680DA/SLA-T4680DSA models only.

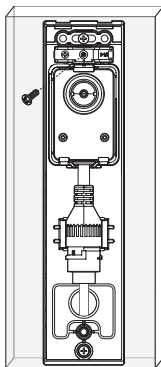


INSTALLATION


7-1

- SLA-T4680DA/SLA-T4680DSA

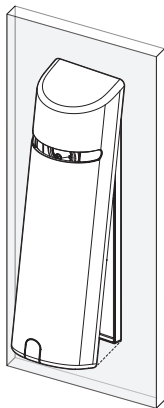

7-2

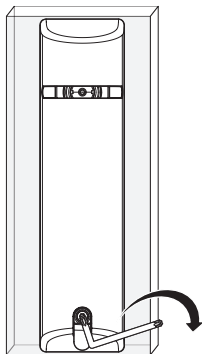


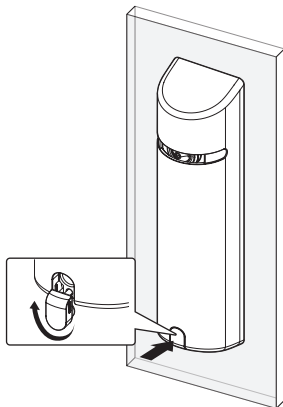


INSTALLATION

8-1

- SLA-F2480DA/SLA-F2480DSA

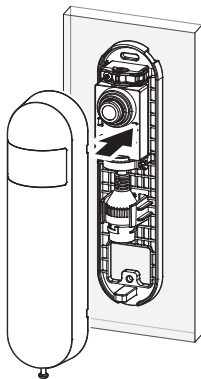


8-2

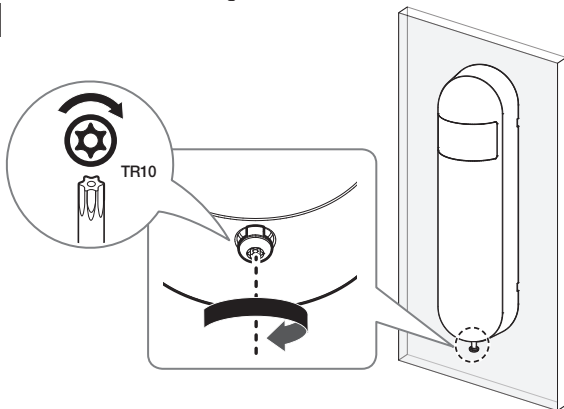


INSTALLATION




8-3

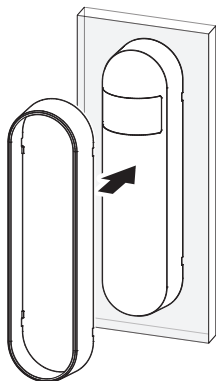

8-4



The following Page(s) are related to Miscellaneous-01. The next supplement, if applicable, will be identified with a new Supplement Page Heading.





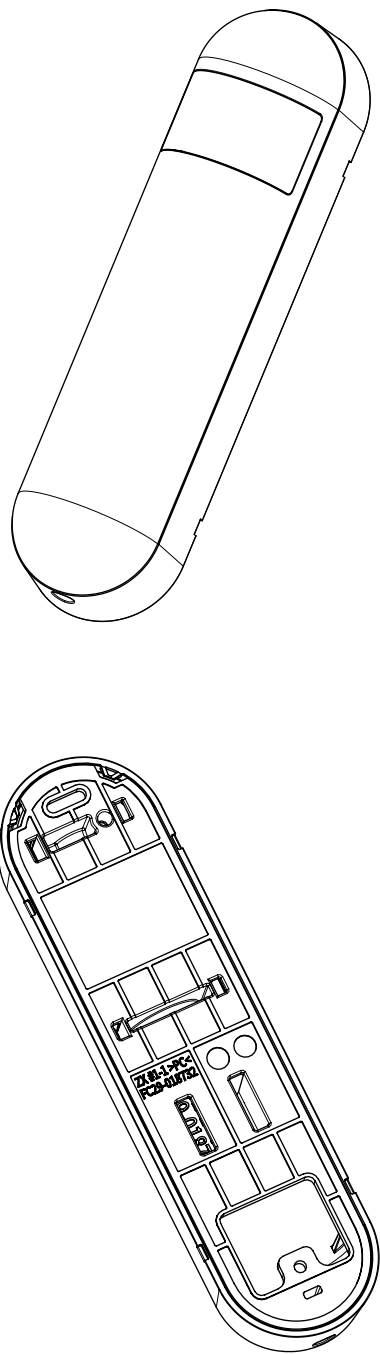
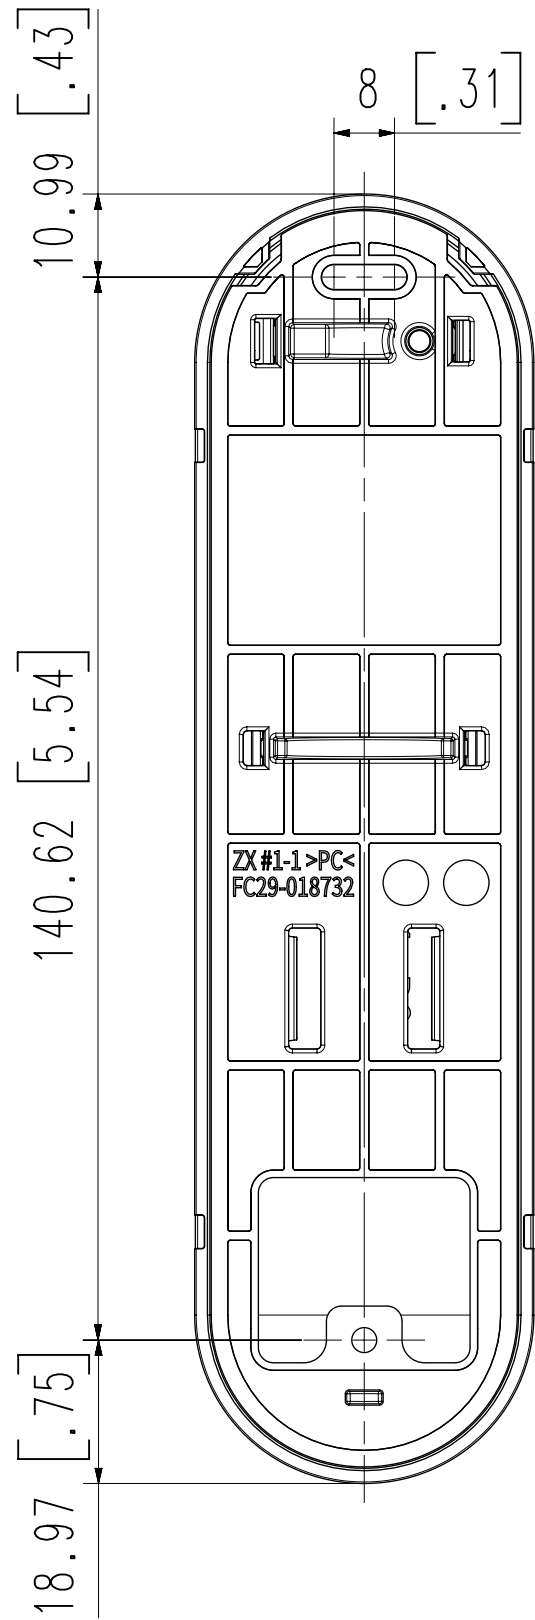
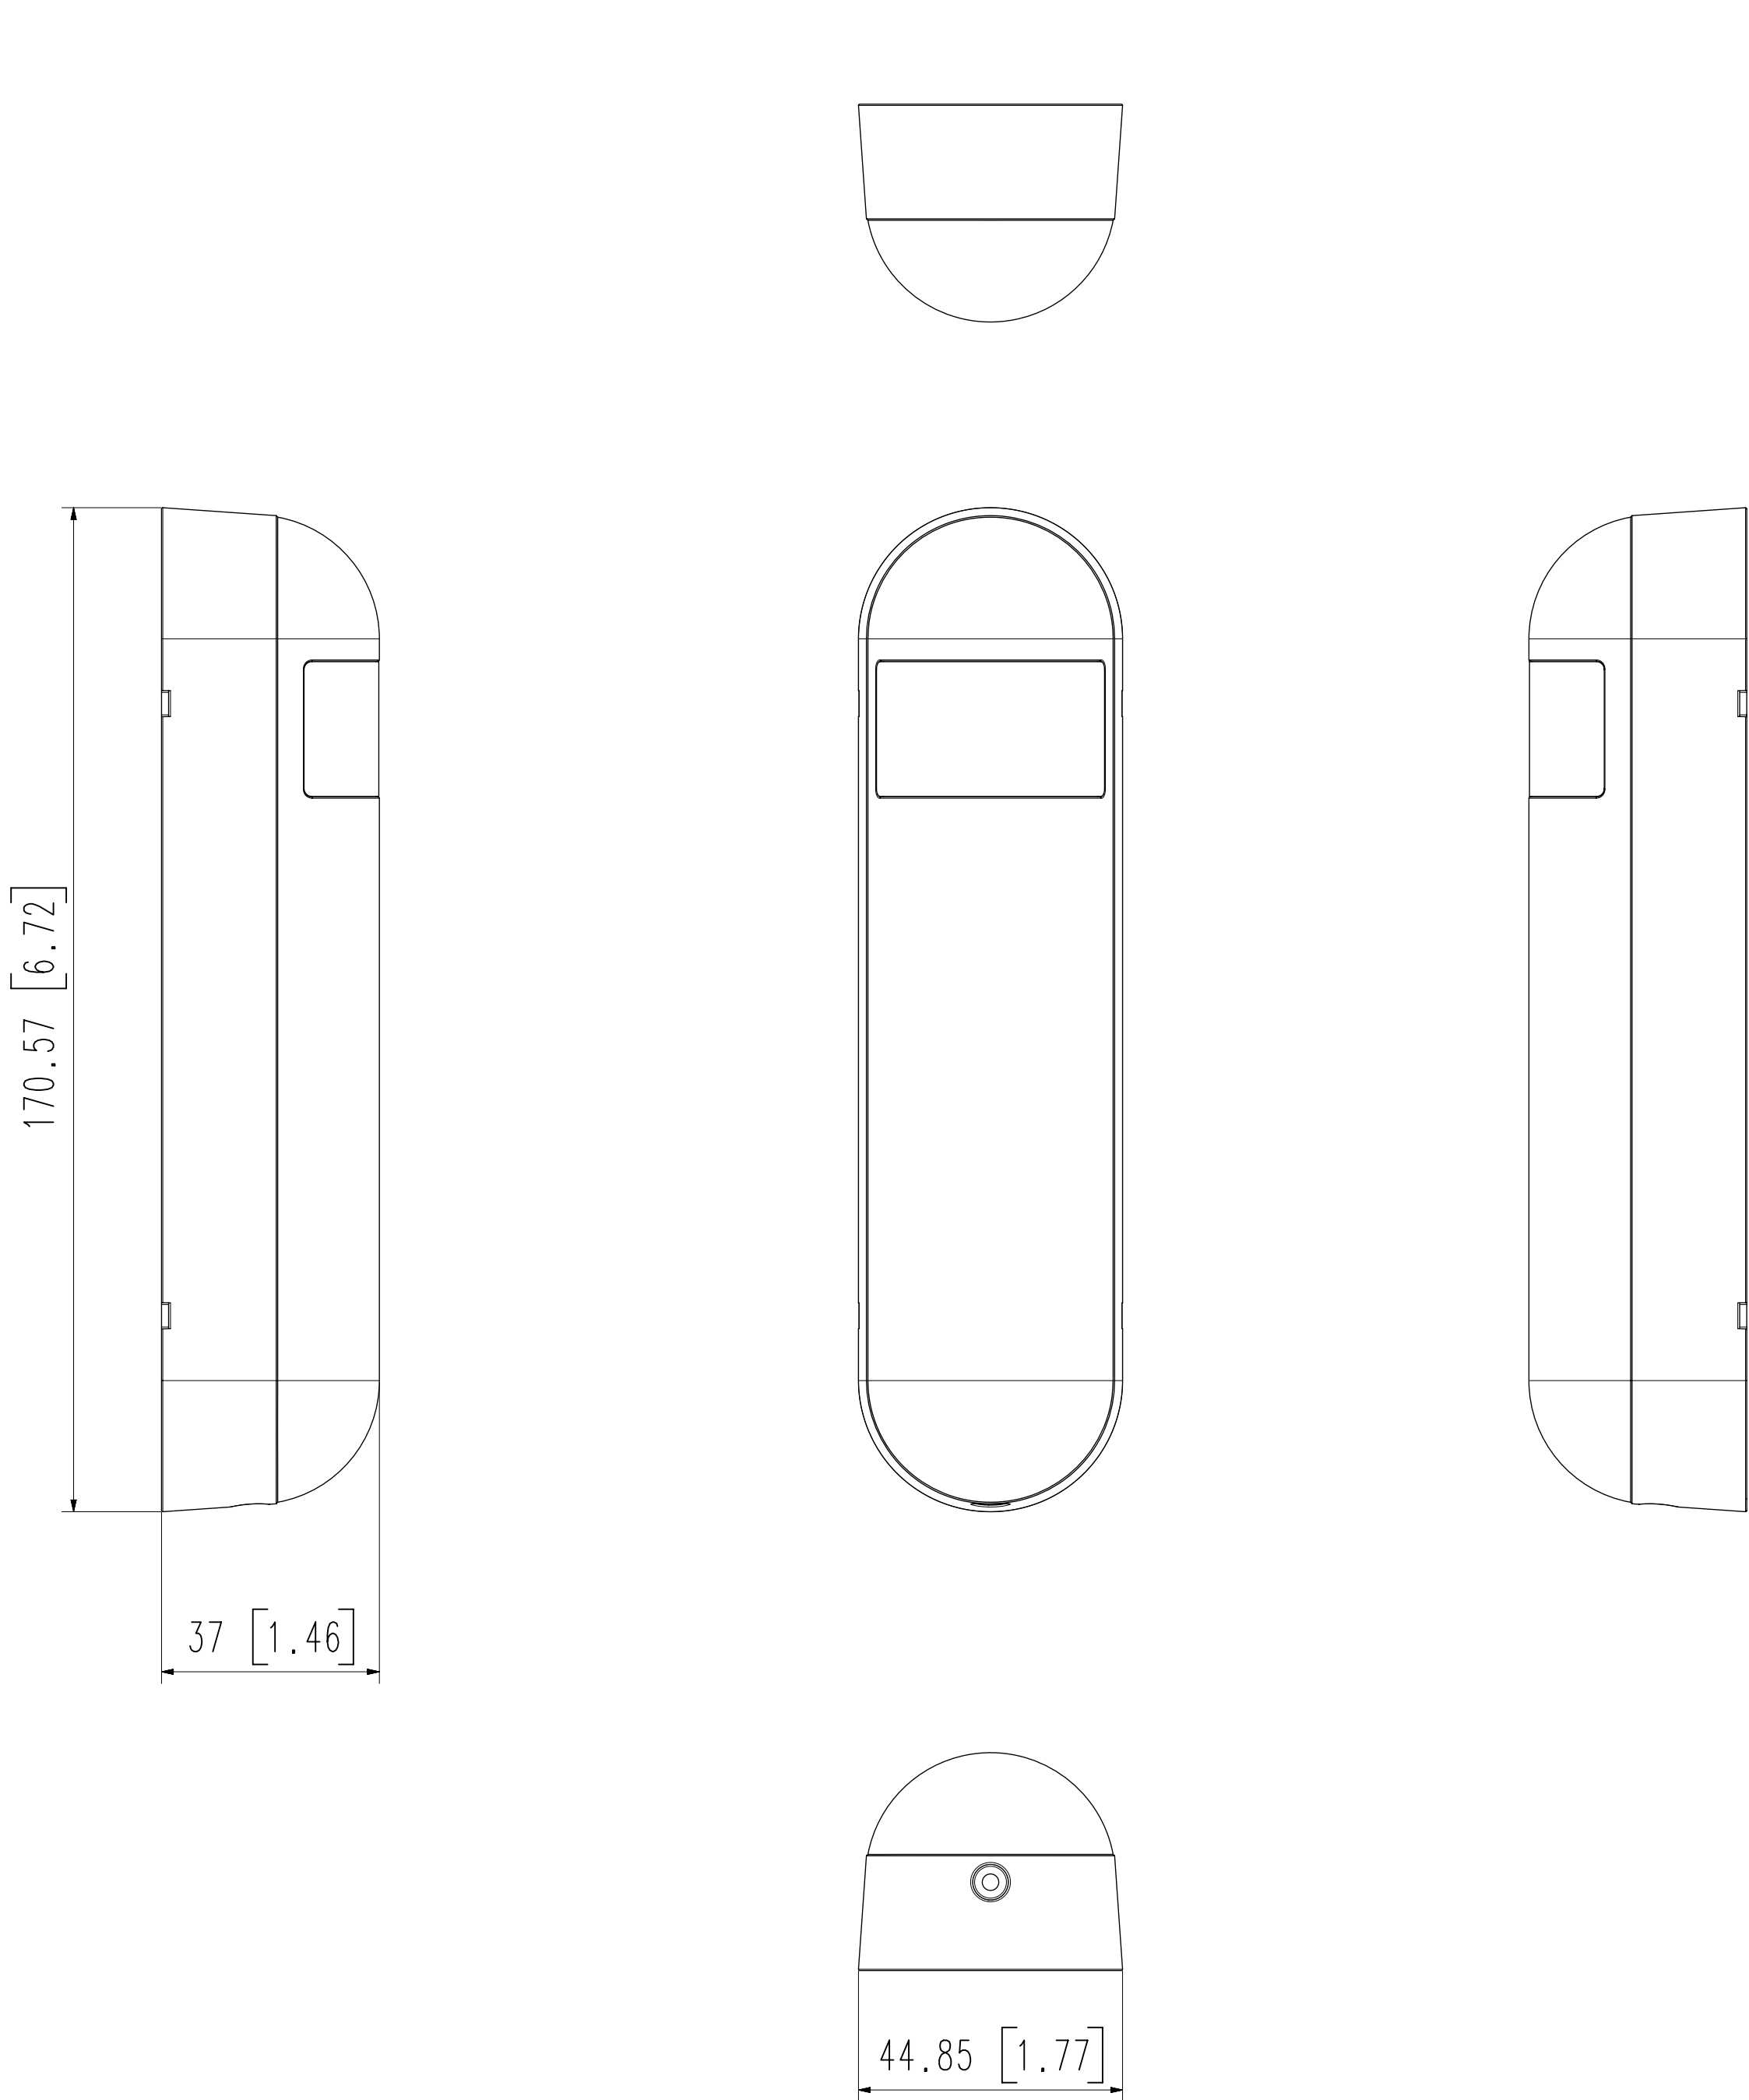


3		
2		
1	SLA-F2480DA	'25.07.14
No.	MODEL NAME	DATE
Unit : mm [inch]		SCALE : 1 / 1
Hanwha Vision		

The following Page(s) are related to Miscellaneous-02. The next supplement, if applicable, will be identified with a new Supplement Page Heading.

174.01 [6.85]

37 [1.46]

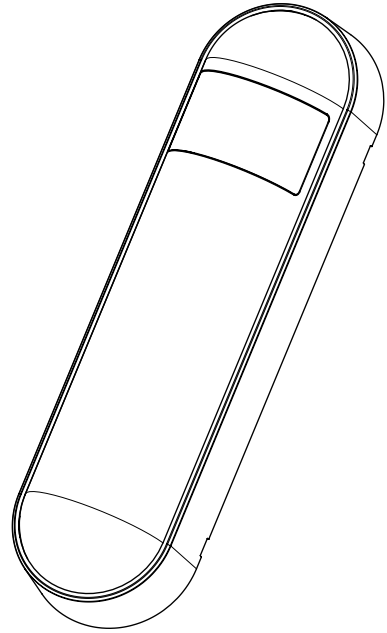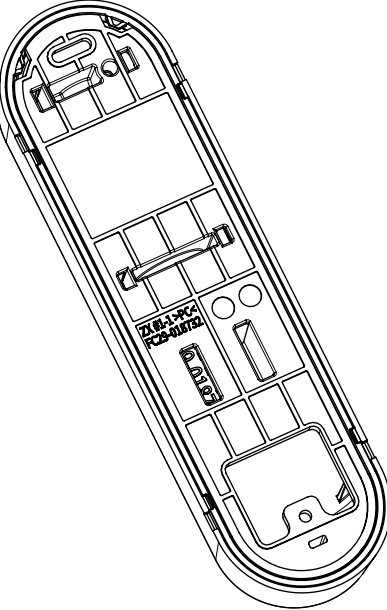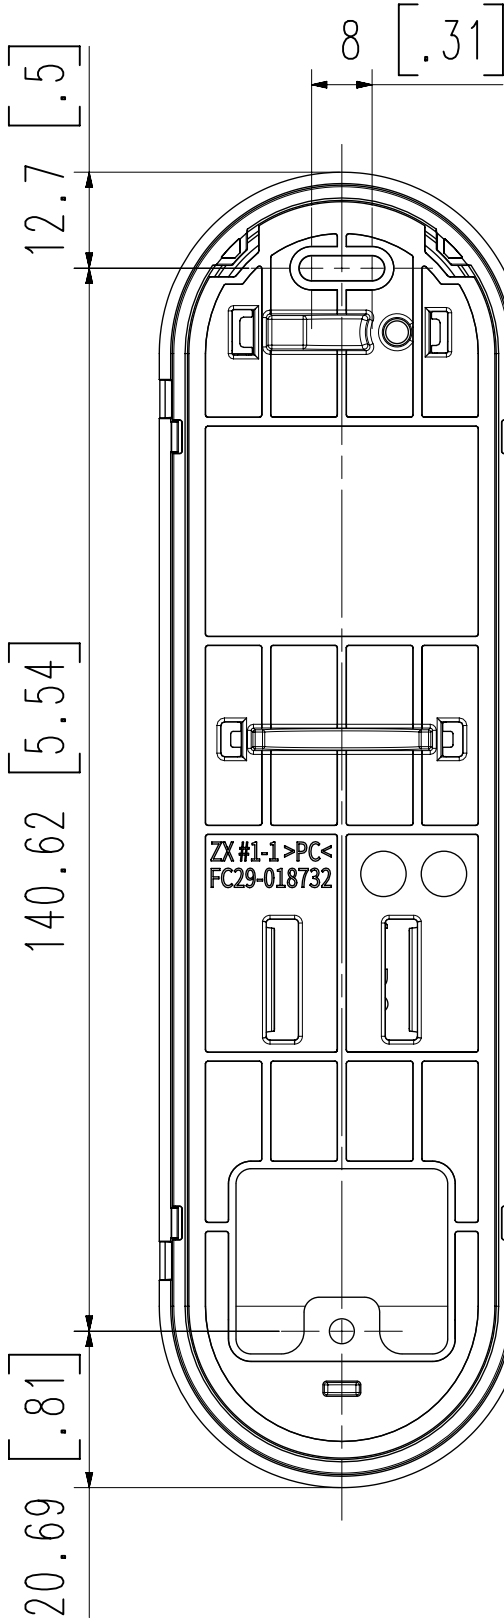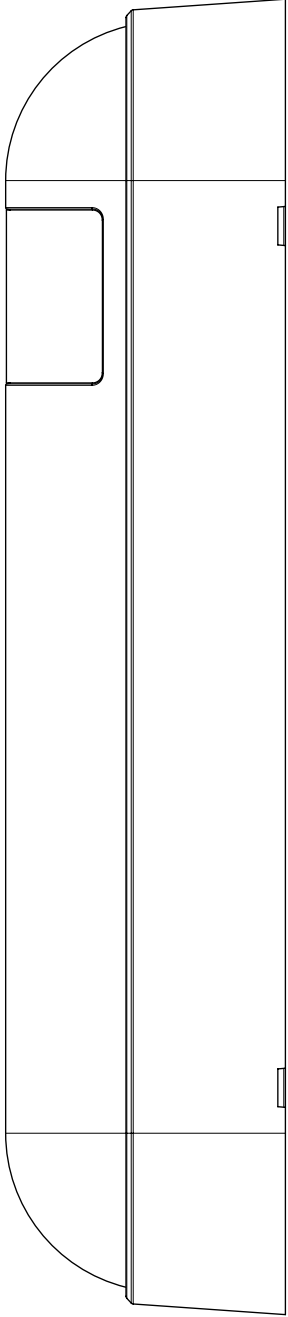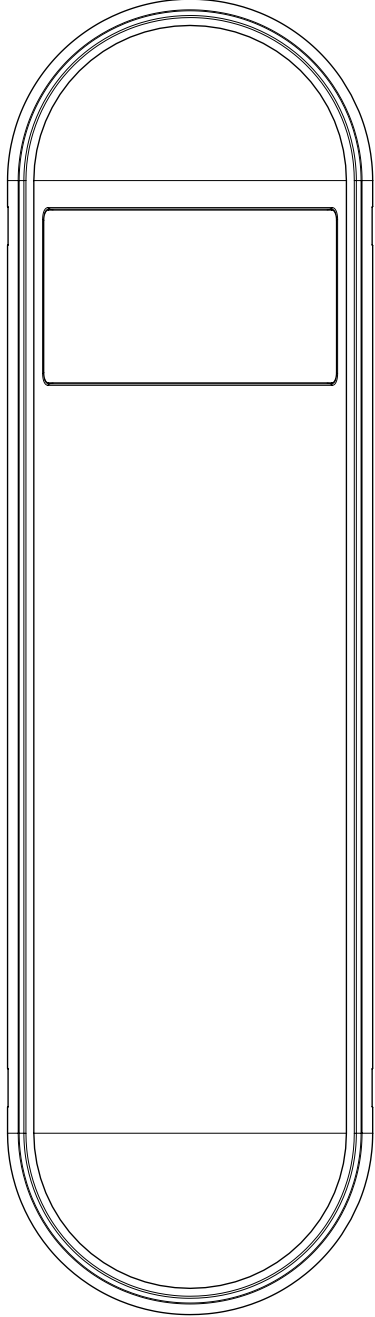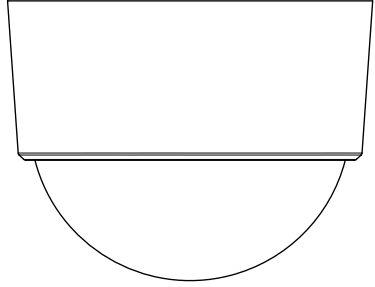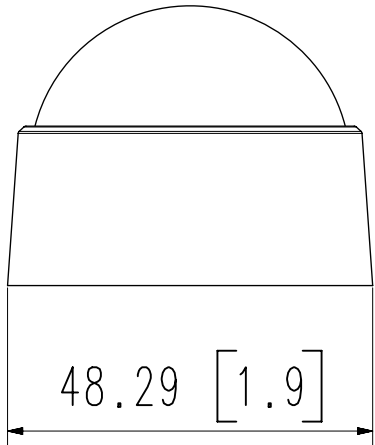

3		
2		
1	SLA-F2480DSA	'25.07.14
No.	MODEL NAME	DATE
Unit : mm [inch]		SCALE : 1 / 1
Hanwha Vision		

LENS MODULE

MODEL : SLA-F2480DSA

DC 5.0V  0.25A

CAN ICES-3(A)/NMB-3(A)

Fac. ID: D **DATE**

R-R-HWVS-SLAF2480DSA

HANWHA VISION CO., LTD.

MADE IN KOREA

