


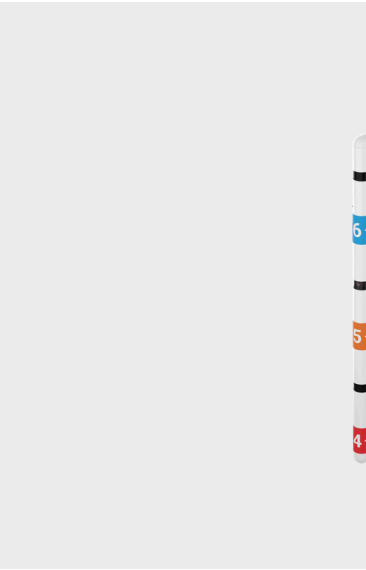

# SLA-F2480HA

## 5MP Height Strip Lens Housing

### Key Features

- Designed for easy installation
- Compatible with most standard door frames
- Highly visible color-coded height indicators
- Captures facial details and approximate height
- Adjustable 3-position lens mounting
- Curved design allowing 180° HFOV adjustment
- Side-visible wrap-around labels
- Includes lens and housing: compatible with PNM-20000QB

# SLA-F2480HA

5MP Height Strip Lens Housing



## Specifications

### Video

|                         |                       |        |
|-------------------------|-----------------------|--------|
| Imaging Device          | Size                  | 1/2.8" |
|                         | Type                  | CMOS   |
| Min. Illumination (Lux) | Color(1/30sec, 30IRE) | 0.08   |
|                         | BW(1/30sec, 30IRE)    | 0.08   |

### Lens

|                                |            |                               |
|--------------------------------|------------|-------------------------------|
| Focal Length (mm)              |            | 2.45                          |
| Max. Aperture Ratio (F number) | Wide       | 2.0                           |
|                                | Tele       | 2.0                           |
| Angular Field of View          | Horizontal | 123°                          |
|                                | Vertical   | 91°                           |
|                                | Diagonal   | 159°                          |
| Mount Type                     |            | RJ12 connected with main unit |
| Focus Control                  |            | Fixed                         |

### Pan / Tilt / Rotate

|                           |     |                                 |
|---------------------------|-----|---------------------------------|
| Pan / Tilt / Rotate Range | Pan | Flexible panning $\pm 30^\circ$ |
|---------------------------|-----|---------------------------------|

### Environmental & Electrical

|                     |             |                                |
|---------------------|-------------|--------------------------------|
| Operating Condition | Temperature | -10°C ~ +55°C (+14°F ~ +131°F) |
|                     | Humidity    | 0~95% RH                       |
| Storage Condition   | Temperature | -50°C~+60°C(-58°F~+140°F)      |
|                     | Humidity    | Less than 90% RH               |

### Mechanical

|                    |                                                  |
|--------------------|--------------------------------------------------|
| Color              | White                                            |
| Material           | Plastic                                          |
| Product Dimensions | 48x955x44mm(1.89x37.61x1.73"), Cable: 8m(26.2ft) |
| Product Weight     | 1,043g(2.30lb), Cable: 350g(0.77lb)              |
| Supported Products | PNM-C20000QB                                     |

---

### Certification & Standards

|                    |                                                                                                                                                                                                         |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EMC</b>         | FCC 47 CFR 15 Subpart B Class A, ICES-3(A)/NMB-3(A), CE/UKCA EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, RCM AS/NZS CISPR 32 Class A, KS C 9832 Class A, KS C 9835 |
| <b>Safety</b>      | UL 62368-1, CAN/CSA C22.2 NO. 62368-1                                                                                                                                                                   |
| <b>Environment</b> | None, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78                                                                                                       |


# SLA-F2480HA

5MP Height Strip Lens Housing



## CAD

Unit: mm [inch]

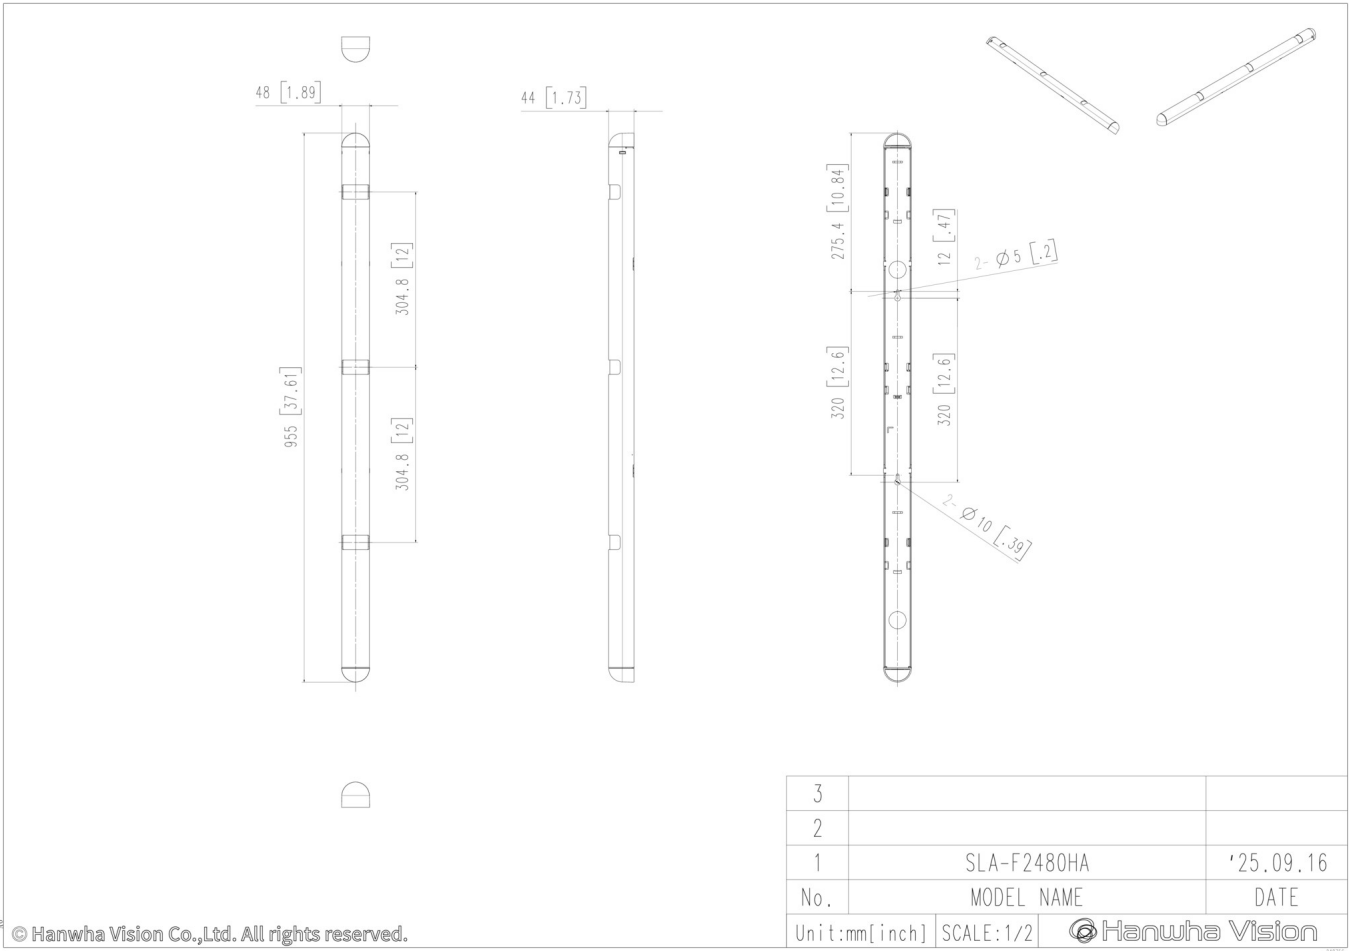

© Hanwha Vision Co.,Ltd. All rights reserved.