


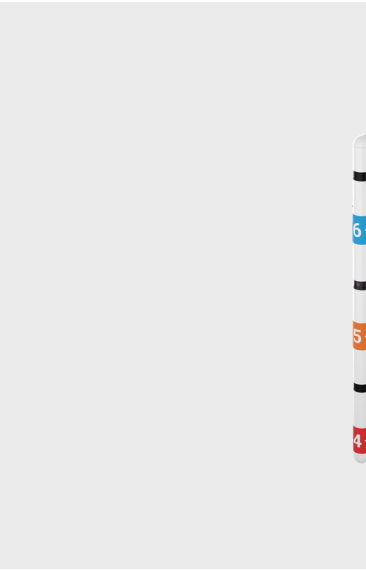

SLA-F2480HA

5MP Height Strip Lens Housing

Key Features

- Designed for easy installation
- Compatible with most standard door frames
- Highly visible color-coded height indicators
- Captures facial details and approximate height
- Adjustable 3-position lens mounting
- Curved design allowing 180° HFOV adjustment
- Side-visible wrap-around labels
- Includes lens and housing: compatible with PNM-20000QB

SLA-F2480HA

5MP Height Strip Lens Housing



Specifications

Video

Imaging Device	Size	1/2.8"
	Type	CMOS
Min. Illumination (Lux)	Color(1/30sec, 30IRE)	0.08
	BW(1/30sec, 30IRE)	0.08

Lens

Focal Length (mm)		2.45
Max. Aperture Ratio (F number)	Wide	2.0
	Tele	2.0
Angular Field of View	Horizontal	123°
	Vertical	91°
	Diagonal	159°
Mount Type		RJ12 connected with main unit
Focus Control		Fixed

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan	Flexible panning $\pm 30^\circ$
---------------------------	-----	---------------------------------

Environmental & Electrical

Operating Condition	Temperature	-10°C ~ +55°C (+14°F ~ +131°F)
	Humidity	0~95% RH
Storage Condition	Temperature	-50°C~+60°C(-58°F~+140°F)
	Humidity	Less than 90% RH

Mechanical

Color	White
Material	Plastic
Product Dimensions	48x955x44mm(1.89x37.61x1.73"), Cable: 8m(26.2ft)
Product Weight	1,043g(2.30lb), Cable: 350g(0.77lb)
Supported Products	PNM-C20000QB

Certification & Standards

EMC	FCC 47 CFR 15 Subpart B Class A, ICES-3(A)/NMB-3(A), CE/UKCA EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, RCM AS/NZS CISPR 32 Class A, KS C 9832 Class A, KS C 9835
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1
Environment	None, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78


SLA-F2480HA

5MP Height Strip Lens Housing



CAD

Unit: mm [inch]

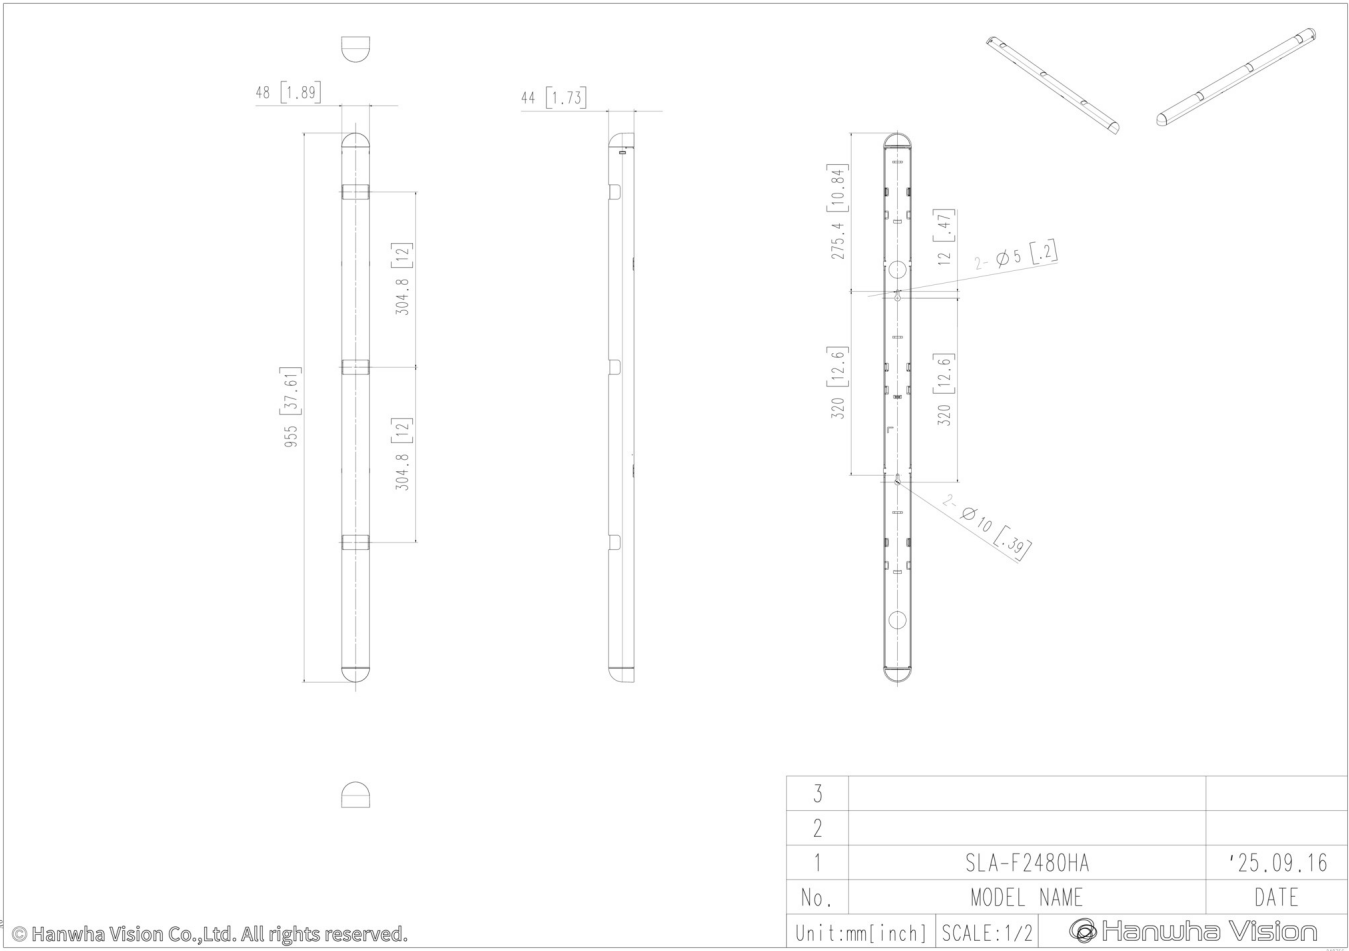

© Hanwha Vision Co.,Ltd. All rights reserved.