



TEST REPORT



Report No. : KES-EM253083

Page 1 / 27

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

1. Client

- Name : Hanwha Vision Co., Ltd.
- Address : 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

- Product item : LENS MODULE
- Model name : SLA-F1080FA
- Variant model : SLA-F2480WA
- Manufacturer etc. : HANWHA VISION VIETNAM COMPANY LIMITED
- Manufacturer address : Lot O-2, Que Vo Industrial Zone extended Area, Nam Son Ward, Bac Ninh Province, Vietnam
- Manufacturer etc. : D-TECH CO.,LTD.
- Manufacturer address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

3. Date of test : 2025. 09. 11. ~ 2025. 09. 11.

4. Location of Test : Permanent Testing Lab

- Address : 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Republic of Korea

5. Test method used : FCC 47 CFR Part 15, Subpart B (ANSI C63.4a-2017),
IC ICES-003 Issue 7 (ANSI C63.4a-2017)

6. Test result : PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager by
	Name : SeonHo Choi	Name : SeongMin Choi

2025. 10. 17.

KES Co., Ltd.

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
2025. 10. 17.	KES-EM253083	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

Use of uncertainty of measurement for decisions on conformity (decision rule):

- ☒ No decision rule is specified by the 1 standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").
- ☐ Other (to be specified, for example when required by the standard or client)



TABLE OF CONTENTS

1	Laboratory Information	4
1.1	Test Location.....	4
1.2	Laboratory Accreditations and Listings	4
2	Test Summary	5
2.1	Class and Voltage.....	5
2.2	Summary of Test Results	5
2.3	Remarks when standards applied	5
2.4	Variant Model Differences	5
2.5	Device Modifications	5
3	General Product Description	6
4	EUT Setup and Operation Mode	8
4.1	EUT Configuration	8
4.2	System Configuration	8
4.3	External I/O Cabling	9
4.4	EUT Operating Mode(s).....	9
4.5	Test operating S/W	9
4.6	Configuration	10
5	Measurement Procedure.....	11
6	Test Item.....	12
6.1	Conducted Emissions at Mains Power Ports.....	12
6.2	Radiated Emissions(Below 1 GHz)	15
6.3	Radiated Emissions(Above 1 GHz)	18
7	Test Setup Photos and EUT Photographs	21
7.1	Test Setup Photos	21
7.2	EUT Photographs	24
7.3	Label	27



1 Laboratory Information

1.1 Test Location

Category	Details
Address	473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Republic of Korea
Telephone Number	031-883-5092
Facsimile Number	031-883-5169

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0008



2 Test Summary

2.1 Class and Voltage

Test Class	Test Voltage
Class A	AC 120 V, 60 Hz

2.2 Summary of Test Results

Regulation			
47 CFR Part 15, Subpart B, ICES-003 Issue 7			
Test Item	Test Standard	Test Result	Remark
Conducted Emissions at Mains Power Ports	ANSI C63.4a-2017	PASS	-
Radiated Emissions(Below 1 GHz)		PASS	-
Radiated Emissions(Above 1 GHz)		PASS	-
* N/A: Not Applicable			

2.3 Remarks when standards applied

N/A

2.4 Variant Model Differences

Fixed Lens(No electronics) and Lens the assembly part Equipment Difference in dimensions

2.5 Device Modifications

N/A



3 General Product Description

Division		Specificity
Internal maximum operating frequency		3 000 MHz
Power	Rated power supply	DC 5 V
	Test Power	AC 120 V, 60 Hz
I/O Ports	User port	RJ-45 1 EA
	Unused/Administrator Port	N/A
function	Product features	LENS MODULE
	Wireless function	N/A
Components		Main body 1 EA, Cable 1 EA
Others		Please refer to the specifications listed below.



	SLA-F1080FA
Video	
Imaging Device	1/2.8" CMOS
Resolution	None
Max. Framerate	None
NETD	None
Pixel Size	None
Video Out	None
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	1.6mm fixed focal
Optical Zoom	None
Max. Aperture Ratio	F1.6
Angular Field of View	H: 180°, V: 145°, D: 180°
Min. Object Distance	0.5m(1.64ft)
Focus Control	Fixed
Lens Type	None
Mount Type	RJ12 connected with main unit
Optional Lens	None
Environmental & Electrical	
Operating Temperature / Humidity	-10°C~+55°C(+14°F~+131°F) / 0~95%RH(non-condensing)
Storage Temperature / Humidity	-50°C~+60°C(-58°F~+140°F) / 0~90% RH
Wind Load	None
EPA(Effective Projected Area)	None
Certification	IP66
Input Voltage	DC 5V/0.25A
Power Consumption	1.25W
Mechanical	
Color / Material	Black / Plastic, Metal
RAL Code	RAL9005
Product Dimensions / Weight	Lens: ø35x68.9mm(ø1.38x2.71"), 108g(0.24lb) Cable: 8m(26.2ft)
Compatible Conduit hole / Gang	None
Certifications & Standards	
Network	None
EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3 VCCI CISPR 32 Class A RCM AS/NZS CISPR 32 Class A KS C 9832 Class A , KS C 9835
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1
Video	None



4 EUT Setup and Operation Mode

4.1 EUT Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
LENS MODULE	SLA-F1080FA	-	HANWHA VISION VIETNAM CO MPANY LIMITED	EUT
NETWORK CAMERA Adaptor	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
NETWORK CAMERA	PNM-C20000QB	-	HANWHA VISION VIETNAM CO MPANY LIMITED	-
Laptop	LG15N54	410NZXE015458	LG Electronics Inc.	-
Laptop Adaptor	ADP-90WH B	84ZW19F1747	DELTA ELECTRONICS(JIAN GSU) LTD.	-

4.2 System Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
-	-	-	-	-



4.3 External I/O Cabling

Start		End		Cable Spec.	
Product Name	I/O Port	Product Name	I/O Port	Length(m)	Shield
LENS MODULE (EUT)	RJ-45	NETWORK CAMERA	RJ-12	8.1	S
NETWORK CAMERA Adaptor	DC Jack		DC Jack	0.8	U
Laptop	RJ-45		RJ-45	2.9	U
	DC Jack	Laptop Adaptor	DC Jack	1.6	U

* Unshielded=U, Shielded=S

4.4 EUT Operating Mode(s)


Category	Mode	Operating
Mode 1	Operation	- Check the network behavior of the EUT with the laptop's ping test. - View images of the camera through the Web Viewer.

4.5 Test operating S/W

Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd.



4.6 Configuration

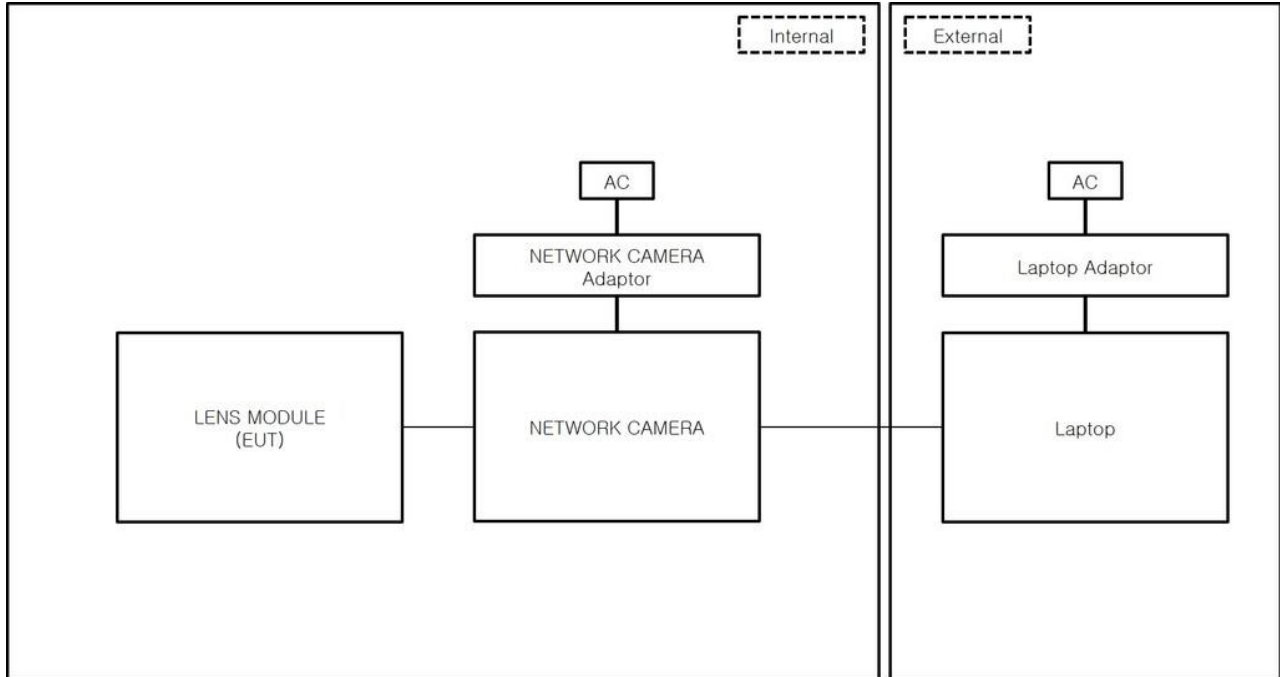

Mode 1



5 Measurement Procedure

- Conducted Emissions

The conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP".

- Radiated Electric Field Emissions

The test was done at a SEMI ANECHOIC CHAMBER with quasi-peak detector. The final test data was measured using a Quasi-Peak detector below 1 GHz at 10 m or 3 m distance and a Peak and Average detector above 1 GHz at 3 m distance. Test was proceeded worst case test mode and cable configuration. Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency.

Measurement procedures was In accordance with ANSI C63.4 or CISPR 32.

◆ Calculation

- Conducted Emissions

$\text{QuasiPeak[dBuV]} / \text{CAverage[dBuV]} = \text{Reading Value[dBuV]} + \text{Corr. [dB]}$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

- Radiated Emissions(Below 1 GHz)

$\text{Result(QP)} [\text{dB}(\mu\text{V/m})] = (\text{Reading(QP)}[\text{dB}(\mu\text{V})] + \text{c.f}[\text{dB}(1/\text{m})])$

$\text{Margin(QP)}[\text{dB}] = \text{Limit}[\text{dB}(\mu\text{V/m})] - \text{Result(QP)} [\text{dB}(\mu\text{V/m})]$

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

- Radiated Emissions(Above 1 GHz)

$\text{Result(PK/CAV)} [\text{dB}(\mu\text{V/m})] = (\text{Reading(PK/CAV)}[\text{dB}(\mu\text{V})] + \text{c.f}[\text{dB}(1/\text{m})])$

$\text{Margin(PK/CAV)}[\text{dB}] = \text{Limit}[\text{dB}(\mu\text{V/m})] - \text{Result(PK/CAV)} [\text{dB}(\mu\text{V/m})]$

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(PK/CAV) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



6 Test Item

6.1 Conducted Emissions at Mains Power Ports

6.1.1 Test Equipment


Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #6	-	DYMSTEC	-	-	-	■
EMC32 Measurement Software	EMC32	R&S	9.12.00	-	-	■
EMI TEST RECEIVER	ESR3	Rohde & Schwarz	101783	2024-11-06	2025-11-06	■
LISN	ENV216	Rohde & Schwarz	101786	2025-01-09	2026-01-09	■
ARTIFICIAL MAINS NETWORK	ESH2-Z5	Rohde & Schwarz	100450	2024-11-06	2025-11-06	■
PULSE LIMITER	ESH3-Z2	Rohde & Schwarz	101915	2024-11-06	2025-11-06	■

6.1.2 Test Location : SHIELD ROOM #6

6.1.3 Test Conditions :

Temperature	Relative Humidity
(25.7 ~ 25.9) °C	(57.0 ~ 57.3) % R.H.

6.1.4 Diagram of test setup

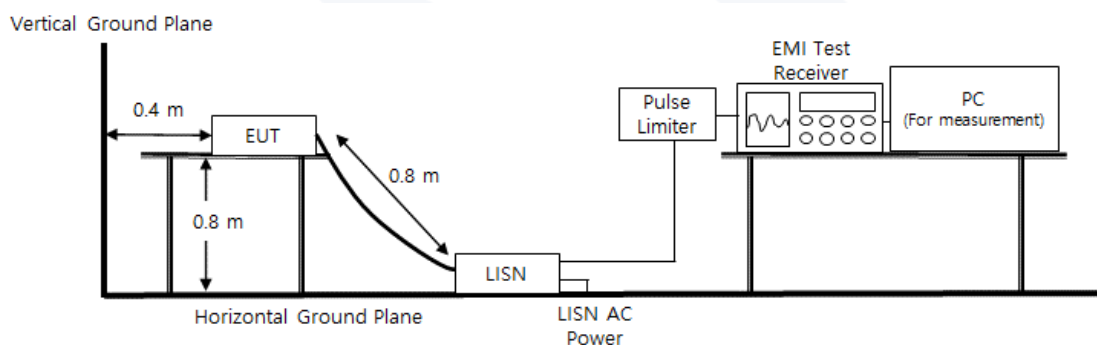




6.1.5 Test Result

- Test Date : 2025-09-11
- Test Mode : Mode 1

Test Report

1 / 1

Test Description: Conducted Emission
Job No.: KES-EM253083
Phase: L
Mode:
Operator Name: KES

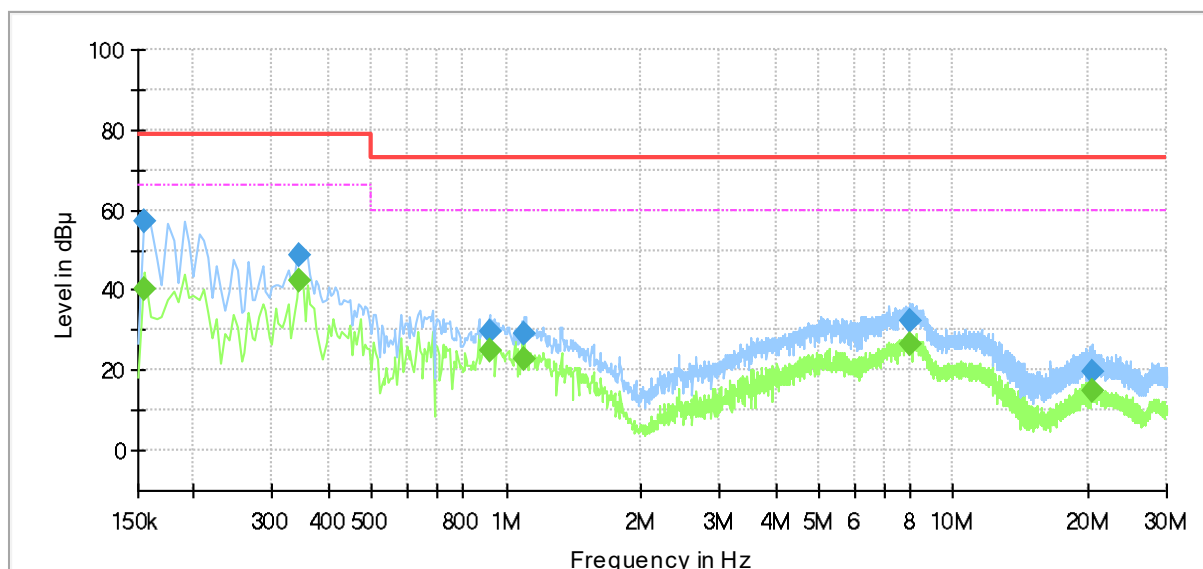

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	57.23	—	79.00	21.77	1000.0	9.000	L1	19.5
0.155000	—	40.06	66.00	25.94	1000.0	9.000	L1	19.5
0.345000	48.49	—	79.00	30.51	1000.0	9.000	L1	19.6
0.345000	—	42.54	66.00	23.46	1000.0	9.000	L1	19.6
0.915000	29.45	—	73.00	43.55	1000.0	9.000	L1	19.6
0.915000	—	24.91	60.00	35.09	1000.0	9.000	L1	19.6
1.095000	29.06	—	73.00	43.94	1000.0	9.000	L1	19.6
1.095000	—	22.75	60.00	37.25	1000.0	9.000	L1	19.6
8.035000	32.09	—	73.00	40.91	1000.0	9.000	L1	20.0
8.035000	—	26.63	60.00	33.37	1000.0	9.000	L1	20.0
20.485000	—	15.11	60.00	44.89	1000.0	9.000	L1	20.4
20.485000	19.40	—	73.00	53.60	1000.0	9.000	L1	20.4



Report No. : KES-EM253083

Page 14 / 27


○ Test Date : 2025-09-11

● Test Mode : Mode 1

Test Report

1 / 1

Test Description: Conducted Emission
Job No.: KES-EM253083
Phase: N
Mode:
Operator Name: KES

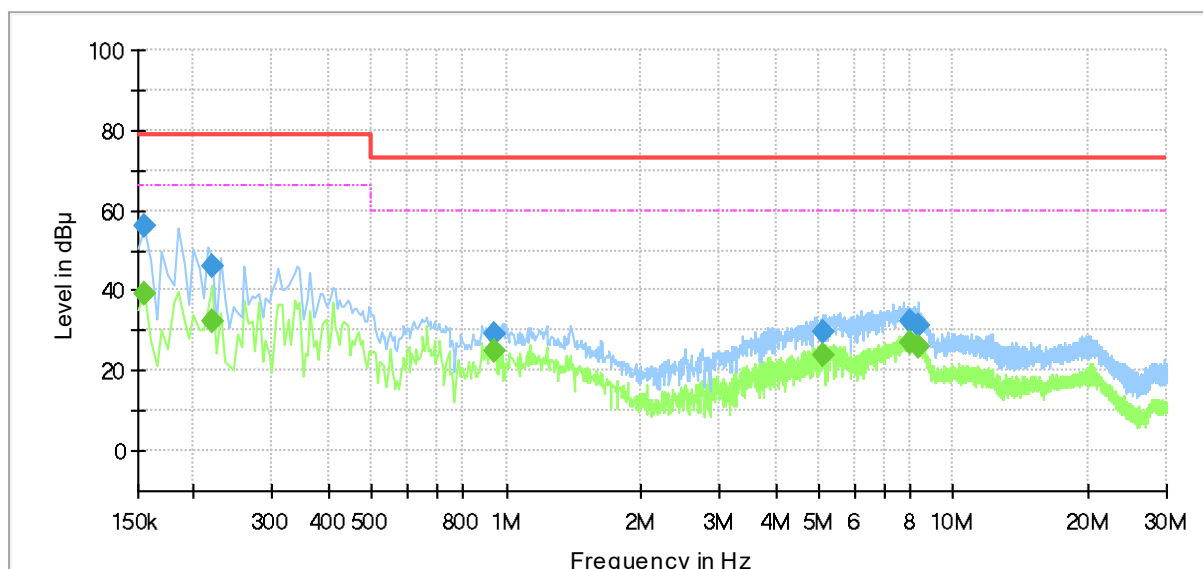

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	39.10	66.00	26.90	1000.0	9.000	N	19.5
0.155000	56.18	---	79.00	22.82	1000.0	9.000	N	19.5
0.220000	---	32.16	66.00	33.84	1000.0	9.000	N	19.5
0.220000	45.94	---	79.00	33.06	1000.0	9.000	N	19.5
0.945000	---	24.69	60.00	35.31	1000.0	9.000	N	19.6
0.945000	29.22	---	73.00	43.78	1000.0	9.000	N	19.6
5.105000	---	23.73	60.00	36.27	1000.0	9.000	N	19.9
5.105000	29.74	---	73.00	43.26	1000.0	9.000	N	19.9
7.965000	---	26.97	60.00	33.03	1000.0	9.000	N	20.0
7.965000	32.34	---	73.00	40.66	1000.0	9.000	N	20.0
8.355000	---	26.07	60.00	33.93	1000.0	9.000	N	20.0
8.355000	31.48	---	73.00	41.52	1000.0	9.000	N	20.0

6.1.6 Remark

Complies with the test requirements.



6.2 Radiated Emissions(Below 1 GHz)

6.2.1 Test Equipment


Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #4(10 m)	-	DYMSTEC	-	-	-	■
EP5/RE Software	EP5/RE	TOYO	6.0.0	-	-	■
EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100551	2025-02-13	2026-02-13	■
AMPLIFIER	SCU 01	Rohde & Schwarz	100603	2024-11-06	2025-11-06	■
BILOG ANTENNA	VULB 9168	SCHWARZBEC K	9168-461	2024-05-09	2026-05-09	■
ATTENUATOR	6806.17.A	HUBER+SUHNER	-	2025-02-13	2026-02-13	■

6.2.2 Test Location : SEMI ANECHOIC CHAMBER #4(10 m) Measurement Distance : □ 3 m, ■ 10 m

6.2.3 Test Conditions :

Temperature	Relative Humidity
(25.0 ~ 25.2) °C	(52.3 ~ 52.5) % R.H.


6.2.4 Diagram of test setup

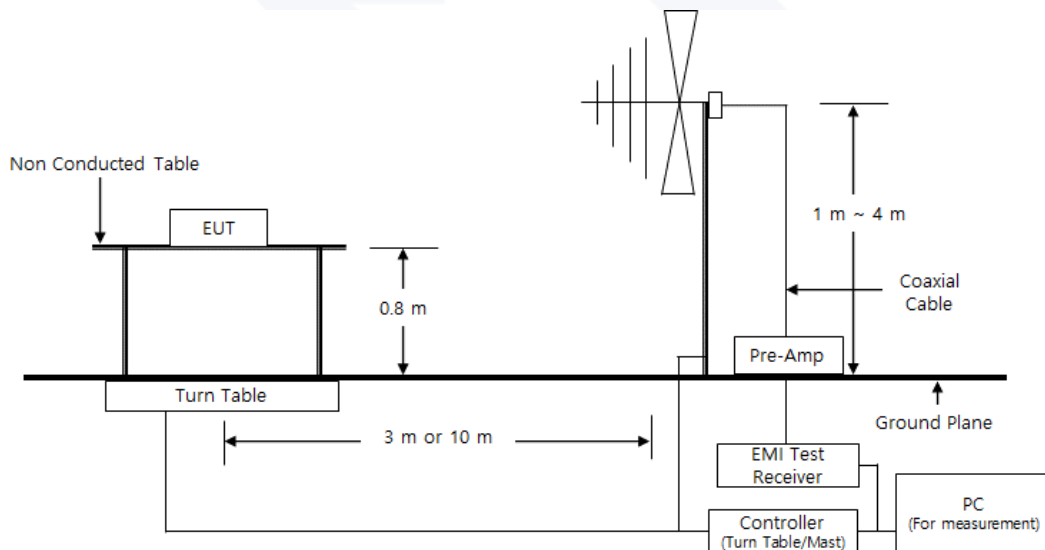



6.2.5 Test Result

- Test Date : 2025-09-11
- Test Mode : Mode 1_FCC

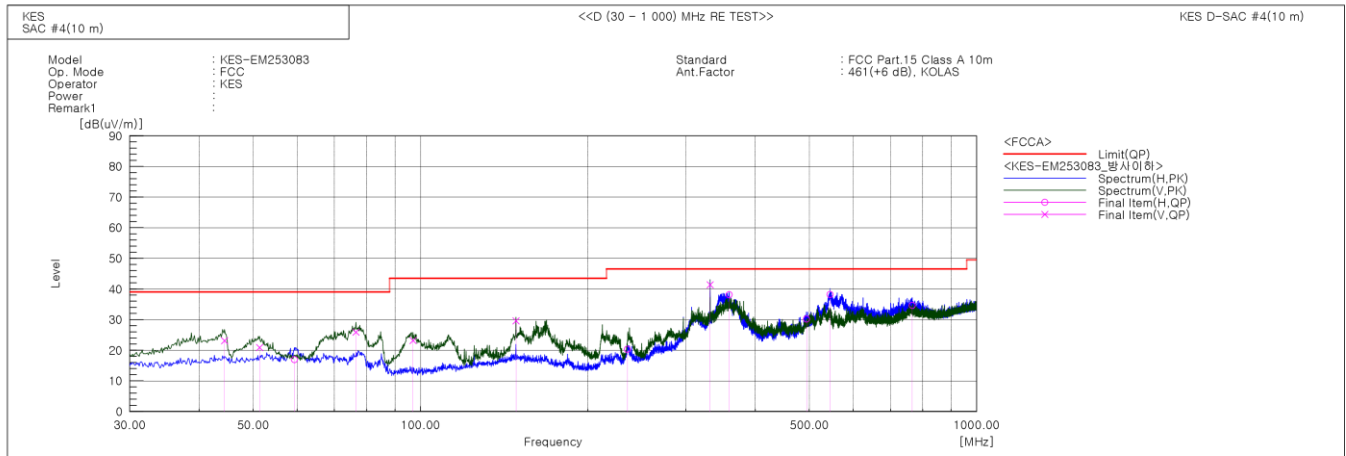

Final Result

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	44.429	V	44.5	-21.4	23.1	39.0	15.9	117.0	318.0	
2	51.340	V	41.9	-21.0	20.9	39.0	18.1	100.0	28.0	
3	59.343	H	38.3	-21.4	16.9	39.0	22.1	400.0	233.0	
4	76.560	V	50.6	-24.7	25.9	39.0	13.1	106.0	344.0	
5	96.930	V	48.6	-25.4	23.2	43.5	20.3	100.0	109.0	
6	148.461	V	49.0	-19.4	29.6	43.5	13.9	100.0	83.0	
7	235.398	H	40.7	-20.4	20.3	46.5	26.2	394.0	211.0	
8	331.791	V	57.4	-16.0	41.4	46.5	5.1	100.0	232.0	
9	358.830	H	53.3	-15.2	38.1	46.5	8.4	306.0	86.0	
10	494.266	H	40.5	-10.3	30.2	46.5	16.3	397.0	67.0	
11	544.949	H	47.3	-9.1	38.2	46.5	8.3	300.0	82.0	
12	765.503	H	38.3	-3.7	34.6	46.5	11.9	400.0	18.0	


※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.



Report No. : KES-EM253083

Page 17 / 27

- Test Date : 2025-09-11
- Test Mode : Mode 1_IC

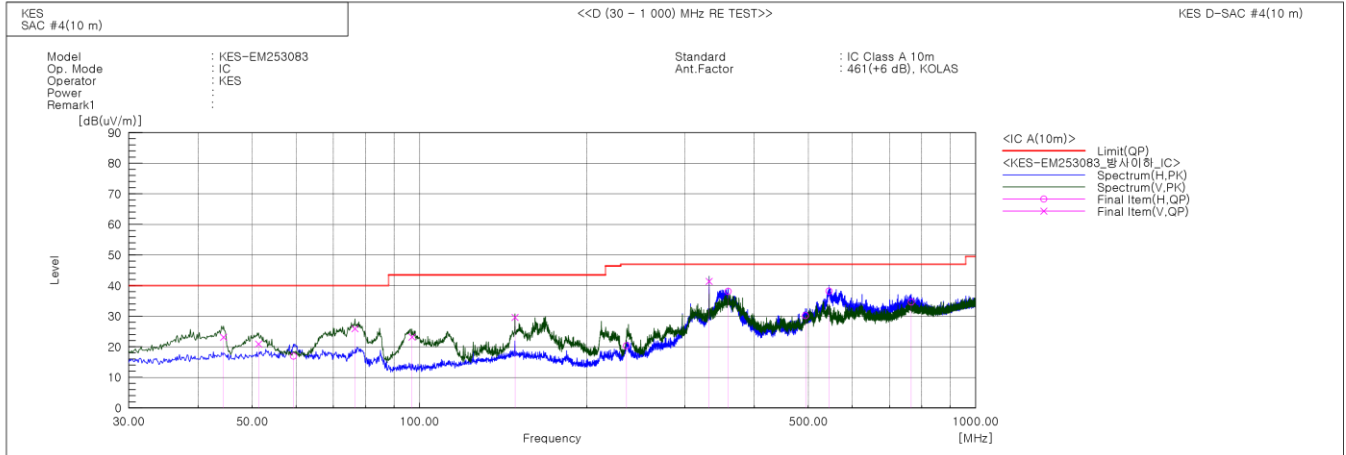

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	44.429	V	44.5	-21.4	23.1	40.0	16.9	117.0	318.0	
2	51.340	V	41.9	-21.0	20.9	40.0	19.1	100.0	28.0	
3	59.343	H	38.3	-21.4	16.9	40.0	23.1	400.0	233.0	
4	76.560	V	50.6	-24.7	25.9	40.0	14.1	106.0	344.0	
5	96.930	V	48.6	-25.4	23.2	43.5	20.3	100.0	109.0	
6	148.461	V	49.0	-19.4	29.6	43.5	13.9	100.0	83.0	
7	235.398	H	40.7	-20.4	20.3	47.0	26.7	394.0	211.0	
8	331.791	V	57.4	-16.0	41.4	47.0	5.6	100.0	232.0	
9	358.830	H	53.3	-15.2	38.1	47.0	8.9	306.0	86.0	
10	494.266	H	40.5	-10.3	30.2	47.0	16.8	397.0	67.0	
11	544.949	H	47.3	-9.1	38.2	47.0	8.8	300.0	82.0	
12	765.503	H	38.3	-3.7	34.6	47.0	12.4	400.0	18.0	

※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.

6.2.6 Remark

Complies with the test requirements.



6.3 Radiated Emissions(Above 1 GHz)

6.3.1 Test Equipment


Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #5	-	SY Corporation	-	-	-	■
ES10/RE Software	ES10/RE	TOYO	2022.01.000	-	-	■
EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	2025-02-13	2026-02-13	■
PREAMPLIFIER	8449B	HP	3008A00538	2025-04-30	2026-04-30	■
ATTENUATOR	8491B	HP	23094	2025-02-13	2026-02-13	■
HORN ANTENNA	BBHA 9120D	SCHWARZBEC K	9120D-1802	2024-11-04	2025-11-04	■

6.3.2 Test Location : SEMI ANECHOIC CHAMBER #5

6.3.3 Test Conditions :

Temperature	Relative Humidity
(25.5 ~ 25.7) °C	(54.2 ~ 54.6) % R.H.


6.3.4 Diagram of test setup

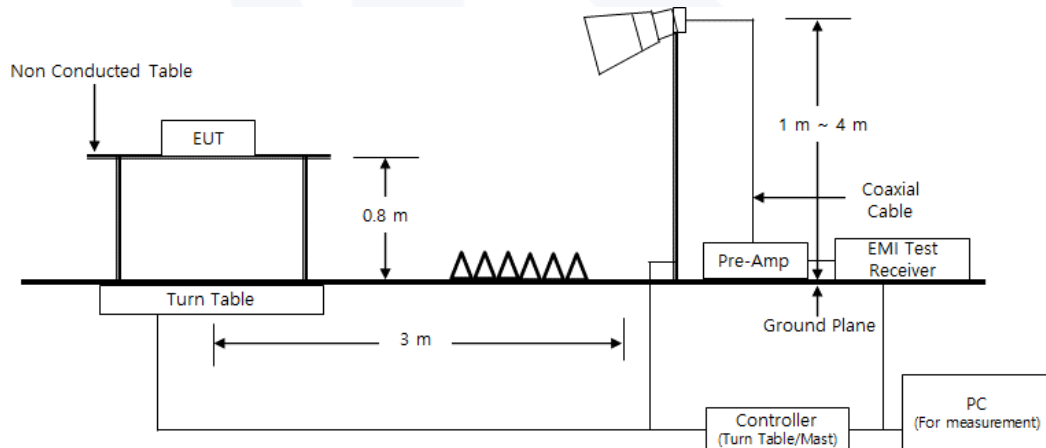



6.3.5 Test Result

- Test Date : 2025-09-11
- Test Mode : Mode 1

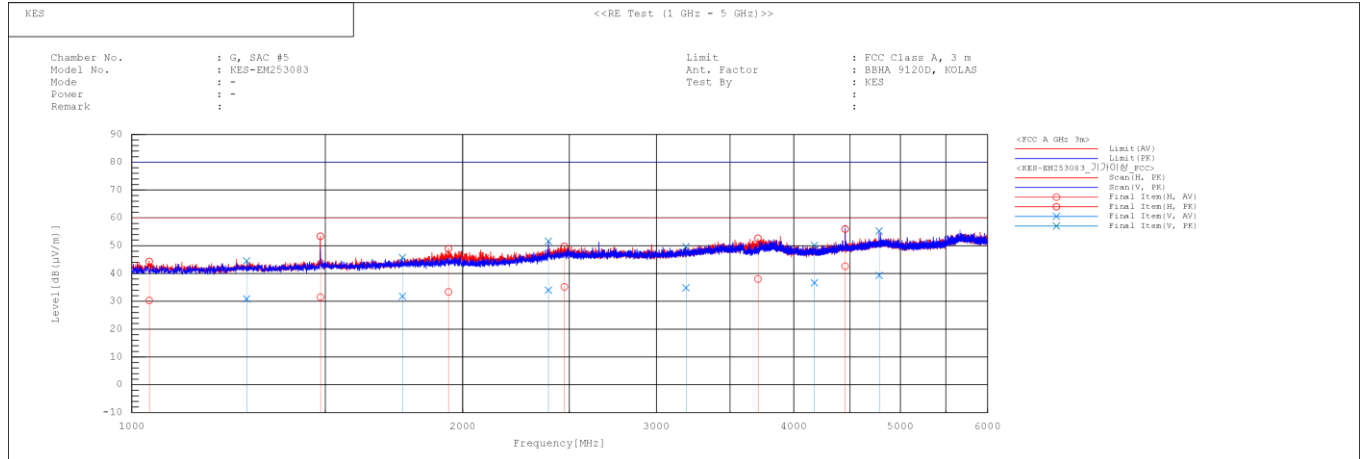

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f. [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1037.448	H	31.7	45.7	-1.4	30.3	44.3	60.0	80.0	29.7	35.7	104.0	313.1
2	1272.117	V	30.9	44.5	0.0	30.9	44.5	60.0	80.0	29.1	35.5	100.0	154.1
3	1484.669	H	30.4	52.3	1.1	31.5	53.4	60.0	80.0	28.5	26.6	300.0	323.6
4	1762.770	V	29.5	43.4	2.3	31.8	45.7	60.0	80.0	28.2	34.3	100.0	49.4
5	1941.202	H	30.7	46.2	2.7	33.4	48.9	60.0	80.0	26.6	31.1	305.0	335.5
6	2393.595	V	29.1	46.7	4.9	34.0	51.6	60.0	80.0	26.0	28.4	102.0	223.4
7	2474.401	H	30.1	44.7	5.1	35.2	49.8	60.0	80.0	24.8	30.2	399.0	7.5
8	3191.100	V	27.9	42.7	6.9	34.8	49.6	60.0	80.0	25.2	30.4	108.0	265.1
9	3711.659	H	30.0	44.7	8.0	38.0	52.7	60.0	80.0	22.0	27.3	400.0	152.2
10	4177.030	V	27.3	40.7	9.4	36.7	50.1	60.0	80.0	23.3	29.9	117.0	328.4
11	4454.207	H	32.0	45.4	10.6	42.6	56.0	60.0	80.0	17.4	24.0	301.0	25.3
12	4782.110	V	27.7	43.7	11.6	39.3	55.3	60.0	80.0	20.7	24.7	195.0	142.7

※ The data is the result of measured by the detector in PK and CISPR Average on the Peak graph.

※ The Average of the test data is the cispr average result.



Report No. : KES-EM253083

Page 20 / 27

○ Test Date : 2025-09-11

● Test Mode : Mode 1

(5 ~ 15) GHz

PK

Frequency (MHz)	Reading PK (dBuV)	Polarization	Height (m)	ANT Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5 655.116	41.300	H	1.000	32.450	8.840	33.840	48.750	80.000	31.250
7 741.746	41.400	V	1.000	36.450	11.690	33.560	55.980	80.000	24.020

Cispr-AV

Frequency (MHz)	Reading CISPR AV (dBuV)	Polarization	Height (m)	ANT Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
5 655.116	27.800	H	1.000	32.450	8.840	33.840	35.250	60.000	24.750
7 741.746	28.400	V	1.000	36.450	11.690	33.560	42.980	60.000	17.020

※ No spurious emission were detected above 15 GHz

6.3.6 Remark

Complies with the test requirements.




7 Test Setup Photos and EUT Photographs


7.1 Test Setup Photos




<Conducted Emissions at Mains Power Ports - Front>

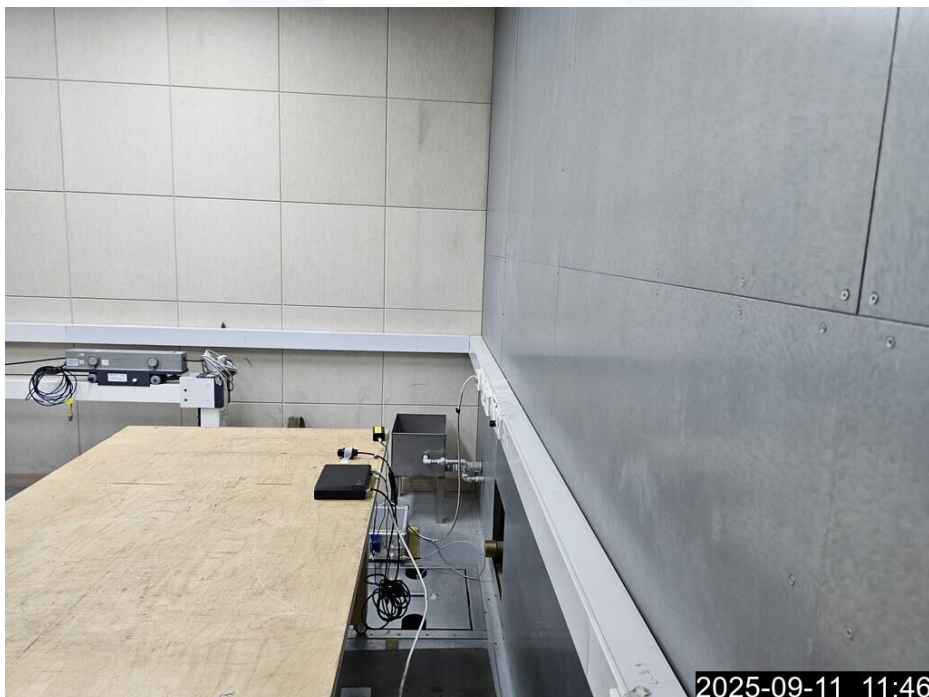


<Conducted Emissions at Mains Power Ports - Rear>

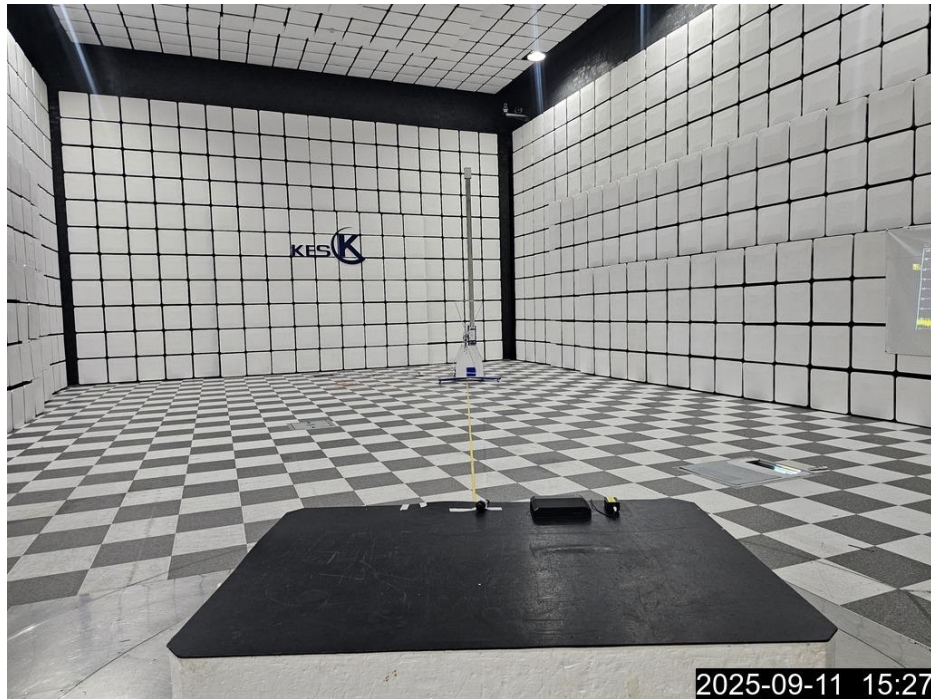


<Radiated Emissions(Below 1 GHz) - Front>

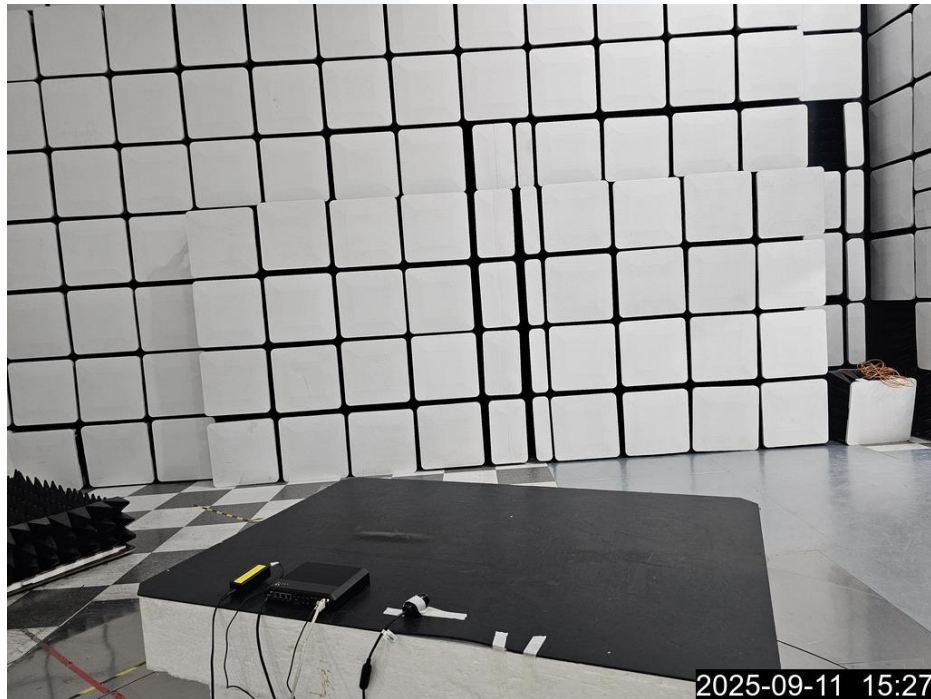

<Radiated Emissions(Below 1 GHz) - Rear>

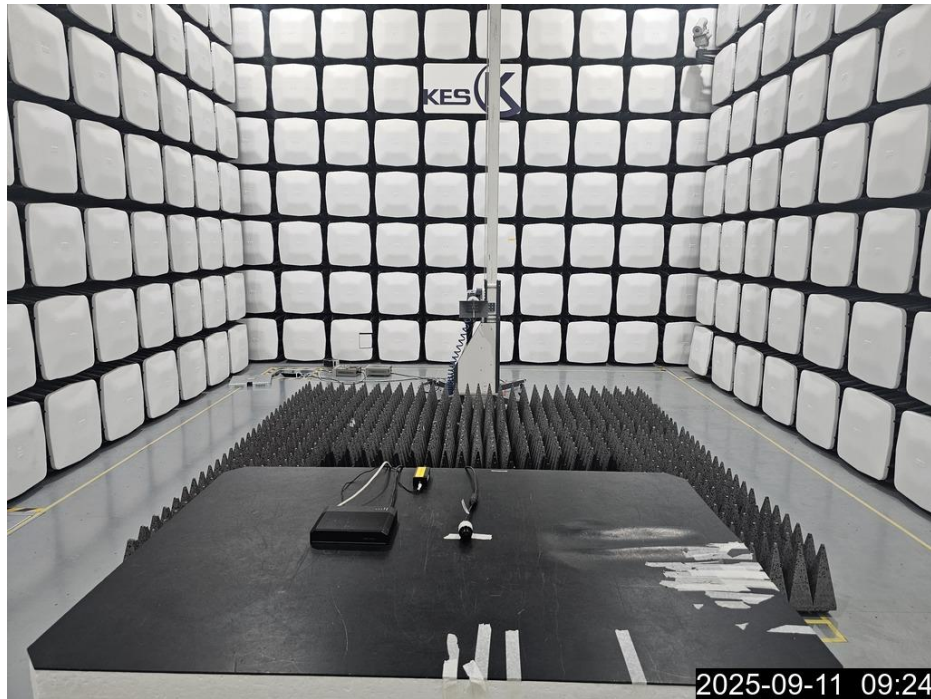

<Radiated Emissions(Above 1 GHz) - Front>

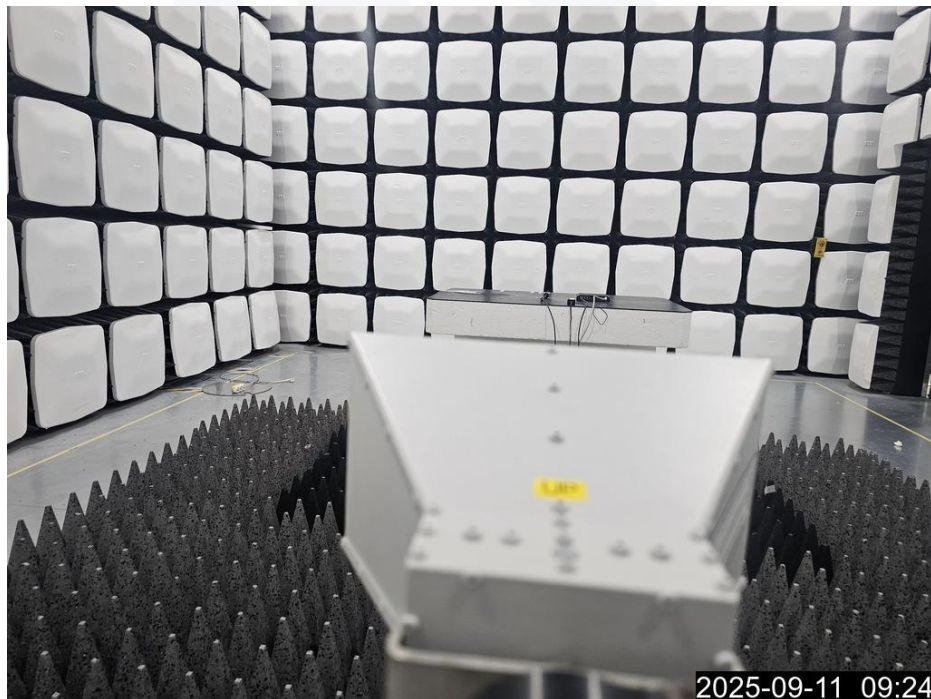

<Radiated Emissions(Above 1 GHz) - Rear>



7.2 EUT Photographs



<EUT External Photographs - Top>



<EUT External Photographs - Bottom>



<Port>



<EUT Internal Photographs>



7.3 Label

	Name : Hanwha Vision Co., Ltd. Product item : LENS MODULE Model name : SLA-F1080FA
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.	
The above label is only an example. The specific format is left to the manufacturer to decide, as long as the label includes the required information, in accordance with ICES-Gen. The requirements specified in ICES-Gen shall apply. An example ISED compliance label, to be placed on each unit of an equipment model (or in the user manual, if allowed), is given below:	
CAN ICES-003(A) / NMB-003(A)	

The End.