

SLA-M2890DN

1/2.8 CS-mount Auto с ИК коррекцией мегапиксельный объектив

Key Features

- Автоматическая диафрагма F1.2 с управлением постоянным током
- Вариофокальный объектив 2,8 ~ 9 мм (0,11" ~ 0,35")

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SLA-M2890DN

1/2.8 CS-mount Auto с ИК коррекцией мегапиксельный объектив



Specifications

Video

Imaging Device	Size	1/2.8"
	Type	CMOS
Resolution		3MP

Lens

Focal Length (mm)		2.8~9mm
Back Focal Length (mm)		7.52mm(0.3") (In air)
Flange Back Focal Length (mm)		12.5mm(0.49")
Zoom Ratio		3.2x
Max. Aperture Ratio (F number)	Wide	1.2
	Tele	360
Angular Field of View	Horizontal	104.2°~33.7°
	Vertical	77.2°~25.3°
	Diagonal	134.2°~42.7°
Mount Type		CS mount

Mechanical

Product Dimensions	45.0 x 51.5 x 54.3mm(1.77" x 2.03" x 2.14")
Product Weight	84g(0.19lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


SLA-M2890DN

1/2.8 CS-mount Auto с ИК коррекцией мегапиксельный объектив



CAD

Unit: mm [inch]

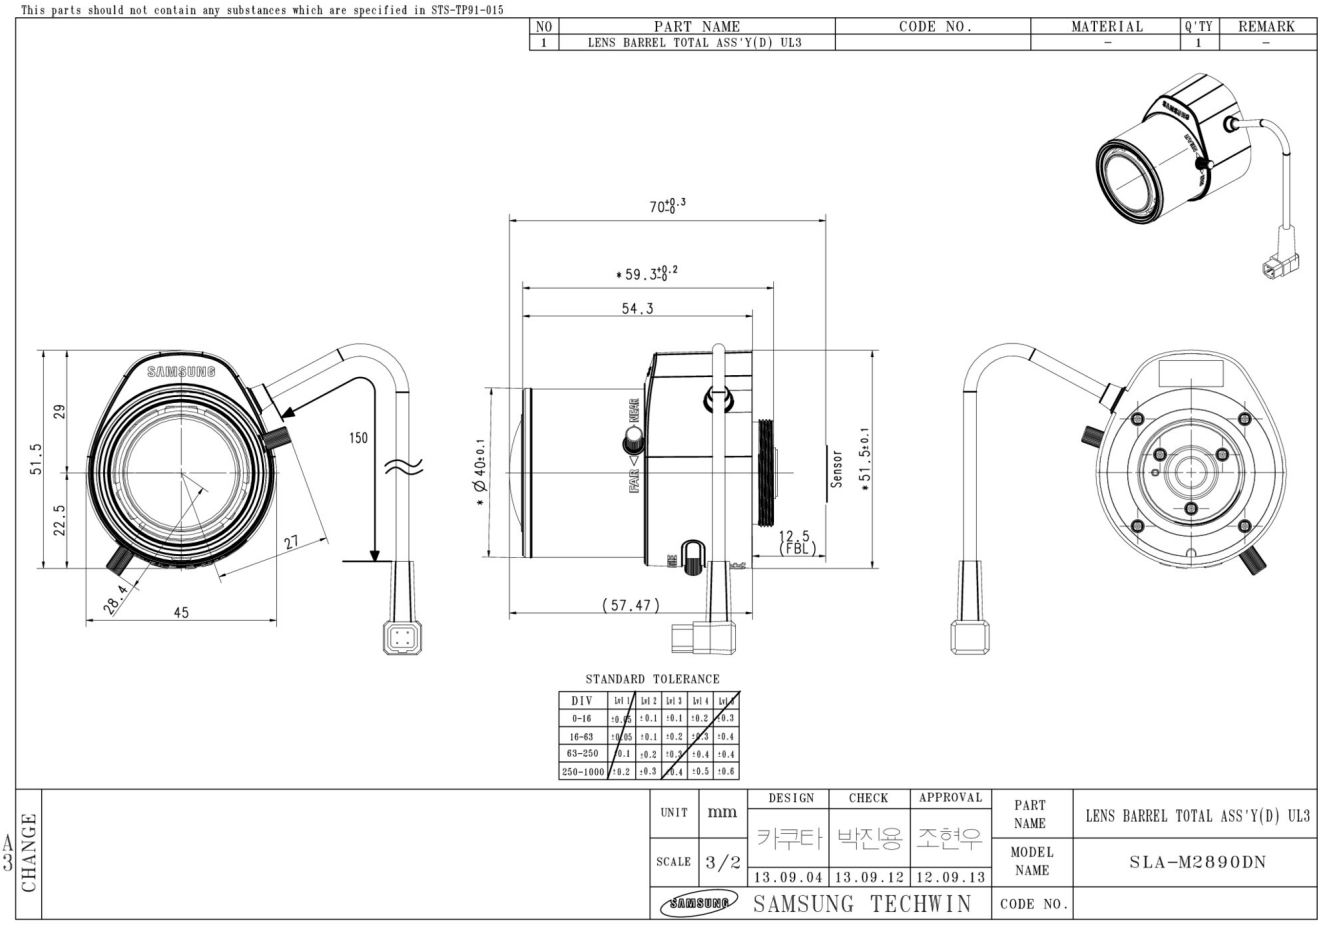

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.