

SLA-T4680

2M Lens Modülleri

Key Features

- En Fazla 2 Megapiksel (1920 x 1080) çözünürlük
- 0,45 Lüks@F2.0
- 0,06 Lüks@F2.5
- 2,4 mm sabit lens

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SLA-T4680

2M Lens Modülleri



Specifications

Video

Görüntüleme Aygıtı	Boyut	1/2.8"
	Tür	CMOS
Etkin Piksel		1,945(H)x1,109(V) 2.16M
Min. Aydınlatma (Lüks)	Renk(1/30sn, 30IRE)	0.06
	SB(1/30sn, 30IRE)	0.06

Lens

Odak Uzunluğu (mm)		4.6
En Fazla Diyafram Açıklığı Oranı (F numarası)	Geniş	2.5
Açısal Görüş Alanı	Yatay	73°
	Dikey	39°
	Diyagonal	85°
Montaj Tipi		RJ12 connected with main unit
Odak Kontrolü		Fixed

Çevresel ve Elektriksel

Çalışma Koşulu	Sıcaklık	-10°C ~ +55°C (+14°F ~ +131°F)
	Nemlilik	Less than 90% RH
Depolama Koşulu	Sıcaklık	-50°C~+60°C(-58°F~+140°F)
	Nemlilik	Less than 90% RH

Mekanik

Renk	Black
Malzeme	Plastic
Ürün Boyutları	ø24x42mm(ø0.94"x1.65")
Ürün Ağırlığı	310g (0.68 lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


SLA-T4680

2M Lens Modülleri



CAD

Unit: mm [inch]

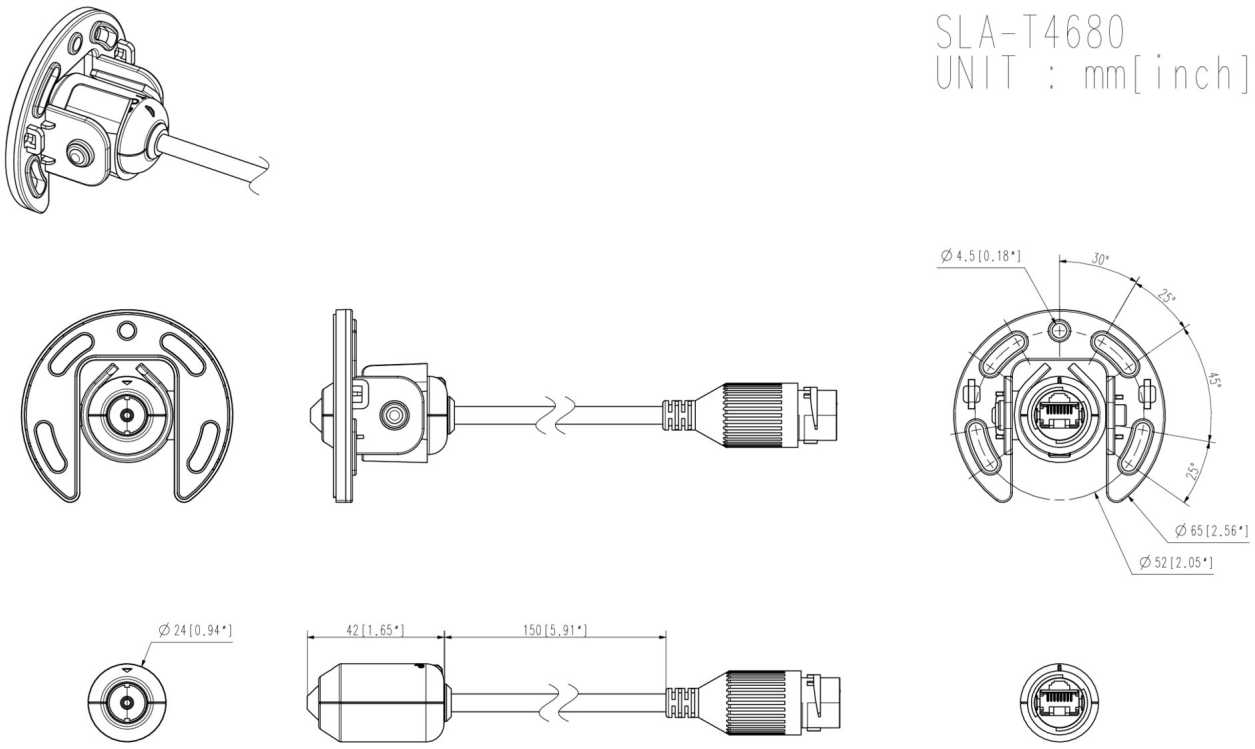

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices



XNB-6001

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.