

TEST REPORT

EN 60950-1

Information technology equipment – Safety – Part 1: General requirements

Report Number. : CTK-2017-02280

Date of issue : 2017-07-06

Total number of pages..... : 49 pages

Applicant's name..... : Hanwha Techwin Co Ltd

Address : 42 SUNGJU-DONG CHANGWON-SI, GYEONGNAM, 641-716 KOREA

Test specification:

Standard..... : EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013

Test procedure : CE (LVD)

Non-standard test method..... : N/A

Test Report Form No..... : IEC60950_1F

Test Report Form(s) Originator : SGS Fimko Ltd

Master TRF..... : Dated 2015-03

Modified Test Report Form No..... : CTK-RF-SC-IEC60950-1F

TRF modified by : CTK Co., Ltd.

Copyright © 2014 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the CTK, responsible for this Test Report.

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(2) / (49) pages	

Test item description	LED Monitor		
Trade Mark			
Manufacturer	HANWHA TECHWIN (TIANJIN) CO LTD 11 WEILIU RD, MICRO-ELECTRONIC INDUSTRIAL PARK, TEDA, TIANJIN 300385, People's Republic of China		
Model/Type reference	SMT-2232, SMT-2232V, SMT-2233		
Ratings	AC 100-240 V~, 50/60 Hz, 0.6 A		
Testing procedure and testing location:			
☒	Testing Laboratory:	CTK Co., Ltd.	
Testing location/ address		(Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF	
☐	Associated Testing Laboratory:		
Testing location/ address		N/A	
Tested by (name, function, signature).....		JungKyu Yang, Project handler	
Approved by (name, function, signature)		KwangWon Lee, Reviewer	
☐	Testing procedure: TMP/CTF Stage 1:		
Testing location/ address		N/A	
Tested by (name, function, signature).....		N/A	
Approved by (name, function, signature)		N/A	
☐	Testing procedure: WMT/CTF Stage 2:		
Testing location/ address		N/A	
Tested by (name, function, signature).....		N/A	
Witnessed by (name, function, signature)		N/A	
Approved by (name, function, signature)		N/A	
☐	Testing procedure: SMT/CTF Stage 3 or 4:		
Testing location/ address		N/A	
Tested by (name, function, signature).....		N/A	
Witnessed by (name, function, signature)		N/A	

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(3) / (49) pages	
---	---	--	--

Approved by (name, function, signature)	N/A	
Supervised by (name, function, signature)	N/A	

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(4) / (49) pages	
---	--	--	--

List of Attachments (including a total number of pages in each attachment): Attachment 1: 21 pages (European group differences (EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013)) Attachment 2: 3 pages (Photographs)	
Summary of testing:	
Tests performed (name of test and test clause): All clauses	Testing location: CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF
Summary of compliance with National Differences List of countries addressed: European group differences	
☒ The product fulfils the requirements of the standard EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013	

Copy of marking plate					
 <table border="1"> <tr> <td>Model : SMT-2232</td> <td>Color Display Unit</td> </tr> <tr> <td>Model Code : SMT-2232V/EO</td> <td>AC100-240V~ 50/60Hz 0.6A</td> </tr> </table> Apparatet må kun tilkoples jordat stikkontakt. Apparaten skall anslutas till jordat uttag när den ansluts till ett nätverk. Laite on liitettävä suojamaadoituskoskettimillä varustettuun. 10/2012 S/N: C96167VCA00001T SAMSUNG TECHWIN CO.,LTD. MADE BY SAMSUNG IN CHINA	Model : SMT-2232	Color Display Unit	Model Code : SMT-2232V/EO	AC100-240V~ 50/60Hz 0.6A	 型号 Model: SMT-2232 Model Code: SMT-2232V/CH LED液晶监视器 适用电压范围 交流 AC 100-240V~ 50/60Hz 0.6A 小心: 为减少电击的危险, 请不要打开机壳 (或后盖), 只有专业人员才能维修。 生产者: 天津三星泰科光电子有限公司 序列号: C95Z67VCA00001T 生产日期: 10/2012
Model : SMT-2232	Color Display Unit				
Model Code : SMT-2232V/EO	AC100-240V~ 50/60Hz 0.6A				
 Model : SMT-2232 Model Code : SMT-2232V/EX AC100-240V~ 50/60Hz 0.6A S/N: C95W67VCA00001T SAMSUNG TECHWIN CO.,LTD. MADE BY SAMSUNG IN CHINA	 品名: LCD モニター 型 名: SMT-2232 MODEL CODE: SMT-2232V/JP 定格電圧: AC100-240V~ 50/60Hz 定格電流: 0.6A 定格消費電力: 30.5W 製造番号: C96167VCA00001T MANUFACTURED : Oct 2012 SAMSUNG TECHWIN CO.,LTD. MADE BY SAMSUNG IN CHINA				

SAMSUNG 제 품 명 : SMT-2232
모델코드 : SMT-2232V/DO

기기의명칭(모델명) : LED 모니터
인 증 번 호 : KCC-RE-STW-SMT2232W
인증 받은자의 상호 : 삼성테크윈(주)
제 조 년 월 : 2012.10
제조사 / 제조국가 : Welhal Daewoo Electronics Co., Ltd./중국

정 격 : AC100-240V~, 50/60Hz 0.55A
관 매 원 : 삼성테크윈(주)
서비스 센터 대표전화
(전국 어디서나) 1588-5772

제품명칭: 모니터
ZU10059-11001

S/N: C99X67VCA00001T

SAMSUNG Model : SMT-2232
Model Code : SMT-2232V/US

Color Display Unit AC100-240V~ 50/60Hz 0.6A

Canada ICES-003 Class A / Canada NMB-003 Classe A

TUV SUD NRTL US

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FACTORY ID: DAEWOO
SAMSUNG TECHWIN CO., LTD.
MADE BY SAMSUNG IN CHINA
MANUFACTURED : Oct 2012

S/N: C95Y67VCA00001T

SAMSUNG 제 품 명 : SMT-2232V
모델코드 : SMT-2232V/DO

기기의명칭(모델명) : LED 모니터
인 증 번 호 : KCC-RE-STW-SMT2232W
인증 받은자의 상호 : 삼성테크윈(주)
제 조 년 월 : 2012.10
제조사 / 제조국가 : Welhal Daewoo Electronics Co., Ltd./중국

정 격 : AC100-240V~, 50/60Hz 0.55A
관 매 원 : 삼성테크윈(주)
서비스 센터 대표전화
(전국 어디서나) 1588-5772

제품명칭: 모니터
ZU10059-11001

S/N: C99X67VCA00001T

SAMSUNG 品名: LCD 모니터
型 名: SMT-2232V
MODEL CODE: SMT-2232V/JP

定 格 電 圧: AC100-240V~ 50/60Hz
定 格 電 流: 0.6A
定 格 消 費 電 力: 30.5W

製造番号: C96167VCA00001T MANUFACTURED: Oct 2012

SAMSUNG TECHWIN CO.,LTD. MADE BY SAMSUNG IN CHINA

SAMSUNG Model: SMT-2232V
Model Code: SMT-2232V/EX

AC100-240V~ 50/60Hz 0.6A

Apparater må kun tilkøbes jorden stikkontakt.
Apparaten skall anslutas till jordat uttag när den ansluts till ett nätverk.
Laitte on liitettävä suojamaadoitukseen osakeittimillä varustettuun.

S/N: C95W67VCA00001T
SAMSUNG TECHWIN CO.,LTD. MADE BY SAMSUNG IN CHINA

SAMSUNG 型号 Model: SMT-2232V
Model Code: SMT-2232V/CH

LED液晶监视器 适用电压范围 交流
AC 100-240V~ 50/60Hz 0.6A

小心: 为减少电击的危险, 请不要打开机壳
(或后盖), 只有专业人员才能维修。

生产者: 天津三星泰科光电子有限公司

序列号: C95Z67VCA00001T 生产日期: 10/2012

SAMSUNG Model: SMT-2232V
Model Code: SMT-2232V/EO

Color Display Unit
AC100-240V~ 50/60Hz 0.6A

Apparater må kun tilkøbes jorden stikkontakt.
Apparaten skall anslutas till jordat uttag när den ansluts till ett nätverk.
Laitte on liitettävä suojamaadoitukseen osakeittimillä varustettuun.

10/2012

S/N: C96167VCA00001T
SAMSUNG TECHWIN CO.,LTD. MADE BY SAMSUNG IN CHINA

SAMSUNG Model: SMT-2232V
Model Code: SMT-2232V/US

Color Display Unit AC100-240V~ 50/60Hz 0.6A

Canada ICES-003 Class A / Canada NMB-003 Classe A

TUV SUD NRTL US

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FACTORY ID: DAEWOO
SAMSUNG TECHWIN CO., LTD.
MADE BY SAMSUNG IN CHINA
MANUFACTURED : Oct 2012

S/N: C95Y67VCA00001T

SAMSUNG Model: SMT-2233
Model Code: SMT-2233/EX

AC100-240V~ 50/60Hz 0.6A

Apparater må kun tilkøbes jorden stikkontakt.
Apparaten skall anslutas till jordat uttag när den ansluts till ett nätverk.
Laitte on liitettävä suojamaadoitukseen osakeittimillä varustettuun.

S/N: C95W67VCA00001T
SAMSUNG TECHWIN CO.,LTD. MADE BY SAMSUNG IN CHINA

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(6) / (49) pages	
---	---	--	--

Test item particulars	
Equipment mobility	☒ movable ☐ hand-held ☐ transportable ☐ stationary ☐ for building-in ☐ direct plug-in
Connection to the mains	☒ pluggable equipment ☒ type A ☐ type B ☐ permanent connection ☒ detachable power supply cord ☐ non-detachable power supply cord ☐ not directly connected to the mains
Operating condition	☒ continuous ☐ rated operating / resting time:
Access location	☒ operator accessible ☐ restricted access location
Over voltage category (OVC)	☐ OVC I ☒ OVC II ☐ OVC III ☐ OVC IV ☐ other:
Mains supply tolerance (%) or absolute mains supply values	-10 %, +10 %
Tested for IT power systems	☐ Yes ☒ No
IT testing, phase-phase voltage (V)	N/A
Class of equipment	☒ Class I ☐ Class II ☐ Class III ☐ Not classified
Considered current rating of protective device as part of the building installation (A)	16
Pollution degree (PD)	☐ PD 1 ☒ PD 2 ☐ PD 3
IP protection class	IP X0
Altitude during operation (m)	Up to 2 000 m
Altitude of test laboratory (m)	180 m
Mass of equipment (kg)	5.1 kg
Possible test case verdicts:	
- test case does not apply to the test object: N/A	
- test object does meet the requirement.....: P (Pass)	
- test object does not meet the requirement: F (Fail)	
Testing	
Date of receipt of test item: 2017-06-15	
Date(s) of performance of tests	
2017-06-15 to 2017-07-05	
General remarks:	
"(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report. Throughout this report a ☐ comma / ☒ point is used as the decimal separator.	

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(7) / (49) pages	
---	---	---	--

Manufacturer's Declaration per sub-clause 4.2.5 of IECEE 02:																			
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided..... :	☐ Yes																		
	☒ Not applicable																		
When differences exist; they shall be identified in the General product information section.																			
Name and address of factory (ies) : 1. Weihai Daewoo Electronics Co., Ltd. (30997) No. 26, Hongkong Road, Economic & Technical Development Zone, Weihai City, Shandong Province 264205, People's Republic of China																			
General product information: - The maximum ambient temperature permitted by the manufacturer (Tma): 40 °C - Model SMT-2232 is basic model, which was tested and it was the representative of the other model. - Model SMT-2232V and SMT-2233 are identical to basic model, except for model designation.																			
Abbreviations used in the report: <table border="0" data-bbox="228 1097 1508 1276"> <tr> <td>- normal conditions</td><td>N.C.</td> <td>- single fault conditions</td><td>S.F.C</td> </tr> <tr> <td>- functional insulation</td><td>OP</td> <td>- basic insulation</td><td>BI</td> </tr> <tr> <td>- double insulation</td><td>DI</td> <td>- supplementary insulation</td><td>SI</td> </tr> <tr> <td>- between parts of opposite polarity</td><td>BOP</td> <td>- reinforced insulation</td><td>RI</td> </tr> </table> Indicate used abbreviations (if any)				- normal conditions	N.C.	- single fault conditions	S.F.C	- functional insulation	OP	- basic insulation	BI	- double insulation	DI	- supplementary insulation	SI	- between parts of opposite polarity	BOP	- reinforced insulation	RI
- normal conditions	N.C.	- single fault conditions	S.F.C																
- functional insulation	OP	- basic insulation	BI																
- double insulation	DI	- supplementary insulation	SI																
- between parts of opposite polarity	BOP	- reinforced insulation	RI																

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(8) / (49) pages	
---	---	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1	GENERAL		P

1.5	Components		P
1.5.1	General		P
	Comply with EN 60950-1 or relevant component standard	(see appended table 1.5.1)	P
1.5.2	Evaluation and testing of components	Certified components are used in accordance with their ratings, certifications and they comply with applicable parts of this standard. Components not certified are used in accordance with their ratings and they comply with applicable parts of EN 60950-1 and the relevant component standard. Components, for which no relevant IEC-standard exists, have been tested under the conditions occurring in the equipment, using applicable parts of EN 60950-1.	P
1.5.3	Thermal controls	No thermal controls	N/A
1.5.4	Transformers	Evaluated during separate certification of power supply	N/A
1.5.5	Interconnecting cables	The interconnecting cables contain only SELV.	P
1.5.6	Capacitors bridging insulation	Evaluated during separate certification of power supply	N/A
1.5.7	Resistors bridging insulation	Evaluated during separate certification of power supply	N/A
1.5.7.1	Resistors bridging functional, basic or supplementary insulation		N/A
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits		N/A
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable		N/A
1.5.8	Components in equipment for IT power systems		N/A
1.5.9	Surge suppressors	Evaluated during separate certification of power supply	N/A
1.5.9.1	General		N/A
1.5.9.2	Protection of VDRs		N/A
1.5.9.3	Bridging of functional insulation by a VDR		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(9) / (49) pages	
---	---	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.9.4	Bridging of basic insulation by a VDR		N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR		N/A

1.6	Power interface		P
1.6.1	AC power distribution systems		P
1.6.2	Input current	(see appended table 1.6.2)	P
1.6.3	Voltage limit of hand-held equipment	Not a hand-held unit.	N/A
1.6.4	Neutral conductor	Neutral is insulated from earth with basic insulation throughout the equipment.	P

1.7	Marking and instructions		P
1.7.1	Power rating and identification markings	(see copy of marking plates)	P
1.7.1.1	Power rating marking	Power rating marking is located on the outside surface of the equipment.	P
	Multiple mains supply connections	No multiple mains	N/A
	Rated voltage(s) or voltage range(s) (V)	AC 100-240 V~	P
	Symbol for nature of supply, for d.c. only	The equipment is for a.c. supply.	N/A
	Rated frequency or rated frequency range (Hz)	50/60 Hz	P
	Rated current (mA or A)	0.6 A	P
1.7.1.2	Identification markings		P
	Manufacturer's name or trade-mark or identification mark		P
	Model identification or type reference	(see copy of marking plates)	P
	Symbol for Class II equipment only	Class I equipment.	N/A
	Other markings and symbols	(see copy of marking plates)	P
1.7.1.3	Use of graphical symbols	.	P
1.7.2	Safety instructions and marking		P
1.7.2.1	General		P
1.7.2.2	Disconnect devices	Appliance inlet	P
1.7.2.3	Overcurrent protective device	Pluggable equipment type A	N/A
1.7.2.4	IT power distribution systems		N/A
1.7.2.5	Operator access with a tool	No operator access area with a tool	N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(10) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.6	Ozone	The equipment under test does not produce ozone.	N/A
1.7.3	Short duty cycles		N/A
1.7.4	Supply voltage adjustment	No voltage selector.	N/A
	Methods and means of adjustment; reference to installation instructions		N/A
1.7.5	Power outlets on the equipment		N/A
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference)	Evaluated during separate certification of power supply.	N/A
1.7.7	Wiring terminals		N/A
1.7.7.1	Protective earthing and bonding terminals	Earthing pin of approval appliance inlet was used as protective earthing terminal. The marking is shown adjacent to the terminal according to IEC 60417 - 5019	P
1.7.7.2	Terminals for a.c. mains supply conductors	Appliance inlet used.	N/A
1.7.7.3	Terminals for d.c. mains supply conductors		N/A
1.7.8	Controls and indicators		P
1.7.8.1	Identification, location and marking	The function of controls affecting safety is obvious without knowledge of language etc	P
1.7.8.2	Colours	Only functional user colour.	P
1.7.8.3	Symbols according to IEC 60417	The switch is marked with the symbol for "stand-by" (IEC 60417-5009).	P
1.7.8.4	Markings using figures	No Markings using figures	N/A
1.7.9	Isolation of multiple power sources	No multiple power sources	N/A
1.7.10	Thermostats and other regulating devices	No thermostats and other regulating devices	N/A
1.7.11	Durability	Rubbing the marking by hand for 15s with a piece of cloth soaked with water and petroleum spirit. After this test, the marking is still legible.	P
1.7.12	Removable parts	No marking on removable parts.	N/A
1.7.13	Replaceable batteries	No lithium battery in the equipment.	N/A
	Language(s)		—

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(11) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.14	Equipment for restricted access locations	Equipment not intended for installation in restricted access locations	N/A

2	PROTECTION FROM HAZARDS	P
----------	--------------------------------	----------

2.1	Protection from electric shock and energy hazards		P
2.1.1	Protection in operator access areas		P
2.1.1.1	Access to energized parts	No part of ELV or hazardous voltages are accessible	P
	Test by inspection :	No hazard.	P
	Test with test finger (Figure 2A) :	No hazard.	P
	Test with test pin (Figure 2B) :	No hazard.	P
	Test with test probe (Figure 2C) :	No TNV circuits	N/A
2.1.1.2	Battery compartments	No battery compartments.	N/A
2.1.1.3	Access to ELV wiring	No internal wiring at ELV accessible to the operator.	N/A
	Working voltage (V _{peak} or V _{rms}); minimum distance through insulation (mm)		—
2.1.1.4	Access to hazardous voltage circuit wiring		N/A
2.1.1.5	Energy hazards :	No energy hazard in operator access area.	P
2.1.1.6	Manual controls	No shafts of knobs etc. at ELV or hazardous voltage.	N/A
2.1.1.7	Discharge of capacitors in equipment		P
	Measured voltage (V); time-constant (s)..... :	74 V d.c. at 1 s	—
2.1.1.8	Energy hazards – d.c. mains supply		N/A
	a) Capacitor connected to the d.c. mains supply .. :		N/A
	b) Internal battery connected to the d.c. mains supply :		N/A
2.1.1.9	Audio amplifiers :	No audio amplifiers.	N/A
2.1.2	Protection in service access areas	Checked by inspection, unintentional contact is unlikely during service operations.	P
2.1.3	Protection in restricted access locations	Equipment not intended for installation in restricted access locations.	N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(12) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.2	SELV circuits		P
2.2.1	General requirements	Evaluated during separate certification of power supply.	P
2.2.2	Voltages under normal conditions (V) :	< SELV	P
2.2.3	Voltages under fault conditions (V) :	< SELV	P
2.2.4	Connection of SELV circuits to other circuits :	SELV circuits are only connected to other SELV circuits.	P

2.3	TNV circuits		N/A
2.3.1	Limits	No TNV circuit	N/A
	Type of TNV circuits :		—
2.3.2	Separation from other circuits and from accessible parts		N/A
2.3.2.1	General requirements		N/A
2.3.2.2	Protection by basic insulation		N/A
2.3.2.3	Protection by earthing		N/A
2.3.2.4	Protection by other constructions :		N/A
2.3.3	Separation from hazardous voltages		N/A
	Insulation employed :		—
2.3.4	Connection of TNV circuits to other circuits		N/A
	Insulation employed :		—
2.3.5	Test for operating voltages generated externally		N/A

2.4	Limited current circuits		N/A
2.4.1	General requirements	No limited current circuits	N/A
2.4.2	Limit values		N/A
	Frequency (Hz)..... :		—
	Measured current (mA) :		—
	Measured voltage (V)..... :		—
	Measured circuit capacitance (nF or µF) :		—
2.4.3	Connection of limited current circuits to other circuits		N/A

2.5	Limited power sources		P
	a) Inherently limited output	(see appended table 2.5)	P
	b) Impedance limited output		P

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(13) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	c) Regulating network or IC current limiter, limits output under normal operating and single fault condition		N/A
	Use of integrated circuit (IC) current limiters		—
	d) Overcurrent protective device limited output		N/A
	Max. output voltage (V), max. output current (A), max. apparent power (VA) :		—
	Current rating of overcurrent protective device (A) :		—

2.6	Provisions for earthing and bonding		P
2.6.1	Protective earthing	Accessible conductive parts are reliably connected to protective earth.	P
2.6.2	Functional earthing	Functional earthing is separated from hazardous voltages by basic insulation and protective earth.	P
	Use of symbol for functional earthing :		P
2.6.3	Protective earthing and protective bonding conductors		P
2.6.3.1	General		P
2.6.3.2	Size of protective earthing conductors		P
	Rated current (A), cross-sectional area (mm ²), AWG :	0.6 A, 0.75 mm ² , 18 AWG (see appended table 1.5.1)	—
2.6.3.3	Size of protective bonding conductors	Evaluated during separate certification of power supply.	N/A
	Rated current (A), cross-sectional area (mm ²), AWG :		—
	Protective current rating (A), cross-sectional area (mm ²), AWG..... :		—
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min) :	From the appliance inlet to the chassis : 0.023 Ω, 0.736 V, 32 A, 2 min	P
2.6.3.5	Colour of insulation :	Evaluated during separate certification of power supply.	N/A
2.6.4	Terminals		P
2.6.4.1	General		P
2.6.4.2	Protective earthing and bonding terminals		N/A
	Rated current (A), type, nominal thread diameter (mm)..... :		—

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(14) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors	Appliance inlet used.	P
2.6.5	Integrity of protective earthing		P
2.6.5.1	Interconnection of equipment		N/A
2.6.5.2	Components in protective earthing conductors and protective bonding conductors	There are no switches or overcurrent protective devices in the protective earthing / bonding conductors.	P
2.6.5.3	Disconnection of protective earth	Appliance inlet used.	P
2.6.5.4	Parts that can be removed by an operator	No operator removable parts with protective earth connection except supply cord.	P
2.6.5.5	Parts removed during servicing	Protective earthed parts cannot be removed in a way which impairs safety.	P
2.6.5.6	Corrosion resistance	Evaluated during separate certification of power supply.	N/A
2.6.5.7	Screws for protective bonding	Evaluated during separate certification of power supply.	N/A
2.6.5.8	Reliance on telecommunication network or cable distribution system		N/A

2.7	Overcurrent and earth fault protection in primary circuits		P
2.7.1	Basic requirements	Protective devices are integrated in the equipment.	P
	Instructions when protection relies on building installation		N/A
2.7.2	Faults not simulated in 5.3.7		N/A
2.7.3	Short-circuit backup protection	Pluggable type A equipment	P
2.7.4	Number and location of protective devices	Evaluated during separate certification of power supply.	N/A
2.7.5	Protection by several devices		N/A
2.7.6	Warning to service personnel		N/A

2.8	Safety interlocks		N/A
2.8.1	General principles	No safety interlocks	N/A
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
	Protection against extreme hazard		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(15) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches, relays and their related circuits		N/A
2.8.7.1	Separation distances for contact gaps and their related circuits (mm) :		N/A
2.8.7.2	Overload test		N/A
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test		N/A
2.8.8	Mechanical actuators		N/A

2.9	Electrical insulation		P
2.9.1	Properties of insulating materials	Neither natural rubber, materials containing asbestos nor hygroscopic materials are used as insulation.	P
2.9.2	Humidity conditioning	48 h	P
	Relative humidity (%), temperature (°C) :	93 %, 30 °C	—
2.9.3	Grade of insulation	Insulation is considered to be functional, basic, supplementary, reinforced or double insulation	P
2.9.4	Separation from hazardous voltages	The accessible conductive parts, including SELV circuits and their related windings, are separated from parts at hazardous voltage by double insulation or reinforced insulation.	P
	Method(s) used :	Method 1 is used.	—

2.10	Clearances, creepage distances and distances through insulation		P
2.10.1	General		P
2.10.1.1	Frequency :	EUT Frequency under 30 kHz	P
2.10.1.2	Pollution degrees :	Pollution degree 2.	P
2.10.1.3	Reduced values for functional insulation	The functional insulation complied with clause 5.3.4.	P
2.10.1.4	Intervening unconnected conductive parts		N/A
2.10.1.5	Insulation with varying dimensions		N/A
2.10.1.6	Special separation requirements		N/A
2.10.1.7	Insulation in circuits generating starting pulses		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(16) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.2	Determination of working voltage		P
2.10.2.1	General		P
2.10.2.2	RMS working voltage		P
2.10.2.3	Peak working voltage		P
2.10.3	Clearances	(see appended table 2.10.3 and 2.10.4)	P
2.10.3.1	General		P
2.10.3.2	Mains transient voltages		P
	a) AC mains supply	Overvoltage category II for primary circuit and transient voltage 2500 Vpeak.	P
	b) Earthed d.c. mains supplies		N/A
	c) Unearthed d.c. mains supplies		N/A
	d) Battery operation		N/A
2.10.3.3	Clearances in primary circuits	(see appended table 2.10.3 and 2.10.4).	P
2.10.3.4	Clearances in secondary circuits	Function insulation verified by short-circuit tests according 5.3.4 c)	N/A
2.10.3.5	Clearances in circuits having starting pulses	No such circuit.	N/A
2.10.3.6	Transients from a.c. mains supply	Overvoltage Category II ; Mains transient voltage is 1500 Vpeak.	P
2.10.3.7	Transients from d.c. mains supply		N/A
2.10.3.8	Transients from telecommunication networks and cable distribution systems	Not connected to telecommunication networks and cable distribution systems	N/A
2.10.3.9	Measurement of transient voltage levels		N/A
	a) Transients from a mains supply	Measurement not relevant.	N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network ..	Not connected to telecommunication networks	N/A
2.10.4	Creepage distances		P
2.10.4.1	General		P
2.10.4.2	Material group and comparative tracking index		P
	CTI tests	Material group IIIb is assumed to be used	—
2.10.4.3	Minimum creepage distances	(see appended table 2.10.3 and 2.10.4).	P

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(17) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.5	Solid insulation		N/A
2.10.5.1	General	Evaluated during separate certification of power supply.	N/A
2.10.5.2	Distances through insulation		N/A
2.10.5.3	Insulating compound as solid insulation		N/A
2.10.5.4	Semiconductor devices		N/A
2.10.5.5.	Cemented joints		N/A
2.10.5.6	Thin sheet material – General		N/A
2.10.5.7	Separable thin sheet material		N/A
	Number of layers (pcs)..... :		—
2.10.5.8	Non-separable thin sheet material		N/A
2.10.5.9	Thin sheet material – standard test procedure		N/A
	Electric strength test		—
2.10.5.10	Thin sheet material – alternative test procedure		N/A
	Electric strength test		—
2.10.5.11	Insulation in wound components		N/A
2.10.5.12	Wire in wound components		N/A
	Working voltage :		N/A
	a) Basic insulation not under stress :		N/A
	b) Basic, supplementary, reinforced insulation :		N/A
	c) Compliance with Annex U :		N/A
	Two wires in contact inside wound component; angle between 45° and 90° :		N/A
2.10.5.13	Wire with solvent-based enamel in wound components		N/A
	Electric strength test		—
	Routine test		N/A
2.10.5.14	Additional insulation in wound components		N/A
	Working voltage :		N/A
	- Basic insulation not under stress :		N/A
	- Supplementary, reinforced insulation :		N/A
2.10.6	Construction of printed boards	Evaluated during separate certification of power supply.	N/A
2.10.6.1	Uncoated printed boards		N/A
2.10.6.2	Coated printed boards		N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(18) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.6.4	Insulation between conductors on different layers of a printed board		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs)..... :		N/A
2.10.7	Component external terminations		N/A
2.10.8	Tests on coated printed boards and coated components		N/A
2.10.8.1	Sample preparation and preliminary inspection		N/A
2.10.8.2	Thermal conditioning		N/A
2.10.8.3	Electric strength test		N/A
2.10.8.4	Abrasion resistance test		N/A
2.10.9	Thermal cycling		N/A
2.10.10	Test for Pollution Degree 1 environment and insulating compound		N/A
2.10.11	Tests for semiconductor devices and cemented joints		N/A
2.10.12	Enclosed and sealed parts	Evaluated during separate certification of power supply.	N/A

3	WIRING, CONNECTIONS AND SUPPLY	P
----------	---------------------------------------	----------

3.1	General		P
3.1.1	Current rating and overcurrent protection	Adequate cross sectional areas on internal wiring.	P
3.1.2	Protection against mechanical damage	Wireways are smooth and free from edges.	P
3.1.3	Securing of internal wiring	Internal wiring is secured against excessive strain, loosening of terminals and damage to the conductor insulation.	P
3.1.4	Insulation of conductors	Insulation on internal conductors is considered to be of adequate quality and suitable for the application and the working voltage involved.	P
3.1.5	Beads and ceramic insulators	No beads or similar ceramic insulators on conductors.	N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(19) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.1.6	Screws for electrical contact pressure	Electrical screw connection is only connecting protective earth to chassis. Metal screw engages more than 2 threads. Screws made of insulating material are not used where electrical connections, including protective earthing are involved.	P
3.1.7	Insulating materials in electrical connections	No contact pressure through insulating materials.	P
3.1.8	Self-tapping and spaced thread screws	Thread-cutting or space thread screws are not used for electrical connections.	P
3.1.9	Termination of conductors		N/A
	10 N pull test		N/A
3.1.10	Sleeving on wiring	Sleeves are not used as supplementary insulation.	P

3.2	Connection to a mains supply		P
3.2.1	Means of connection	Appliance inlet	P
3.2.1.1	Connection to an a.c. mains supply		P
3.2.1.2	Connection to a d.c. mains supply		N/A
3.2.2	Multiple supply connections	Only one supply connection.	N/A
3.2.3	Permanently connected equipment	The equipment is not intended for permanent connection to the mains.	N/A
	Number of conductors, diameter of cable and conduits (mm)		—
3.2.4	Appliance inlets		P
3.2.5	Power supply cords		P
3.2.5.1	AC power supply cords		P
	Type	(see appended table 1.5.1)	—
	Rated current (A), cross-sectional area (mm ²), AWG	0.6 A, Min. 0.75 mm ² , 18 AWG (see appended table 1.5.1)	—
3.2.5.2	DC power supply cords		N/A
3.2.6	Cord anchorages and strain relief	Equipment provided with an appliance inlet.	N/A
	Mass of equipment (kg), pull (N)		—
	Longitudinal displacement (mm)		—

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(20) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.7	Protection against mechanical damage		N/A
3.2.8	Cord guards		N/A
	Diameter or minor dimension D (mm); test mass (g):		—
	Radius of curvature of cord (mm)		—
3.2.9	Supply wiring space	Equipment provided with an appliance inlet.	N/A

3.3	Wiring terminals for connection of external conductors		N/A
3.3.1	Wiring terminals	Appliance inlet provided.	N/A
3.3.2	Connection of non-detachable power supply cords		N/A
3.3.3	Screw terminals		N/A
3.3.4	Conductor sizes to be connected		N/A
	Rated current (A), cord/cable type, cross-sectional area (mm ²)		—
3.3.5	Wiring terminal sizes		N/A
	Rated current (A), type, nominal thread diameter (mm)		—
3.3.6	Wiring terminal design		N/A
3.3.7	Grouping of wiring terminals		N/A
3.3.8	Stranded wire		N/A

3.4	Disconnection from the mains supply		P
3.4.1	General requirement		P
3.4.2	Disconnect devices	Appliance coupler	P
3.4.3	Permanently connected equipment	Not permanently connected equipment.	N/A
3.4.4	Parts which remain energized		N/A
3.4.5	Switches in flexible cords		N/A
3.4.6	Number of poles - single-phase and d.c. equipment	The disconnect device disconnects both poles simultaneously.	P
3.4.7	Number of poles - three-phase equipment	Single phase equipment.	N/A
3.4.8	Switches as disconnect devices		N/A
3.4.9	Plugs as disconnect devices		N/A
3.4.10	Interconnected equipment		N/A
3.4.11	Multiple power sources		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(21) / (49) pages	
---	---	---	--

EN 60950-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

3.5	Interconnection of equipment		P
3.5.1	General requirements		P
3.5.2	Types of interconnection circuits	SELV circuit – SELV circuit	P
3.5.3	ELV circuits as interconnection circuits	No ELV interconnections.	N/A
3.5.4	Data ports for additional equipment	see clause 2.5	P

4	PHYSICAL REQUIREMENTS		P
----------	------------------------------	--	---

4.1	Stability		P
	Angle of 10°		P
	Test force (N)		N/A

4.2	Mechanical strength		P
4.2.1	General		P
	Rack-mounted equipment.		N/A
4.2.2	Steady force test, 10 N		N/A
4.2.3	Steady force test, 30 N		N/A
4.2.4	Steady force test, 250 N	No hazard.	P
4.2.5	Impact test	The front panel is tested according to IEC 60065 clause 19.5. The front panel tested with impact hammer and the glass do not break or crack.	P
	Fall test	No hazard.	P
	Swing test	No hazard.	P
4.2.6	Drop test; height (mm)		N/A
4.2.7	Stress relief test	Test is carried out at 70 °C / 7 h. No risk of shrinkage or distortion on enclosures due to release of internal stresses.	P
4.2.8	Cathode ray tubes		N/A
	Picture tube separately certified		N/A
4.2.9	High pressure lamps	No high pressure lamps	N/A
4.2.10	Wall or ceiling mounted equipment; force (N)		N/A

4.3	Design and construction		P
------------	--------------------------------	--	---

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(22) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.3.1	Edges and corners	All edges and corners are rounded and smoothed.	P
4.3.2	Handles and manual controls; force (N)		N/A
4.3.3	Adjustable controls		N/A
4.3.4	Securing of parts	No loosening of parts impairing creepage distances or clearances is likely to occur.	P
4.3.5	Connection by plugs and sockets		N/A
4.3.6	Direct plug-in equipment	No direct plug-in equipment.	N/A
	Torque		—
	Compliance with the relevant mains plug standard		N/A
4.3.7	Heating elements in earthed equipment	No heating elements provided	N/A
4.3.8	Batteries	No batteries	N/A
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		N/A
4.3.9	Oil and grease		N/A
4.3.10	Dust, powders, liquids and gases		N/A
4.3.11	Containers for liquids or gases		N/A
4.3.12	Flammable liquids		N/A
	Quantity of liquid (l)		N/A
	Flash point (°C)		N/A
4.3.13	Radiation		N/A
4.3.13.1	General		N/A
4.3.13.2	Ionizing radiation		N/A
	Measured radiation (pA/kg)		—
	Measured high-voltage (kV)		—
	Measured focus voltage (kV)		—
	CRT markings		—
4.3.13.3	Effect of ultraviolet (UV) radiation on materials		N/A
	Part, property, retention after test, flammability classification		N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation		N/A
4.3.13.5	Lasers (including laser diodes) and LEDs		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(23) / (49) pages	
---	--	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.3.13.5.1	Lasers (including laser diodes)		N/A
	Laser class		—
4.3.13.5.2	Light emitting diodes (LEDs)		N/A
4.3.13.6	Other types		N/A

4.4	Protection against hazardous moving parts		N/A
4.4.1	General		N/A
4.4.2	Protection in operator access areas		N/A
	Household and home/office document/media shredders		N/A
4.4.3	Protection in restricted access locations		N/A
4.4.4	Protection in service access areas		N/A
4.4.5	Protection against moving fan blades		N/A
4.4.5.1	General		N/A
	Not considered to cause pain or injury. a)		N/A
	Is considered to cause pain, not injury. b)		N/A
	Considered to cause injury. c)		N/A
4.4.5.2	Protection for users		N/A
	Use of symbol or warning		N/A
4.4.5.3	Protection for service persons		N/A
	Use of symbol or warning		N/A

4.5	Thermal requirements		P
4.5.1	General		P
4.5.2	Temperature tests	(see appended table 4.5)	P
	Normal load condition per Annex L	L7	—
4.5.3	Temperature limits for materials	(see appended table 4.5)	P
4.5.4	Touch temperature limits		P
4.5.5	Resistance to abnormal heat	Evaluated during separate certification of power supply.	N/A

4.6	Openings in enclosures		P
4.6.1	Top and side openings		P
	Dimensions (mm)	Top and side openings: 0.75 mm width	—
4.6.2	Bottoms of fire enclosures		P

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(24) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Construction of the bottom, dimensions (mm) ...:	Fire enclosure construction is considered to comply with the requirements. Size and spacing of openings in metal bottoms of fire enclosures: - Metal thickness: 0.83 mm - Max. diameter of holes: 1.85 mm - Min. spacing of holes centre to centre: 5.2 mm Openings size 35 mm², under components and parts meet the requirements for V-1.	—
4.6.3	Doors or covers in fire enclosures		N/A
4.6.4	Openings in transportable equipment		N/A
4.6.4.1	Constructional design measures		N/A
	Dimensions (mm):		—
4.6.4.2	Evaluation measures for larger openings		N/A
4.6.4.3	Use of metallized parts		N/A
4.6.5	Adhesives for constructional purposes		N/A
	Conditioning temperature (°C), time (weeks).....:		—

4.7	Resistance to fire		P
4.7.1	Reducing the risk of ignition and spread of flame		P
	Method 1, selection and application of components wiring and materials	(see appended table 4.7)	P
	Method 2, application of all of simulated fault condition tests	(see appended table 5.3)	P
4.7.2	Conditions for a fire enclosure		P
4.7.2.1	Parts requiring a fire enclosure	The fire enclosure is required to cover all part.	P

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(25) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.2.2	Parts not requiring a fire enclosure	The following parts are not required fire enclosure: Switch board and sensor board supplied by limited power sources complying with 2.5 and mounted on PCB of more than FLAMMABILITY CLASS V-1	P
4.7.3	Materials		P
4.7.3.1	General	(see appended table 1.5.1)	P
4.7.3.2	Materials for fire enclosures	Fire enclosure is consist of internal metal enclosure and circuits, out of fire enclosure are supplied form input connector of switch board and sensor board are evaluated as LPS. Other decorative parts including enclosures are flammability class HB.	P
4.7.3.3	Materials for components and other parts outside fire enclosures		P
4.7.3.4	Materials for components and other parts inside fire enclosures		P
4.7.3.5	Materials for air filter assemblies	No air filters in the equipment.	N/A
4.7.3.6	Materials used in high-voltage components	No high-voltage components.	N/A

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS	P
----------	--	----------

5.1	Touch current and protective conductor current	P
5.1.1	General	P
5.1.2	Configuration of equipment under test (EUT)	P
5.1.2.1	Single connection to an a.c. mains supply	P
5.1.2.2	Redundant multiple connections to an a.c. mains supply	P
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply	P
5.1.3	Test circuit	P
5.1.4	Application of measuring instrument	Measuring instrument D.1 is used.
5.1.5	Test procedure	P
5.1.6	Test measurements	P
	Supply voltage (V):	(see appended table 5.1)

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(26) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Measured touch current (mA)	(see appended table 5.1)	—
	Max. allowed touch current (mA)	(see appended table 5.1)	—
	Measured protective conductor current (mA)		—
	Max. allowed protective conductor current (mA).....		—
5.1.7	Equipment with touch current exceeding 3,5 mA		N/A
5.1.7.1	General		N/A
5.1.7.2	Simultaneous multiple connections to the supply		N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks	No telecommunication networks	N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system		N/A
	Supply voltage (V)		—
	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
5.1.8.2	Summation of touch currents from telecommunication networks		N/A
	a) EUT with earthed telecommunication ports		N/A
	b) EUT whose telecommunication ports have no reference to protective earth		N/A

5.2	Electric strength		P
5.2.1	General	(see appended table 5.2)	P
5.2.2	Test procedure	(see appended table 5.2)	P

5.3	Abnormal operating and fault conditions		P
5.3.1	Protection against overload and abnormal operation	(see appended table 5.3)	P
5.3.2	Motors		N/A
5.3.3	Transformers	Evaluated during separate certification of power supply.	N/A
5.3.4	Functional insulation.....	c)	P
5.3.5	Electromechanical components		N/A
5.3.6	Audio amplifiers in ITE		N/A
5.3.7	Simulation of faults	(see appended table 5.3)	P
5.3.8	Unattended equipment	No thermostats, temperature limiters or thermal cut-outs.	N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(27) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.3.9	Compliance criteria for abnormal operating and fault conditions		P
5.3.9.1	During the tests	No fire, emission of molten metal or deformation was noted during the tests	P
5.3.9.2	After the tests	No reduction of clearance and creepage distances. Electric strength test is made on basic, supplementary and reinforced insulation.	P

6	CONNECTION TO TELECOMMUNICATION NETWORKS	N/A
----------	---	-----

6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N/A
6.1.1	Protection from hazardous voltages		N/A
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements	No TNV circuit	N/A
	Supply voltage (V)		—
	Current in the test circuit (mA)		—
6.1.2.2	Exclusions		N/A

6.2	Protection of equipment users from overvoltages on telecommunication networks		N/A
6.2.1	Separation requirements	No TNV circuit	N/A
6.2.2	Electric strength test procedure		N/A
6.2.2.1	Impulse test		N/A
6.2.2.2	Steady-state test		N/A
6.2.2.3	Compliance criteria		N/A

6.3	Protection of the telecommunication wiring system from overheating		N/A
	Max. output current (A)		—
	Current limiting method		—

7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS	N/A
----------	---	-----

7.1	General	Not connected to a cable distribution system.	N/A
------------	----------------	---	-----

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(28) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N/A
7.3	Protection of equipment users from overvoltages on the cable distribution system		N/A
7.4	Insulation between primary circuits and cable distribution systems		N/A
7.4.1	General		N/A
7.4.2	Voltage surge test		N/A
7.4.3	Impulse test		N/A

A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N/A
A.1.1	Samples		—
	Wall thickness (mm)		—
A.1.2	Conditioning of samples; temperature (°C)		N/A
A.1.3	Mounting of samples		N/A
A.1.4	Test flame (see IEC 60695-11-3)		N/A
	Flame A, B, C or D		—
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N/A
A.2.1	Samples, material		—
	Wall thickness (mm)		—
A.2.2	Conditioning of samples; temperature (°C)		N/A
A.2.3	Mounting of samples		N/A
A.2.4	Test flame (see IEC 60695-11-4)		N/A
	Flame A, B or C		—
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(29) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N/A
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.3	Hot flaming oil test (see 4.6.2)		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A
A.3.3	Compliance criterion		N/A

B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)		N/A
B.1	General requirements		N/A
	Position		—
	Manufacturer		—
	Type		—
	Rated values		—
B.2	Test conditions		N/A
B.3	Maximum temperatures		N/A
B.4	Running overload test		N/A
B.5	Locked-rotor overload test		N/A
	Test duration (days)		—
	Electric strength test: test voltage (V)		—
B.6	Running overload test for d.c. motors in secondary circuits		N/A
B.6.1	General		N/A
B.6.2	Test procedure		N/A
B.6.3	Alternative test procedure		N/A
B.6.4	Electric strength test; test voltage (V)		N/A
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
B.7.1	General		N/A
B.7.2	Test procedure		N/A
B.7.3	Alternative test procedure		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(30) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.7.4	Electric strength test; test voltage (V)		N/A
B.8	Test for motors with capacitors		N/A
B.9	Test for three-phase motors		N/A
B.10	Test for series motors		N/A
	Operating voltage (V)		—

C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)		N/A
	Position	Evaluated during separate certification of power supply.	—
	Manufacturer		—
	Type		—
	Rated values		—
	Method of protection		—
C.1	Overload test		N/A
C.2	Insulation		N/A
	Protection from displacement of windings		N/A

D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		P
D.1	Measuring instrument		P
D.2	Alternative measuring instrument		N/A

E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)		N/A
----------	--	--	-----

F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)		N/A
----------	---	--	-----

G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N/A
G.1	Clearances		N/A
G.1.1	General		N/A
G.1.2	Summary of the procedure for determining minimum clearances		N/A
G.2	Determination of mains transient voltage (V)		N/A
G.2.1	AC mains supply		N/A
G.2.2	Earthed d.c. mains supplies		N/A
G.2.3	Unearthed d.c. mains supplies		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(31) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.2.4	Battery operation		N/A
G.3	Determination of telecommunication network transient voltage (V)		N/A
G.4	Determination of required withstand voltage (V)		N/A
G.4.1	Mains transients and internal repetitive peaks		N/A
G.4.2	Transients from telecommunication networks		N/A
G.4.3	Combination of transients		N/A
G.4.4	Transients from cable distribution systems		N/A
G.5	Measurement of transient voltages (V)		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
G.6	Determination of minimum clearances		N/A

H	ANNEX H, IONIZING RADIATION (see 4.3.13)	N/A
----------	---	-----

J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)	N/A
	Metal(s) used	—

K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)	N/A
K.1	Making and breaking capacity	N/A
K.2	Thermostat reliability; operating voltage (V)	N/A
K.3	Thermostat endurance test; operating voltage (V)	N/A
K.4	Temperature limiter endurance; operating voltage (V)	N/A
K.5	Thermal cut-out reliability	N/A
K.6	Stability of operation	N/A

L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)	P
L.1	Typewriters	N/A
L.2	Adding machines and cash registers	N/A
L.3	Erasers	N/A
L.4	Pencil sharpeners	N/A
L.5	Duplicators and copy machines	N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(32) / (49) pages	
---	--	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
L.6	Motor-operated files		N/A
L.7	Other business equipment	LCD Monitor	P

M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N/A
M.1	Introduction		N/A
M.2	Method A		N/A
M.3	Method B		N/A
M.3.1	Ringing signal		N/A
M.3.1.1	Frequency (Hz)		—
M.3.1.2	Voltage (V)		—
M.3.1.3	Cadence; time (s), voltage (V)		—
M.3.1.4	Single fault current (mA)		—
M.3.2	Tripping device and monitoring voltage		N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V)		N/A

N	ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)		N/A
N.1	ITU-T impulse test generators		N/A
N.2	IEC 60065 impulse test generator		N/A

P	ANNEX P, NORMATIVE REFERENCES		—
----------	--------------------------------------	--	---

Q	ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)		N/A
	- Preferred climatic categories		N/A
	- Maximum continuous voltage		N/A
	- Combination pulse current		N/A
	Body of the VDR Test according to IEC60695-11-5.....		N/A
	Body of the VDR. Flammability class of material (min V-1).....		N/A

R	ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N/A
----------	---	--	-----

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(33) / (49) pages	
---	---	---	--

EN 60950-1			
------------	--	--	--

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)		N/A
-----	---	--	-----

R.2	Reduced clearances (see 2.10.3)		N/A
-----	---------------------------------	--	-----

S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N/A
----------	---	--	-----

S.1	Test equipment		N/A
-----	----------------	--	-----

S.2	Test procedure		N/A
-----	----------------	--	-----

S.3	Examples of waveforms during impulse testing		N/A
-----	--	--	-----

T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N/A
----------	---	--	-----

			—
--	--	--	---

U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		N/A
----------	---	--	-----

			—
--	--	--	---

V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)		N/A
----------	---	--	-----

V.1	Introduction		N/A
-----	--------------	--	-----

V.2	TN power distribution systems		N/A
-----	-------------------------------	--	-----

W	ANNEX W, SUMMATION OF TOUCH CURRENTS		N/A
----------	---	--	-----

W.1	Touch current from electronic circuits		N/A
-----	--	--	-----

W.1.1	Floating circuits		N/A
-------	-------------------	--	-----

W.1.2	Earthed circuits		N/A
-------	------------------	--	-----

W.2	Interconnection of several equipments		N/A
-----	---------------------------------------	--	-----

W.2.1	Isolation		N/A
-------	-----------	--	-----

W.2.2	Common return, isolated from earth		N/A
-------	------------------------------------	--	-----

W.2.3	Common return, connected to protective earth		N/A
-------	--	--	-----

X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)		N/A
----------	--	--	-----

X.1	Determination of maximum input current		N/A
-----	--	--	-----

X.2	Overload test procedure		N/A
-----	-------------------------	--	-----

Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)		N/A
----------	--	--	-----

Y.1	Test apparatus		N/A
-----	----------------------	--	-----

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(34) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Y.2	Mounting of test samples		N/A
Y.3	Carbon-arc light-exposure apparatus		N/A
Y.4	Xenon-arc light exposure apparatus		N/A
Z	ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)		N/A

AA	ANNEX AA, MANDREL TEST (see 2.10.5.8)	N/A
-----------	--	-----

BB	ANNEX BB, CHANGES IN THE SECOND EDITION	—
-----------	--	---

CC	ANNEX CC, Evaluation of integrated circuit (IC) current limiters	N/A
CC.1	General	N/A
CC.2	Test program 1	N/A
CC.3	Test program 2	N/A
CC.4	Test program 3.....	N/A
CC.5	Compliance.....	N/A

DD	ANNEX DD, Requirements for the mounting means of rack-mounted equipment	N/A
DD.1	General	N/A
DD.2	Mechanical strength test, variable N	N/A
DD.3	Mechanical strength test, 250N, including end stops	N/A
DD.4	Compliance	N/A

EE	ANNEX EE, Household and home/office document/media shredders	N/A
EE.1	General	N/A
EE.2	Markings and instructions	N/A
	Use of markings or symbols	N/A
	Information of user instructions, maintenance and/or servicing instructions	N/A
EE.3	Inadvertent reactivation test	N/A
EE.4	Disconnection of power to hazardous moving parts	N/A
	Use of markings or symbols	N/A
EE.5	Protection against hazardous moving parts	N/A
	Test with test finger (Figure 2A)	N/A
	Test with wedge probe (Figure EE1 and EE2)	N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(35) / (49) pages	
---	--	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: List of critical components				P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
Power cord set (EU)	Weihai Honglin Electronic Co., Ltd. / HONGLIN	HL-013 H05VV-F HL-026	16 A, 250 V 3G 0.75 mm ² 10 A, 250 V	EN 60799	VDE
(Alternate)	Changzhou Hong Chang Electro nics Co., Ltd. / S ANGLE	DTIII-2P-05 H05VV-F DTII-3P-04	16 A, 250 V 3G 0.75 mm ² 10 A, 250 V	VDE 0620-1 - EN 60320-1	VDE
Front enclosure	Cheil Industries Inc Chemicals Div	HF-0680(+)	Min.2.2 mm, thickness, HB	UL 94	UL
(Alternate)	KINGFA SCI & TECH CO LTD	5197, HIPS-5197	Min.2.2 mm, thickness, HB	UL 94	UL
(Alternate)	QINGDAO HAIER NEW MATERIAL R & D CO LTD	CR-3003	Min.2.2 mm, thickness, HB	UL 94	UL
Rear enclosure	Cheil Industries Inc Chemicals Div	HF-0680(+)	Min.2.2 mm, thickness, HB	UL 94	UL
(Alternate)	KINGFA SCI & TECH CO LTD	5197, HIPS-5197	Min.2.2 mm, thickness, HB	UL 94	UL
(Alternate)	QINGDAO HAIER NEW MATERIAL R & D CO LTD	CR-3003	Min.2.2 mm, thickness, HB	UL 94	UL
Insulation sheet between SMPS top to metal chassis	SKC Co., Ltd.	SR01, SR50, SR53, SS51	VTM-2, 0.48 mm thickness	UL 94	UL
(Alternate)	JINGMEN GORUN TECHNOLOGY CO LTD.	HF70	V-0, Min. 0.43 mm thickness	UL 94	UL
Switching Mode Power Supply	Powernet Technologies Corp.	PWL2204STCC M	Input: 100-240 V~, 50-60Hz, 1.2 A, Class I DC Output: A5V: +5.3 V, 2.8	EN 60950-1	UL DEMKO

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(36) / (49) pages	
---	--	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
			A A13V: +12.8 V, 0.9 A (CNM803) LED Driver Output: +40.3 V, 100 mA (CNL802)		
LCD Module	Manufacturer: HEFEI BOE OPTOELECTRONICS TECHNOLOGY CO LTD Trademark: BOE	HT185WX1-300	-	EN 60950-1	UL DEMKO
(Alternate)	SAMSUNG DISPLAY CO LTD	LTM215HT05	Max. 5 V d.c., Max. 1.5 A	EN 60950-1	TUV SUD
Speaker	Interchangeable	Interchangeable	8 Ω , 1 W	EN 60950-1	Tested in equipment
PCB	Interchangeable	Interchangeable	V-0, Min. 105 °C, Min. 1.6 mm thickness	UL 796	UL

supplementary information:
¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(37) / (49) pages	
---	--	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.1	TABLE: Opto Electronic Devices		N/A
Manufacturer : Type : Separately tested..... : Bridging insulation : External creepage distance..... : Internal creepage distance : Distance through insulation : Tested under the following conditions : Input : Output..... : supplementary information			

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(38) / (49) pages	
---	--	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.6.2	TABLE: Electrical data (in normal conditions)						P
U (V)	I (A)	I _{rated} (A)	P (W)	Fuse #	I _{fuse} (A)	Condition/status	
90	0.421	-	21.65	FP801S	0.421	Max. Normal Load (50 Hz)	
100	0.381	0.6	21.42	FP801S	0.381	Max. Normal Load (50 Hz)	
240	0.252	0.6	21.77	FP801S	0.252	Max. Normal Load (50 Hz)	
264	0.242	-	22.02	FP801S	0.242	Max. Normal Load (50 Hz)	
90	0.423	-	21.62	FP801S	0.423	Max. Normal Load (60 Hz)	
100	0.392	0.6	21.22	FP801S	0.392	Max. Normal Load (60 Hz)	
240	0.252	0.6	21.65	FP801S	0.252	Max. Normal Load (60 Hz)	
264	0.243	-	21.85	FP801S	0.243	Max. Normal Load (60 Hz)	
supplementary information:							
Max. Normal load: Full white display with Max. brightness, contrast and resolution and picture provided from a computer. Max. volume and 1 kHz sine wave.							

2.1.1.5 c) 1)	TABLE: max. V, A, VA test					N/A
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)		
supplementary information:						
Evaluated during separate certification of power supply.						

2.1.1.5 c) 2)	TABLE: stored energy			N/A
Capacitance C (μF)	Voltage U (V)	Energy E (J)		
supplementary information:				
Evaluated during separate certification of power supply.				

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(39) / (49) pages	
---	--	---	--

EN 60950-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

2.2	TABLE: evaluation of voltage limiting components in SELV circuits		N/A
------------	--	--	-----

Component (measured between)	max. voltage (V) (normal operation)		Voltage Limiting Components
	V peak	V d.c.	

Fault test performed on voltage limiting components	Voltage measured (V) in SELV circuits (V peak or V d.c.)

supplementary information:

Evaluated during separate certification of power supply.

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(40) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.5	TABLE: Limited power sources					P
Circuit output tested: See below						
Note: Measured Uoc (V) with all load circuits disconnected: See below						
Components	Test condition (Single fault)	Uoc (V)	I _{sc} (A)		VA	
			Meas.	Limit	Meas.	Limit
VGA (Pin 4)	Normal	4.0	0	8	0	100
VGA (Pin 9)	Normal	2.1	0	8	0	100
VGA (Pin 10)	Normal	3.1	0	8	0	100
VGA (Pin 11)	Normal	4.1	0	8	0	100
VGA (Pin 12)	Normal	3.8	0	8	0	100
VGA (Pin 13)	Normal	0.22	0	8	0	100
VGA (Pin 14)	Normal	0.4	0	8	0	100
VGA (Pin 15)	Normal	3.5	0	8	0	100
HDMI (Pin 1)	Normal	0.58	0	8	0	100
HDMI (Pin 2)	Normal	0.11	0	8	0	100
HDMI (Pin 4)	Normal	4.7	0	8	0	100
HDMI (Pin 5)	Normal	4.6	0	8	0	100
HDMI (Pin 7)	Normal	3.2	0	8	0	100
HDMI (Pin 8)	Normal	3.3	0.03	8	0.04	100
HDMI (Pin 10)	Normal	3.2	0.03	8	0.04	100
HDMI (Pin 11)	Normal	3.3	0.03	8	0.04	100
HDMI (Pin 13)	Normal	3.3	0.03	8	0.04	100
HDMI (Pin 14)	Normal	3.2	0.03	8	0.04	100
HDMI (Pin 17)	Normal	3.3	0.03	8	0.04	100
HDMI (Pin 19)	Normal	3.3	0.02	8	0.04	100
Input connector (CN 3301) on switch board (Pin 1)	Normal	5.11	3.42	8	13.7	100
Input connector (CN 3301) on switch board (Pin 3)	Normal	5.12	0	8	0	100

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(41) / (49) pages	
---	--	---	--

EN 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
Input connector (CN 3301) on switch board (Pin 4)	Normal	5.11	0	8	0	100
Input connector (CN 3301) on switch board (Pin 5)	Normal	3.21	0	8	0	100
Input connector (CN 2001) on sensor board (Pin 1)	Normal	6.65	3.6	8	13.22	100
Input connector (CN 2001) on sensor board (Pin 2)	Normal	6.61	3.4	8	13.54	100
Input connector (CN 2001) on sensor board (Pin 4)	Normal	3.33	0.8	8	2.51	100
Input connector (CN 2001) on sensor board (Pin 5)	Normal	2.21	0	8	0	100
Input connector (CN 2001) on sensor board (Pin 7)	Normal	6.77	3.6	8	13.44	100
Input connector (CN 2001) on sensor board (Pin 8)	Normal	6.79	3.6	8	13.79	100
supplementary information:						
Sc=Short circuit, Oc=Open circuit						

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(42) / (49) pages	
---	--	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.10.2	Table: working voltage measurement			N/A
Location		RMS voltage (V)	Peak voltage (V)	Comments
supplementary information:				
Evaluated during separate certification of power supply.				

2.10.3 and 2.10.4	TABLE: Clearance and creepage distance measurements						P
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
Functional:							
Basic/supplementary:							
Primary-Protective earth	340	240	2.0	3.1	2.5	3.1	
Reinforced:							
supplementary information:							
Evaluated during separate certification of power supply.							

2.10.5	TABLE: Distance through insulation measurements					N/A
Distance through insulation (DTI) at/of:	U peak (V)	U rms (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)	
supplementary information:						
Evaluated during separate certification of power supply.						

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(43) / (49) pages	
---	--	---	--

EN 60950-1									
Clause	Requirement + Test					Result - Remark			Verdict
4.3.8	TABLE: Batteries								N/A
The tests of 4.3.8 are applicable only when appropriate battery data is not available									N/A
Is it possible to install the battery in a reverse polarity position?									N/A
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition									
Max. current during fault condition									
Test results:									Verdict
- Chemical leaks									N/A
- Explosion of the battery									N/A
- Emission of flame or expulsion of molten metal									N/A
- Electric strength tests of equipment after completion of tests									N/A
supplementary information:									

4.3.8	TABLE: Batteries	N/A
Battery category : Manufacturer : Type / model : Voltage : Capacity : Tested and Certified by (incl. Ref. No.) : Circuit protection diagram: 		

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(44) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

MARKINGS AND INSTRUCTIONS (1.7.13)	
Location of replaceable battery	
Language(s) :	
Close to the battery :	
In the servicing instructions :	
In the operating instructions :	

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(45) / (49) pages	
---	--	--	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.5	TABLE: Thermal requirements						P
	Supply voltage (V)	90 V~ / 60 Hz	264 V~ / 50 Hz	N/A	N/A	N/A	—
	Ambient T _{min} (°C)	See below	See below	N/A	N/A	N/A	—
	Ambient T _{max} (°C)	See below	See below	N/A	N/A	N/A	—
Maximum measured temperature T of part/at :		T (°C)					Allowed T _{max} (°C)
1. Transformer (TM801S) core		79.2	80.0	N/A	N/A	N/A	110 (B)
2. Transformer (TM801S) coil		80.8	81.0	N/A	N/A	N/A	110 (B)
3. Linefilter(LX801S) coil		73.3	60.4	N/A	N/A	N/A	100
4. Capacitor CP801		66.8	60.1	N/A	N/A	N/A	105
5. PCB near BD801S		81.0	68.1	N/A	N/A	N/A	105
6. Heatsink(HS804)		76.0	80.7	N/A	N/A	N/A	N/A
7. L901 coil		90.5	91.5	N/A	N/A	N/A	100
8. Capacitor CM885		75.1	73.2	N/A	N/A	N/A	105
9. PCB near DM881		85.0	82.1	N/A	N/A	N/A	105
10. Optocoupler PC801S		64.1	63.0	N/A	N/A	N/A	N/A
11. Heatsink for IC 4001		87.3	86.5	N/A	N/A	N/A	N/A
12. L2003		75.5	74.4	N/A	N/A	N/A	100
13. PCB near IC 1002		85.1	85.5	N/A	N/A	N/A	105
14. L1 (LCD panel board)		60.2	61.1	N/A	N/A	N/A	100
15. Top enclosure		46.2	45.4	N/A	N/A	N/A	95
16. LCD panel		49.5	48.4	N/A	N/A	N/A	80
17. Touch switch		46.0	46.2	N/A	N/A	N/A	85
18. Ambient		40.0 (22.2°C)	40.0 (22.5°C)	N/A	N/A	N/A	N/A
supplementary information:							
Maximum temperature T at Tma (40 °C) is calculated. (T at Tma = T- t ₂ +Tma)							
Temperature test was performed with K-type thermo-couple.							

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(46) / (49) pages	
---	--	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.5.5	TABLE: Ball pressure test of thermoplastic parts		N/A
	Allowed impression diameter (mm) :	≤ 2 mm	—
Part	Test temperature (°C)	Impression diameter (mm)	
supplementary information:			
Evaluated during separate certification of power supply			

4.7	TABLE: Resistance to fire					P
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence	
supplementary information:						
(see appended table 1.5.1)						

5.1	TABLE: touch current measurement				P
Measured between:	Measured (mA)	Limit (mA)	Comments/conditions		
Equipment main protective earthing terminal	0.71	3.5			
supplementary information:					
Supply voltage: 264 V a.c., 60 Hz					

5.2	TABLE: Electric strength tests, impulse tests and voltage surge tests				P
Test voltage applied between:	Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No		
Functional:					
Basic/supplementary:					
Unit: Primary-Protective earth	AC	1 500	No		
Reinforced:					
Unit: Primary-Secondary	AC	3 000	No		
supplementary information:					

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(47) / (49) pages	
---	--	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.3	TABLE: Fault condition tests		P
	Ambient temperature (°C)	20-30	—
	Power source for EUT: Manufacturer, model/type, output rating	N/A	—

Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
1. Openings	Blocked	264 a.c.	1 h 40 min	FP801S	0.21	Temperature stabilized, No hazard, Transformer(TM801S) coil 75.8 °C, core 73.6 °C ambient 22.1 °C


supplementary information: FI – Final Input Current; IP – Internal protection operated; CD – Component Damaged (list damaged components); NCD – No Component Damaged; CT – Constant temperatures were obtained (list components: temperature;); NB – No indication of dielectric breakdown; YB – Dielectric breakdown (indicate time and location); NC – Cheesecloth remained intact; YC – Cheesecloth charred or flamed; NT – Tissue paper remained intact; YT – Tissue paper charred or flamed;						
---	--	--	--	--	--	--

C.2	TABLE: transformers							N/A
Loc.	Tested insulation	Working voltage peak / V (2.10.2)	Working voltage rms / V (2.10.2)	Required electric strength/ V (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)	Required distance thr. insul. (2.10.5)	
Loc.	Tested insulation			Test voltage/ V	Measured clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers	
supplementary information:								
Evaluated during separate certification of power supply.								

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(48) / (49) pages	
---	---	---	--

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

C.2	TABLE: transformers		N/A



 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(1) / (21) pages	
---	---	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT EN 60950-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Information technology equipment – Safety – Part 1: General requirements			
Differences according to : EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013			
Attachment Form No. : EU_GD_EN60950_1F			
Attachment Originator : SGS Fimko Ltd			
Master Attachment : Date 2014-02			
Copyright © 2014 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			

EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 – CENELEC COMMON MODIFICATIONS

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	Clauses, subclauses, notes, tables and figures which are additional to those in IEC60950-1 and it's amendmets are prefixed "Z"		P
Contents	Add the following annexes:		P
	Annex ZA (normative)	Normative references to international publications with their corresponding European publications	
(A2:2013)	Annex ZB (normative)	Special national conditions	
	Annex ZD (informative)	IEC and CENELEC code designations for flexible cords	
General	Delete all the "country" notes in the reference document (IEC 60950-1:2005) according to the following list:		P
	1.4.8 Note 2	1.5.1 Note 2 & 3	1.5.7.1 Note
	1.5.8 Note 2	1.5.9.4 Note	1.7.2.1 Note 4, 5 & 6
	2.2.3 Note	2.2.4 Note	2.3.2 Note
	2.3.2.1 Note 2	2.3.4 Note 2	2.6.3.3 Note 2 & 3
	2.7.1 Note	2.10.3.2 Note 2	2.10.5.13 Note 3
	3.2.1.1 Note	3.2.4 Note 3.	2.5.1 Note 2
	4.3.6 Note 1 & 2	4.7 Note 4	4.7.2.2 Note
	4.7.3.1 Note 2	5.1.7.1 Note 3 & 4	5.3.7 Note 1
	6 Note 2 & 5	6.1.2.1 Note 2	6.1.2.2 Note
	6.2.2 Note	6.2.2.1 Note 2	6.2.2.2 Note
	7.1 Note 3	7.2 Note	7.3 Note 1 & 2
	G.2.1 Note 2	Annex H Note 2	

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(2) / (21) pages	
---	--	---	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
General (A1:2010)	Delete all the “country” notes in the reference document (IEC 60950-1:2005/A1:2010) according to the following list: 1.5.7.1 Note 6.1.2.1 Note 2 6.2.2.1 Note 2 EE.3 Note		P
General (A2:2013)	Delete all the “country” notes in the reference document (IEC 60950-1:2005/A2:2013) according to the following list: 2.7.1 Note * 2.10.3.1 Note 2 6.2.2. Note * Note of secretary: Text of Common Modification remains unchanged.		P
1.1.1 (A1:2010)	Replace the text of NOTE 3 by the following. NOTE 3 The requirements of EN 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the safety of multimedia equipment. For television sets EN 60065 applies.		P
1.3.Z1	Add the following subclause: 1.3.Z1 Exposure to excessive sound pressure The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones. NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for “one package equipment”, and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.		N/A
(A12:2011)	In EN 60950-1:2006/A12:2011 Delete the addition of 1.3.Z1 / EN 60950-1:2006 Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010		P
1.5.1 (Added info*)	Add the following NOTE: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC. New Directive 2011/65/11 *		P

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(3) / (21) pages	
---	--	---	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1 (A1:2010)	In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.		N/A
1.7.2.1 (A12:2011)	In EN 60950-1:2006/A12:2011 Delete NOTE Z1 and the addition for Portable Sound System. Add the following clause and annex to the existing standard and amendments.		N/A
	Zx Protection against excessive sound pressure from personal music players		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(4) / (21) pages	
---	--	---	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	Zx.1 General This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players. A personal music player is a portable equipment for personal use, that: - is designed to allow the user to listen to recorded or broadcast sound or video; and - primarily uses headphones or earphones that can be worn in or on or around the ears; and - allows the user to walk around while in use. NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment. A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause. The requirements in this sub-clause are valid for music or video mode only. The requirements do not apply: - while the personal music player is connected to an external amplifier; or - while the headphones or earphones are not used. NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player. The requirements do not apply to: - hearing aid equipment and professional equipment; NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(5) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	- analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015. NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies. For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.		N/A
	Zx.2 Equipment requirements No safety provision is required for equipment that complies with the following: - equipment provided as a package (personal music player with its listening device), where - the acoustic output LAeq,T is ≤ 85 dBA measured while playing the fixed “programme simulation noise” as described in EN 50332-1; and - a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is ≤ 27 mV measured as described in EN 50332-2, while playing the fixed “programme simulation noise” as described in EN 50332-1. NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level LAeq,T is meant. See also Zx.5 and Annex Zx. All other equipment shall: - protect the user from unintentional acoustic outputs exceeding those mentioned above; and - have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(6) / (21) pages	
---	--	---	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and NOTE 2 Examples of means include visual or audible signals. Action from the user is always required. NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off. d) have a warning as specified in Zx.3; and e) not exceed the following: 1) equipment provided as a package (player with its listening device), the acoustic output shall be ≤ 100 dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and 2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be ≤ 150 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1. For music where the average sound pressure (long term LAeq,T) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song. NOTE 4 Classical music typically has an average sound pressure (long term LAeq,T) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(7) / (21) pages	
---	--	---	--

Attachment 1 – European Group Differences and National Differences

Clause	Requirement + Test	Result - Remark	Verdict
IEC 60950_1F - ATTACHMENT			
IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	Zx.3 Warning The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following: - the symbol of Figure 1 with a minimum height of 5 mm; and - the following wording, or similar: “To prevent possible hearing damage, do not listen at high volume levels for long periods.”  Figure 1 – Warning label (IEC 60417-6044) Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.		N/A
	Zx.4 Requirements for listening devices (headphones and earphones)		N/A
	Zx.4.1 Wired listening devices with analogue input With 94 dBA sound pressure output LAeq,T, the input voltage of the fixed “programme simulation noise” described in EN 50332-2 shall be ≥ 75 mV. This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control). NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(8) / (21) pages	
---	--	---	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	Zx.4.2 Wired listening devices with digital input With any playing device playing the fixed “programme simulation noise” described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output LAeq,T of the listening device shall be ≤ 100 dBA. This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.). NOTE An example of a wired listening device with digital input is a USB headphone.		N/A
	Zx.4.3 Wireless listening devices In wireless mode: - with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and - respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and - with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output LAeq,T of the listening device shall be ≤ 100 dBA. NOTE An example of a wireless listening device is a Bluetooth headphone.		N/A
	Zx.5 Measurement methods Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s. NOTE Test method for wireless equipment provided without listening device should be defined.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(9) / (21) pages	
---	--	---	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.1	Replace the subclause as follows: Basic requirements To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;		N/A
	c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions. If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.		N/A
2.7.2	This subclause has been declared 'void'.		P
3.2.3	Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(10) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT									
Clause	Requirement + Test	Result - Remark	Verdict						
IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)									
Clause	Requirement + Test	Result - Remark	Verdict						
3.2.5.1	Replace “60245 IEC 53” by “H05 RR-F”; “60227 IEC 52” by “H03 VV-F or H03 VVH2-F”; “60227 IEC 53” by “H05 VV-F or H05 VVH2-F2”. In Table 3B, replace the first four lines by the following: <table><tr><td>Up to and including 6 </td><td>0,75 ^{a)} </td></tr><tr><td>Over 6 up to and including 10 (0,75) ^{b)}</td><td>1,0 </td></tr><tr><td>Over 10 up to and including 16 (1,0) ^{c)}</td><td>1,5 </td></tr></table> In the conditions applicable to Table 3B delete the words “in some countries” in condition ^{a)}. In NOTE 1, applicable to Table 3B, delete the second sentence.	Up to and including 6	0,75 ^{a)}	Over 6 up to and including 10 (0,75) ^{b)}	1,0	Over 10 up to and including 16 (1,0) ^{c)}	1,5		N/A
Up to and including 6	0,75 ^{a)}								
Over 6 up to and including 10 (0,75) ^{b)}	1,0								
Over 10 up to and including 16 (1,0) ^{c)}	1,5								
3.2.5.1 (A2:2013)	NOTE Z1 The harmonised code designations corresponding to the IEC cord types are given in Annex ZD		N/A						
3.3.4	In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following: <table><tr><td>Over 10 up to and including 16 </td><td>1,5 to 2,5 </td><td>1,5 to 4 </td></tr></table> Delete the fifth line: conductor sizes for 13 to 16 A	Over 10 up to and including 16	1,5 to 2,5	1,5 to 4		N/A			
Over 10 up to and including 16	1,5 to 2,5	1,5 to 4							
4.3.13.6 (A1:2010)	Replace the existing NOTE by the following: NOTE Z1 Attention is drawn to: 1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz, and 2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).		N/A						
	Standards taking into account mentioned Recommendation and Directive which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.		N/A						
Annex H	Replace the last paragraph of this annex by: At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 µSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level. Replace the notes as follows: NOTE These values appear in Directive 96/29/Euratom. Delete NOTE 2.		N/A						

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(11) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
Bibliography	Additional EN standards.		N/A

ZA	NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS	—
-----------	--	---

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.2.4.1	In Denmark , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.		N/A
1.2.13.14 (A11:2009)	In Norway and Sweden , for requirements see 1.7.2.1 and 7.3 of this annex.		N/A
1.5.7.1 (A11:2009)	In Finland , Norway and Sweden , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.8	In Norway , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).		N/A
1.5.9.4	In Finland , Norway and Sweden , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(12) / (21) pages	
---	---	---	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1	In Finland, Norway and Sweden, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text in the applicable countries shall be as follows: In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan" In Norway: "Apparatet må tilkoples jordet stikkontakt" In Sweden: "Apparaten skall anslutas till jordat uttag"		N/A
1.7.2.1 (A11:2009)	In Norway and Sweden, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: "Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing – and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)."		

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(13) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	NOTE In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min. Translation to Norwegian (the Swedish text will also be accepted in Norway): “Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel- TV nettet.” Translation to Swedish: ”Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet.”		N/A
1.7.2.1 (A2:2013)	In Denmark, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text in Denmark shall be as follows: In Denmark: “Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.”		N/A
1.7.5	In Denmark, socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For STATIONARY EQUIPMENT the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a.		N/A
1.7.5 (A11:2009)	For CLASS II EQUIPMENT the socket outlet shall be in accordance with Standard Sheet DKA 1-4a.		

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(14) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.5 (A2:2013)	In Denmark, socket-outlets for providing power to other equipment shall be in accordance with the DS 60884-2-D1:2011. For class I equipment the following Standard Sheets are applicable: DK 1-3a, DK 1-1c, DK 1-1d, DK 1-5a or DK 1-7a, with the exception for STATIONARY EQUIPMENT where the socket-outlets shall be in accordance with Standard Sheet DK 1-1b, DK 1-1c, DK 1-1d or DK 1-5a. Socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance with DS 60884-2-D1 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with by DS 60884-2-D1 Standard Sheet DKA 1-3a or DKA 1-3b. Justification the Heavy Current Regulations, 6c		N/A
2.2.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.2	In Finland, Norway and Sweden there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.3.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N/A
2.6.3.3	In the United Kingdom , the current rating of the circuit shall be taken as 13 A, not 16 A.		N/A
2.7.1	In the United Kingdom , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.		N/A
2.10.5.13	In Finland, Norway and Sweden , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(15) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	In Switzerland, supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets: SEV 6532-2.1991 Plug Type 15 3P+N+PE 250/400 V, 10 A SEV 6533-2.1991 Plug Type 11 L+N 250 V, 10 A SEV 6534-2.1991 Plug Type 12 L+N+PE 250 V, 10 A In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998: SEV 5932-2.1998: Plug Type 25 , 3L+N+PE 230/400 V, 16 A SEV 5933-2.1998: Plug Type 21, L+N, 250 V, 16 A SEV 5934-2.1998: Plug Type 23, L+N+PE 250 V, 16 A		N/A
3.2.1.1	In Denmark, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a. If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(16) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1 (A2:2013)	In Denmark, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a. If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2. Justification the Heavy Current Regulations, 6c		N/A
3.2.1.1	In Spain, supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994. Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994. If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.		N/A
3.2.1.1	In the United Kingdom, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations. NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(17) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	In Ireland , apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.		N/A
3.2.4	In Switzerland , for requirements see 3.2.1.1 of this annex.		N/A
3.2.5.1	In the United Kingdom , a power supply cord with conductor of 1,25 mm ² is allowed for equipment with a rated current over 10 A and up to and including 13 A.		N/A
3.3.4	In the United Kingdom , the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: • 1,25 mm ² to 1,5 mm ² nominal cross-sectional area.		N/A
4.3.6	In the United Kingdom , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A
4.3.6	In Ireland , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(18) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.7.1	In Finland, Norway and Sweden TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment: • STATIONARY PLUGGABLE EQUIPMENT TYPE A that is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and is provided with instructions for the installation of that conductor by a SERVICE PERSON; • STATIONARY PLUGGABLE EQUIPMENT TYPE B; • STATIONARY PERMANENTLY CONNECTED EQUIPMENT.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(19) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.1 (A1:2010)	In Finland, Norway and Sweden, add the following text between the first and second paragraph of the compliance clause: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. Alternatively for components, there is no distance through insulation requirements for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(20) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b). It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2. A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions: - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 60384-14; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.		N/A
6.1.2.2	In Finland, Norway and Sweden , the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N/A
7.2	In Finland, Norway and Sweden , for requirements see 6.1.2.1 and 6.1.2.2 of this annex. The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N/A
7.3 (A11:2009)	In Norway and Sweden , for requirements see 1.2.13.14 and 1.7.2.1 of this annex.		N/A

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong) 113, Yejik-ro, Cheoin-gu, Yongin-shi Gyeonggi-do KOREA, REPUBLIC OF Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2017-02280 Page(21) / (21) pages	
---	--	--	--

Attachment 1 – European Group Differences and National Differences

IEC60950_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

Annex ZD (informative)

IEC and CENELEC code designations for flexible cords

Type of flexible cord	Code designations	
	IEC	CENELEC
PVC insulated cords		
Flat twin tinsel cord	60227 IEC 41	H03VH-Y
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F
Ordinary polyvinyl chloride sheathed flexible cord	60277 IEC 53	H05VV-F H05VVH2-F
Rubber insulated cords		
Braided cord	60245 IEC 51	H03RT-F
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F
Cords having high flexibility		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H

Attachment 2 – Photographs

<Photo 1> External Front view



<Photo 2> External Rear view



Attachment 2 – Photographs

<Photo 3> Internal view 1




<Photo 4> Internal view 2



Attachment 2 – Photographs

<Photo 5> Power Supply Top View

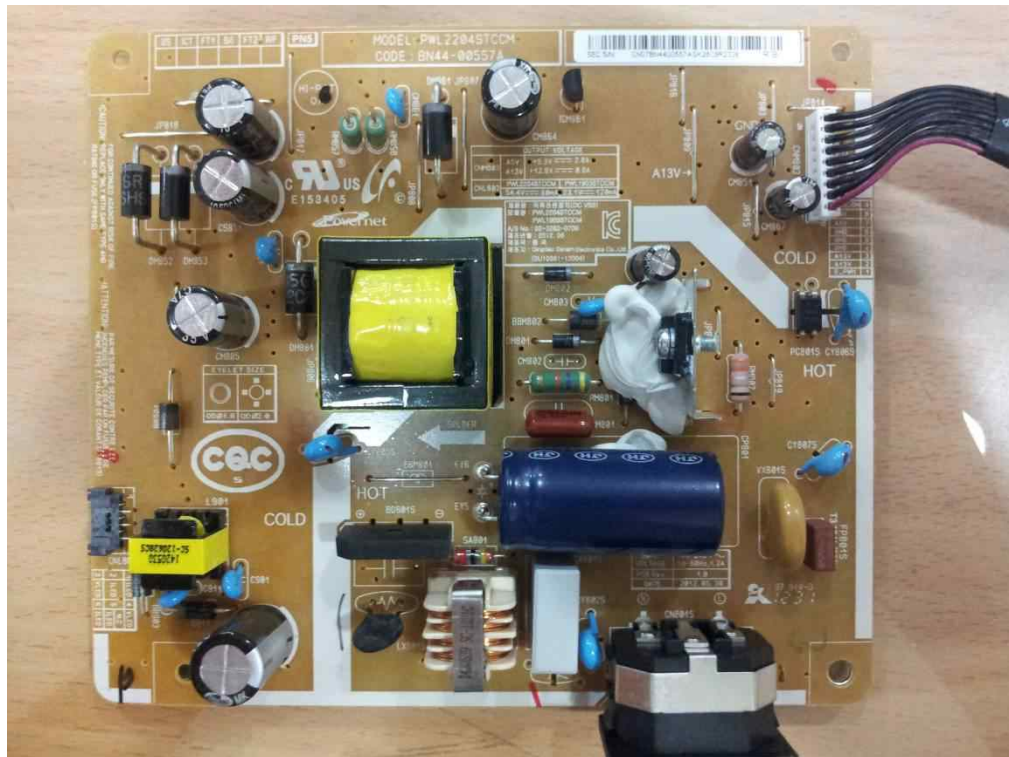

<Photo 6> Power Supply Bottom View

