

# SMT-2721D

Monitor decodificador de vídeo

## Key Features

- Monitor FHD de 27 pulgadas con decodificador de vídeo integrado
- Admite cámara con resolución hasta 4K
- Hasta 64 flujos de vídeo en directo
- Múltiples configuraciones de pantalla
- Alimentación dual (HPoE y CC 24V) • Salida HDMI para monitor externo
- Certificado por la FCC, cumple con la NDAA, fabricado en Corea
- Brillo 300 cd/m<sup>2</sup>, Contraste 3000:1
- Diseñado y probado funcionando 24/7

# SMT-2721D

Monitor decodificador de vídeo



## Specifications

### Display

|                     |                       |
|---------------------|-----------------------|
| Type                | LED Monitor           |
| Screen Size         | 27inch                |
| Max. Resolution     | 1920x1080             |
| Brightness          | 300 cd/m <sup>2</sup> |
| Contrast Ratio      | 3000:1                |
| Aspect Ratio        | 16:9                  |
| Viewing Angle (H/V) | 178°/178°             |
| Display Color       | 16.7M                 |
| Response Time       | 12ms                  |
| Panel Life          | 30,000 hours          |

### Interface

|         |                  |                                                                                       |
|---------|------------------|---------------------------------------------------------------------------------------|
| Video   | Connectors       | HDMI#1 - Internal, Decoder main monitor, HDMI#2 - External, Decoder secondary monitor |
| HDMI    | Connector        | HDMI                                                                                  |
|         | Available Format | 1280x720@60Hz, 1280 X 1024@60Hz, 1920x1080@60Hz                                       |
| Audio   | Output Signal    | Speakers : 8Ω 1W x 2                                                                  |
| Network | Ethernet         | 1xRJ-45 10/100/1000BASE-T                                                             |
| USB     | USB              | 2xUSB 2.0(Mouse,Keyboard), 1xUSB 2.0 (AD Firmware upgrade)                            |

### On Screen Display

|           |                                  |
|-----------|----------------------------------|
| Functions | VESA™ DPMS Compatible            |
| Language  | English, Spanish, French, Korean |

### General

|               |                       |                            |
|---------------|-----------------------|----------------------------|
| Electrical    | Input Voltage         | DC24V, HPoE 802.3bt        |
|               | Power Consumption     | 31W                        |
| Environmental | Operating Temperature | 0 ~ +40°C (+32°F ~ +104°F) |
|               | Operating Humidity    | 10% ~ 80% (non-condensing) |

## General

|                   |                                  |                                 |
|-------------------|----------------------------------|---------------------------------|
| <b>Mechanical</b> | Dimensions without Stand (WxHxD) | 624x387x58mm(24.6x15.2x2.3")    |
|                   | Weight                           | 6.5kg(14.3lb)                   |
|                   | Packing Dimension (WxHxD)        | 725x500x150mm(28.5x19.7x5.9")   |
|                   | Packing Weight                   | 8.2kg(18.1lb)                   |
|                   | Cabinet Color                    | Black                           |
|                   | VESA Mounts Interface            | 100x100mm, 200x100mm, 200x200mm |


## Decoder

|                      |                           |                                                                                                                        |
|----------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>Video</b>         | Codec                     | H.265 / H.264 / MJPEG                                                                                                  |
|                      | Max. Decoding Performance | 2x8M@30fps, 12x2M@30fps                                                                                                |
|                      | Division (/Monitor)       | - Clone mode (HDMI#1) Max. 64, - Expand mode (HDMI#1) Max. 36 (HDMI#2) Max. 25                                         |
|                      | Layout                    | Up to 20, Sequence support                                                                                             |
| <b>Audio</b>         | Codec                     | G.711 / G.726 / AAC                                                                                                    |
| <b>Management</b>    |                           | Local UI, Web-Viewer, SSM                                                                                              |
| <b>Time Setting</b>  |                           | NTP/Manual                                                                                                             |
| <b>Export/Import</b> |                           | Configuration Export/Import                                                                                            |
| <b>Log</b>           |                           | Max. 100,000 (System log)                                                                                              |
| <b>Protocol</b>      |                           | RTP, RTSP, HTTP, CGI (SUNAPI), ONVIF                                                                                   |
| <b>Security</b>      |                           | IP address filtering, User access Log, 802.1x, Encryption, Device certificate(Hanwha Techwin Root CA), Signed firmware |

## Monitor decodificador de vídeo



Unit: mm [inch]

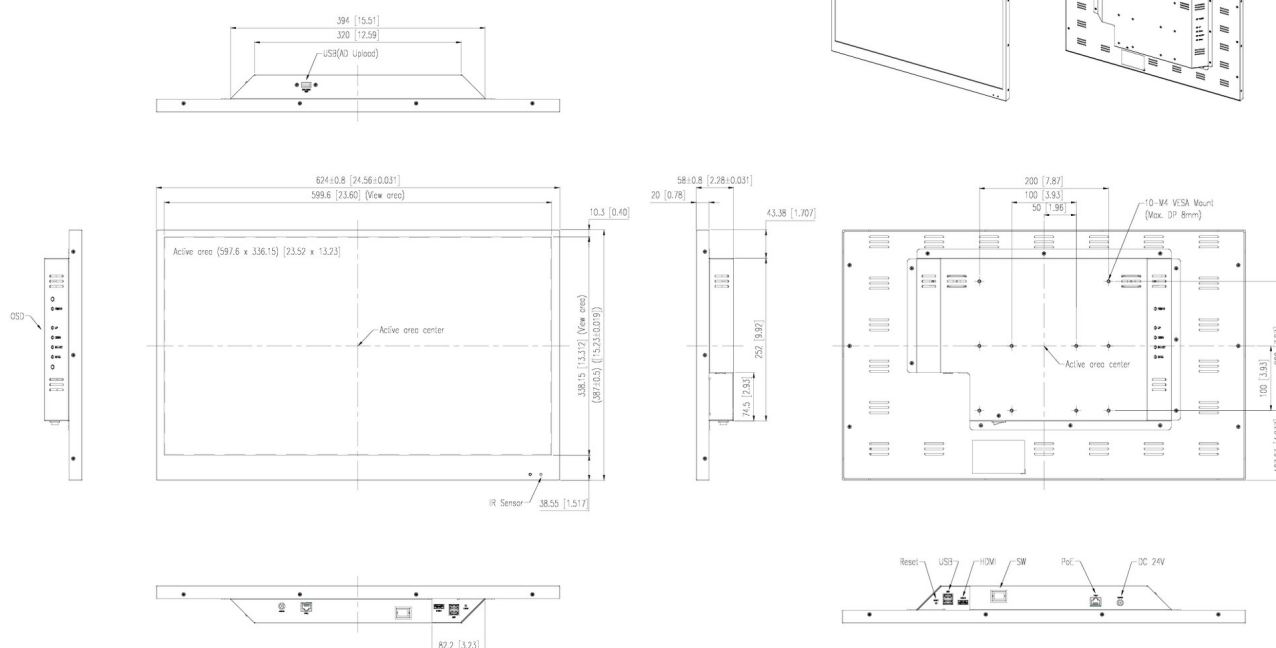

|               |          |
|---------------|----------|
| Revision      | V1.0     |
| Revision Date | 25/04/17 |
| Paper Size    | A3       |
| Unit          | mm[inch] |
| Scale         | 1 : 5    |

©Hanwha Vision Co., Ltd. All right reserved.