

TESTING CERTIFICATE

EMC Compliance Ltd.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do,
443-390, Korea
TEL: 82 31 336 9919
FAX: 82 505 299 8311

Certificate No.: EMC-CE-4698

Page(1) / (42) Pages



1. Applicant

Name: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Date of Receipt: February 10, 2014

2. Manufacturer

Name#1: Samsung Techwin Co., Ltd.
Name#2: TIANJIN SAMSUNG TECHWIN
OPTO-ELECTRONIC CO., LTD

3. Use of Report:

Completed report

4. Test Sample:

Network Camera, SNB-6010

5. Date of Test:

February 20 ~ March 05, 2014

6. Test method used:

AS/NZS CISPR 22:2009+A1:2010, Class A

7. Testing Environment:

Temperature: $(19.45 \pm 2.65) ^\circ\text{C}$,
Relative Humidity: $(20.2 \pm 2.7) \% \text{ R.H.}$

8. Test Results:

Refer to page 14 ~ page 30
(Measurement uncertainty: Refer to page 6)

This result shown in this report refer only to the sample(s) tested unless otherwise stated.

This Test Report cannot be reproduced, except in full, without the written approval of
EMC Compliance Laboratory.

Affirmation	Tested by  Name: PARK, GUN-SU	Technical Manager  Name: YEOM, HAN-SEOK
-------------	--	---

The above test certificate is the accredited test results by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

2014. 03. 18

EMC Compliance Ltd.

Accredited by KOLAS, Republic of KOREA

Contents

1. Applicant information	3
2. Laboratory information	4
3. Test system configuration.....	5
3.1 Operation environment	5
3.2 Measurement Uncertainty.....	6
4. Description of E.U.T.	7
4.1 General information.....	7
4.2 Product description.....	9
4.3 Auxiliary equipments.....	9
4.4 Test configuration	10
4.5 Operating conditions.....	12
5. Summary of test results.....	13
5.1 Summary of EMI emission test results.....	13
6. Test results	14
6.1 Conducted Emission.....	14
6.2 Radiated Emission	21
7. E.U.T. photographs.....	31

1. Applicant information

Applicant: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#1: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#2: TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO., LTD
Address: No.11 Weiliu Road. Micro-Electronic Industrial Park
Jingang Road Tianjin 300385, China

2. Laboratory information

Address

EMC compliance Ltd.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-390, Korea

Telephone Number: 82 31 336 9919

Facsimile Number: 82 505 299 8311


FCC CAB.: KR0040

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No.: 8035A

KOLAS NO.: 231

SITE MAP

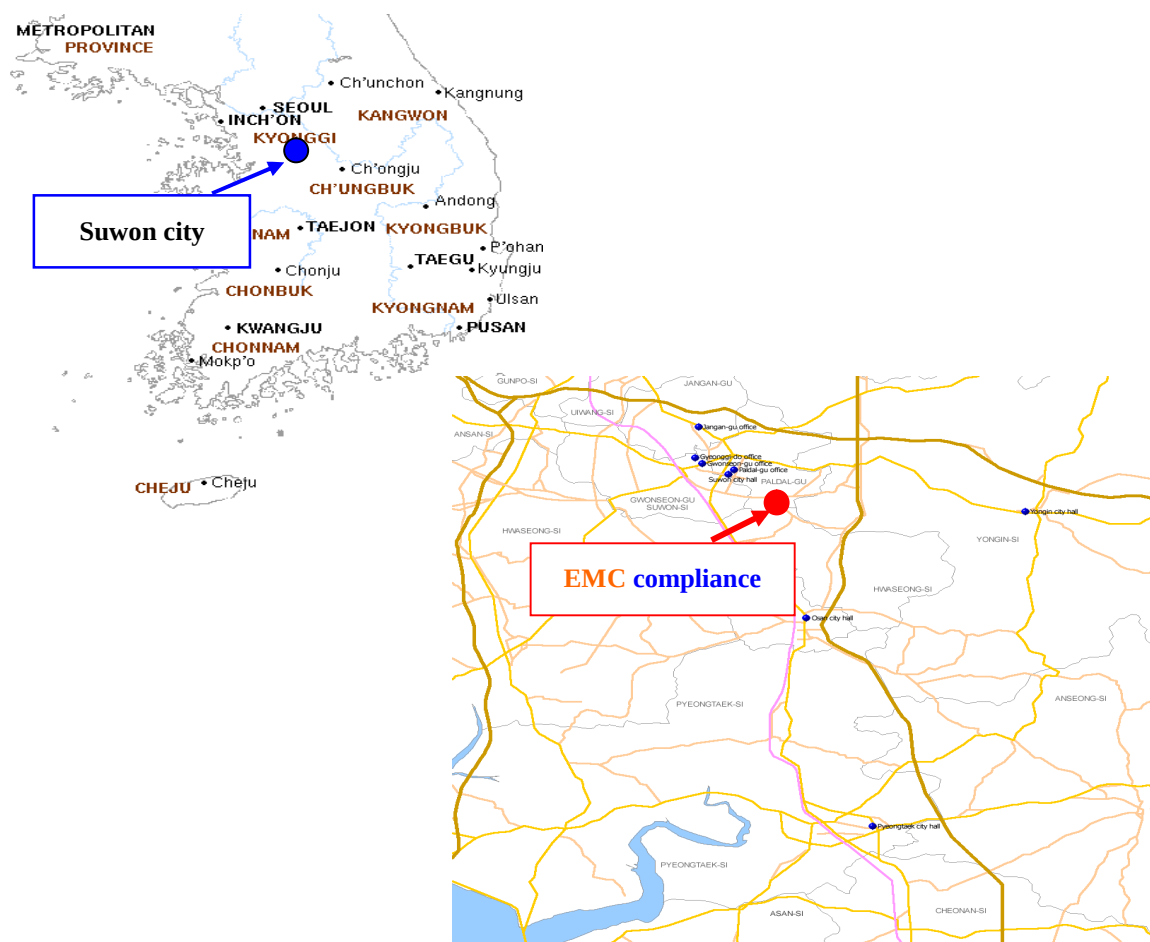

3. Test system configuration

3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber(10 m)	: 16.8 °C	22.9 % R.H.	-
Shielded room(CE)	: 22.1 °C	17.5 % R.H.	-

Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted emission measurement (C.L: Approx 95 %, k = 2)		
Shielded Room (CE#1)	9 kHz ~ 150 kHz: ± 3.82 dB	
	150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz: ± 3.82 dB	
	150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#3)	9 kHz ~ 150 kHz: ± 4.00 dB	
	150 kHz ~ 30 MHz: ± 3.63 dB	
Radiated Emission measurement (C.L: Approx 95 %, k = 2)		
10 m Chamber (#F4)	30 MHz ~ 300 MHz	3 m: + 4.56 dB, - 4.58 dB 10 m: + 4.56 dB, - 4.56 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.84 dB, - 4.85 dB 10 m: + 4.71 dB, - 4.72 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB
10 m Chamber (#F2)	30 MHz ~ 300 MHz	3 m: + 4.86 dB, - 4.88 dB 10 m: + 4.86 dB, - 4.86 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.98 dB, - 4.99 dB 10 m: + 4.85 dB, - 4.87 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB

4. Description of E.U.T.

4.1 General information

Video	
Imaging Device	1/2.8" PS 2.38M CMOS
Total Pixels	1952(H) x 1116(V)
Effective Pixels	1944(H) x 1104(V)
Scanning System	Progressive
Min. Illumination	Color : 0.5Lux (1/30sec, F2.5, 50IRE) B/W : 0.5Lux (1/30sec, F2.5, 50IRE)
S / N Ratio	-
Lens	
Focal Length (Zoom Ratio)	4.6mm pinhole
Max. Aperture Ratio	2.5
Angular Field of View	H : 71° / V : 38°
Min. Object Distance	-
Focus Control	-
Lens Type	-
Mount Type	RJ-12 connected with main unit
Operational	
Camera Title	Off / On (Displayed up to 45 characters)
Day & Night	Auto(S/W) / Color / B/W / Schedule
Backlight Compensation	Off / BLC / WDR
Wide Dynamic Range	120dB
Contrast Enhancement	SSDR (Samsung Super Dynamic Range)
Digital Noise Reduction	SSNR3 (2D + 3D noise filter)(Off/On)
Digital Image Stabilization	Off / On
Defog	Off / Auto / Manual
Motion Detection	Off / On (4ea 4 Points Polygonal zones)
Privacy Masking	Off / On (32 Zones with 4 Points of Polygonal)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	-
Flip / Mirror	Off / On
Intelligent Video Analytics	Tampering, Virtual Line, Enter/Exit, Appear / Disappear
Alarm I/O	Input 1ea / Output 1ea
Serial Interface	-
Alarm Triggers	Motion detection, Alarm Input, Video Analytics, Network Disconnection
Alarm events	File upload via FTP and E-Mail Notification via E-Mail, local storage(SD/SDHC/SDXC) or NAS recording at Event External output
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264 (MPEG-4 Part 10/AVC), Motion JPEG
Resolution	1920x1080 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 640x480 / 640x360 / 320x240 / 320x180
Max. Framerate	H.264 : Max. 30fps at all resolutions MJPEG : 1920 x 1080, 1280 x 1024, 1280 x 960, 1280 x 720, 1024 x 768 : Max. 15fps 800 x 600, 800 x 450, 640 x 480, 640 x 360, 320 x 240, 320 x 180 : Max. 30fps

Smart Codec	-
Video Quality Adjustment	H.264 : Compression Level, Target Bitrate Level Control MJPEG : Quality Level Control
Bitrate Control Method	H.264 : CBR or VBR Motion JPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1x Authentication
Streaming Method	Unicast / Multicast
Max. User Access	15 users at Unicast Mode
Memory Slot	Micro SD/SDHC/SDXC - motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded.
Application Programming Interface	ONVIF Profile S HTTP API v2.0 SVNP 1.2
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Finnish, Norwegian
Web Viewer	Supported OS : Windows XP / VISTA / 7 / 8, MAC OS X 10.7 Supported Browser : Microsoft Internet Explorer (Ver. 7~10), Mozilla Firefox (Ver. 9~19), Google Chrome (Ver. 15~25), Apple Safari (Ver. 6.0.2(Mac OS X 10.8, 10.7 Only), 5.1.7) * Mac OS X Only
Central Management Software	SmartViewer 4.X
Environmental	
Operating Temperature / Humidity	-20°C ~ +55°C(+14°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Electrical	
Input Voltage / Current	DC12V, PoE(IEEE802.3af)
Power Consumption	PoE : Max 7.5W DC12V : Max 6.5W
Mechanical	
Color / Material	Header : Black / Plastic Unit : IVORY / Plastic
Dimension (WxHxD)	Header : Φ25×42.4mm Unit : W121.2×H28×D76mm
Weight	Header : 315g(with Cable) Unit : 285g

4.2 Product description


Type of product	Network Camera
Model name (Basic)	SNB-6010P
Model name (Variant)	-
Difference	-
Trade name	-
Serial no	Engineering Sample
Testing voltage	DC 12 V , PoE
Product rating	DC 12 V , PoE
Internal clock frequency	Above 108 MHz
Note	* AC/DC adaptor was not provided by the manufacturer. * PoE Switch was not provided by the manufacturer.

4.3 Auxiliary equipments

Type	Model / Part #	Serial number	Manufacturer
Note PC	C1321	472680432038	FUJITSU
USB Mouse	1088	8165900112701	Microsoft
Headset	SHS-250V	-	SAMSUNG
JIG	-	-	-
AC/DC Adaptor	ADS-30SL-12-2	-	Samsung Techwin
PoE Switch	FS109P	2HK1283V50C35	NETGEAR
Micro SD Card(4GB)	-	-	-


4.4 Test configuration

#1- DC 12V

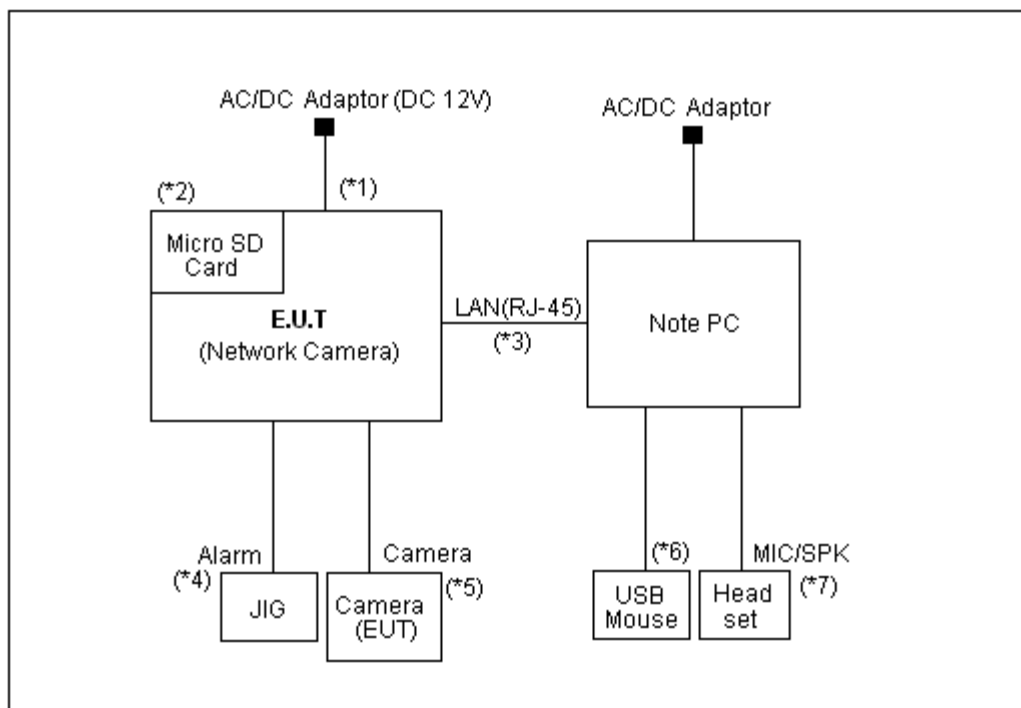

Note *	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (Network Camera)	Power	AC/DC Adaptor	Power	1.2	Non-Shield
2		Micro SD	Micro SD Card	Micro SD	Direct	-
3		LAN(RJ-45)	Note PC	LAN(RJ-45)	3.0	Non-Shield
4		Alarm	JIG	Alarm	3.0	Non-Shield
5		Camera	Camera (EUT)	Camera	5.0	Non-Shield
6	Note PC	USB	USB Mouse	USB	1.8	Shield
7		MIC/SPK	Headset	MIC/SPK	2.0	Non-Shield

#2- PoE

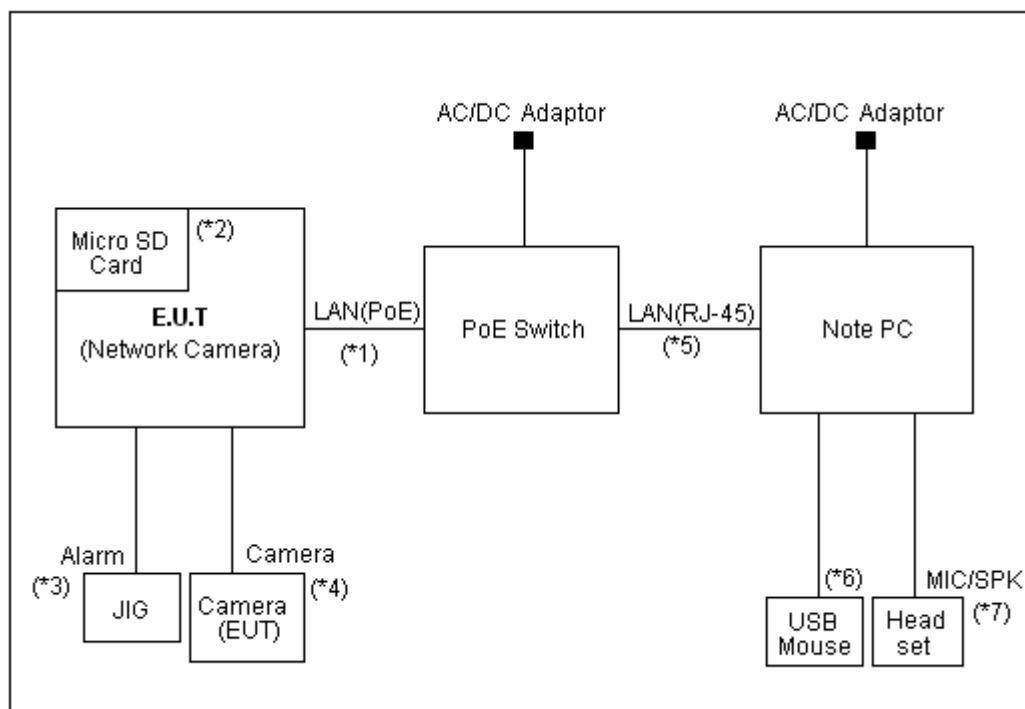

* Power supplied from PoE Switch

Note *	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (Network Camera)	LAN(PoE)	PoE Switch	LAN(PoE)	3.0	Non-Shield
2		Micro SD	Micro SD Card	Micro SD	Direct	-
3		Alarm	JIG	Alarm	3.0	Non-Shield
4		Camera	Camera (EUT)	Camera	5.0	Non-Shield
5	Note PC	LAN(RJ-45)	PoE Switch	LAN(RJ-45)	3.0	Non-Shield
6		USB	USB Mouse	USB	1.8	Shield
7		MIC/SPK	Headset #2	MIC/SPK	2.0	Non-Shield

4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating
1	Web viewer monitoring test.
	Alarm test.
	Ping test.

* Note: 2 types of powers are available for the product, that are DC 12 V, PoE.

Therefore, tests were performed for 2 different types of powers.

5. Summary of test results

5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
☒	Conducted Emission	AS/NZS CISPR 22:2009, Class A	14 Page ~ 20 Page
☒	Radiated Emission	AS/NZS CISPR 22:2009, Class A	21 Page ~ 30 Page

6. Test results

6.1 Conducted Emission

Test specification	AS/NZS CISPR 22:2009, Class A		
Testing voltage	DC 12 V, PoE		
Test facility	Shielded room (CE#2)		
Date	2014. 02. 20		
Temperature (°C)	22.1 °C	Humidity (% R.H.)	17.5 % R.H.
Remarks	Complied		

6.1.1 Limits of conducted emission measurement

☐ AC main

Frequency MHz	Class A $\text{dB}_{\mu\text{V}}$		Class B $\text{dB}_{\mu\text{V}}$	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79	66	66 ~ 56 *	56 ~ 46*
0.5 ~ 5	73	60	56	46
5 ~ 30	73	60	60	50

*The limit decreases linearly with the logarithm of frequency.

☒ Telecommunication

Frequency MHz	Class A Voltage Limits $\text{dB}_{\mu\text{V}}$		Current Limits $\text{dB}_{\mu\text{A}}$	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	97 to 87	84 to 74	53 to 43	40 to 30
0.5 ~ 30	87	74	43	30
Frequency MHz	Class B Limits $\text{dB}_{\mu\text{V}}$		Current Limits $\text{dB}_{\mu\text{A}}$	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	84 to 74	74 to 64	40 to 30	30 to 20
0.5 ~ 30	74	64	30	20

* The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz

* The current and voltage disturbance limits are derived for use with an impedance stabilization Network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44 \text{ dB}$).

6.1.2 Measurement procedure

The measurements were performed in a shielded room. EUT was setup as shown in photograph and placed on a non-metallic table height of 0.8 m above the reference ground plane. The rear of table was located 0.4 m to the vertical conducted plane. EUT was power through the LISN, which was bonded to the ground plane. The LISN power was filtered. Each EUT power lead, except ground (safety) lead was individually connected through a LISN to input power source. EUT signal cables that hung closer than 0.4 m to the Horizontal metal ground 0.3 m ~ 0.4 m long. The power cord was bundles in the center. All peripheral equipment was powered from a sub LISN. The LISN and ISN were positioned 0.8 m from the EUT. Peak and Average detection were used in preliminary testing and Quasi-peak and Average detections were used at final measurement. Both lines of power cord, hot and neutral, were measured.


6.1.3 Used equipments

Equipment	Model	Serial No.	Makers	Next Cal. Date	Used
Test Receiver	ESCI7	100732	R&S	2015.01.27	☐
Test Receiver	ESCI	100001	R&S	2014.07.25	☒
Test Receiver	ESCI	100710	R&S	2014.10.28	☐
LISN	ENV216	101352	R&S	2015.01.02	☐
LISN	NNLK8121	8121-472	SCHWARZBECK	2014.07.08	☒
8-WIRE ISN	NTFM 8158 CAT5	CAT5-8158-0028	SCHWARZBECK	2014.04.13	☒
8-WIRE ISN	NTFM 8158 CAT3	CAT3-8158-0020	SCHWARZBECK	2014.04.13	☐
ISN	ST08	24342	TESEQ	2014.06.21	☐


6.1.4 Photographs of test setup

* Telecommunication

#1- DC 12V

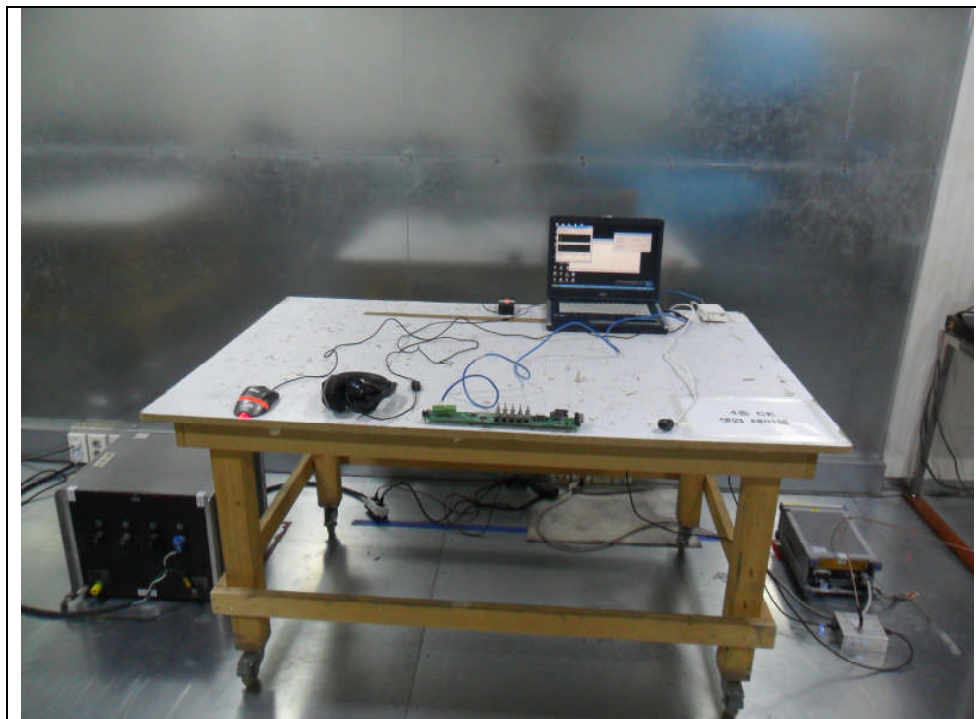


#2-PoE

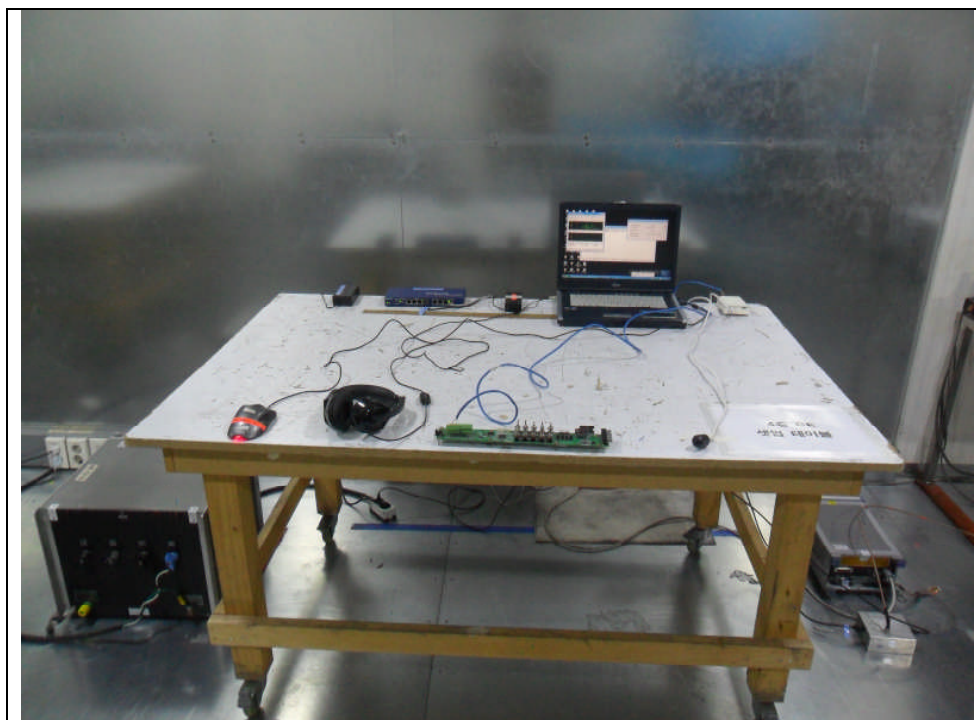

6.1.5 Conducted emission measurement result

* Telecommunication port


LAN Port (LCL 65 dB)_10 Mbps (SNB-6010P)_#1- DC 12V

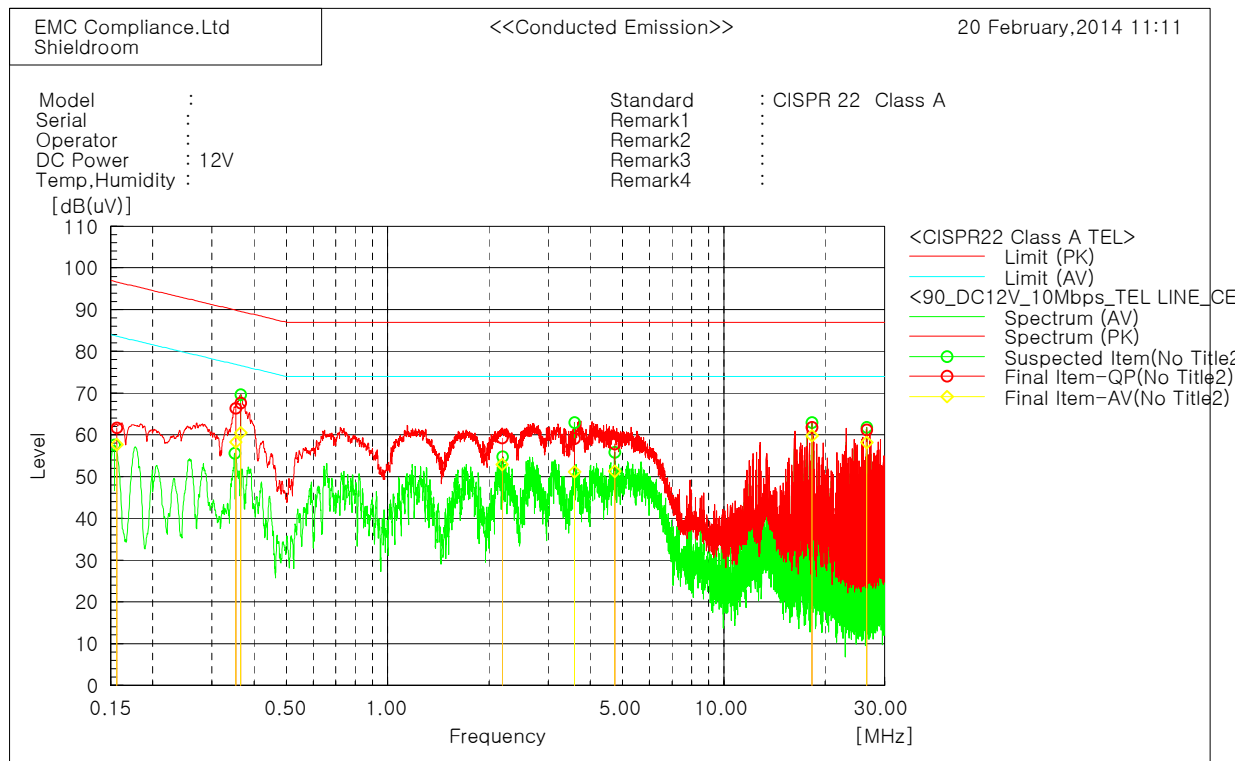

Final Result

--- ISN-CAT5 Phase ---										
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.15673	51.3	47.3	10.4	61.7	57.7	96.6	83.6	34.9	25.9
2	0.35428	56.3	48.1	10.1	66.4	58.2	89.9	76.9	23.5	18.7
3	0.36638	57.5	50.4	10.1	67.6	60.5	89.6	76.6	22.0	16.1
4	2.1929	48.8	42.5	10.4	59.2	52.9	87.0	74.0	27.8	21.1
5	3.59248	49.2	41.4	9.8	59.0	51.2	87.0	74.0	28.0	22.8
6	4.73094	48.1	41.5	9.7	57.8	51.2	87.0	74.0	29.2	22.8
7	18.24353	52.3	50.3	9.5	61.8	59.8	87.0	74.0	25.2	14.2
8	26.60966	51.7	48.6	9.5	61.2	58.1	87.0	74.0	25.8	15.9


LAN Port (LCL 65 dB)_100 Mbps (SNB-6010P)_#1- DC 12V

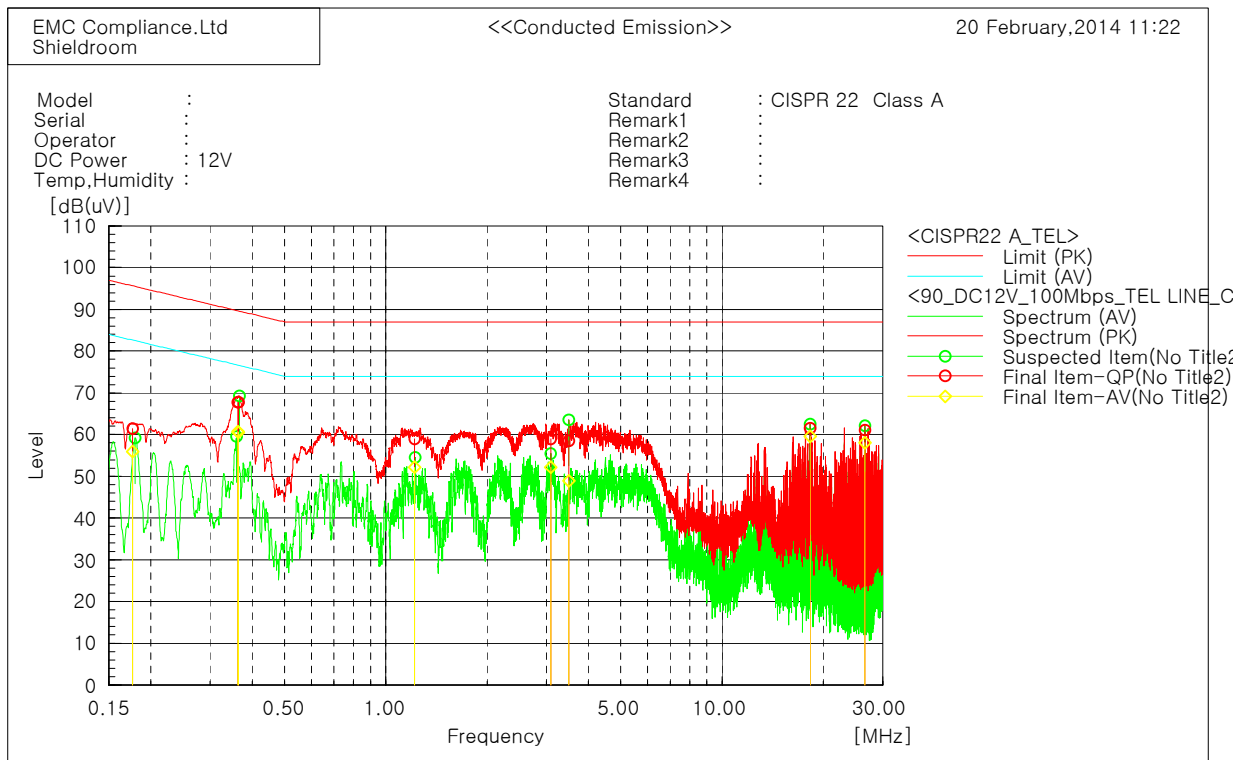

Final Result

--- ISN-CAT5 Phase ---											
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	
	[MHz]	QP	CAV		QP	CAV	QP	AV	QP	CAV	
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.17675	51.2	45.7	10.3	61.5	56.0	95.6	82.6	34.1	26.6	
2	0.36497	57.6	50.5	10.1	67.7	60.6	89.6	76.6	21.9	16.0	
3	0.36364	57.7	50.6	10.1	67.8	60.7	89.6	76.6	21.8	15.9	
4	1.22002	48.7	41.9	10.3	59.0	52.2	87.0	74.0	28.0	21.8	
5	3.08894	48.9	42.2	10.0	58.9	52.2	87.0	74.0	28.1	21.8	
6	3.50276	48.6	39.0	9.9	58.5	48.9	87.0	74.0	28.5	25.1	
7	18.24278	52.1	50.1	9.5	61.6	59.6	87.0	74.0	25.4	14.4	
8	26.60968	51.6	48.6	9.5	61.1	58.1	87.0	74.0	25.9	15.9	

LAN Port (LCL 65 dB)_10 Mbps (SNB-6010P)_#2- PoE

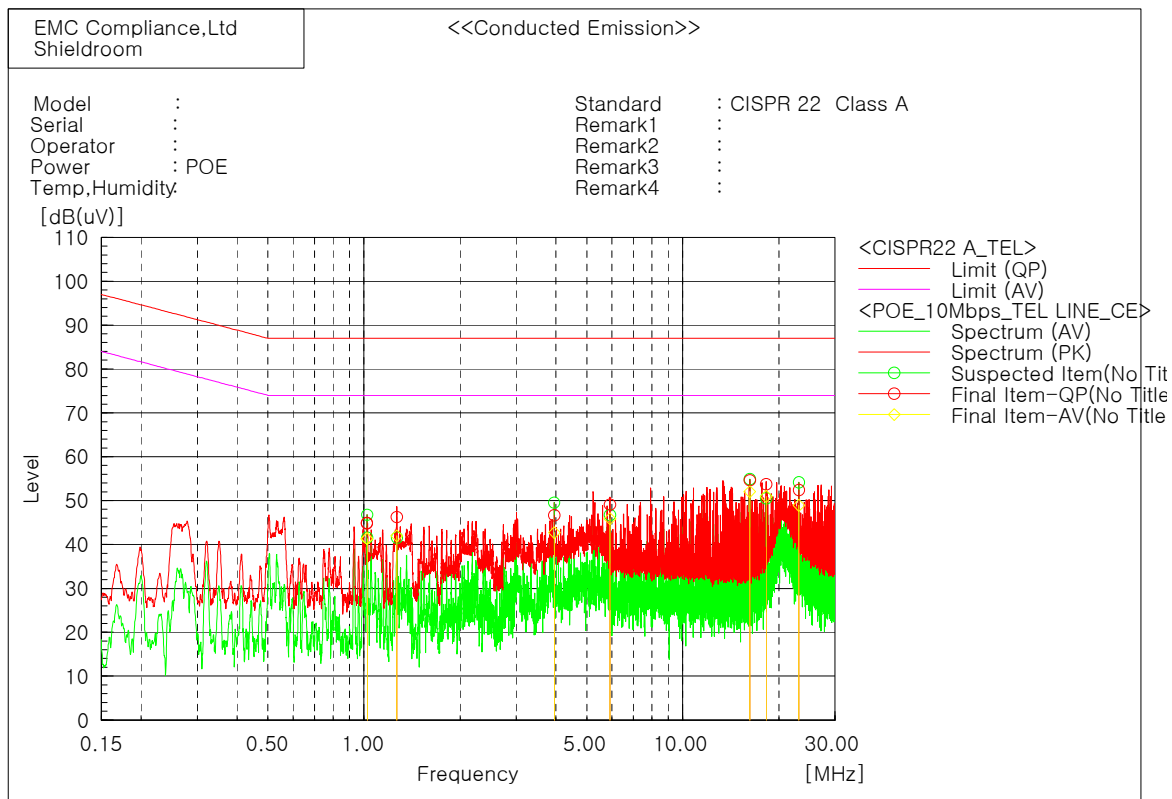


Final Result

--- ISN-Cat5 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	1.02228	34.6	31.1	10.2	44.8	41.3	87.0	74.0	42.2	32.7
2	1.02244	34.7	31.1	10.2	44.9	41.3	87.0	74.0	42.1	32.7
3	1.26628	35.9	31.6	10.3	46.2	41.9	87.0	74.0	40.8	32.1
4	3.95411	36.9	32.9	9.8	46.7	42.7	87.0	74.0	40.3	31.3
5	5.90823	39.5	36.3	9.6	49.1	45.9	87.0	74.0	37.9	28.1
6	16.22825	45.1	42.4	9.6	54.7	52.0	87.0	74.0	32.3	22.0
7	18.24335	44.2	41.5	9.5	53.7	51.0	87.0	74.0	33.3	23.0
8	23.12806	42.9	39.4	9.5	52.4	48.9	87.0	74.0	34.6	25.1

LAN Port (LCL 65 dB)_100 Mbps (SNB-6010P)_#2- PoE

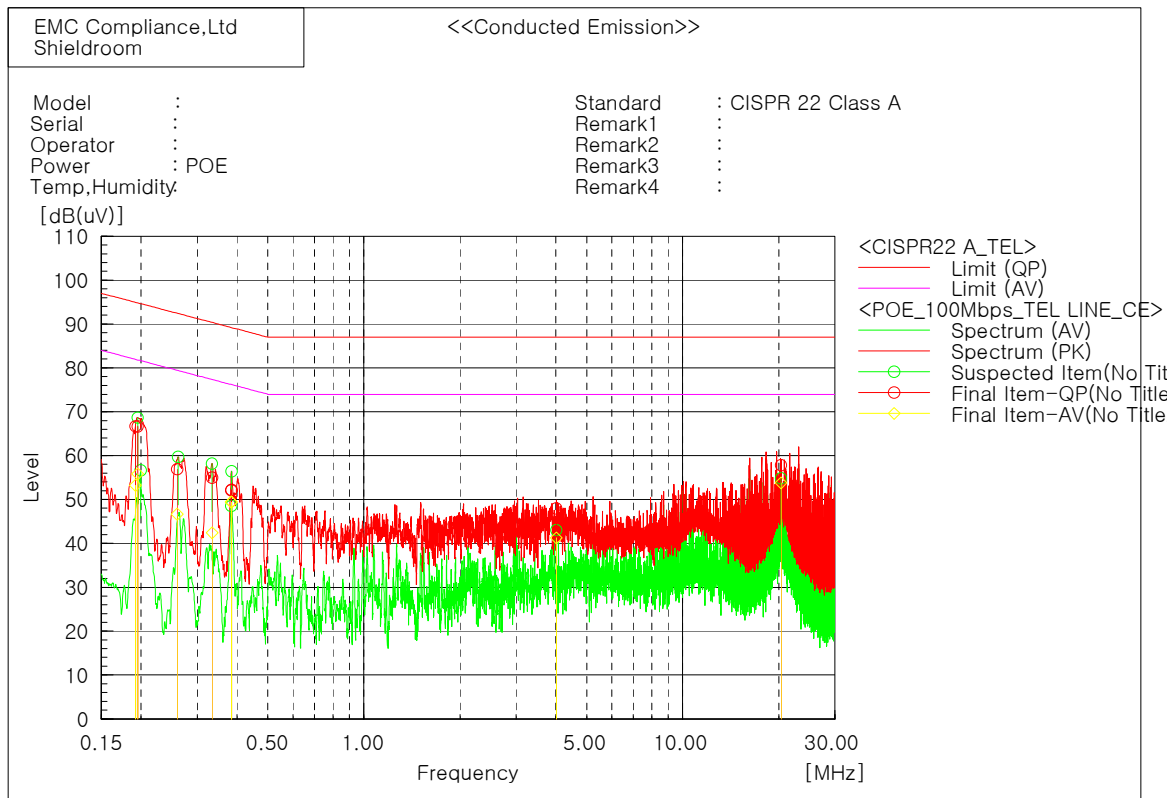

Final Result

--- ISN-Cat5 Phase ---

No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.19217	56.4	42.9	10.3	66.7	53.2	94.9	81.9	28.2	28.7
2	0.25987	46.7	36.5	10.2	56.9	46.7	92.4	79.4	35.5	32.7
3	0.33411	44.8	32.2	10.2	55.0	42.4	90.3	77.3	35.3	34.9
4	0.38472	42.1	39.2	10.1	52.2	49.3	89.2	76.2	37.0	26.9
5	0.19537	56.3	45.5	10.3	66.6	55.8	94.8	81.8	28.2	26.0
6	0.38402	42.0	39.3	10.1	52.1	49.4	89.2	76.2	37.1	26.8
7	4.01565	38.2	31.4	9.8	48.0	41.2	87.0	74.0	39.0	32.8
8	20.32066	48.3	44.3	9.5	57.8	53.8	87.0	74.0	29.2	20.2

6.2 Radiated Emission

Test specification	AS/NZS CISPR 22:2009, Class A		
Testing voltage	DC 12 V, PoE		
Test facility	10 m Chamber (#F2)		
Test distance	10 m, 3 m		
Date	2014. 03. 05		
Temperature (°C)	16.8 °C	Humidity (% R.H.)	22.9 % R.H.
Remarks	Complied		

6.2.1 Limits of radiated emission measurement

☒ Limits below 1 GHz

Frequency MHz	Class A dB μ V/m @ 10 m	Class B dB μ V/m @ 10 m
30 ~ 230	40	30
230 ~ 1 000	47	37

☒ Limits above 1 GHz

Frequency MHz	Class A @ 3 m		Class B @ 3 m	
	Average limit dB μ V/m	Peak limit dB μ V/m	Average limit dB μ V/m	Peak limit dB μ V/m
1 ~ 3	56	76	50	70
3 ~ 6	60	80	54	74

Note - The lower limit applies at the transition frequency.

6.2.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
Test Receiver	ESCI7	100732	R&S	2015.01.27	☒
Test Receiver	ESCI	100001	R&S	2014.07.25	☐
Test Receiver	ESCI	100710	R&S	2014.10.28	☐
Test Receiver	ESR	101078	R&S	2015.02.24	☐
Bi-Log Antenna	VULB 9168	440	SCHWARZBECK	2015.10.16	☒
Amplifier	310N	293004	SONOMA INSTRUMENT	2014.10.31	☒
3 dB Attenuator	8491B	22981	HP	2014.03.19	☒
Antenna Mast	MA4000-EP	303	Innco Systems	-	☒
Turn Table	DT2000S-1t	079	Innco Systems	-	☒
Amplifier	8449B	3008A02343	AGILENT	2014.10.31	☒
Horn ANT	3115	00155772	ETS	2015.02.26	☒
Spectrum Analyzer	FSP7	100289	R&S	2014.11.25	☐

6.2.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 3 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G= Amplifier Gain

3 dB Att = 3 dB Attenuator



If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 3 dB, A.G 35 dB

The result is



$$30 + 12 + 5 + 3 - 35 = 15 \text{ dB}\mu\text{V/m}$$

6.2.5 Photographs of test setup



* 30 MHz ~ 1 GHz (#1- DC 12V)

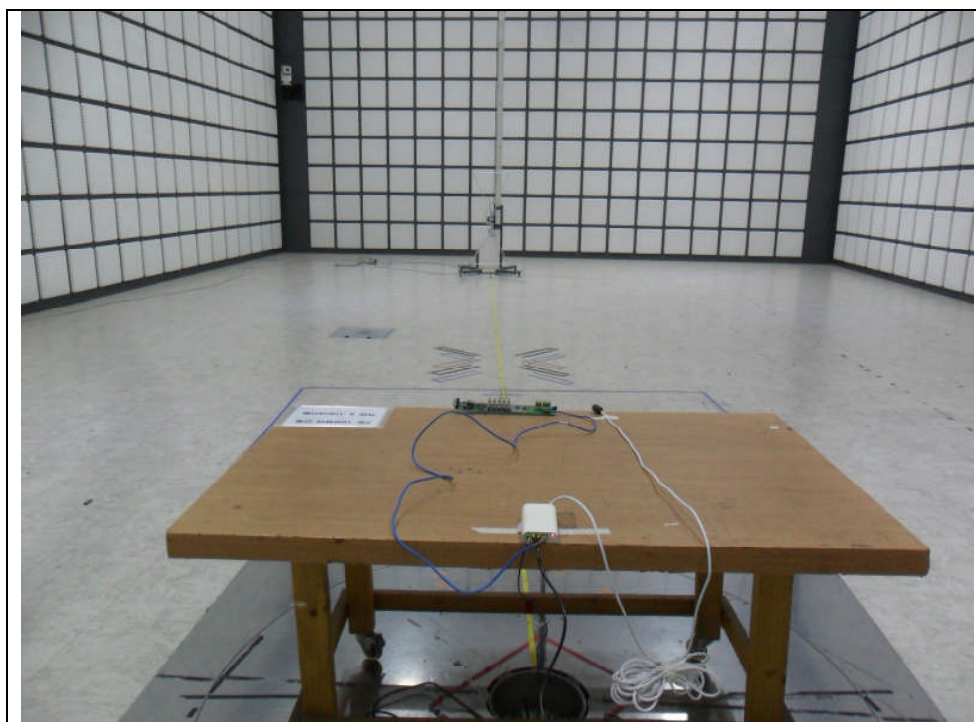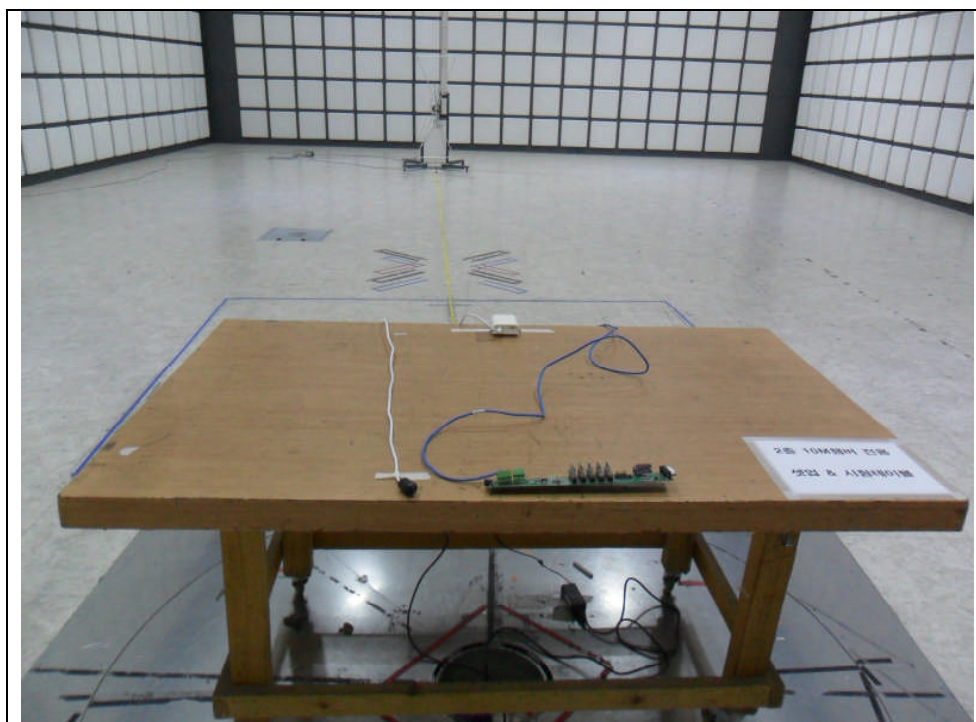



* 1 GHz ~ 6 GHz (#1- DC 12V)

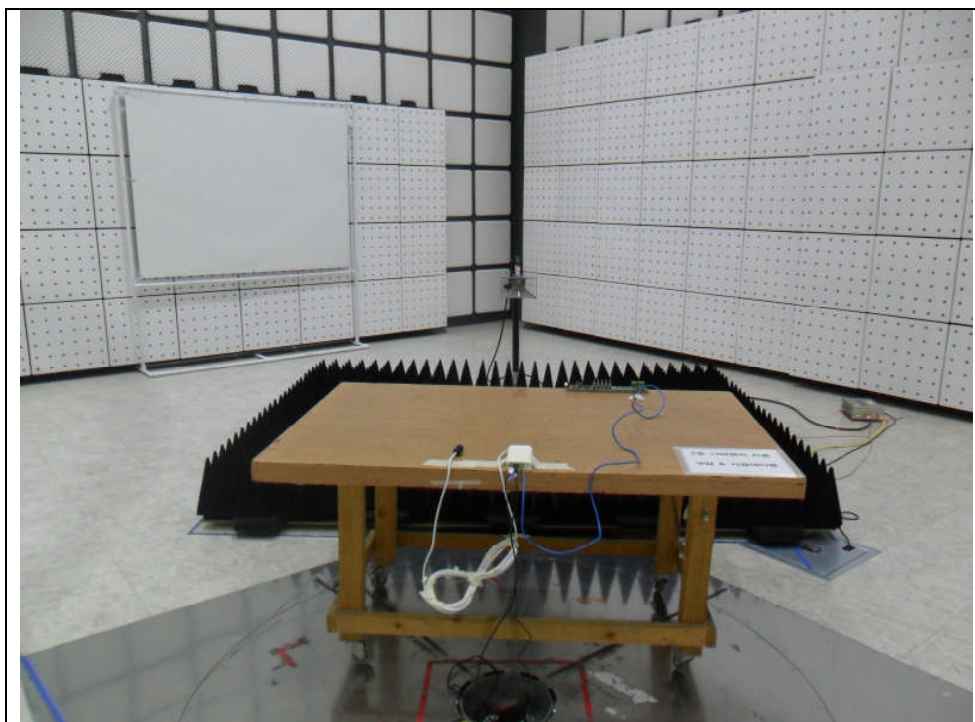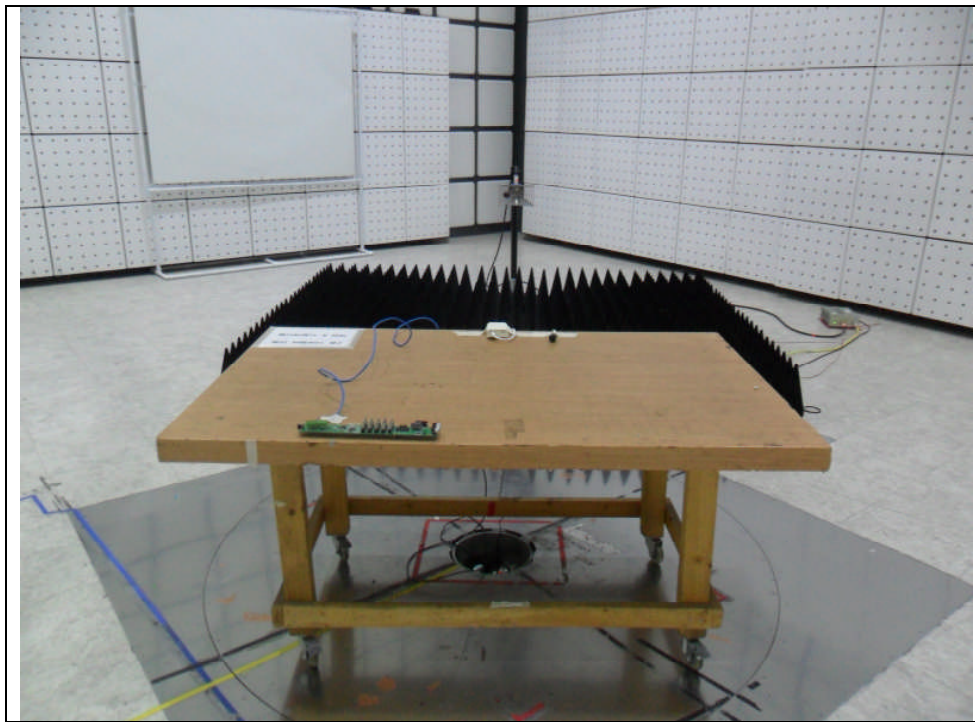

* 30 MHz ~ 1 GHz (#2- PoE)

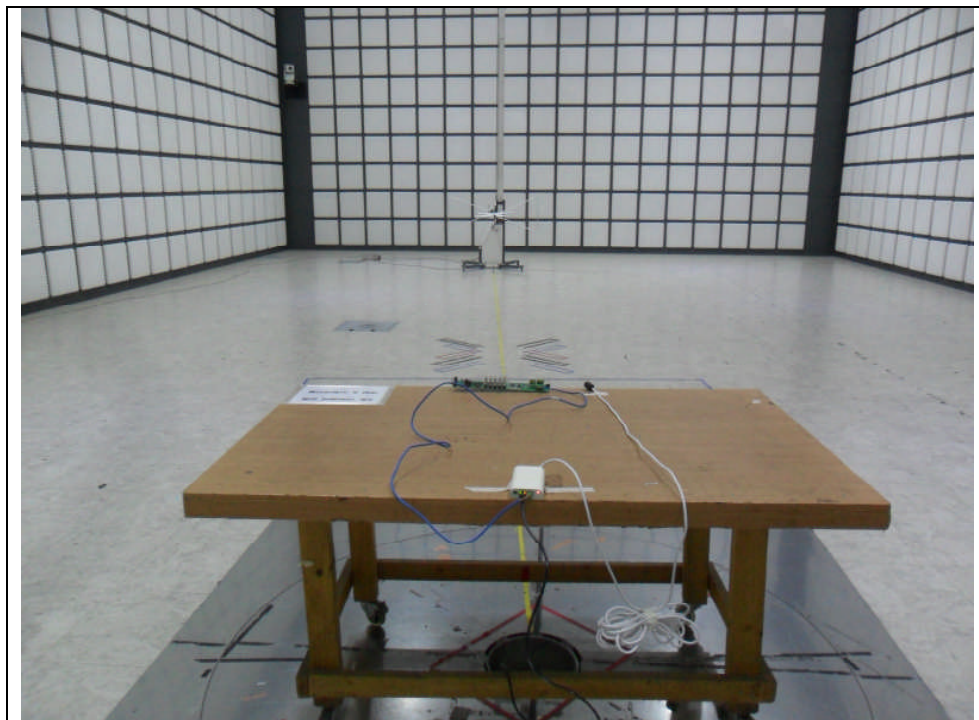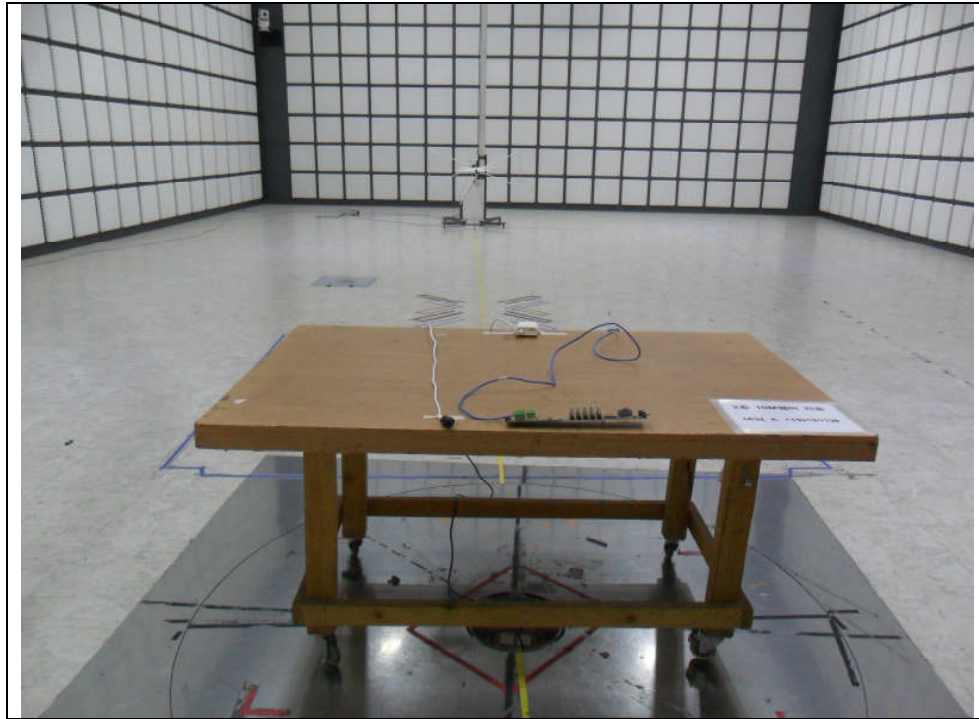


* 1 GHz ~ 6 GHz (#2- PoE)

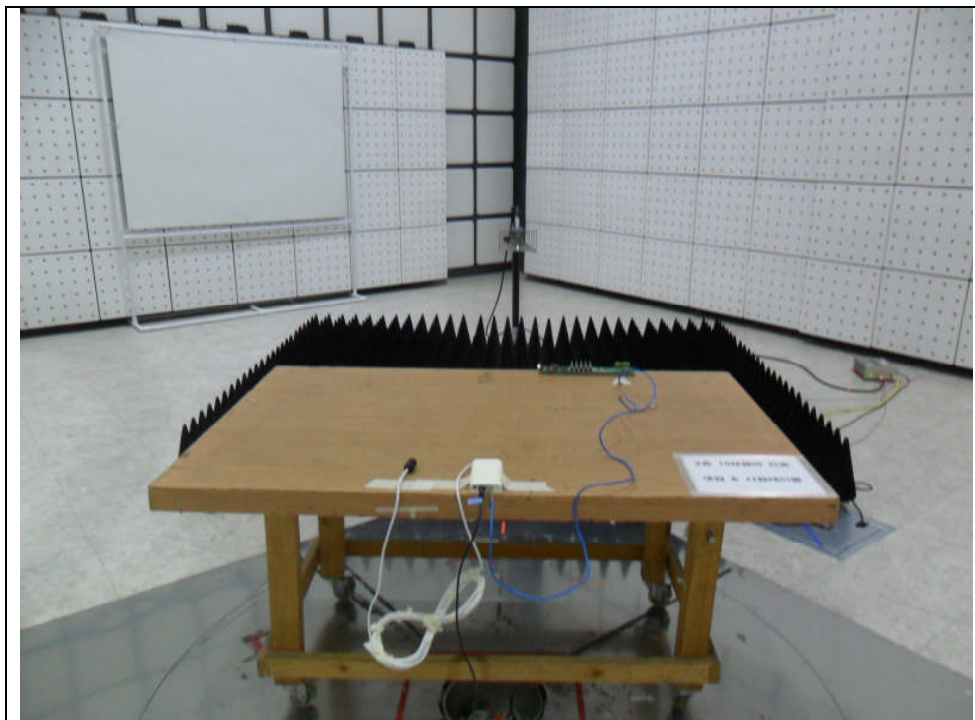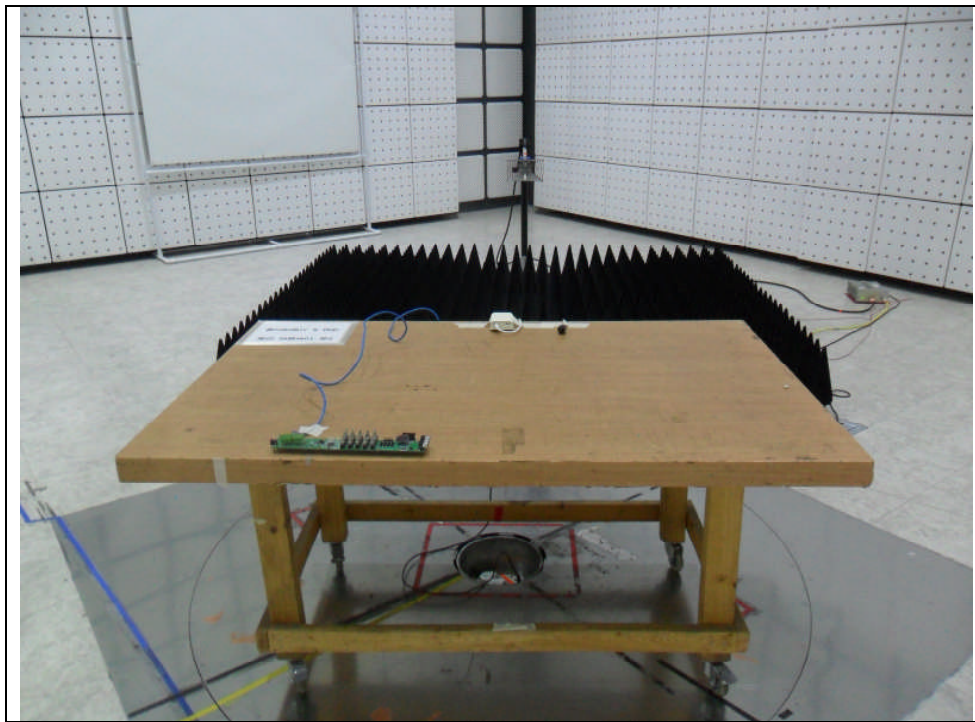

6.2.6 Radiated emission measurement result

* Graph and Data


* 30 MHz ~ 1 GHz (SNB-6010P) _#1- DC 12V

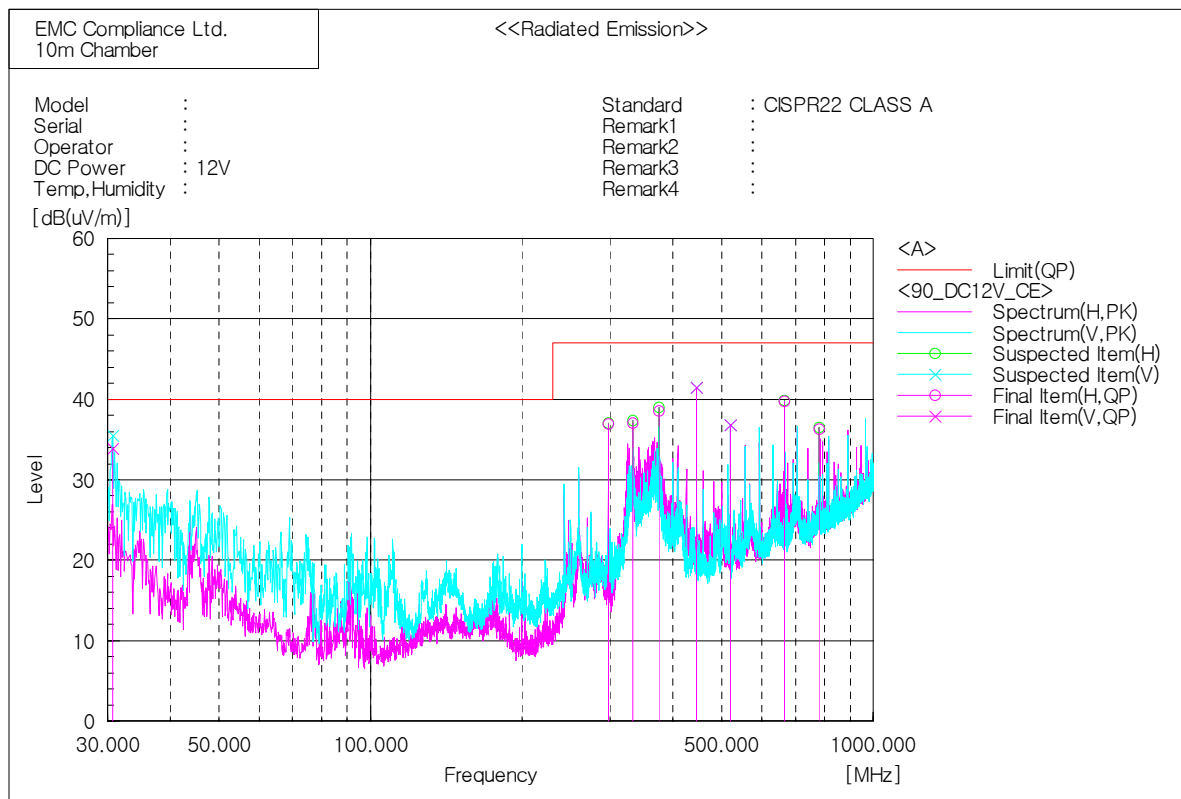

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	30.728	V	49.0	-15.1	33.9	40.0	6.1	100.0	11.9
2	296.993	H	47.3	-10.4	36.9	47.0	10.1	200.0	358.7
3	333.004	H	46.1	-9.1	37.0	47.0	10.0	200.0	55.6
4	375.078	H	46.6	-8.0	38.6	47.0	8.4	200.0	51.8
5	445.497	V	49.5	-8.0	41.5	47.0	5.5	100.0	22.8
6	519.729	V	40.9	-4.1	36.8	47.0	10.2	100.0	29.8
7	666.078	H	40.7	-0.9	39.8	47.0	7.2	200.0	26.6
8	779.689	H	34.9	1.4	36.3	47.0	10.7	100.0	80.5


* 1 GHz ~ 6 GHz (SNB-6010P) _#1- DC 12V

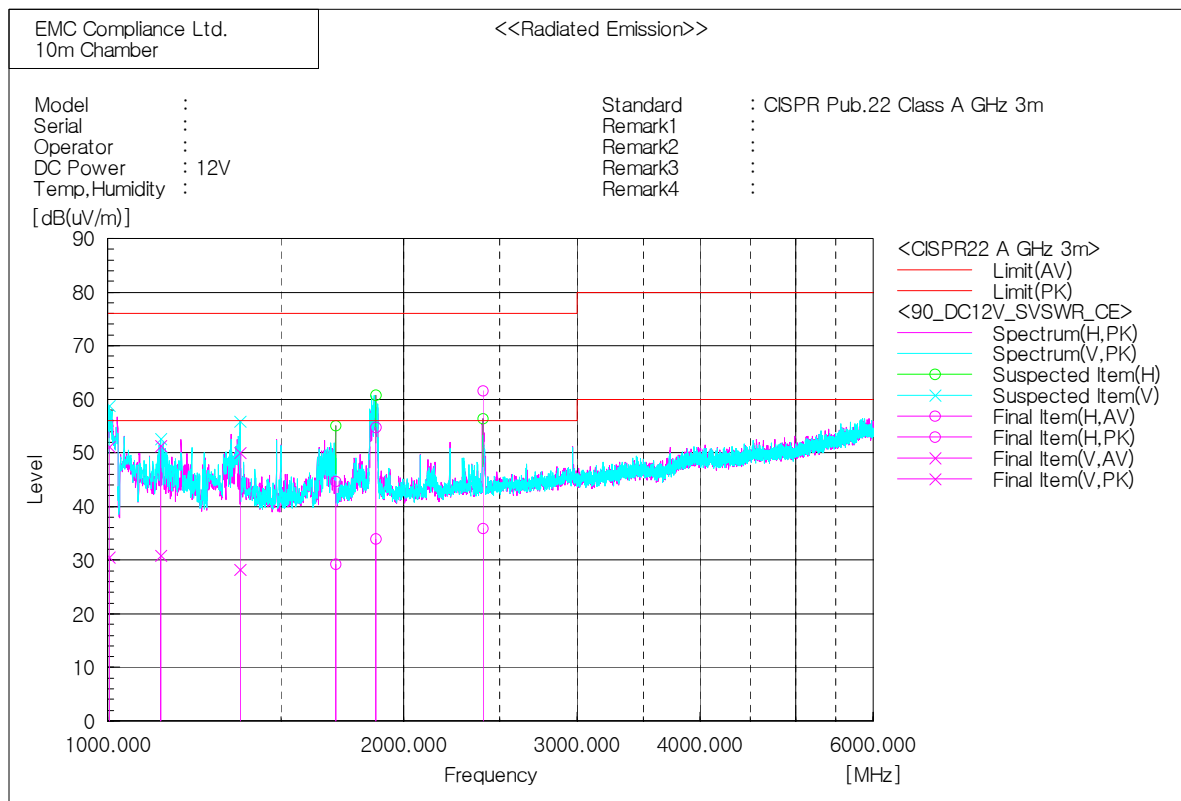

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1004.375	V	37.4	58.1	-6.9	30.5	51.2	56.0	76.0	25.5	24.8	100.0	34.5
2	1131.875	V	36.3	56.8	-5.5	30.8	51.3	56.0	76.0	25.2	24.7	100.0	34.5
3	1363.125	V	53.2	31.4	-3.2	50.0	28.2	56.0	76.0	6.0	47.8	100.0	356.5
4	1704.375	H	29.8	45.2	-0.6	29.2	44.6	56.0	76.0	26.8	31.4	100.0	48.3
5	1873.125	H	33.4	54.1	0.6	34.0	54.7	56.0	76.0	22.0	21.3	100.0	321.9
6	2406.250	H	33.3	59.0	2.6	35.9	61.6	56.0	76.0	20.1	14.4	100.0	1.3


* 30 MHz ~ 1 GHz (SNB-6010P) _#2- PoE

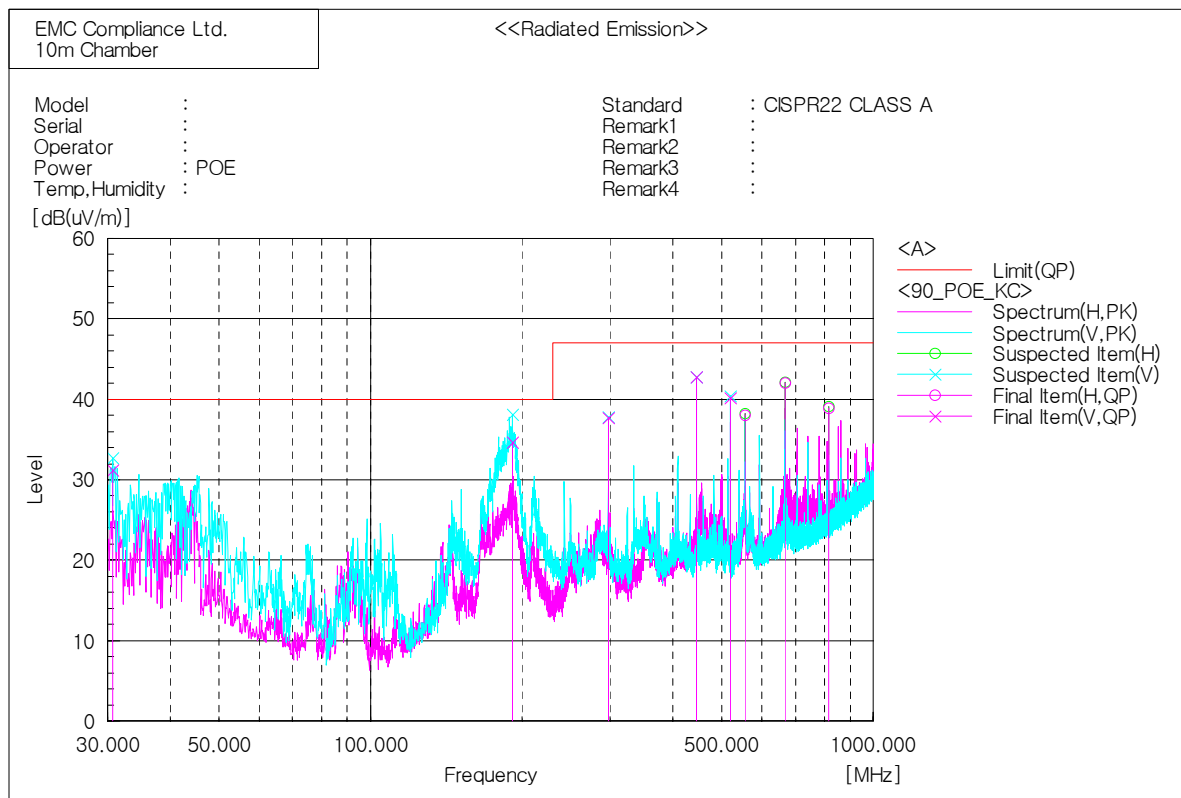

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	30.728	V	46.3	-15.1	31.2	40.0	8.8	100.0	1.3
2	191.505	V	49.1	-14.4	34.7	40.0	5.3	100.0	153.2
3	296.993	V	48.1	-10.4	37.7	47.0	9.3	100.0	305.3
4	445.524	V	48.8	-6.0	42.8	47.0	4.2	100.0	181.3
5	519.729	V	44.3	-4.1	40.2	47.0	6.8	100.0	204.8
6	556.953	H	40.9	-2.9	38.0	47.0	9.0	100.0	71.5
7	668.260	H	42.9	-0.9	42.0	47.0	5.0	100.0	54.8
8	816.791	H	36.7	2.2	38.9	47.0	8.1	100.0	54.8

* 1 GHz ~ 6 GHz (SNB-6010P) _#2- PoE

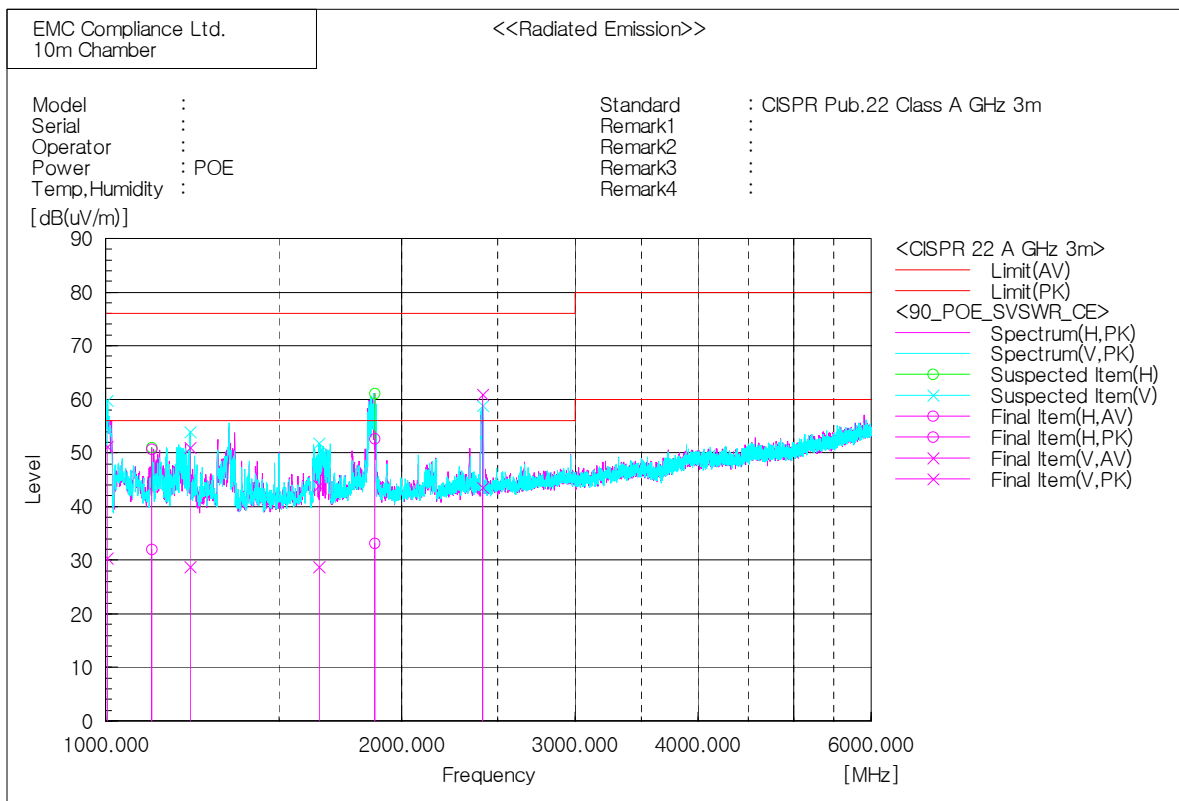

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1005.000	V	37.3	58.1	-6.9	30.4	51.2	56.0	76.0	25.6	24.8	100.0	45.4
2	1114.375	H	37.8	56.5	-5.8	32.0	50.7	56.0	76.0	24.0	25.3	100.0	3.4
3	1218.750	V	33.4	55.6	-4.6	28.8	51.0	56.0	76.0	27.2	25.0	100.0	354.6
4	1646.250	V	29.4	44.6	-0.7	28.7	43.9	56.0	76.0	27.3	32.1	100.0	69.5
5	1876.250	H	32.5	52.0	0.6	33.1	52.6	56.0	76.0	22.9	23.4	100.0	326.4
6	2419.375	V	40.8	58.3	2.7	43.5	61.0	56.0	76.0	12.5	15.0	100.0	114.8

7. E.U.T. photographs

Whole




Front View



Rear View




Left View

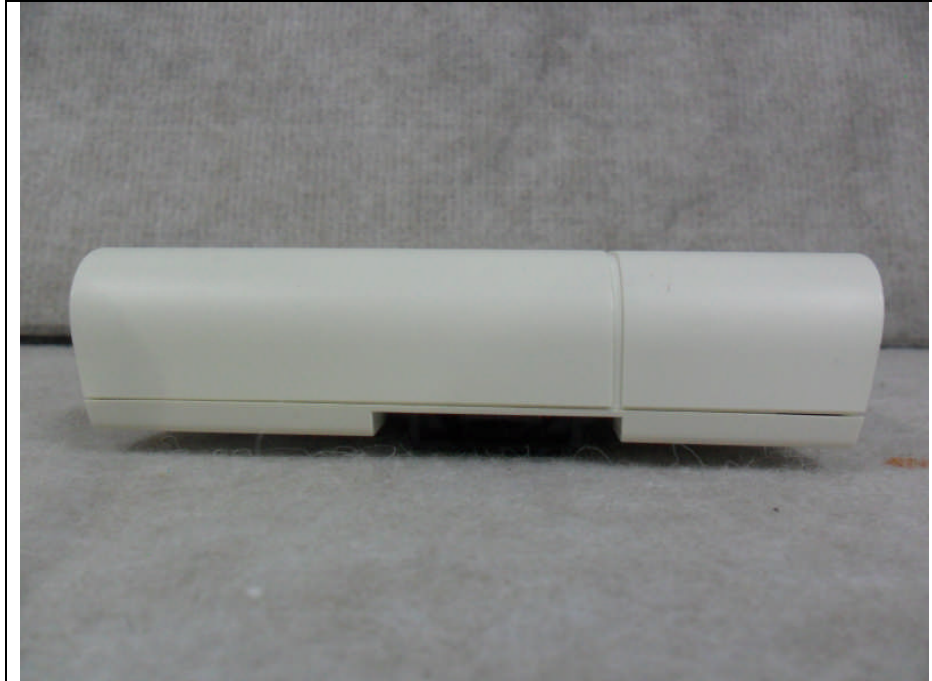

Right View




Top View

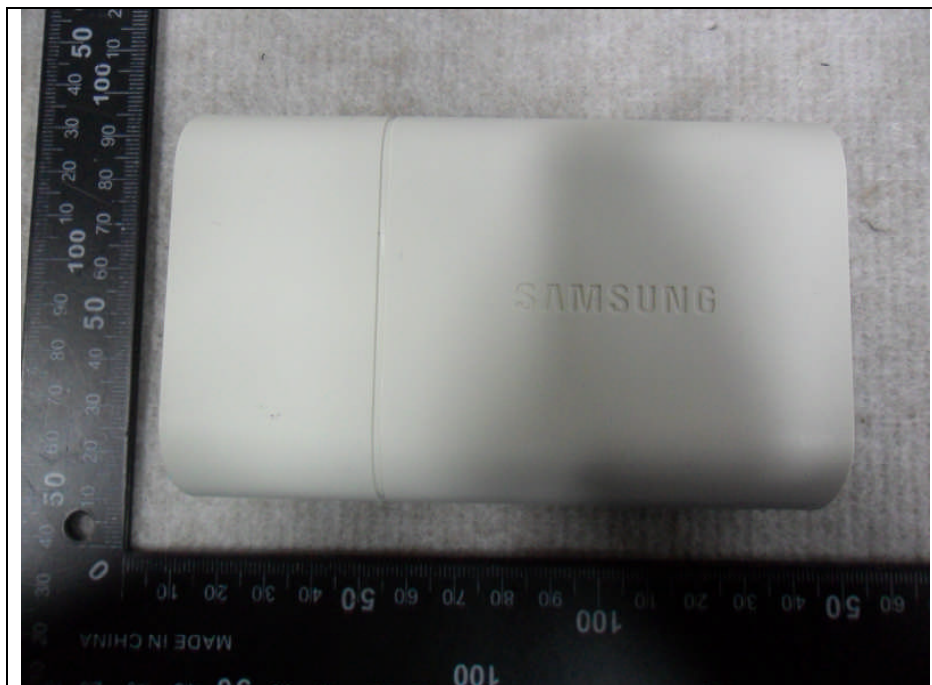



Bottom View



Inside

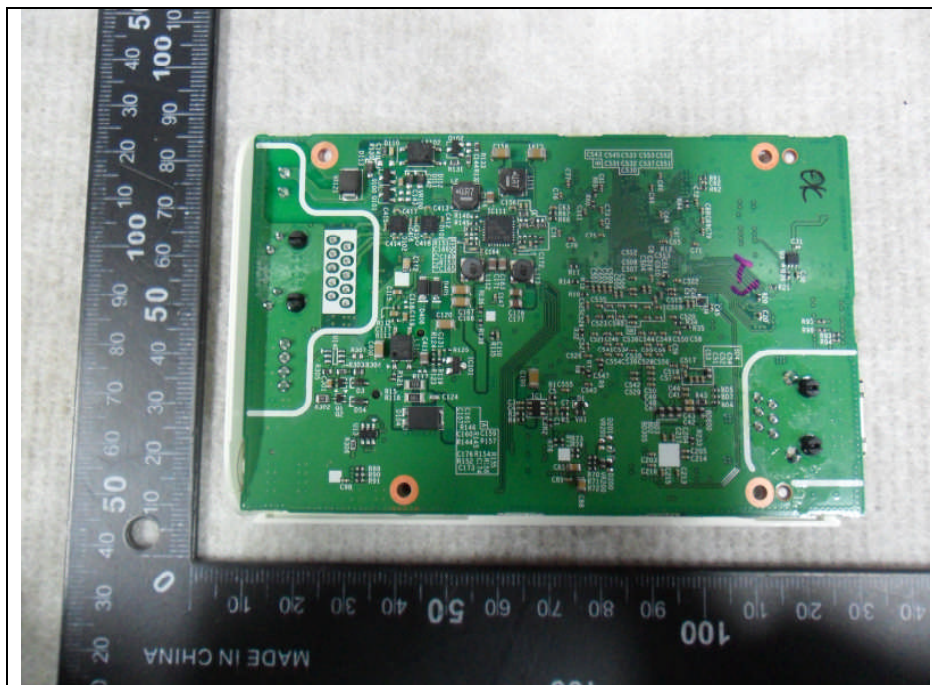


Main Board

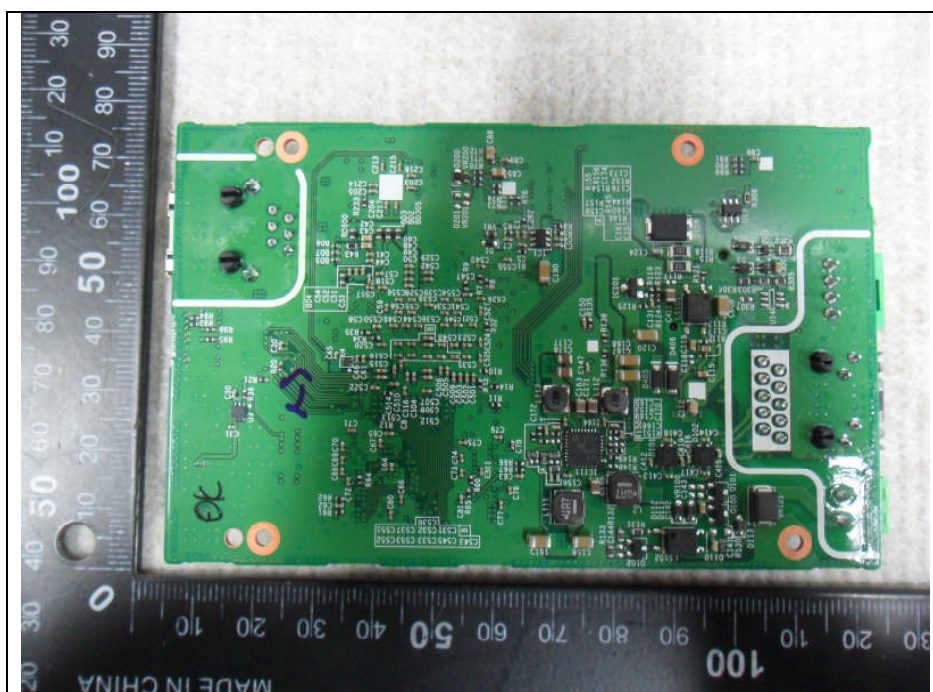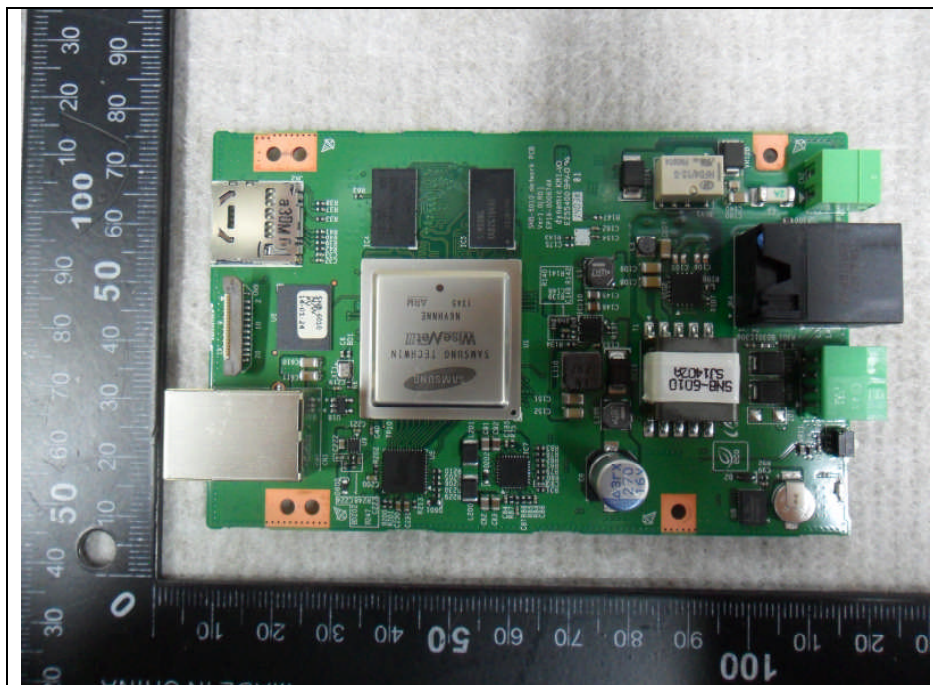

Camera







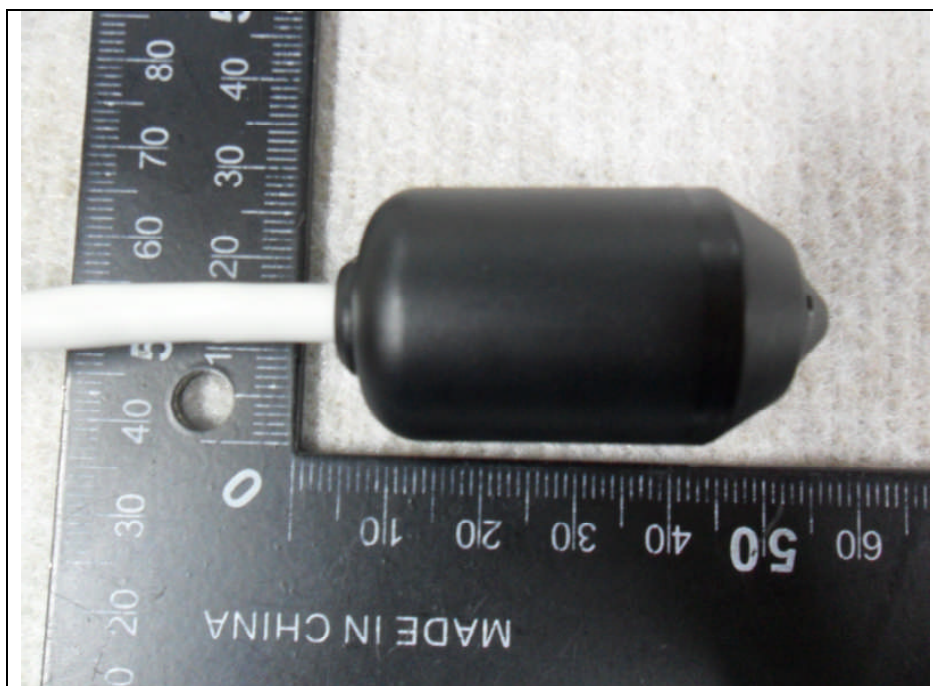



Camera CCD Board

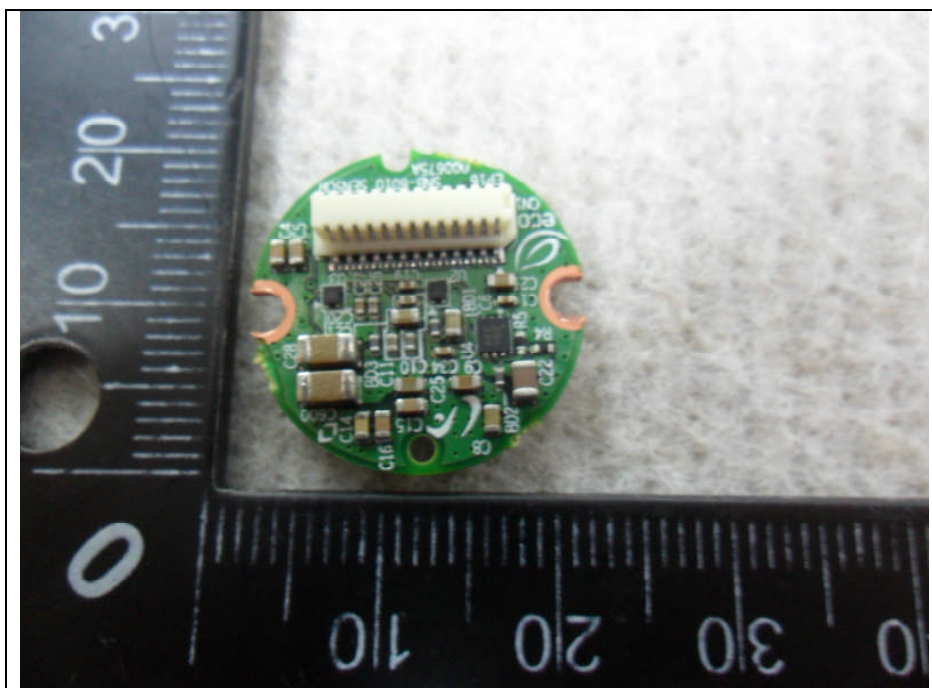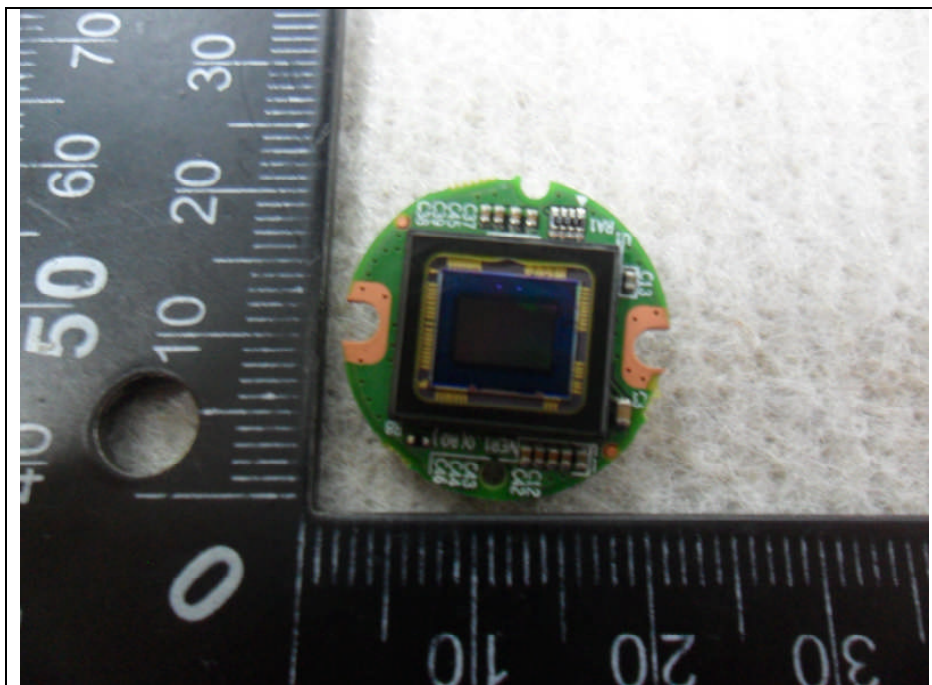

Camera CCD SUB Board

