

SND-7080/7080F

3M Full HD Network Dome Camera



SND-7080


SND-7080F

Key Features


- Max. 3M (2048 x 1536) resolution
- 16:9 Full HD (1080p) resolution support
- 3~8.5mm (2.8x) motorized varifocal lens
- H.264 / MJPEG multiple codecs
- Full HD WDR
- Smart Compression (ROI encoding)

Dimensions

Unit : mm (inch)

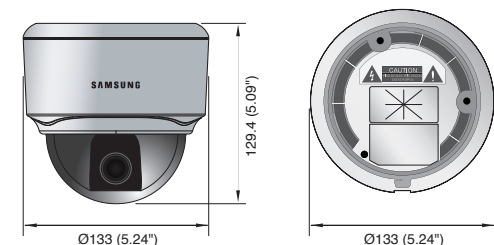

SND-7080

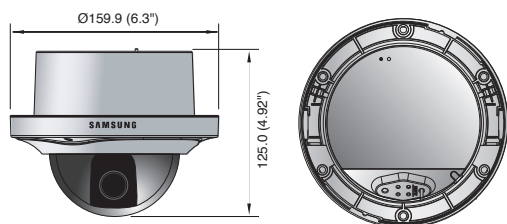

SND-7080F

SND-7080/7080F

VIDEO	
Imaging Device	1/2.8" 3M PS CMOS
Effective Pixels	2,096(H) x 1,561(V)
Scanning System	Progressive
Min. Illumination	Color : 1Lux (F1.2, 50IRE), 0.017Lux (Sens-up 60x), B/W : 0.08Lux (F1.2, 50IRE), 0.001Lux (Sens-up 60x)
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 704 x 480(N), 704 x 576(P), for installation
LENS	
Focal Length (Zoom Ratio)	3 ~ 8.5mm (2.8x) Motorized vari-focal
Max. Aperture Ratio	F1.2
Angular Field of View	H : 100°(Wide) ~ 35.3°(Tele), V : 74.6°(Wide) ~ 26°(Tele)
Min. Object Distance	0.5m (1.64ft)
Focus Control	Remote control via network (Manual, One-shot AF)
Lens Type	DC Auto Iris
PAN / TILT / ROTATE	
Pan Range	0° ~ 355°
Tilt Range	0° ~ 90°
Rotate Range	0° ~ 355°
OPERATIONAL	
Camera Title	Off / On (Displayed up to 15 characters)
Day & Night	Auto (ICR) / Color / B/W / External B/W
Backlight Compensation	Off / BLC / HLC / WDR
Wide Dynamic Range	Off / On (Full HD WDR), 52dB
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)
Digital Noise Reduction	SSNR III (2D+3D noise filter) (Off / On)
Motion Detection	Off / On (4 programmable zones)
Privacy Masking	Off / On (1 ea 4 point polygonal + 16 ea rectangular zones)
Sens-up (Frame Integration)	Off / Auto (2x ~ 60x)
Gain Control	Off / Low / Medium / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	Auto / A.FLK / Manual (1/30 ~ 30,000sec)
Flip / Mirror	Off / On
Intelligent Video Analytics	Scene Change, Virtual Line, Enter / Exit, Appear / Disappear
Alarm I/O	Input 1 ea / Output 1 ea (Relay)
Remote Control Interface	RS-485
RS-485 Protocol	Samsung-T/E, Pelco-P/D, Sungjin
NETWORK	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265/H.264: Main/Baseline/High, MJPEG
Resolution	3M mode : 2048 x 1536, 1920 x 1080P (Full HD), 1600 x 1200, 1280 x 1024, 1280 x 960, 1280 x 720P (HD), 1024 x 768, 800 x 600, 800 x 450, 640 x 480, 640 x 360, 320 x 240, 320 x 180
	2M mode : 1920 x 1080P (Full HD), 1280 x 1024, 1280 x 960, 1280 x 720P (HD), 1024 x 768, 800 x 600, 800 x 450, 640 x 480, 640 x 360, 320 x 240, 320 x 180
Max. Framerate	3M mode : * H.264 : Max 20fps at all resolutions * MJPEG : 800 x 600 ~ 320 x 180 - 20 fps, 1280 x 1024 ~ 1600 x 1200 - 15 fps, 1920 x 1080 ~ 2048 x 1536 - 10 fps
	2M mode : * H.264 : Max 30fps at all resolutions (When WDR ON, Max. framerate is Max 15fps.) * MJPEG : 800 x 600 ~ 320 x 180 - 30 fp, 1280 x 1024 ~ 1920 x 1080 : 15 fps
Smart Codec	Yes (Area Based Method, Face Detection Method)
Video Quality Adjustment	H.264 : Compression level, Target bitrate level control, MJPEG : Quality level control
Bitrate Control Method	H.264 : CBR or VBR, MJPEG : VBR
Streaming Capability	Multiple streaming (Up to 6 profiles)
Audio I/O	Mic / Line in, Line out
Audio Compression Format	G.711 u-law
Audio Communication	2-Way
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS
Security	HTTPS(SSL) login authentication, Digest login authentication, IP address filtering, User access log, 802.1x authentication
Streaming Method	Unicast / Multicast
Max. User Access	10 users at unicast mode
Memory Slot	SD/SDHC memory slot
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatian, Hungarian, Greek
Web Viewer	Supported OS : Windows XP / VISTA / 7, MAC OS, Supported Browser : Internet Explorer 7.0 or Higher, Firefox, Google Chrome, Apple Safari
Central Management Software	NET-i viewer
ENVIRONMENTAL	
Operating Temperature / Humidity	-10°C ~ +55°C (+14°F ~ +131°F) / 20% ~ 80% RH
ELECTRICAL	
Input Voltage / Current	12V DC, 24V AC, PoE (IEEE802.3af)
Power Consumption	Max. 6W (DC 12V), Max. 7W (AC 24V, PoE (DC 48V))
MECHANICAL	
Color / Material	Ivory / Plastic
Dimensions (WxH)	SND-7080 : Ø133.0 x 129.4mm (Ø5.24" x 5.09"), SND-7080F : Ø159.9 x 125.0mm (Ø6.3" x 4.92") (Flush mounting type)
Weight	SND-7080 : 700g (1.54 lb), SND-7080F : 800g (1.76 lb)

* You can find applicable models with accessory selector www.hanwha-security.com/en/products/accessory-selector/

* The latest product information / specification can be found at hanwha-security.com

* Design and specifications are subject to change without notice.

* Wisenet is the proprietary brand of **Hanwha Techwin** formerly known as Samsung Techwin.