

DECLARATION OF CONFORMITY

We; Samsung Techwin Co., Ltd.
DECLARE UNDER OUR SOLE RESPONSIBILITY THAT THE PRODUCT;

Report No: KES-E1-15T0080
Type of equipment: NETWORK CAMERA
Model Name: SND-L5083RP
Applicant: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Sengsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : TIANJIN SAMSUNG TECHWIN
OPTO-ELECTRONIC CO.,LTD
No.11 Weiliu Road, Micro-Electronic
Address: Industrial Park, Jingang Road,
Tianjin, 300385, China

Test standards : AS/NZS CISPR22:2009+A1:2010

Classification: C-Tick

The above equipment was tested by EMC compliance Testing Laboratory for with the requirements of C-tick Rules and Regulations. The results of testing in this report apply to the product / system which was tested only.

Mar. 16. 2015
(Date of issue)

(Name and signature of authorized person)



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (1) of (32)

AS/NZS EMI Test Report

Test Report No. : KES-E1-15T0080
Date of Issue : 03. 16. 2015
Description of Product : NETWORK CAMERA
Model No. : SND-L5083RP
Variant Model : -
Applicant : Samsung Techwin Co., Ltd.
Address : 84, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea
Manufacturer : TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO.,LTD
Address : No.11 Weiliu Road, Micro-Electronic Industrial Park, Jingang Road, Tianjin, 300385, China
Applicable Regulation : AS/NZS CISPR22:2009 + A1:2010

Date of Receipt : 02.26.2015
Test Date : 03. 02. 2015

Tested by:

Kang Hyeon, Kim
Test Engineer

Reviewed by:

Dong Hun, Jang
Technical Manager

Testing Laboratories for Safety and RF Compliance
C-3701 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Testing Laboratories for EMC Compliance
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
Tel : +82-31-883-5092 / Fax: +82-31-883-5169

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (2) of (32)

Revision history

Revision	Date of issue	Test report No.	Description
-	03. 16. 2015	KES-E1-15T0080	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (3) of (32)

TABLE OF CONTENTS

1	General Information	4
2	Test standards and results	9
3	Test Performed	10
3.1	Conducted Emission Measurements	10
3.2	Radiated Emission Measurements	17
4	Test Setup Photographs	25
4.1	Conducted Emission	25
4.2	Radiated Emission	27
6	External Photographs	29
7	Internal Photographs	30

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (4) of (32)

1. General Information

1.1 Introduction

The EMI Test Report for CE Declaration of Conformity is prepared on behalf of named applicant in accordance with the EMC Directive(2004/108/EC) of the European Economic Community. The test results reported in this document relate only to the item that was tested.

All radiated emission, conducted emission measurements required by the EMC Directive were performed manually at KES Co., Ltd. (here in after called KES), 473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

The radiated emission measurements performed on 10 meter, Open Area Test Site, test range maintained by KES. Complete ANSI63.4;2009 description and site attenuation measurement data records are maintained at the test facility and have been placed on file with the Federal Communications Commission.

The KES EMC test facilities in and Yeosu-si are designated testing laboratory according to ISO/IEC 17025 by Radio Research Agency(RRA), Korea Communication Commission.



1.2 Product Description for Equipment Under Test (EUT)

Samsung Techwin Co., Ltd., NETWORK CAMERA, Model No: SND-L5083RP or the "E.U.T". as referred to in this report is base model.

Main Specifications of EUT are:

Video	
Imaging Device	1/2.9" 1.37M CMOS
Total Pixels	1,312(H) x 1,069(V)
Effective Pixels	1,305(H) x 1,049(V)
Scanning System	Progressive
Min. Illumination	Color: 0.07Lux(1/30sec, F1.4, 50IRE), 0.001Lux(2sec, 50IRE) Color: 0.02Lux(1/30sec, F1.4, 30IRE) B/W : 0 Lux (IR LED on)
Lens	
Focal Length (Zoom Ratio)	3~10mm V/F
Max. Aperture Ratio	F1.4
Angular Field of View	H: 82.0°(Wide)~26.5°(Tele)(±5%), V: 59.7°(Wide)~19.9°(Tele) (±5%) D: 96.6° (Wide)~32.4°(Tele)
Min. Object Distance	0.5m
Focus Control	Manual
Lens Type	DC auto iris
Mount Type	Board type
Pan / Tilt / Rotate	
Pan Range	0~354°
Tilt Range	0~67°
Rotate Range	0~355°
Operational	
IR Viewable Length	10m
Camera Title	Off / On (Displayed up to 15 characters)
Day & Night	True Day & Night
Backlight Compensation	Off / BLC
Contrast Enhancement	SSDR(SamsungSuperDynamicRange) (Off / On)
Digital Noise Reduction	SSNR(Off / On)
Motion Detection	Off / On (4ea rectangler zones)
Privacy Masking	Off / On (6ea rectangler zones)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC(Lens distortion control)	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker
Flip / Mirror	Flip / Mirror / Hallway view
Intelligent Video Analytics	Motion Detection with metadata, Tampering
Alarm Triggers	Motiondetection, Tampering Detection, SD card error
Alarm Events	FileuploadviaFTPandE-Mail LocalstoragerecordingatEvent NotificationviaE-Mail
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264, MJPEG

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.
C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (6) of (32)

Resolution	1280x1024/1280x960/ 1280x720 / 1024x768 / 800x600 / 720x576 / 640x480 / 320x240
Max. Framerate	H.264:Max30fpsatallresolutions MJPEG:Max1fpsat1280x1024/1280x960/1280x720,Max.15fpsatotherresolution
Video Quality Ajustment	H.264:TargetBitrateLevelControl MJPEG:QualityLevelControl
Bitrate control method	H.264:CBRorVBR MJPEG:VBR
Streaming Capability	Multiple Streaming(Up to 3 Profiles)
Audio I/O	Built-in Mic
Audio Compression Format	G.711u-law/G.726Selectable G.726(ADPCM)8KHz,G.7118KHz G.726:16Kbps,24Kbps,32Kbps,40Kbps
Audio Communication	Uni-directional
IP	IPv4, IPv6
Protocol	TCP/IP,UDP/IP,RTP(UDP),RTP(TCP),RTCP,RTSP,NTP,HTTP,HTTPS,SSL,DHCP,PPPoE,FTP,SMTP,ICMP,IGMP, SNMPv1/v2c/v3(MIB-2),ARP,DNS,DDNS,QoS,PIM-SM,UPnP,Bonjour
Security	HTTPS(SSL)LoginAuthentication DigestLoginAuthentication IPAddressFiltering UseraccessLog 802.1XAuthentication
Streaming Method	Unicast / Multicast
Max. User Access	6 users at Unicast Mode
Edge storage	MicroSD/SDHCMax32G,NAS (Motionimagesrecorded in theSDmemorycardcanbedownloaded) (ManualrecordingatLocalIPC)
Application Programming Interface	ONVIFProfileS,G SUNAPI(HTTPAPI)
Webpage Language	English,French,German,Spanish,Italian,Chinese,Korean, Russian,Japanese,Swedish,Denish,Portuguese,Turkish,Polish,Czech,Rumanian,Serbian,Dutch,Croatia,Hungary,Greek,Finnish,Norwegian
Web Viewer	SupportedOS:WindowsXP/VISTA/7/8/8.1,MACOSX10.7~10.10 SupportedBrowser:MicrosoftInternetExplorer(Ver.8~11),MozillaFirefox(Ver.9~35), Google Chrome (Ver. 15~40), Apple Safari (Ver. 8.0.2(Mac OS X 10.10), 8.0.2(Mac OS X 10.9), 6.0.2 (Mac OS X 10.8, 10.7 only), 5.1.7) * Mac OS X only
Central Management Software	SmartViewer
Environmental	
Operating Temperature / Humidity	-10° C ~ +55° C / Less than 90% RH
Storage Temperature / Humidity	-30° C~+60° C(-22° F~+140° F)/ Less than 90% RH
Ingress Protection	-
Vandal Resistance	-
Electrical	
Input Voltage / Current	PoE
Power Consumption	Max. 7.0W
Mechanical	
Color / Material	Ivory / Plastic
Dimension (WxHxD)	Φ119.8mm x 98mm
Weight	300g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (7) of (32)

1.3 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	SND-L5083RP	-	TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO., LTD	E.U.T

1.4 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	NT63025J	JK9091EF400432X	SAMSUNG	-
AC/DC Adaptor	A13-040N2A	CN60BA4400313AD0 N843KO243	Chicony Power Technology (suzhou) Co., Ltd.	-
POE Switch	ANY4805C-LT1	10H300002	ANY ELECTRONICS CO., LTD	-
Micro SD Card	-	-	SANDISK	-

1.5 External I/O Cabling

Description	Length (m)	Port / From	Port/To	Remarks
NETWORK CAMERA	-	Micro SD slot / Micro SD Card	Micro SD Card slot / Micro SD Card	-
NETWORK CAMERA	3.0	RJ-45 / EUT	RJ-45 / POE Switch	Unshielded
POE Switch	3.0	RJ-45 / POE Switch	RJ-45 / Notebook	Unshielded

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.


1.6 Special Accessories

As shown in section 1.8, all interface cables used for compliance testing are shielded as normally supplied or by use respective component manufacturers.

1.7 EUT Modifications

No modifications were made to the EUT in order to achieve and maintain compliance to the standards described in this report.

1.8 Configuration of Test System

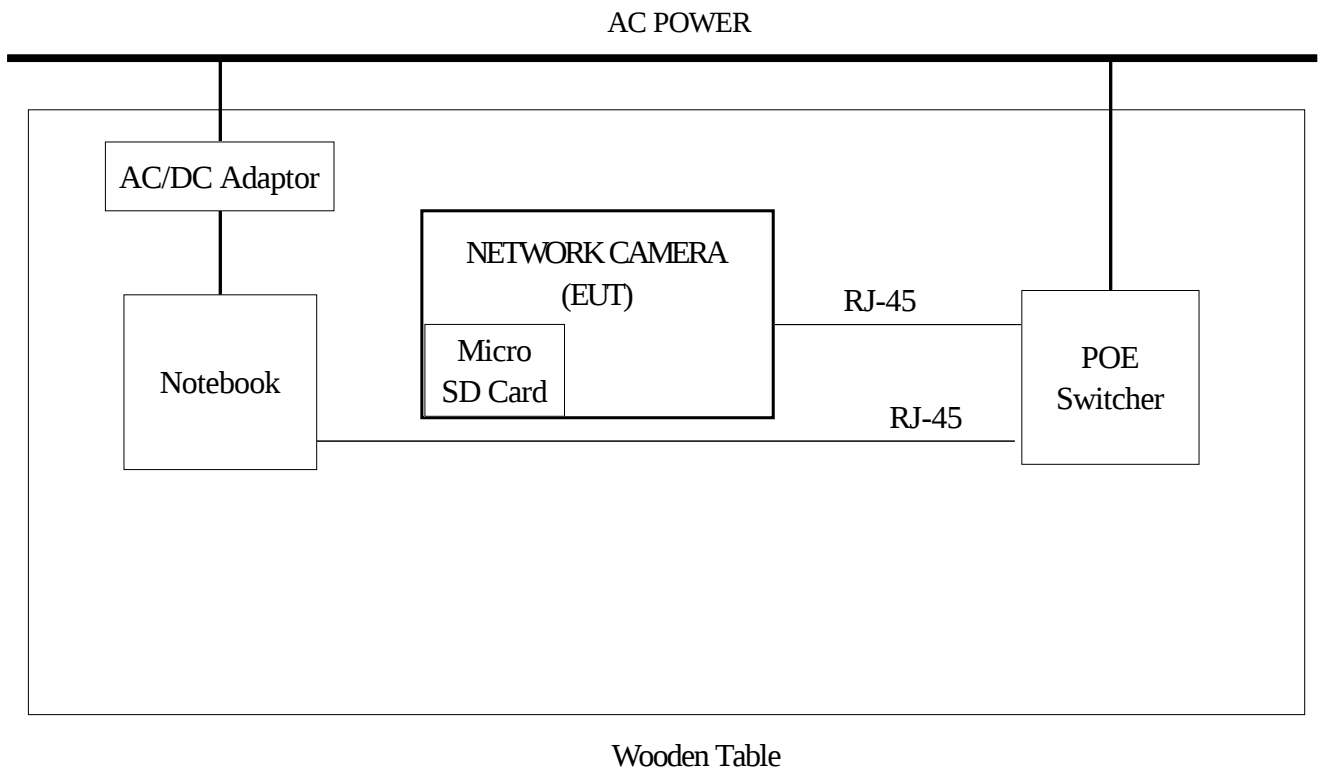

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (9) of (32)

1.9 Operating condition

- Ping test
- web view monitoring

Test standards and results

Specifications	Description	Test Point	Remark
CISPR22, Class A	Conducted Emission	AC Input Port	N/A(1)
CISPR22, Class A	Radiated Emission	Enclosure	C

Note : C=Complies N/C=Not Complies N/T=Not Tested N/A=Not Applicable

Note (1) : This device is operate by POE power. Test is not applicable.

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (10) of (32)

2. Test Performed

2.1 Conducted Emission Measurements

2.1.1 Test Description

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was placed on a wooden table, 80 centimeters height above the floor. Power was fed to the EUT through a 50 ohm/ 50 micro henry Line Impedance Stabilization Network (LISN). The ground plane that was electrically bonded to the shield room ground system and all power lines entering the shield room were filtered.

2.1.2 Test Equipments

Description	Manufacturer	Model Number	Serial Number	Cal. Due
EMI Receiver/Signal Analyzer	Narda S.T.S / PMM	PMM 9010F	020WW31006	04. 04. 2015
LISN	R&S	ENV216	101137	02. 10. 2016
LISN	EMCO	3810/2	2228	-
8-Wire ISN CAT3	Schwarzbeck Mess	CAT3 8158	8158-0019	04.08.2015
8-Wire ISN CAT5	Schwarzbeck Mess	NTFM 8158	8158-0030	05.21.2015
8-Wire ISN CAT6	Schwarzbeck Mess	NTFM 8158	8158-0029	08.15.2015
Electro wave Shieldroom	SEMITEC	-	-	-

2.1.3 Test Environments

Ambient Temperatures : see the data
Relative Humidity : see the data

2.1.4 Test Limits

Frequency (MHz)	CISPR Publication 22			
	Class B		Class A	
	QP	AV	QP	AV
0.15 to 0.50	66 to 56	56 to 46	79	66
0.50 to 5.00	56	46	73	60
5.00 to 30.00	60	50	73	60

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

- Telecommunication

Frequency (MHz)	CISPR 22(Voltage)			
	Class B (dB μ V)		Class A (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 to 0.50	84.0 to 74.0	74.0 to 64.0	97.0 to 87.0	84.0 to 74.0
0.50 to 30.00	74.0	64.0	87.0	74.0

Frequency (MHz)	CISPR 22(Current)			
	Class B (dB μ A)		Class A (dB μ A)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 to 0.50	40.0 to 30.0	30.0 to 20.0	53.0 to 43.0	40.0 to 30.0
0.50 to 30.00	30.0	20.0	43.0	30.0

2.1.5 Test Procedure

The conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP".

The conducted emission test was performed with the EUT exercise program loaded, and the emissions were scanned between 150 kHz to 30 MHz on the HOT side and NEUTRAL side, herein referred to as H and N, respectively.

2.1.6 Test Results

According to the data in section 2.1.7, the EUT complied with the CISPR22 standards.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (12) of (32)

2.1.7 Test Data

Temperature: °C Humidity: R.H. Test Date: Tested by:

Polarization: HOT

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (13) of (32)

Polarization: NEUTRAL

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.




KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (14) of (32)

- Telecommunication

Temperature: 19.5 °C Humidity: 36.4 % R.H. Test Date: 03. 02. 2015 Tested by: Kang Hyeon, Kim
[10 Mbps]

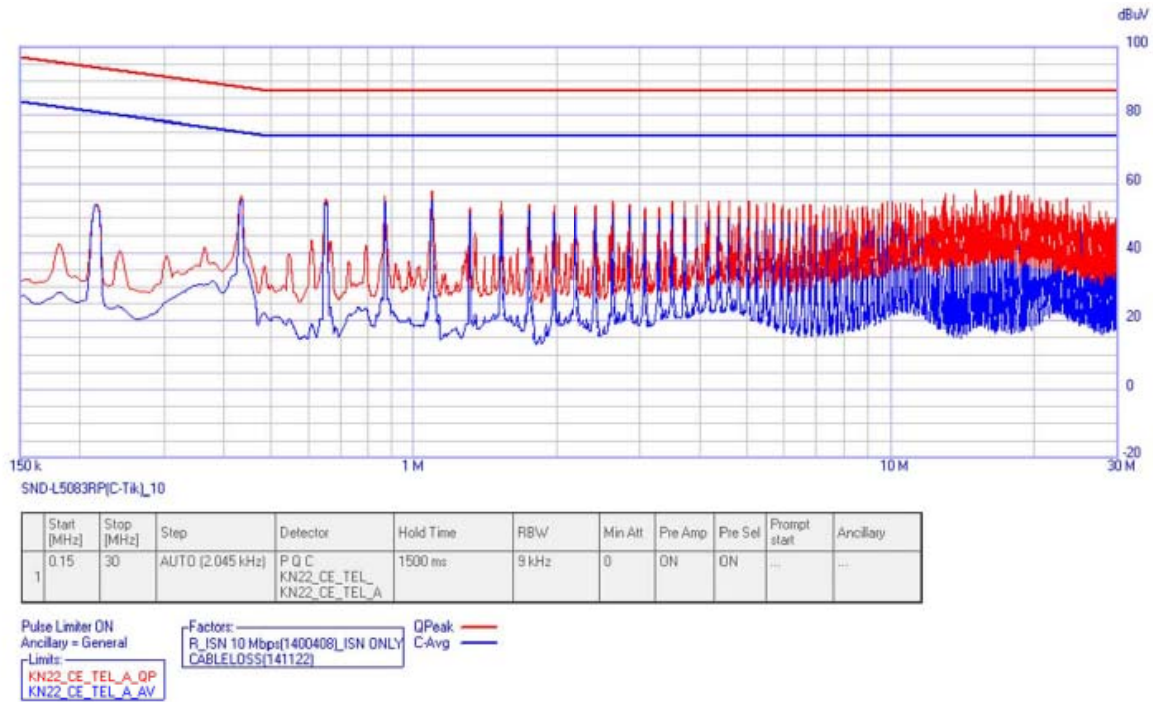

Frequency [MHz]	Q-Peak [dBμV]	Limit [dBμV]	Margin [dB]	C-Avg [dBμV]	Limit [dBμV]	Margin [dB]	Factor (ISN) [dB]	Factor (Cable Loss) [dB]
0.215	54.070	93.990	-39.920	53.630	80.990	-27.360	10.180	0.030
0.365	41.610	89.620	-48.010	30.550	76.620	-46.070	10.070	0.030
0.434	56.370	88.170	-31.800	55.400	75.170	-19.770	10.040	0.030
1.089	57.830	87.000	-29.170	55.410	74.000	-18.590	9.930	0.040
1.093	57.830	87.000	-29.170	55.410	74.000	-18.590	9.930	0.040
13.023	57.260	87.000	-29.740	30.220	74.000	-43.780	9.820	0.300
15.027	58.100	87.000	-28.900	37.300	74.000	-36.700	9.860	0.290
17.064	56.780	87.000	-30.220	34.880	74.000	-39.120	9.870	0.260
17.899	58.010	87.000	-28.990	41.860	74.000	-32.140	9.870	0.230

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.




KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (15) of (32)

[100 Mbps]

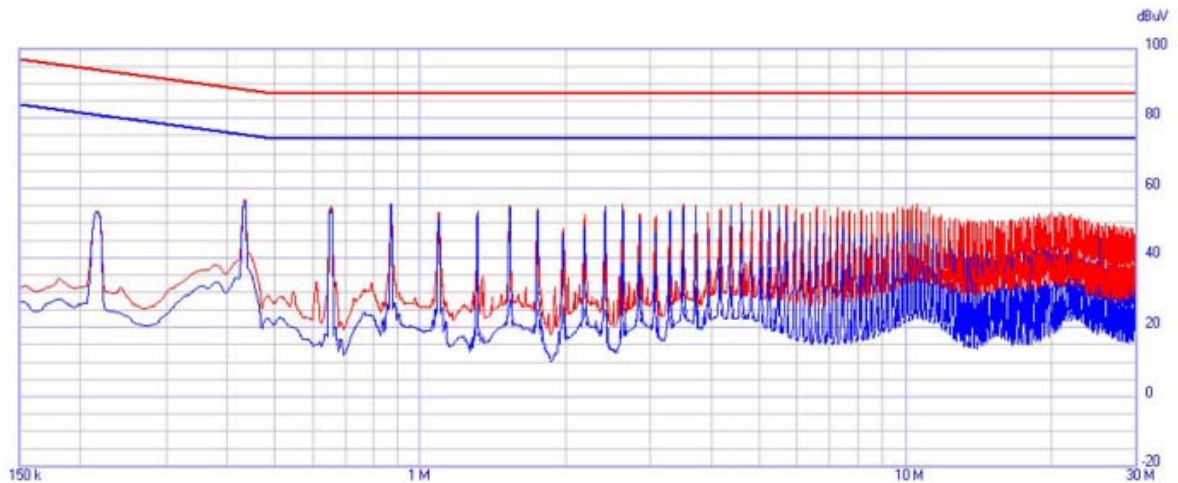

	Start [MHz]	Stop [MHz]	Step	Detector	Hold Time	RBW	Min.Alt	Pre Amp	Pre Sel	Prompt start	Ancillary
1	0.15	30	AUTO (2.045 kHz)	P.Q.C KN22_CE_TEL KN22_CE_TEL_A	1500 ms	9 kHz	0	ON	ON	...	...

Pulse Limiter ON
Ancillary = General

Limits:
KN22_CE_TEL_A_QP
KN22_CE_TEL_A_AV

Factors:
R_ISN 100 Mbps(1400521)_ISN ONLY
CABLELOSS(141122)

QPeak: —
C-Avg: —

Frequency [MHz]	Q-Peak [dBμV]	Limit [dBμV]	Margin [dB]	C-Avg [dBμV]	Limit [dBμV]	Margin [dB]	Factor (ISN) [dB]	Factor (Cable Loss) [dB]
0.215	53.300	93.990	-40.690	52.970	80.990	-28.020	9.720	0.030
0.434	56.680	88.170	-31.490	55.970	75.170	-19.200	9.600	0.030
0.870	55.560	87.000	-31.440	55.350	74.000	-18.650	9.500	0.040
2.616	55.270	87.000	-31.730	54.110	74.000	-19.890	9.370	0.090
3.502	55.420	87.000	-31.580	54.950	74.000	-19.050	9.350	0.130
4.588	55.620	87.000	-31.380	54.150	74.000	-19.850	9.330	0.160
10.537	55.430	87.000	-31.570	48.410	74.000	-25.590	9.260	0.300

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (16) of (32)

[1 000 Mbps]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

2.2 Radiated Emission Measurements

2.2.1 Test Description


The radiated emissions measurements were performed on the ten-meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane.

The frequency spectrum from 30 MHz to 1 000 MHz and 1 000 MHz to 6 000 MHz was scanned and maximum emission levels at each frequency recorded.


The system was rotated 360°, and the antenna was varied in the height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

- above 1 GHz : Antenna height is fixed to 1.0 m

* Below 1 GHz

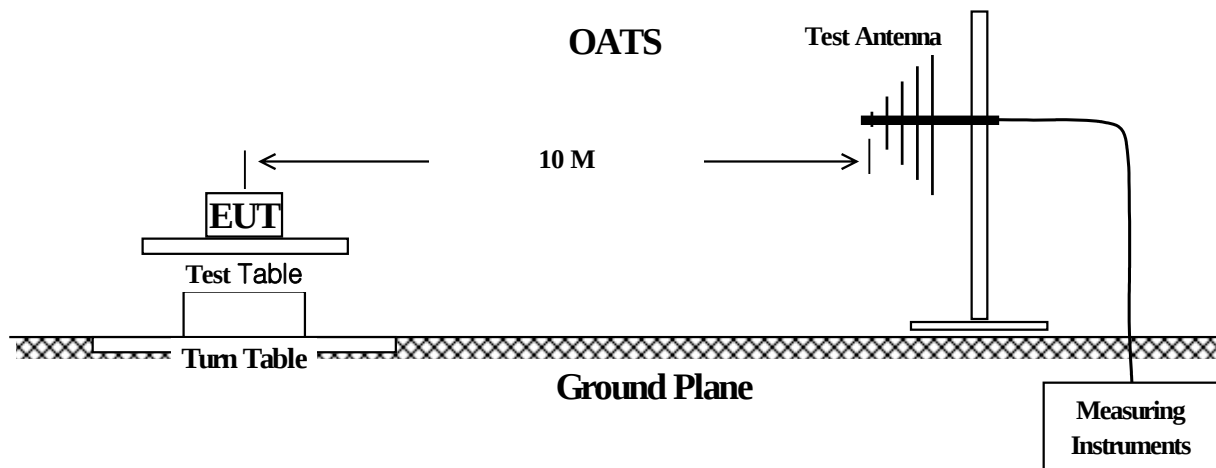

* Above 1 GHz

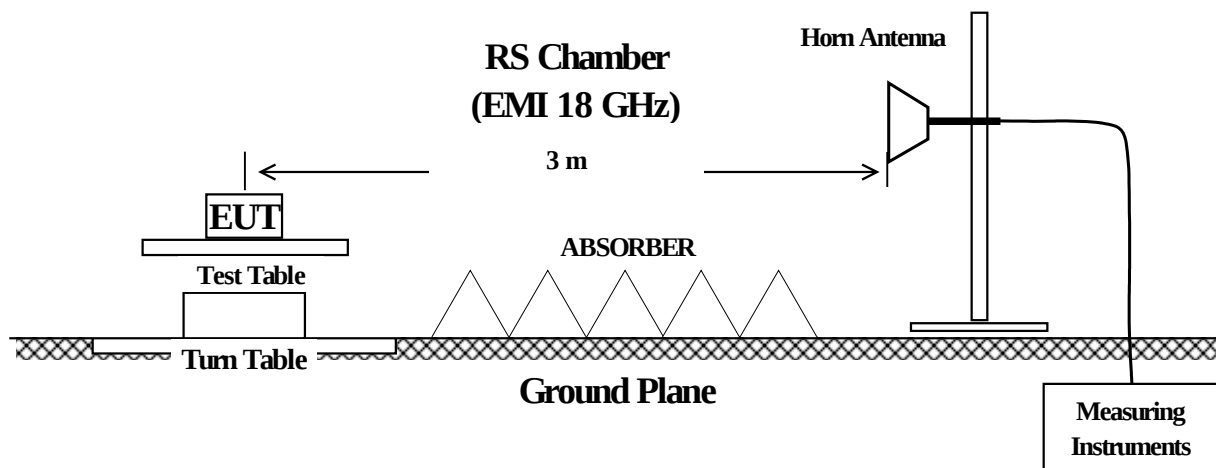

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (18) of (32)

2.2.2 Test Equipments

Description	Manufacturer	Model Number	Serial Number	Cal. Due
EMI TEST Receiver	R & S	ESVS10	826008/014	04.09.2014
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-385	05.09.2015
EMC Analyzer	Agilent	E7405A	US41160306	08.16.2014
PREAMPLIFIER	8449B	H.P	3008A00538	07.23.2015
DOUBLE RIDGED HORN ANTENNA	A.H. SYSTEMS, INC	SAS-571	781	05.13.2015
RS Chamber (EMI 18GHz)	SEMITEC	-	-	-

2.2.3 Test Environments

Temperatures : see the data
Humidity : see the data

2.2.4 Test Limits*** Below 1 GHz**

Frequency (MHz)	CISPR Publication 22	
	Class B	Class A
	Quasi-peak dB(uV/m)	Quasi-peak dB(uV/m)
0,15 to 30	Under consideration	Under consideration
30 to 230	30	40
230 to 1 000	37	47

*** Above 1 GHz**

Frequency (MHz)	CISPR Publication 22			
	Class B @ 3 m (dB μ V/m)		Class A @ 3 m (dB μ V/m)	
	PK	AV	PK	AV
1 000 to 3 000	70	50	76	56
3 000 to 6000	74	54	80	60

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

2.2.5 Test Procedure

Before final measurements of radiated emission were made on the OATS, the EUT was scanned in semi-anechoic chamber in order to determine its emission spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emission in amplitude, direction and frequency. This process was repeated during final radiated emission measurements on the OATS range, at each frequency, in order to ensure that maximum emissions amplitudes were attained.

The radiated emission test was performed with EUT exercise program loaded, and the emissions were scanned between 30 MHz to 1 000 MHz and 1 000 MHz to 6 000 MHz using the spectrum analyzer. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz(1 MHz), and the analyzer was operated in the CISPR quasi-peak (Peak) detection mode.

Measurements were taken using both HORIZONTAL and VERTICAL antenna polarization, herein referred to as H and V, respectively.

3.1.1 Field Strength Calculation

The Field Strength (FS) is calculated by adding the Antenna Factor (AF) and Cable Factor (CF) and Amplifier Gain(AG) from the Measured Reading (MR). The basic equation with a sample calculation is as follows:

$$\text{* Below 1 GHz : FS(dB}\mu\text{V/m)} = \text{MR(dB}\mu\text{V)} + [\text{AF(dB/m)} + \text{CF(dB)}]$$

$$\text{* Above 1 GHz : FS(dB}\mu\text{V/m)} = \text{MR(dB}\mu\text{V)} + [\text{AF(dB/m)} + \text{CF(dB)}] - \text{AG}$$

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (20) of (32)

2.2.6 Test Results

According to the data in section 3.2.7, the EUT complied with the CISPR22 standards.

2.2.7 Test Data*** Below 1 GHz**

Temperature: 2.0 °C Humidity: 57.0 % R.H. Test Date: 03. 02. 2015 Tested by: Kang Hyeon, Kim

Frequency (MHz)	Amplitude (dB μ V/m)	Antenna		Correction Factor		Corrected Amplitude (dB μ V/m)	Applicable Limit (dB μ V/m)	Margin (dB)
		Polar. (H/V)	Height (m)	Ant. (dB)	Cable (dB)			
49.424	17.500	V	1.170	13.630	1.610	32.740	40.000	7.260
186.127	17.200	H	3.250	11.150	3.290	31.640	40.000	8.360
259.859	16.900	V	1.000	12.080	3.970	32.950	47.000	14.050
334.258	18.200	H	4.000	14.150	4.640	36.990	47.000	10.010
371.444	19.400	V	1.860	14.960	4.920	39.280	47.000	7.720
409.217	18.100	H	3.580	15.780	5.210	39.090	47.000	7.910
446.131	17.100	V	1.900	16.580	5.500	39.180	47.000	7.820
557.684	16.700	H	3.050	18.820	6.280	41.800	47.000	5.200

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.




KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (21) of (32)

* Above 1 GHz

Temperature: 19.5 °C Humidity: 36.4 % R.H. Test Date: 03. 02. 2015 Tested by: Kang Hyeon, Kim

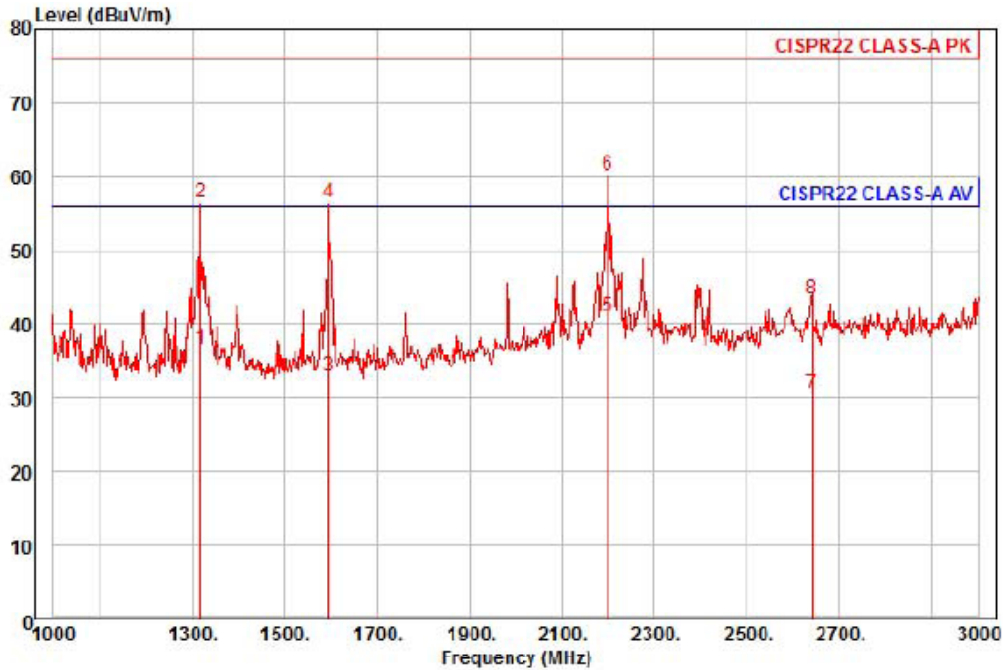

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN ANT (2014.03.10) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
EUT : SND-L5083R
Mode : C-Tik
Memo : 1 - 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1320.00	41.79	24.29	6.21	35.67	223	56.00	-19.38	horizontal	Average
2	1320.00	61.58	24.29	6.21	35.67	223	76.00	-19.59	horizontal	Peak
3	1594.00	35.67	25.62	6.88	35.21	177	56.00	-23.04	horizontal	Average
4	1594.00	59.10	25.62	6.88	35.21	177	76.00	-19.61	horizontal	Peak
5 pp	2200.00	38.52	28.62	8.28	34.39	218	56.00	-14.97	horizontal	Average
6 pk	2200.00	57.56	28.62	8.28	34.39	218	76.00	-15.93	horizontal	Peak
7	2642.00	25.76	29.54	9.21	34.09	68	56.00	-25.58	horizontal	Average
8	2642.00	38.68	29.54	9.21	34.09	68	76.00	-32.66	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (22) of (32)

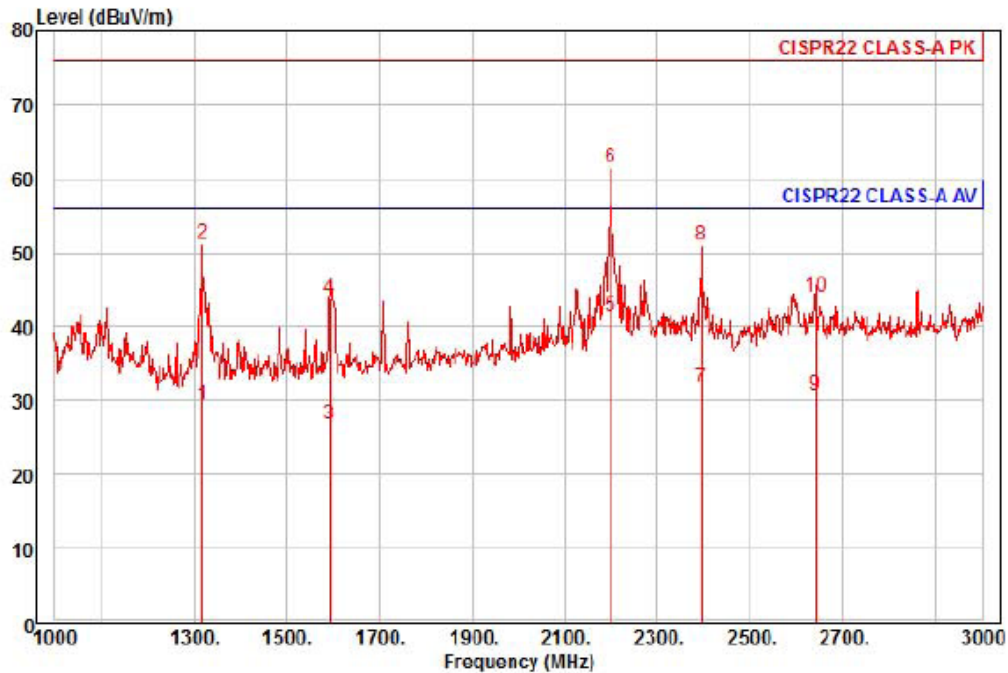

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN ANT (2014.03.10) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
EUT : SND-L5083R
Mode : C-Tik
Memo : 1 - 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1320.00	34.62	24.29	6.21	35.67	9	56.00	-26.55	vertical	Average
2	1320.00	56.48	24.29	6.21	35.67	9	76.00	-24.69	vertical	Peak
3	1592.00	29.50	25.60	6.87	35.21	43	56.00	-29.24	vertical	Average
4	1592.00	46.56	25.60	6.87	35.21	43	76.00	-32.18	vertical	Peak
5 av	2200.00	38.86	28.62	8.28	34.39	32	56.00	-14.63	vertical	Average
6 pp	2200.00	59.00	28.62	8.28	34.39	32	76.00	-14.49	vertical	Peak
7	2396.00	28.27	29.04	8.69	34.26	223	56.00	-24.26	vertical	Average
8	2396.00	47.62	29.04	8.69	34.26	223	76.00	-24.91	vertical	Peak
9	2642.00	26.16	29.54	9.21	34.09	86	56.00	-25.18	vertical	Average
10	2642.00	39.41	29.54	9.21	34.09	86	76.00	-31.93	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (23) of (32)

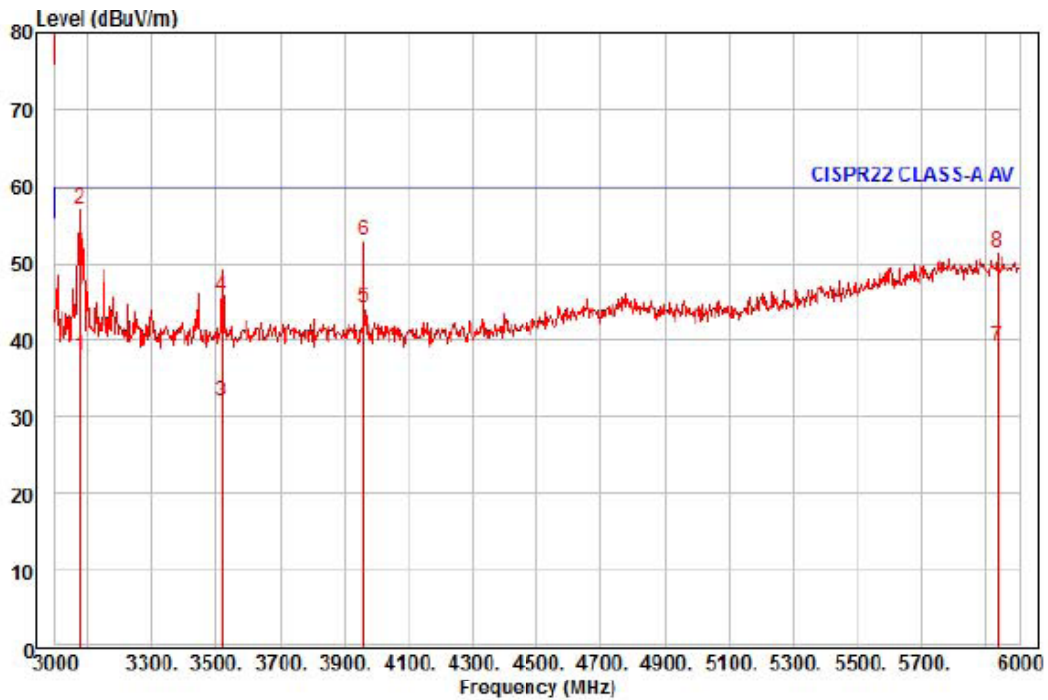

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN ANT (2014.03.10) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
EUT : SND-L5083R
Mode : C-Tik
Memo : 3 - 6 GHz

	Freq	Read	Ant	Cable	Preamp	TPos	Limit	Over		
	MHz	Level	Factor	Loss	Factor	deg	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3078.00	31.49	30.28	10.08	33.93	132	60.00	-22.08	horizontal	Average
2 pk	3078.00	50.58	30.28	10.08	33.93	132	80.00	-22.99	horizontal	Peak
3	3519.00	25.29	30.49	10.77	34.43	312	60.00	-27.88	horizontal	Average
4	3519.00	38.86	30.49	10.77	34.43	312	80.00	-34.31	horizontal	Peak
5 pp	3960.00	35.96	31.80	11.46	34.92	219	60.00	-15.70	horizontal	Average
6	3960.00	44.52	31.80	11.46	34.92	219	80.00	-27.14	horizontal	Peak
7	5934.00	20.19	35.07	17.34	33.34	42	60.00	-20.74	horizontal	Average
8	5934.00	32.40	35.07	17.34	33.34	42	80.00	-28.53	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (24) of (32)

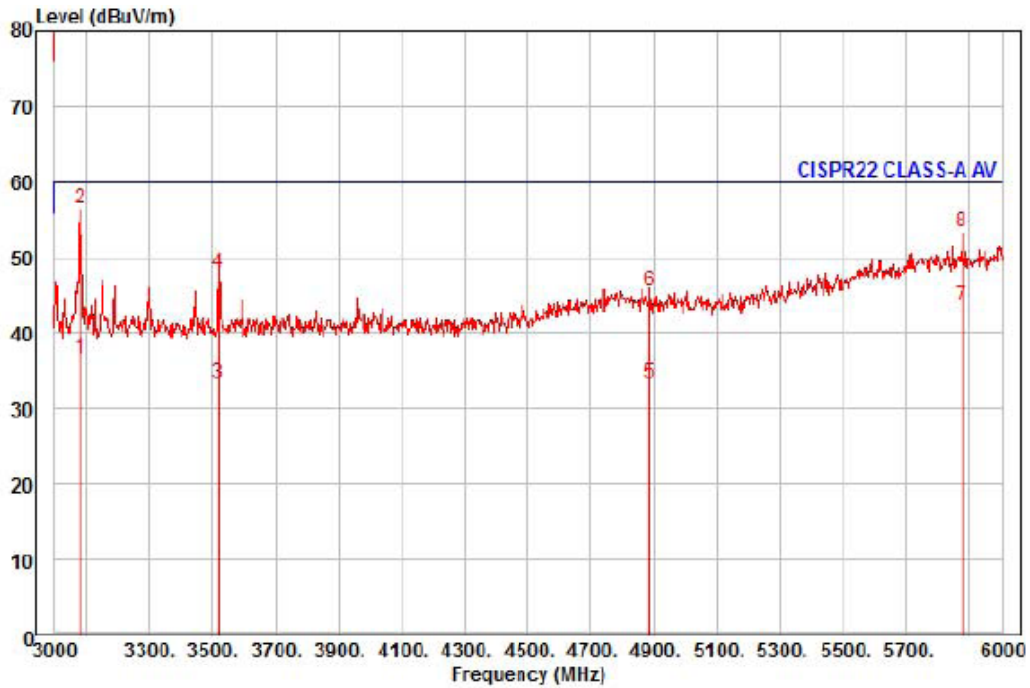

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN ANT (2014.03.10) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
EUT : SND-L5083R
Mode : C-Tik
Memo : 3 - 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3081.00	30.18	30.28	10.09	33.93	122	60.00	-23.38	vertical	Average
2 pk	3081.00	49.92	30.28	10.09	33.93	122	80.00	-23.64	vertical	Peak
3	3519.00	26.44	30.49	10.77	34.43	268	60.00	-26.73	vertical	Average
4	3519.00	41.04	30.49	10.77	34.43	268	80.00	-32.13	vertical	Peak
5	4887.00	20.49	33.35	12.98	33.41	334	60.00	-26.59	vertical	Average
6	4887.00	32.60	33.35	12.98	33.41	334	80.00	-34.48	vertical	Peak
7 pp	5877.00	24.98	34.89	17.09	33.33	247	60.00	-16.37	vertical	Average
8	5877.00	34.85	34.89	17.09	33.33	247	80.00	-26.50	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0080
Page (25) of (32)

3. Test Setup Photographs


3.1 Conducted Emission

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

- **Telecommunication Emission**

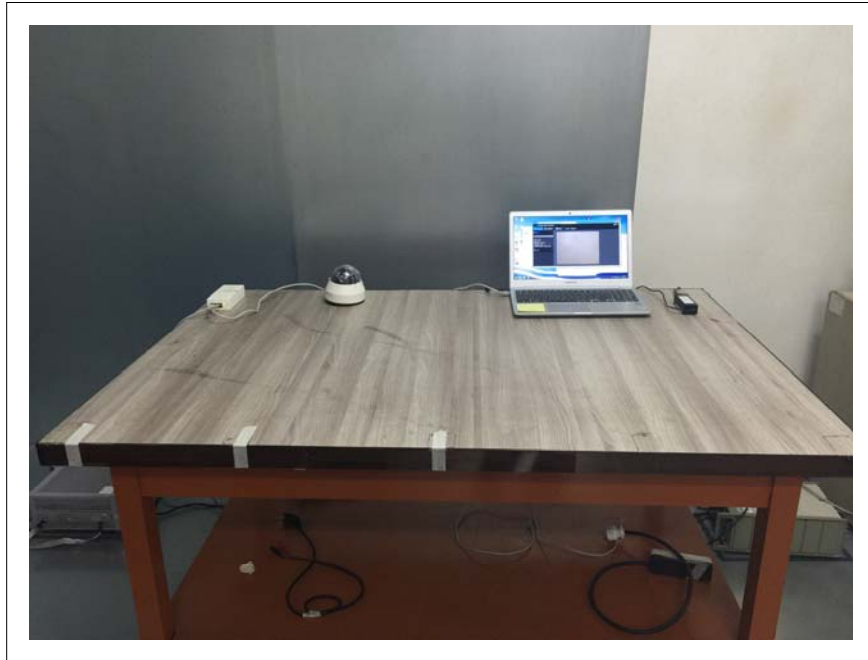

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



3.2 Radiated Emission

* Blow 1 GHz



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

*** Above 1 GHz**

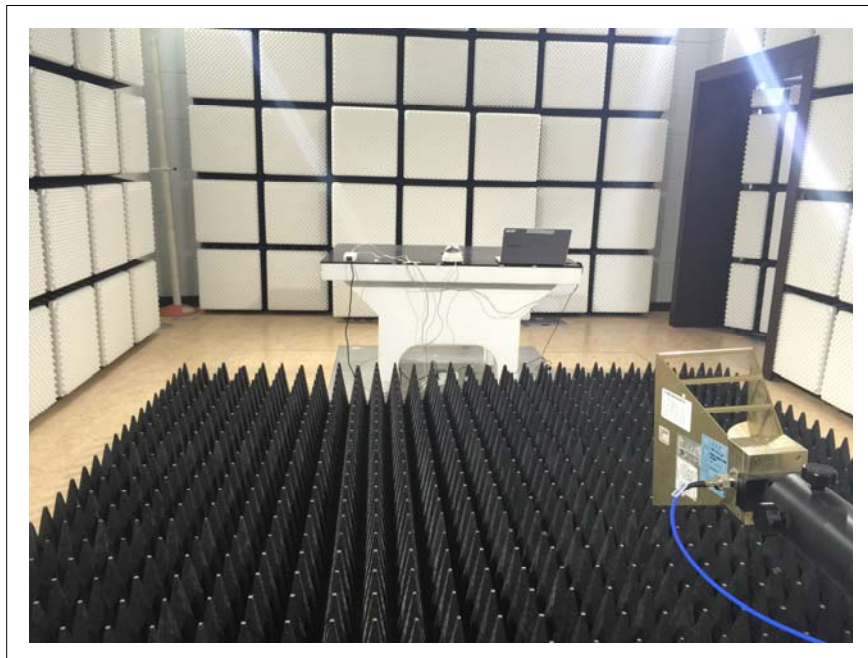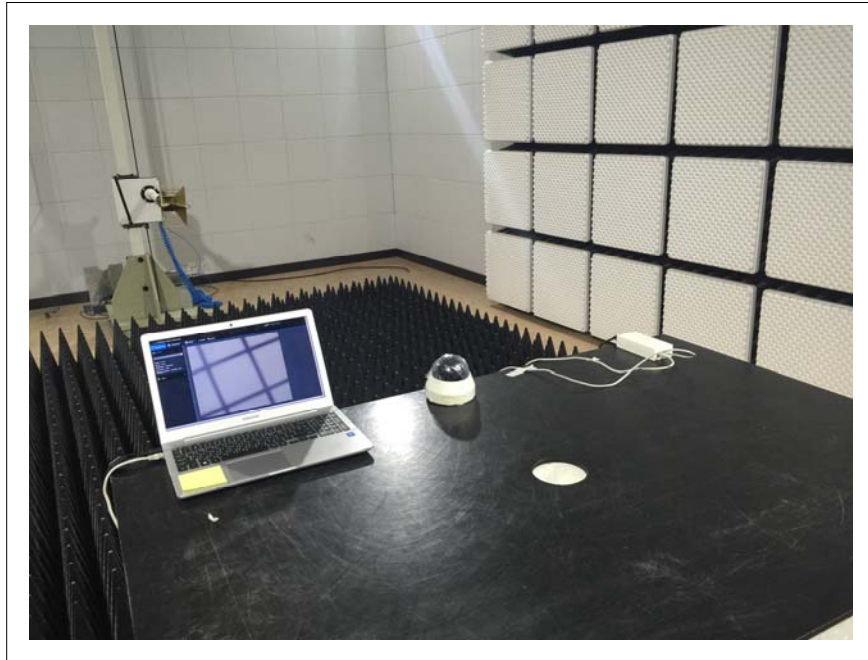

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

4. External Photographs



[FRONT VIEW]



[REAR VIEW]


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

5. Internal Photographs




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.


E.U.T: Internal View(Top) - Main Board

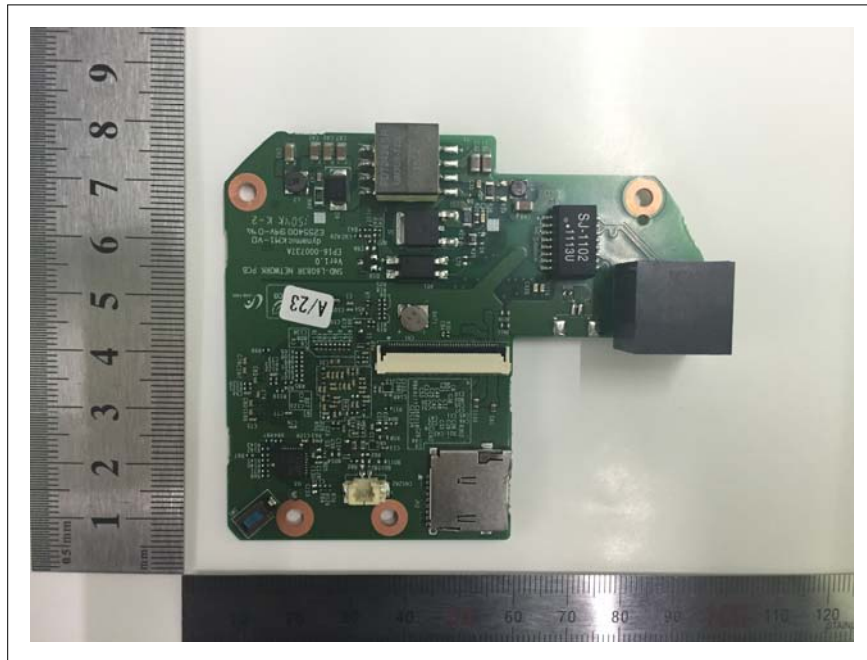


E.U.T: Internal View(Bottom) - Main Board

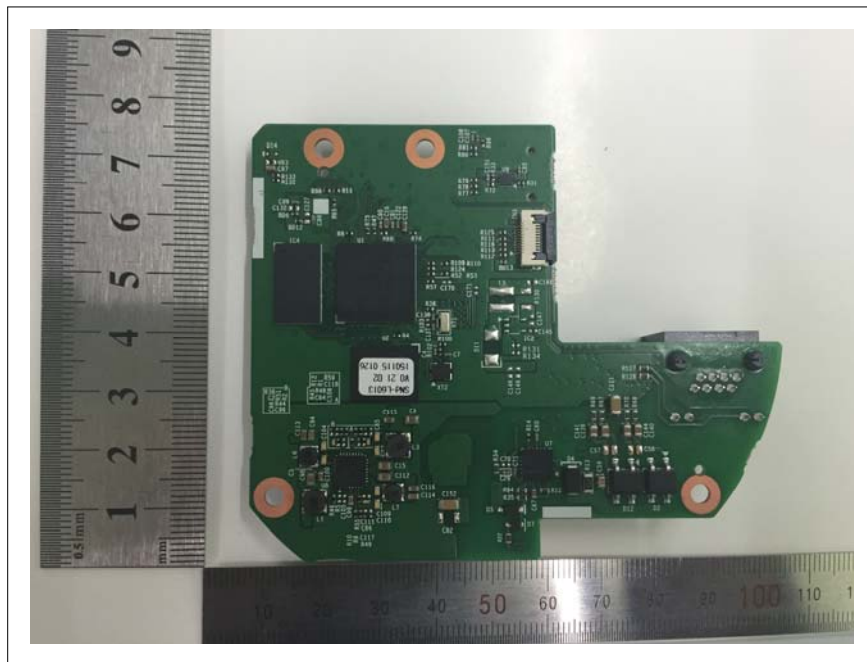

E.U.T: Internal View(Top) - Sensor Board

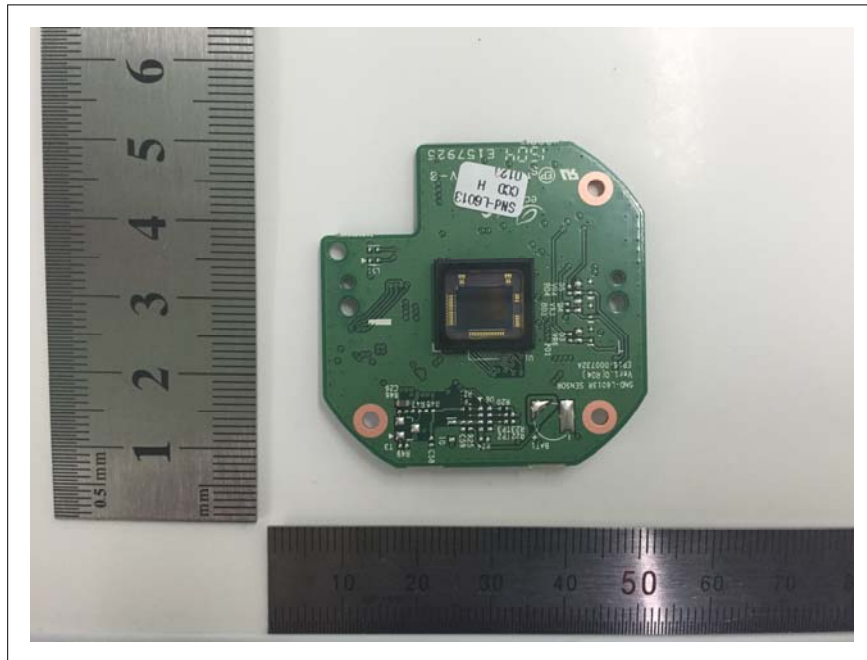

E.U.T: Internal View(Bottom) - Sensor Board

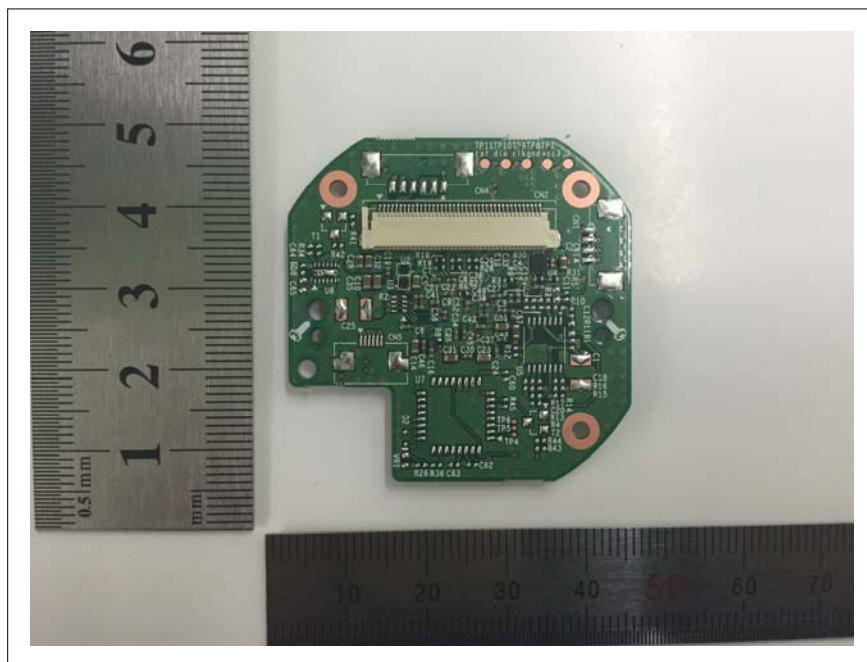

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.