

DECLARATION OF CONFORMITY

We; Samsung Techwin Co., Ltd.

DECLARE UNDER OUR SOLE RESPONSIBILITY THAT THE PRODUCT;

Report No: KES-E1-15T0048

**Type of
equipment:** NETWORK CAMERA

Model Name: SND-L6013P

Applicant: Samsung Techwin Co., Ltd.

Address: 84, Jeongdong-ro, Sengsan-gu, Changwon-si,
Gyeongsangnam-do, Korea

Manufacturer : TIANJIN SAMSUNG TECHWIN
OPTO-ELECTRONIC CO.,LTD

Address: No.11 Weiliu Road, Micro-Electronic
Industrial Park, Jingang Road,
Tianjin, 300385, China

Test standards : AS/NZS CISPR22:2009+A1:2010

Classification: C-Tick

The above equipment was tested by EMC compliance Testing Laboratory for with the requirements of C-tick Rules and Regulations. The results of testing in this report apply to the product / system which was tested only.

Feb. 26. 2015
(Date of issue)

(Name and signature of authorized person)



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (1) of (32)

AS/NZS EMI Test Report

Test Report No. : KES-E1-15T0048
Date of Issue : 02. 26. 2015
Description of Product : NETWORK CAMERA
Model No. : SND-L6013P
Variant Model : -
Applicant : Samsung Techwin Co., Ltd.
Address : 84, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea
Manufacturer : TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO.,LTD
Address : No.11 Weiliu Road, Micro-Electronic Industrial Park, Jingang Road, Tianjin, 300385, China
Applicable Regulation : AS/NZS CISPR22:2009 + A1:2010

Date of Receipt : 02. 05.2015
Test Date : 02. 11. 2015

Tested by:

Kang Hyeon, Kim
Test Engineer

Reviewed by:

Dong Hun, Jang
Technical Manager

Testing Laboratories for Safety and RF Compliance
C-3701 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Testing Laboratories for EMC Compliance
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
Tel : +82-31-883-5092 / Fax: +82-31-883-5169

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (2) of (32)

Revision history

Revision	Date of issue	Test report No.	Description
-	02. 26. 2015	KES-E1-15T0048	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (3) of (32)

TABLE OF CONTENTS

1	General Information	4
2	Test standards and results	9
3	Test Performed	10
3.1	Conducted Emission Measurements	10
3.2	Radiated Emission Measurements	17
4	Test Setup Photographs	25
4.1	Conducted Emission	25
4.2	Radiated Emission	27
6	External Photographs	29
7	Internal Photographs	30

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (4) of (32)

1. General Information

1.1 Introduction

The EMI Test Report for CE Declaration of Conformity is prepared on behalf of named applicant in accordance with the EMC Directive(2004/108/EC) of the European Economic Community. The test results reported in this document relate only to the item that was tested.

All radiated emission, conducted emission measurements required by the EMC Directive were performed manually at KES Co., Ltd. (here in after called KES), 473-29, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

The radiated emission measurements performed on 10 meter, Open Area Test Site, test range maintained by KES. Complete ANSI63.4;2009 description and site attenuation measurement data records are maintained at the test facility and have been placed on file with the Federal Communications Commission.

The KES EMC test facilities in and Yeoju-si are designated testing laboratory according to ISO/IEC 17025 by Radio Research Agency(RRA), Korea Communication Commission.



1.2 Product Description for Equipment Under Test (EUT)

Samsung Techwin Co., Ltd., NETWORK CAMERA, Model No: SND-L6013P or the "E.U.T". as referred to in this report is base model.

Main Specifications of EUT are:

Video	
Imaging Device	1/2.9" 2.19M CMOS
Total Pixels	2,000(H) x 1,121(V)
Effective Pixels	1,984(H) x 1,105(V)
Scanning System	Progressive
Min. Illumination	Color:0.3Lux(1/30sec,F1.8,50IRE),0.005Lux(2sec,50IRE) Color:0.1Lux(1/30sec,F1.8,30IRE) B/W : 0 Lux (IR LED on)
Lens	
Focal Length (Zoom Ratio)	3.6mm
Max. Aperture Ratio	F1.8
Angular Field of View	H: 86.5°, V: 47.8°, D: 101.2° (±5%)
Min. Object Distance	0.5m
Lens Type	Fixed
Mount Type	Board type
Pan / Tilt / Rotate	
Pan Range	0~350°
Tilt Range	0~67°
Rotate Range	0~355°
Operational	
IR Viewable Length	10m
Camera Title	Off / On (Displayed up to 15 characters)
Day & Night	True Day & Night
Backlight Compensation	Off / BLC
Contrast Enhancement	SSDR(SamsungSuperDynamicRange) (Off / On)
Digital Noise Reduction	SSNR(Off / On)
Motion Detection	Off / On (4ea rectangler zones)
Privacy Masking	Off / On (6ea rectangler zones)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC(Lens distortion correction)	On/Off (5 Levels Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker
Flip / Mirror	Flip / Mirror / Hallway view
Intelligent Video Analytics	Motion Detection with metadata, Tampering
Alarm Triggers	Motiondetection, Tampering Detection, SD card error
Alarm Events	FileuploadviaFTPandE-Mail LocalstoragerecordingatEvent NotificationviaE-Mail



Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264, MJPEG
Resolution	1920x1080 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 720x576 / 640x480 / 320x240
Max. Framerate	H.264:Max30fpsatallresolutions MJPEG:Max1fpsat1920x1080/1280x1024/1280x720/1024x768,Max.15fpsatotherresolution
Video Quality Ajustment	H.264:TargetBitrateLevelControl MJPEG:QualityLevelControl
Bitrate control method	H.264:CBRorVBR MJPEG:VBR
Streaming Capability	Multiple Streaming(Up to 3 Profiles)
Audio I/O	Built-in Mic
Audio Compression Format	G.711u-law/G.726Selectable G.726(ADPCM)8KHz,G.7118KHz G.726:16Kbps,24Kbps,32Kbps,40Kbps
Audio Communication	Uni-directional
IP	IPv4, IPv6
Protocol	TCP/IP,UDP/IP,RTP(UDP),RTP(TCP),RTCP,RTSP,NTP,HTTP,HTTPS,SSL,DHCP,PPPoE,FTP,SMTP,ICMP,IGMP, SNMPv1/v2c/v3(MIB-2),ARP,DNS,DDNS,QoS,PIM-SM,UPnP,Bonjour
Security	HTTPS(SSL)LoginAuthentication DigestLoginAuthentication IPAddressFiltering UseraccessLog 802.1XAuthentication
Streaming Method	Unicast / Multicast
Max. User Access	6 users at Unicast Mode
Edge storage	MicroSD/SDHCMax32G,NAS (Motionimagesrecorded in theSDmemorycardcanbedownloaded) (ManualrecordingatLocalPC)
Application Programming Interface	ONVIFProfileS,G SUNAPI(HTTPAPI)
Webpage Language	English,French,German,Spanish,Italian,Chinese,Korean, Russian,Japanese,Swedish,Denish,Portuguese,Turkish,Polish,Czech,Rumanian,Serbian,Dutch,Croatia,Hungary,Greek,Finnish,Norwegian
Web Viewer	SupportedOS:WindowsXP/VISTA/7/8/8.1,MACOSX10.7~10.10 SupportedBrowser:MicrosoftInternetExplorer(Ver.8~11),MozillaFirefox(Ver.9~35), Google Chrome (Ver. 15~40), Apple Safari (Ver. 8.0.2(Mac OS X 10.10), 8.0.2(Mac OS X 10.9), 6.0.2 (Mac OS X 10.8, 10.7 only), 5.1.7) * Mac OS X only
Central Management Software	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-10° C ~ +55° C / Less than 90% RH
Storage Temperature / Humidity	-30° C~+60° C(-22° F~+140° F)/ Less than 90% RH
Electrical	
Input Voltage / Current	PoE
Power Consumption	Max. 7.0W
Mechanical	
Color / Material	Ivory / Plastic
Dimension (WxHxD)	Φ110mm x 86mm
Weight	250g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



1.3 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	SND-L6013P	-	TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO., LTD	E.U.T

1.4 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	NT63025J	JK9091EF400432X	SAMSUNG	-
AC/DC Adaptor	A13-040N2A	CN60BA4400313AD0 N843KO243	Chicony Power Technology (suzhou) Co., Ltd.	-
POE Switch	ANY4805C-LT1	10H300002	ANY ELECTRONICS CO., LTD	-
Micro SD Card	-	-	SANDISK	-

1.5 External I/O Cabling

Description	Length (m)	Port / From	Port/To	Remarks
NETWORK CAMERA	-	Micro SD slot / Micro SD Card	Micro SD Card slot / Micro SD Card	-
NETWORK CAMERA	5.0	RJ-45 / EUT	RJ-45 / POE Switch	Unshielded
POE Switch	1.5	RJ-45 / POE Switch	RJ-45 / Notebook	Unshielded


1.6 Special Accessories

As shown in section 1.8, all interface cables used for compliance testing are shielded as normally supplied or by use respective component manufacturers.

1.7 EUT Modifications

No modifications were made to the EUT in order to achieve and maintain compliance to the standards described in this report.

1.8 Configuration of Test System

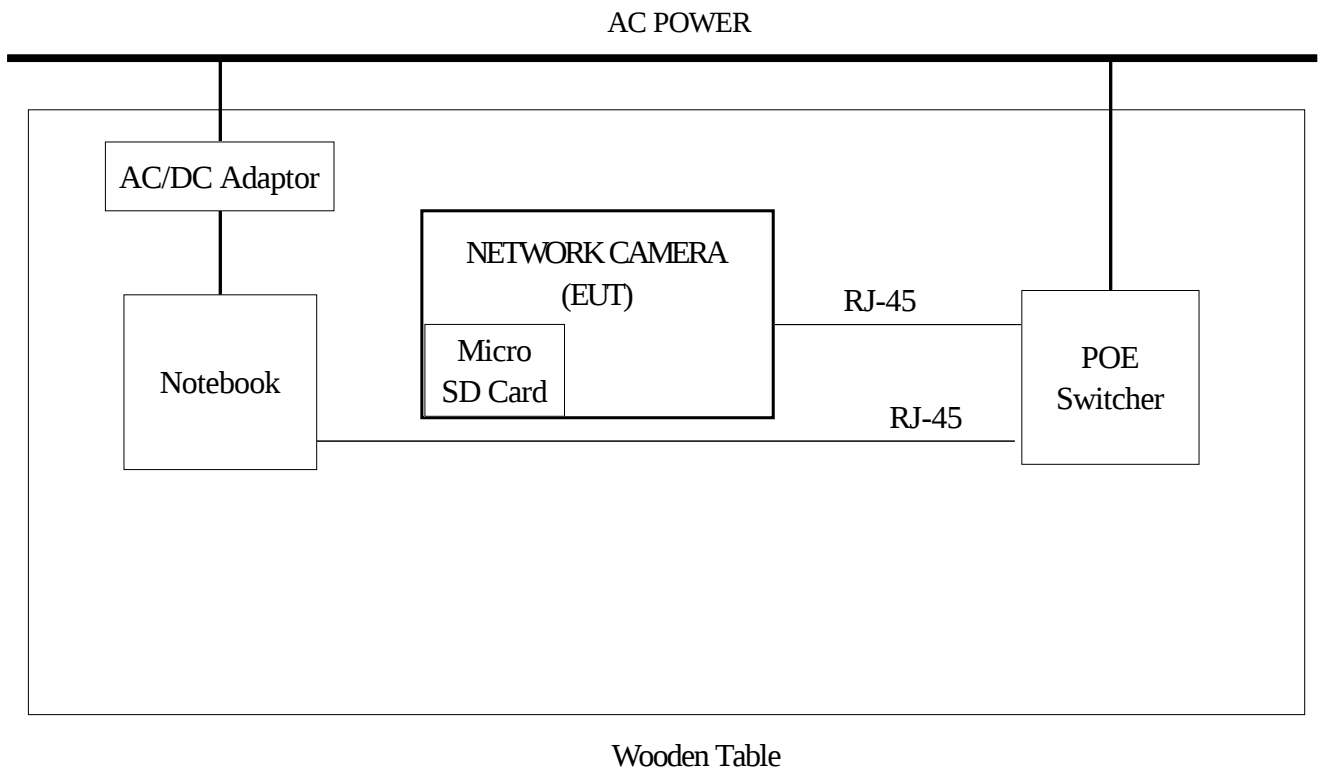

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (9) of (32)

1.9 Operating condition

- Ping test
- web view monitoring

Test standards and results

Specifications	Description	Test Point	Remark
CISPR22, Class A	Conducted Emission	AC Input Port	N/A(1)
CISPR22, Class A	Radiated Emission	Enclosure	C

Note : C=Complies N/C=Not Complies N/T=Not Tested N/A=Not Applicable

Note (1) : This device is operate by POE power. Test is not applicable.

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (10) of (32)

2. Test Performed

2.1 Conducted Emission Measurements

2.1.1 Test Description

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was placed on a wooden table, 80 centimeters height above the floor. Power was fed to the EUT through a 50 ohm/ 50 micro henry Line Impedance Stabilization Network (LISN). The ground plane that was electrically bonded to the shield room ground system and all power lines entering the shield room were filtered.

2.1.2 Test Equipments

Description	Manufacturer	Model Number	Serial Number	Cal. Due
EMI Receiver/Signal Analyzer	Narda S.T.S / PMM	PMM 9010F	020WW31006	04. 04. 2015
LISN	R&S	ENV216	101137	02. 10. 2016
LISN	EMCO	3810/2	2228	-
8-Wire ISN CAT3	Schwarzbeck Mess	CAT3 8158	8158-0019	04.08.2015
8-Wire ISN CAT5	Schwarzbeck Mess	NTFM 8158	8158-0030	05.21.2015
8-Wire ISN CAT6	Schwarzbeck Mess	NTFM 8158	8158-0029	08.15.2015
Electro wave Shieldroom	SEMITEC	-	-	-

2.1.3 Test Environments

Ambient Temperatures : see the data
Relative Humidity : see the data

2.1.4 Test Limits

Frequency (MHz)	CISPR Publication 22			
	Class B		Class A	
	QP	AV	QP	AV
0.15 to 0.50	66 to 56	56 to 46	79	66
0.50 to 5.00	56	46	73	60
5.00 to 30.00	60	50	73	60

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

- Telecommunication

Frequency (MHz)	CISPR 22(Voltage)			
	Class B (dB μ V)		Class A (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 to 0.50	84.0 to 74.0	74.0 to 64.0	97.0 to 87.0	84.0 to 74.0
0.50 to 30.00	74.0	64.0	87.0	74.0

Frequency (MHz)	CISPR 22(Current)			
	Class B (dB μ A)		Class A (dB μ A)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 to 0.50	40.0 to 30.0	30.0 to 20.0	53.0 to 43.0	40.0 to 30.0
0.50 to 30.00	30.0	20.0	43.0	30.0

2.1.5 Test Procedure

The conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP".

The conducted emission test was performed with the EUT exercise program loaded, and the emissions were scanned between 150 kHz to 30 MHz on the HOT side and NEUTRAL side, herein referred to as H and N, respectively.

2.1.6 Test Results

According to the data in section 2.1.7, the EUT complied with the CISPR22 standards.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (12) of (32)

2.1.7 Test Data

Temperature: °C Humidity: R.H. Test Date: Tested by:

Polarization: HOT

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (13) of (32)

Polarization: NEUTRAL

N/A




KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (14) of (32)

- Telecommunication

Temperature: 22.0 °C Humidity: 37.6 % R.H. Test Date: 02. 11. 2015 Tested by: Kang Hyeon, Kim
[10 Mbps]

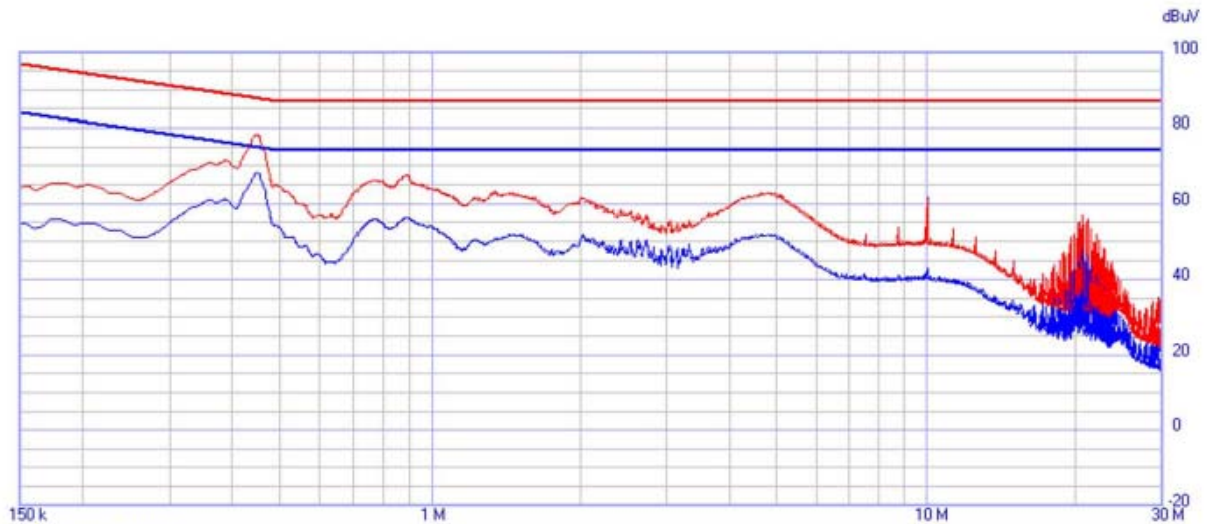

	Start [MHz]	Stop [MHz]	Step	Detector	Hold Time	RBW	Min Att	Pre Amp	Pre Sel	Prompt start	Ancillary
1	0.15	30	AUTO (2.045 kHz)	P Q C KN22_CE_TEL_ KN22_CE_TEL_A	1500 ms	9 kHz	0	ON	ON	...	...

Pulse Limiter ON
Ancillary = General

Limits:
55022_CE_TEL_A_QP
55022_CE_TEL_A_AV

Factors:
R_ISN 10 Mbps(1400408)_ISN ONLY
CABLELOSS(141122)

QPeak
C-Avg

Frequency [MHz]	Q-Peak [dBμV]	Limit [dBμV]	Margin [dB]	C-Avg [dBμV]	Limit [dBμV]	Margin [dB]	Factor (ISN) [dB]	Factor (Cable Loss) [dB]
0.152	64.600	96.890	-32.290	54.890	83.890	-29.000	10.290	0.020
0.185	65.450	95.270	-29.820	55.330	82.270	-26.940	10.220	0.030
0.387	71.500	89.120	-17.620	61.180	76.120	-14.940	10.050	0.030
0.447	78.200	87.940	-9.740	68.050	74.940	-6.890	10.040	0.030
0.502	64.250	87.000	-22.750	53.090	74.000	-20.910	10.050	0.030
0.884	67.730	87.000	-19.270	56.210	74.000	-17.790	9.940	0.040
3.731	57.720	87.000	-29.280	48.250	74.000	-25.750	9.840	0.130
4.837	62.920	87.000	-24.080	51.930	74.000	-22.070	9.850	0.170
10.046	61.710	87.000	-25.290	42.900	74.000	-31.100	9.810	0.280

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.




KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (15) of (32)

[100 Mbps]

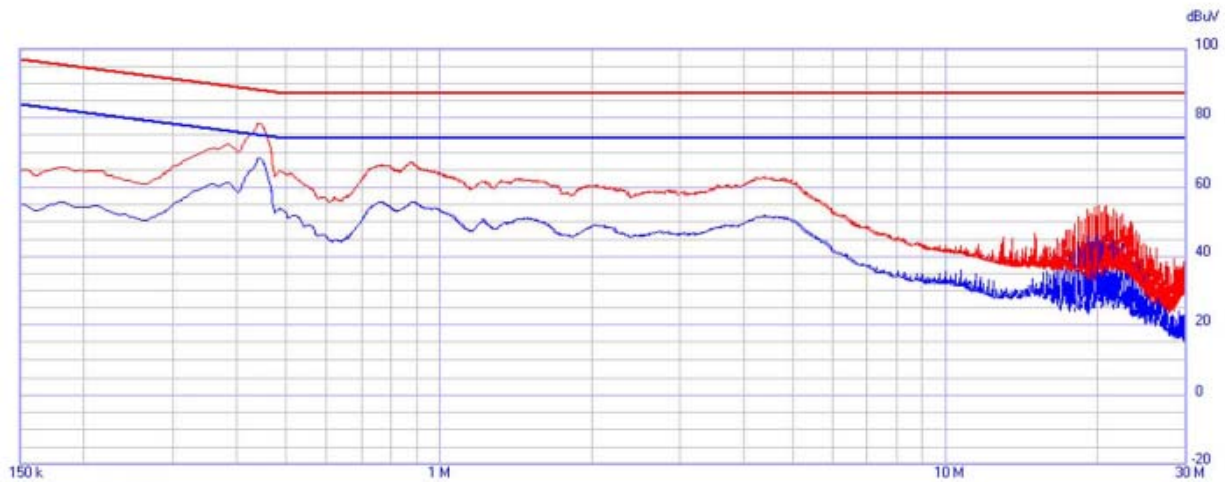

	Start [MHz]	Stop [MHz]	Step	Detector	Hold Time	RBW	Min Alt	Pre Amp	Pre Sel	Prompt start	Ancillary
1	0.15	30	AUTO (2.045 kHz)	P Q C KN22_CE_TEL KN22_CE_TEL_A	1500 ms	9 kHz	0	ON	ON	---	---

Pulse Limiter ON
Ancillary = General

Limits:
55022_CE_TEL_A_QP
55022_CE_TEL_A_AV

Factors:
R_ISN 100 Mbps(1400521)_ISN ONLY
CABLELOSS(141122)

QPeak
C-Avg

Frequency [MHz]	Q-Peak [dBμV]	Limit [dBμV]	Margin [dB]	C-Avg [dBμV]	Limit [dBμV]	Margin [dB]	Factor (ISN) [dB]	Factor (Cable Loss) [dB]
0.152	65.100	96.890	-31.790	55.210	83.890	-28.680	9.790	0.020
0.181	65.700	95.450	-29.750	55.800	82.450	-26.650	9.750	0.030
0.385	72.400	89.170	-16.770	61.520	76.170	-14.650	9.620	0.030
0.444	78.460	87.980	-9.520	68.410	74.980	-6.570	9.600	0.030
0.512	64.020	87.000	-22.980	51.490	74.000	-22.510	9.580	0.030
0.872	67.140	87.000	-19.860	55.480	74.000	-18.520	9.500	0.040
0.874	67.140	87.000	-19.860	55.480	74.000	-18.520	9.500	0.040
4.373	63.120	87.000	-23.880	51.690	74.000	-22.310	9.340	0.150
20.005	54.710	87.000	-32.290	46.210	74.000	-27.790	9.790	0.200
20.649	54.780	87.000	-32.220	46.330	74.000	-27.670	9.720	0.210

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (16) of (32)

[1 000 Mbps]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

2.2 Radiated Emission Measurements

2.2.1 Test Description


The radiated emissions measurements were performed on the ten-meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane.

The frequency spectrum from 30 MHz to 1 000 MHz and 1 000 MHz to 6 000 MHz was scanned and maximum emission levels at each frequency recorded.


The system was rotated 360°, and the antenna was varied in the height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

- above 1 GHz : Antenna height is fixed to 1.0 m

* Below 1 GHz

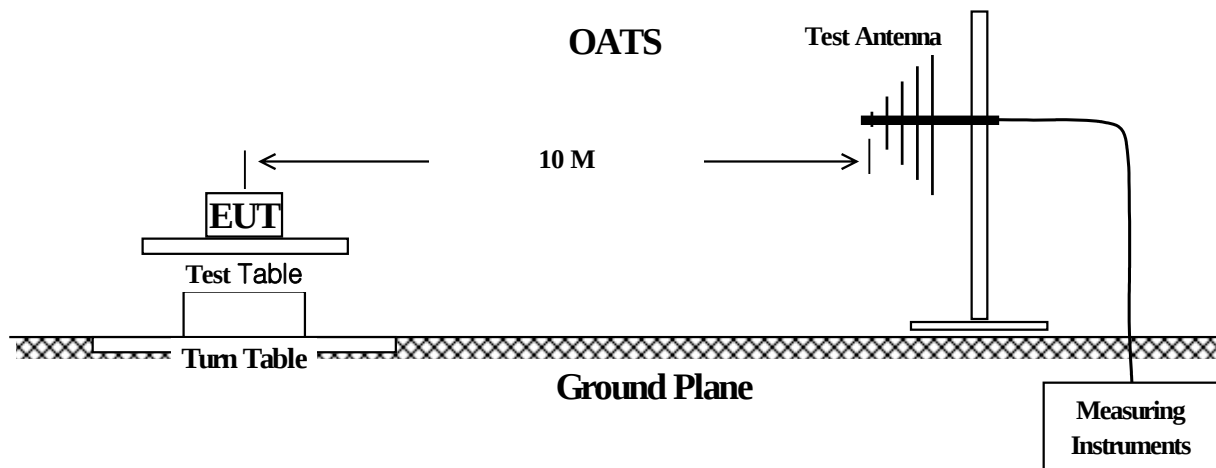

* Above 1 GHz

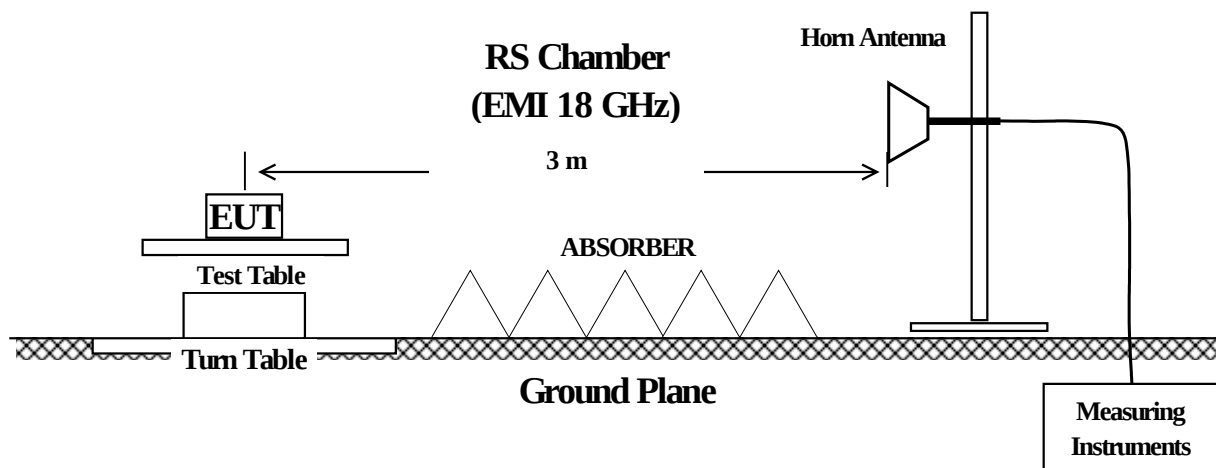

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (18) of (32)

2.2.2 Test Equipments

Description	Manufacturer	Model Number	Serial Number	Cal. Due
EMI TEST Receiver	R & S	ESVS10	826008/014	04.09.2014
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-385	05.09.2015
EMC Analyzer	Agilent	E7405A	US41160306	08.16.2014
PREAMPLIFIER	8449B	H.P	3008A00538	07.23.2015
DOUBLE RIDGED HORN ANTENNA	A.H. SYSTEMS, INC	SAS-571	781	05.13.2015
RS Chamber (EMI 18GHz)	SEMITEC	-	-	-

2.2.3 Test Environments

Temperatures : see the data
Humidity : see the data

2.2.4 Test Limits*** Below 1 GHz**

Frequency (MHz)	CISPR Publication 22	
	Class B	Class A
	Quasi-peak dB(uV/m)	Quasi-peak dB(uV/m)
0,15 to 30	Under consideration	Under consideration
30 to 230	30	40
230 to 1 000	37	47

*** Above 1 GHz**

Frequency (MHz)	CISPR Publication 22			
	Class B @ 3 m (dB μ V/m)		Class A @ 3 m (dB μ V/m)	
	PK	AV	PK	AV
1 000 to 3 000	70	50	76	56
3 000 to 6000	74	54	80	60

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

2.2.5 Test Procedure

Before final measurements of radiated emission were made on the OATS, the EUT was scanned in semi-anechoic chamber in order to determine its emission spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emission in amplitude, direction and frequency. This process was repeated during final radiated emission measurements on the OATS range, at each frequency, in order to ensure that maximum emissions amplitudes were attained.

The radiated emission test was performed with EUT exercise program loaded, and the emissions were scanned between 30 MHz to 1 000 MHz and 1 000 MHz to 6 000 MHz using the spectrum analyzer. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz(1 MHz), and the analyzer was operated in the CISPR quasi-peak (Peak) detection mode.

Measurements were taken using both HORIZONTAL and VERTICAL antenna polarization, herein referred to as H and V, respectively.

3.1.1 Field Strength Calculation

The Field Strength (FS) is calculated by adding the Antenna Factor (AF) and Cable Factor (CF) and Amplifier Gain(AG) from the Measured Reading (MR). The basic equation with a sample calculation is as follows:

$$* \text{ Below 1 GHz : FS(dB}\mu\text{V/m)} = \text{MR(dB}\mu\text{V)} + [\text{AF(dB/m)} + \text{CF(dB)}]$$

$$* \text{ Above 1 GHz : FS(dB}\mu\text{V/m)} = \text{MR(dB}\mu\text{V)} + [\text{AF(dB/m)} + \text{CF(dB)}] - \text{AG}$$

**KES Co., Ltd.**

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (20) of (32)

2.2.6 Test Results

According to the data in section 3.2.7, the EUT complied with the CISPR22 standards.

2.2.7 Test Data*** Below 1 GHz**

Temperature: 3.0 °C Humidity: 48.0 % R.H. Test Date: 02. 11. 2015 Tested by: Kang Hyeon, Kim

Frequency (MHz)	Amplitude (dB μ V/m)	Antenna		Correction Factor		Corrected Amplitude (dB μ V/m)	Applicable Limit (dB μ V/m)	Margin (dB)
		Polar. (H/V)	Height (m)	Ant. (dB)	Cable (dB)			
50.075	20.100	V	1.170	13.640	1.620	35.360	40.000	4.640
133.758	14.200	H	3.500	12.310	2.760	29.270	40.000	10.730
259.879	24.100	V	1.000	12.080	3.970	40.150	47.000	6.850
334.513	20.900	H	4.000	14.150	4.640	39.690	47.000	7.310
380.147	15.400	V	1.900	15.150	4.990	35.540	47.000	11.460
631.132	10.300	V	1.580	19.990	6.790	37.080	47.000	9.920

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.




KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (21) of (32)

* Above 1 GHz

Temperature: 22.0 °C Humidity: 37.6 % R.H. Test Date: 02. 11. 2015 Tested by: Kang Hyeon, Kim

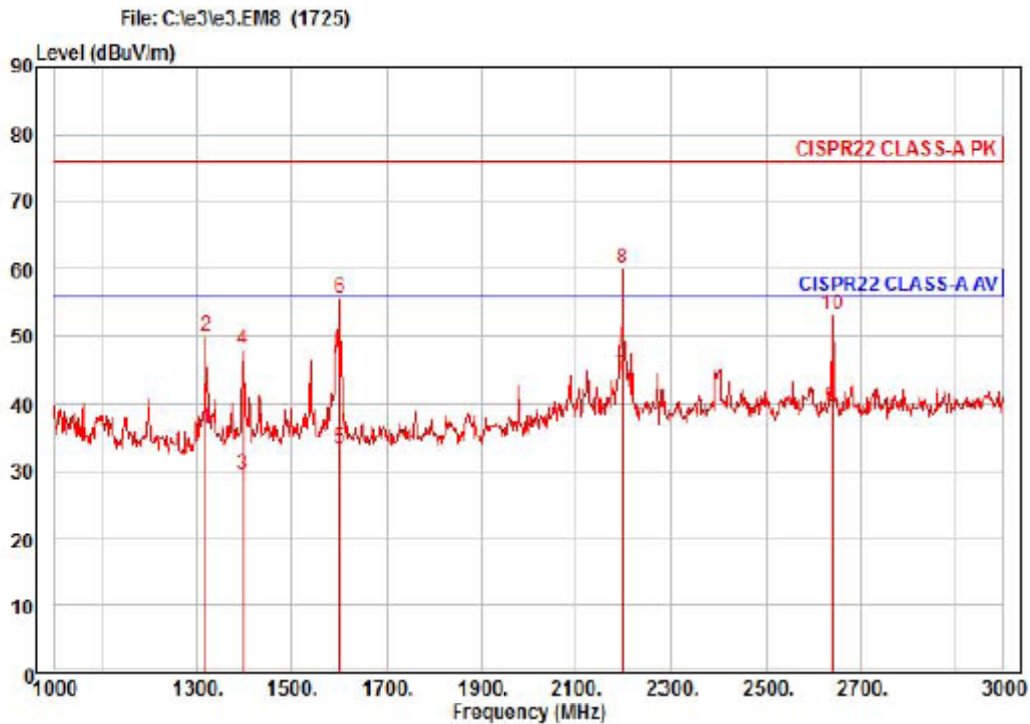

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN ANT (2014.03.10) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
EUT : SND-L6013P
Mode : C-Tik
Memo : 1 - 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1320.00	41.55	24.29	6.21	35.67	212	56.00	-19.62	horizontal	Average
2	1320.00	55.26	24.29	6.21	35.67	212	76.00	-25.91	horizontal	Peak
3	1398.00	34.02	24.61	6.40	35.54	127	56.00	-26.51	horizontal	Average
4	1398.00	52.49	24.61	6.40	35.54	127	76.00	-28.04	horizontal	Peak
5	1600.00	36.00	25.65	6.89	35.20	280	56.00	-22.66	horizontal	Average
6	1600.00	58.36	25.65	6.89	35.20	280	76.00	-20.30	horizontal	Peak
7 pp	2200.00	41.62	28.62	8.28	34.39	42	56.00	-11.87	horizontal	Average
8 pk	2200.00	57.54	28.62	8.28	34.39	42	76.00	-15.95	horizontal	Peak
9	2640.00	34.92	29.54	9.20	34.09	130	56.00	-16.43	horizontal	Average
10	2640.00	48.50	29.54	9.20	34.09	130	76.00	-22.85	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:
KES-E1-15T0048
Page (22) of (32)

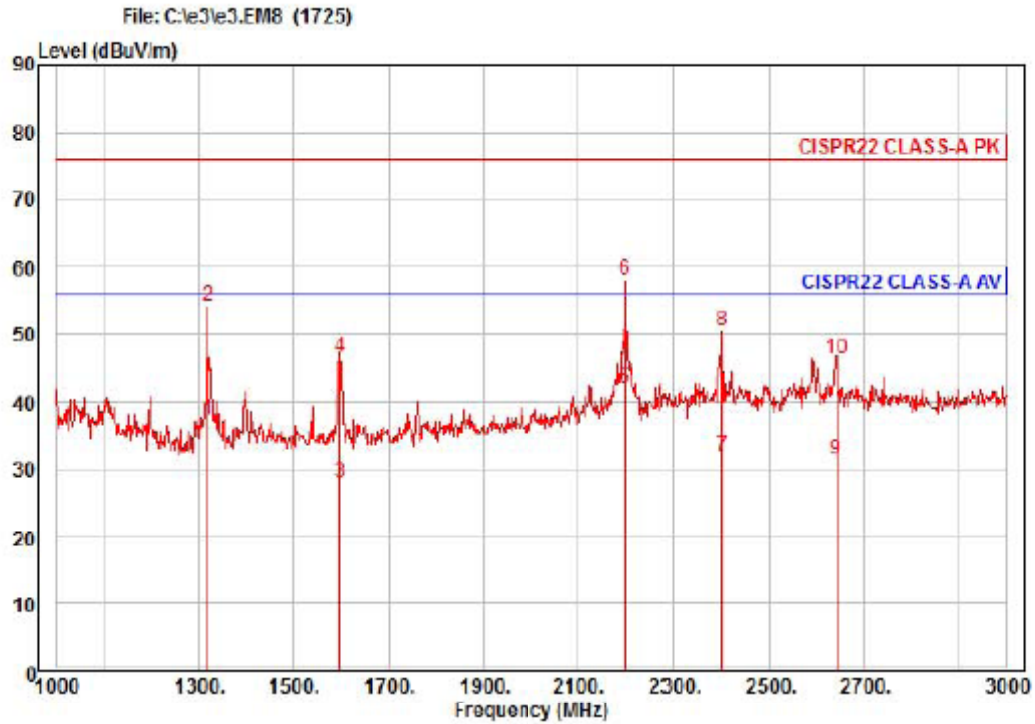

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN ANT (2014.03.10) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
EUT : SND-L6013P
Mode : C-Tik
Memo : 1 - 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1320.00	42.47	24.29	6.21	35.67	55	56.00	-18.70	vertical	Average
2	1320.00	59.35	24.29	6.21	35.67	55	76.00	-21.82	vertical	Peak
3	1598.00	30.65	25.64	6.89	35.20	209	56.00	-28.02	vertical	Average
4	1598.00	49.20	25.64	6.89	35.20	209	76.00	-29.47	vertical	Peak
5 pp	2200.00	39.40	28.62	8.28	34.39	109	56.00	-14.09	vertical	Average
6 pk	2200.00	55.69	28.62	8.28	34.39	109	76.00	-17.80	vertical	Peak
7	2400.00	28.43	29.05	8.70	34.25	330	56.00	-24.07	vertical	Average
8	2400.00	47.03	29.05	8.70	34.25	330	76.00	-25.47	vertical	Peak
9	2642.00	26.72	29.54	9.21	34.09	172	56.00	-24.62	vertical	Average
10	2642.00	41.64	29.54	9.21	34.09	172	76.00	-29.70	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

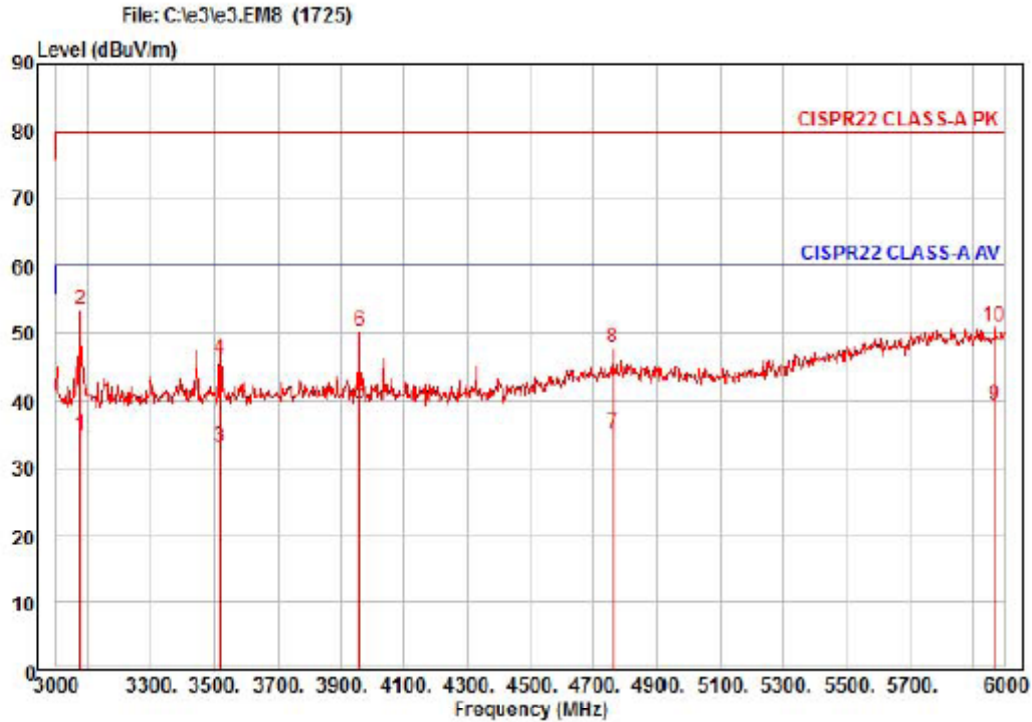

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN ANT (2014.03.10) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
EUT : SND-L6013P
Mode : C-Tik
Memo : 3 - 6 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3078.00	28.40	30.28	10.08	33.93	131	60.00	-25.17	horizontal Average
2 pk	3078.00	47.05	30.28	10.08	33.93	131	80.00	-26.52	horizontal Peak
3	3519.00	26.16	30.49	10.77	34.43	133	60.00	-27.01	horizontal Average
4	3519.00	39.17	30.49	10.77	34.43	133	80.00	-34.00	horizontal Peak
5 pp	3960.00	31.05	31.80	11.46	34.92	323	60.00	-20.61	horizontal Average
6	3960.00	41.90	31.80	11.46	34.92	323	80.00	-29.76	horizontal Peak
7	4764.00	22.98	32.93	12.78	33.63	166	60.00	-24.94	horizontal Average
8	4764.00	35.85	32.93	12.78	33.63	166	80.00	-32.07	horizontal Peak
9	5967.00	19.85	35.18	17.49	33.35	223	60.00	-20.83	horizontal Average
10	5967.00	31.59	35.18	17.49	33.35	223	80.00	-29.09	horizontal Peak



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (24) of (32)

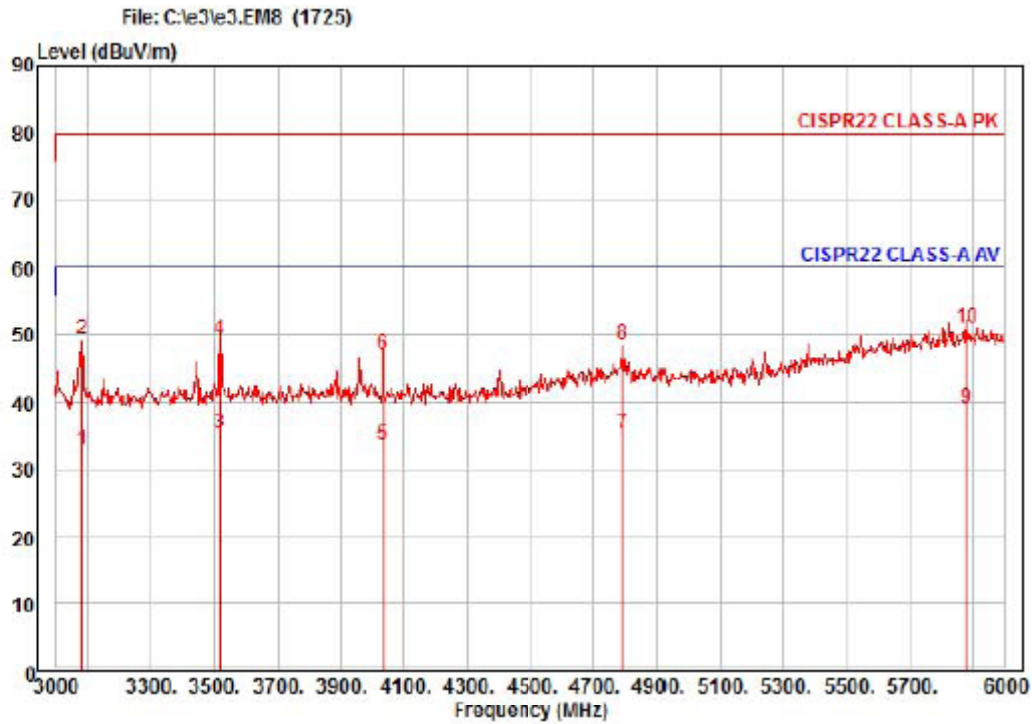

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN ANT (2014.03.10) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : NETWORK CAMERA
EUT : SND-L6013P
Mode : C-Tik
Memo : 3 - 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3081.00	26.35	30.28	10.09	33.93	304	60.00	-27.21	vertical	Average
2	3081.00	42.86	30.28	10.09	33.93	304	80.00	-30.70	vertical	Peak
3	3519.00	28.51	30.49	10.77	34.43	169	60.00	-24.66	vertical	Average
4	3519.00	42.55	30.49	10.77	34.43	169	80.00	-30.62	vertical	Peak
5	4035.00	25.11	31.93	11.58	34.91	250	60.00	-26.29	vertical	Average
6	4035.00	38.43	31.93	11.58	34.91	250	80.00	-32.97	vertical	Peak
7	4794.00	23.05	33.04	12.83	33.57	317	60.00	-24.65	vertical	Average
8	4794.00	36.27	33.04	12.83	33.57	317	80.00	-31.43	vertical	Peak
9 pp	5880.00	20.31	34.90	17.10	33.33	124	60.00	-21.02	vertical	Average
10 pk	5880.00	32.36	34.90	17.10	33.33	124	80.00	-28.97	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-15T0048
Page (25) of (32)

3. Test Setup Photographs


3.1 Conducted Emission

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.


- **Telecommunication Emission**

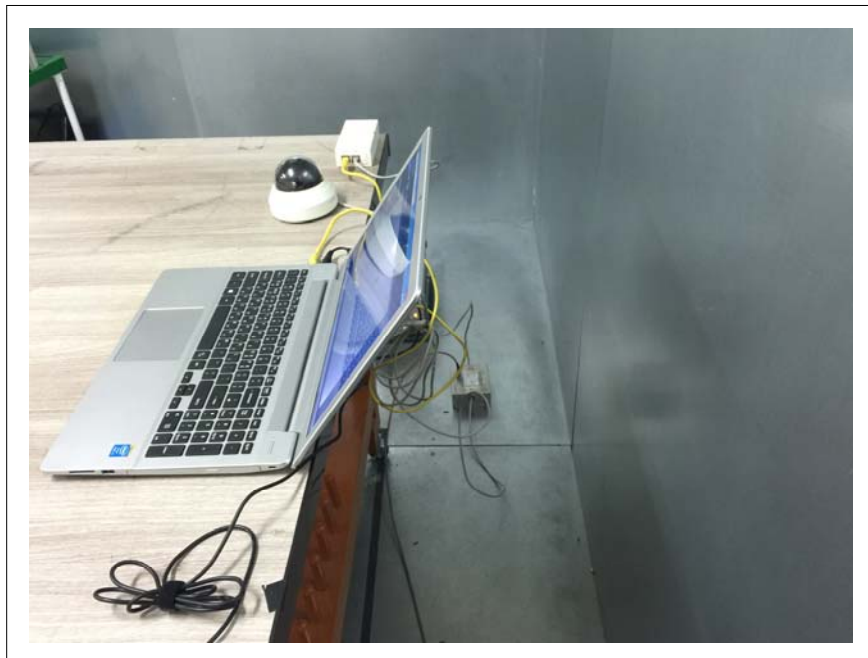

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



3.2 Radiated Emission

* Blow 1 GHz

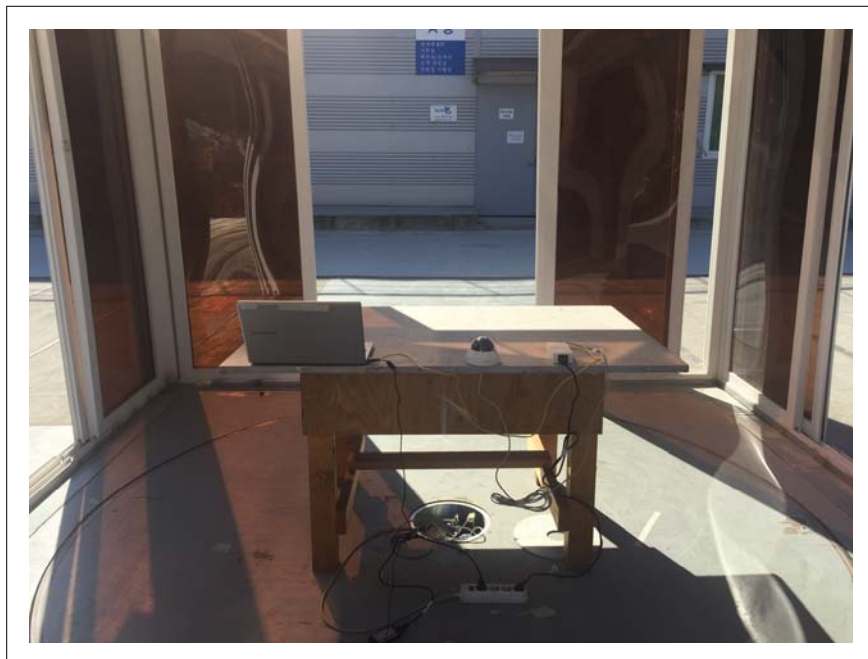

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

*** Above 1 GHz**

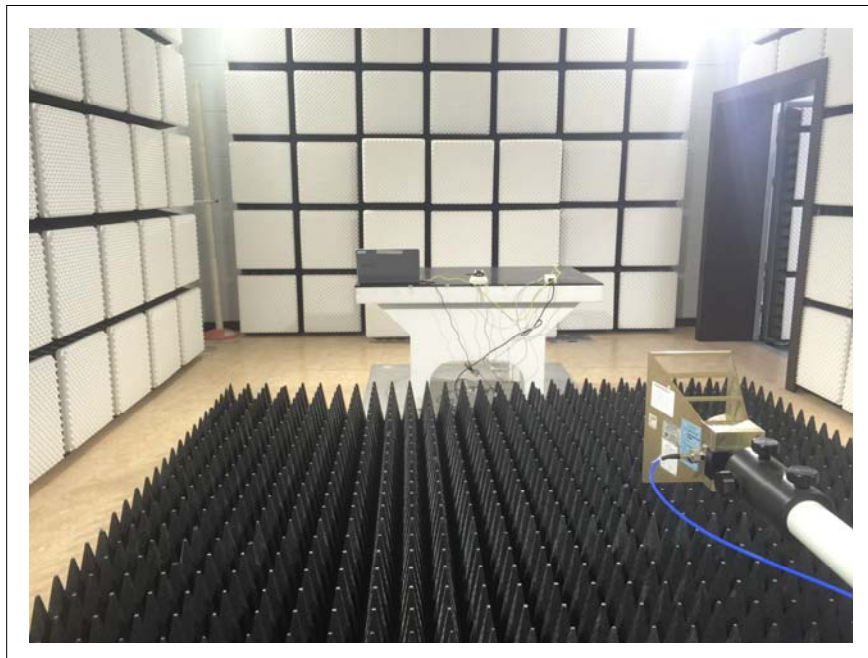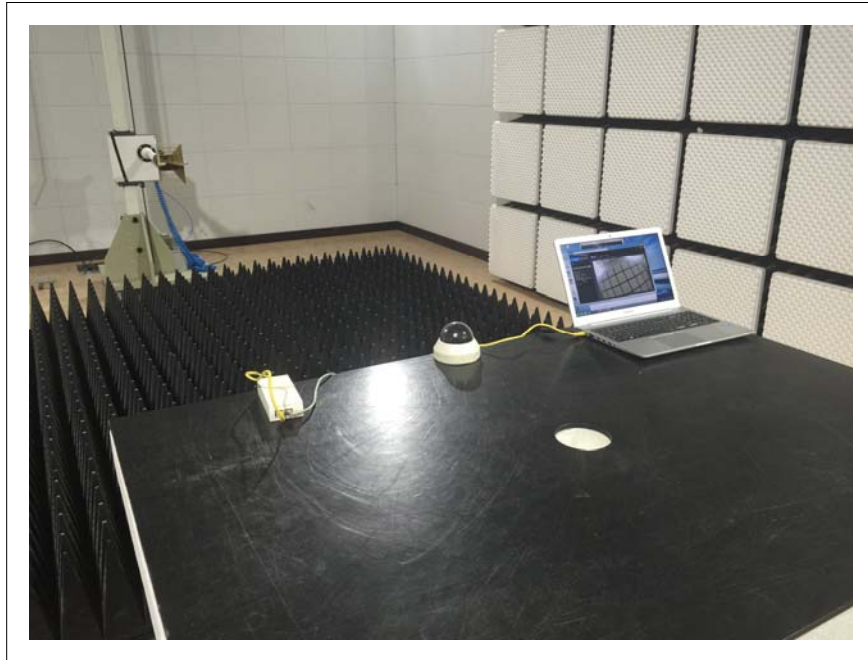

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

4. External Photographs



[FRONT VIEW]



[REAR VIEW]

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

5. Internal Photographs



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

E.U.T: Internal View(Top) - Main Board



E.U.T: Internal View(Bottom) - Main Board



E.U.T: Internal View(Top) - Lens Board



E.U.T: Internal View(Bottom) - Lens Board

