

EMC TEST REPORT

Test report No : EMC-VCCI-0388
Type of Equipment : Network Camera
Model Name : SNP-5430N
Applicant : Samsung Techwin Co., Ltd.
84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer#1 : Samsung Techwin Co., Ltd.
84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer#2 : TIANJIN SAMSUNG TECHWIN
OPTO-ELECTRONIC CO., LTD
No.11 Weiliu Road. Micro-Electronic Industrial
Park Jingang Road Tianjin 300385, China
Test standards : VCCI V-3 / 2013.04, Class A
Testing Laboratory : EMC Compliance Ltd.
Test result : Complied

The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of VCCI Rules and Regulations.

The results of testing in this report apply to the product/system which was tested only.

Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of receipt: 2014. 05. 19

Date of testing: 2014. 06. 03 ~ 06. 05

Issued date: 2014. 06. 12

Tested by:

KIM, JIN-WON

Approved by:

YEOM, HAN-SEOK

Contents

1. Applicant information	3
2. Laboratory information	4
3. Test system configuration	5
3.1 Operation environment	5
3.2 Measurement Uncertainty	6
4. Description of E.U.T.	7
4.1 General information.....	7
4.2 Product description.....	10
4.3 Auxiliary equipments.....	10
4.4 Test configuration	11
4.5 Operating conditions	13
5. Summary of test results	14
5.1 Summary of EMI emission test results.....	14
6. Test results	15
6.1 Conducted Emission.....	15
6.2 Radiated Emission	22
7. E.U.T. photographs	32

1. Applicant information

Applicant: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#1: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#2: TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO., LTD
Address: No.11 Weiliu Road, Micro-Electronic Industrial Park
Jingang Road Tianjin 300385, China

2. Laboratory information

Address

EMC compliance Ltd.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-390, Korea

Telephone Number: 82 31 336 9919

Facsimile Number: 82 505 299 8311


FCC CAB.: KR0040

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No.: 8035A

KOLAS NO.: 231

SITE MAP

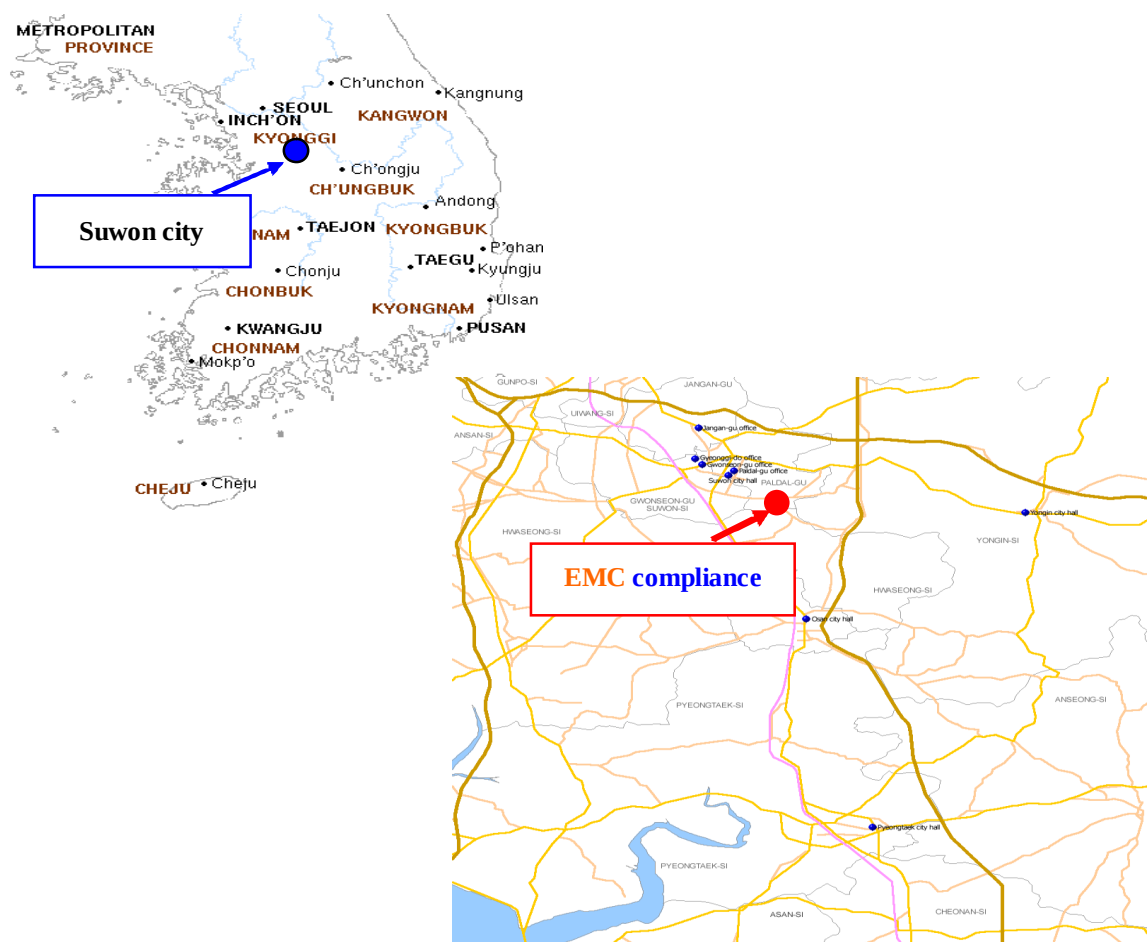

3. Test system configuration

3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber(10 m)	: 19.0 °C	54.9 % R.H.	-
Shielded room(CE)	: 26.0 °C	54.7 % R.H.	-

Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted emission measurement (C.L: Approx 95 %, k = 2)		
Shielded Room (CE#1)	9 kHz ~ 150 kHz: ± 3.82 dB 150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz: ± 3.82 dB 150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#3)	9 kHz ~ 150 kHz: ± 4.00 dB 150 kHz ~ 30 MHz: ± 3.63 dB	
Radiated Emission measurement (C.L: Approx 95 %, k = 2)		
10 m Chamber (#F4)	30 MHz ~ 300 MHz	3 m: + 4.56 dB, - 4.58 dB 10 m: + 4.56 dB, - 4.56 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.84 dB, - 4.85 dB 10 m: + 4.71 dB, - 4.72 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB
	6 GHz ~ 18 GHz	3 m: + 6.41 dB, - 6.53 dB
10 m Chamber (#F2)	30 MHz ~ 300 MHz	3 m: + 4.86 dB, - 4.88 dB 10 m: + 4.86 dB, - 4.86 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.98 dB, - 4.99 dB 10 m: + 4.85 dB, - 4.87 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB
	6 GHz ~ 18 GHz	3 m: + 6.41 dB, - 6.53 dB

4. Description of E.U.T.

4.1 General information

Video	SNP-5430	SNP-5430H
Imaging Device	1/4" Progressive Scan CMOS	
Total Pixels	1392(H) x 1076(V), 1.49M	
Effective Pixels	1368(H) x 1049(V), 1.43M	
Scanning System	Progressive	
Min. Illumination	Color : 0.5 Lux (F1.4, 50IRE) B/W : 0.05 Lux (F1.4, 50IRE) Color : ? Lux (F1.4, 30IRE) B/W : ? Lux (F1.4, 30IRE)	
S / N Ratio	50dB	
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x576(P), for installation	
Lens	SNP-5430	SNP-5430H
Focal Length (Zoom Ratio)	3.5 ~ 150.5 mm(Optical 43X)	
Max. Aperture Ratio	1.4 (Wide) ~ 4.9 (Tele)	
Angular Field of View	H : 53.92°(Wide) ~ 1.396°(Tele) / V : 44.08°(Wide) ~ 1.12°(Tele)	
Min. Object Distance	Wide 1.5m ,Tele 2m	Wide 1.4m ,Tele 1.9m
Focus Control	Auto / Manual / One Push	
Lens Type	DC Auto Iris	
Mount Type	Board-in type	
Pan/Tilt/Rotate		
Pan Range	360° Endless	
Pan Speed	Preset : 700°/sec, Manual : 0.024°/sec ~120°/sec	
Tilt Range	210°(-15° ~195°)	
Tilt Speed	Preset : 700°/sec, Manual : 0.024°/sec ~120°/sec	
Rotate Range	-	
Preset	255ea	
Preset Accuracy	±0.2°	
Auto Tracking	Off / On	
Operational		
Camera Title	Off / On (Displayed up to 45 characters)	
Day & Night	Auto (ICR) / Color / B/W	
Backlight Compensation	Off / BLC / HLC	
Wide Dynamic Range	120dB	
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)	
Digital Noise Reduction	SSNRIII (2D+3D Noise Filter) (Off / On)	
Digital Image Stabilization	Off / On	
Defog	Auto/Manual/Off	
Motion Detection	Off / On (4ea Rectangle zone)	
Privacy Masking	Off / On (32 Zones of Rectangle zone)	
Gain Control	Off / Low / Middle / High	
White Balance	ATW / AWC / Manual / Indoor / Outdoor / Mercury / Sodium	
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)	
Digital Zoom	16x	

Flip / Mirror	Off / On
Intelligent Video Analytics	Tampering, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection
Alarm I/O	Input 4ea / Output 2ea (Relay)
Audio In	Selectable (Mic IN/Line IN), Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out (3.5mm Mono jack), Max output level: 1 Vrms
Serial Interface	RS-485 - Samsung-T/E, Pelco-D/P, Sungjin, Panasonic, Bosch, AD, GE, Vicon, Honeywell
Alarm Triggers	Motion detection, Tampering, Audio Detection, Face Detecton, Video Analytics, Alarm Input, Network Disconnection
Alarm events	File upload via FTP and E-Mail Notification via E-Mail, TCP and HTTP local storage(SD/SDHC/SDXC) or NAS recording at Network disconnected & Event (Alarm Triggers) External output
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264 (MPEG-4 Part 10/AVC), Motion JPEG
Resolution	1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 640x480 / 640x360 / 320x240 / 320x180
Max. Framerate	H.264 : Max 60fps at all resolutions Motion JPEG : 1280x1024 / 1280x960 / 1280x720 / 1024x768 : Max. 15 fps 800x600 / 800x450 / 640x480 / 640x360 / 320x240 / 320x180 : Max. 30fps
Smart Codec	Manual Mode (area-based : SEA) Face detection Mode
Video Quality Adjustment	H.264 : Compression Level, Target Bitrate Level Control MJPEG : Quality Level Control
Bitrate Control Method	H.264 : CBR or VBR, Motion JPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law / G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps
Audio Communication	Bi-directional
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1x Authentication

Streaming Method	Unicast / Multicast	
Max. User Access	15 users at Unicast Mode	
Edge Storage	SD/SDHC/SDXC (SNP-5430 : Micro-SD Type, SNP-5430H : SD Type) - motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage)	
Application Programming Interface	ONVIF Profile S SUNAPI(HTTP API) SVNP 1.2	
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Finnish, Norwegian	
Web Viewer	Supported OS : Windows XP / VISTA / 7 / 8 / 8.1, MAC OS X 10.7 / 10.8 Supported Browser : Microsoft Internet Explorer (Ver. 8~11), Mozilla Firefox (Ver. 9~19) , Google Chrome (Ver. 15~32) Apple Safari (Ver. 6.0.2(Mac OS X 10.8, 10.7 Only), 5.1.7) * Mac OS X Only	
Central Management Software	SmartViewer, SSM	
Environmental	SNP-5430	SNP-5430H
Operating Temperature / Humidity	-10°C ~ +55°C(+14°F ~ +131°F) / Less than 90% RH	24V AC: -50°C ~ +55°C (-58°F ~ +131°F) / ~ 90% RH PoE+ : -30°C ~ +55°C (-22°F ~ +131°F) / ~ 90% RH
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH	
Ingress Protection	-	IP66
Vandal Resistance	IK10 (with SHP-3701H)	IK9
Electrical	SNP-5430	SNP-5430H
Input Voltage / Current	AC24V±10%,PoE+(IEEE802.3at,Class3)	
Power Consumption	20W	24W Max(Heater Off), 65W Max(Heater On, AC24V)
Mechanical	SNP-5430	SNP-5430H
Color / Material	Ivory / Plastic+Metal	
Dimension (WxHxD)	H218 x Ø152 mm	H293.6 x Ø220 mm
Weight	2.2Kg	3.3Kg

4.2 Product description


Type of product	Network Camera
Model name (Basic)	SNP-5430N
Model name (Variant)	-
Difference	-
Trade name	-
Serial no	Engineering Sample
Testing voltage	AC 24 V, PoE
Product rating	AC 24 V, PoE
Internal clock frequency	Above 108 Mhz
Note	* AC/AC adaptor was not provided by the manufacturer. * PoE Switch was not provided by the manufacturer.

4.3 Auxiliary equipments

Type	Model / Part #	Serial number	Manufacturer
Note PC	PSLQ0K-02N005	3A045920Q	TOSHIBA
USB Mouse	1088	-	Microsoft
Headset#1	SHS-250V	-	SAMSUNG
Headset#2	SHS-250V	-	SAMSUNG
JIG	-	-	-
Controller	SCC-1000	EW089028913	SAMSUNG
Micro SD Card(2GB)	-	-	SanDisk
AC/AC Adaptor (AC 24V)	STA-220	Z9530003901A	Samsung Techwin
PoE Switch	GS108P	26V13A3W507E8	NETGEAR
PoE Switch (CS Test)	Procurve	SG930IQ00J	HP


4.4 Test configuration

#1- AC 24V

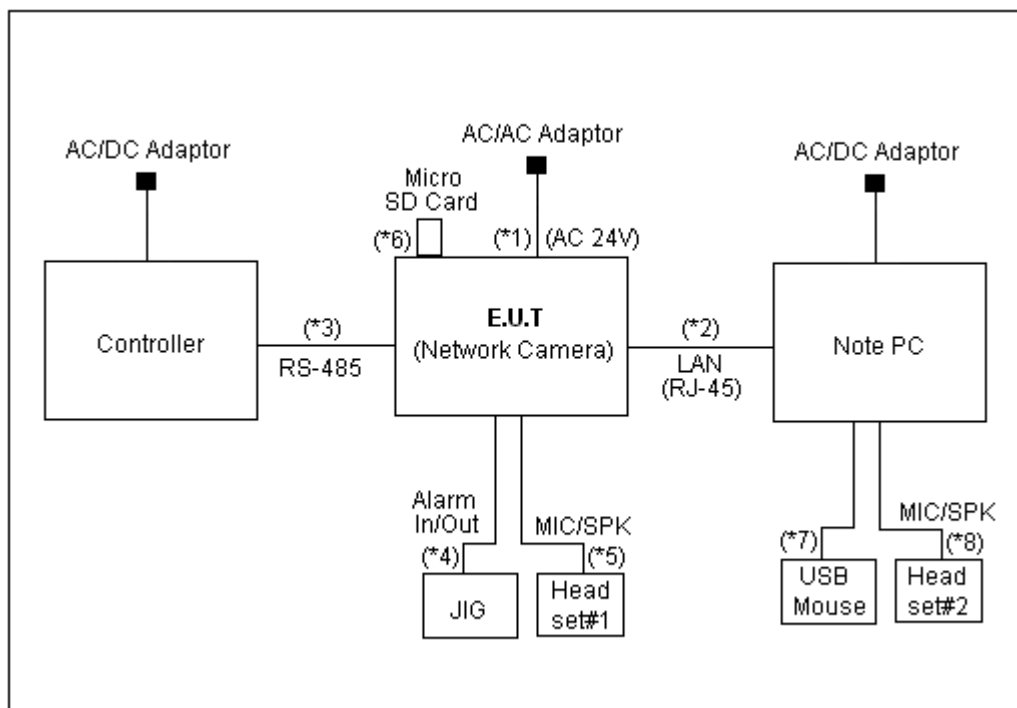

Note *	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (Network Camera)	Power	AC/AC Adaptor	Power	1.5	Non-Shield
2		LAN(RJ-45)	Note PC	LAN(RJ-45)	3.0	Non-Shield
3		RS-485	Controller	RS-485	3.0	Non-Shield
4		Alarm In/Out	JIG	Alarm In/Out	3.0	Non-Shield
5		MIC/SPK	Headset#1	MIC/SPK	2.0	Non-Shield
6		Micro SD	Micro SD Card	Micro SD	Direct	-
7	Note PC	USB	USB Mouse	USB	1.5	Shield
8		MIC/SPK	Headset#2	MIC/SPK	2.0	Non-Shield

#2- PoE

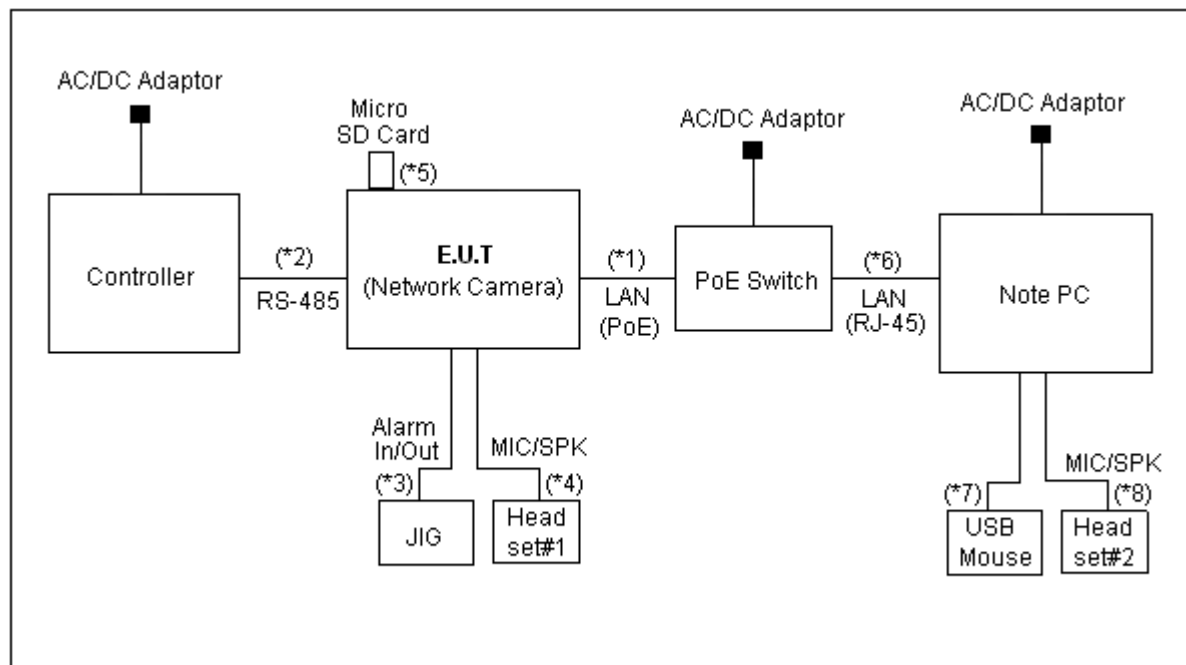

* Power supplied from PoE Switch

Note *	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (Network Camera)	LAN(PoE)	PoE Switch	LAN(PoE)	3.0	Non-Shield
2		RS-485	Controller	RS-485	3.0	Non-Shield
3		Alarm In/Out	JIG	Alarm In/Out	3.0	Non-Shield
4		MIC/SPK	Headset#1	MIC/SPK	2.0	Non-Shield
5		Micro SD	Micro SD Card	Micro SD	Direct	-
6	Note PC	LAN(RJ-45)	PoE Switch	LAN(RJ-45)	2.0	Non-Shield
7		USB	USB Mouse	USB	1.5	Shield
8		MIC/SPK	Headset#2	MIC/SPK	2.0	Non-Shield

4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating
1	Web Viewer Monitoring Test.
	Alarm In/Out Test.
	Controller Test.
	Ping Test.

* Note: 2 types of powers are available for the product, that are AC 24 V, PoE.

Therefore, tests were performed for 2 different types of powers.

5. Summary of test results

5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
☒	Conducted Emission	VCCI V-3 / 2013.04, Class A	Complied
☒	Radiated Emission	VCCI V-3 / 2013.04, Class A	Complied

6. Test results

6.1 Conducted Emission

Test specification	VCCI V-3 / 2013.04, Class A		
Testing voltage	AC 24 V, PoE		
Test facility	Shielded room (CE#1)		
Date	2014. 06. 03		
Temperature (°C)	26.0 °C	Humidity (% R.H.)	54.7 % R.H.
Remarks	Complied		

6.1.1 Limits of conducted emission measurement

☐ AC main

Frequency [MHz]	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79	66	66 ~ 56*	56 ~ 46*
0.5 ~ 5	73	60	56	46
5 ~ 30	73	60	60	50

*The limit decreases linearly with the logarithm of frequency.

☒ Telecommunication

Frequency [MHz]	Class A Voltage Limits (dB(μ V))		Current Limits (dB(μ A))	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	97 to 87	84 to 74	53 to 43	40 to 30
0.5 ~ 30	87	74	43	30
Frequency [MHz]	Class B Limits (dB(μ V))		Current Limits (dB(μ A))	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	84 to 74	74 to 64	40 to 30	30 to 20
0.5 ~ 30	74	64	30	20

* The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz

* The current and voltage disturbance limits are derived for use with an impedance stabilization Network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB).

6.1.2 Measurement procedure

The measurements were performed in a shielded room. EUT was setup as shown in photograph and placed on a non-metallic table height of 0.8 m above the reference ground plane. The rear of table was located 0.4 m to the vertical conducted plane. EUT was power through the LISN, which was bonded to the ground plane. The LISN power was filtered. Each EUT power lead, except ground (safety) lead was individually connected through a LISN to input power source. EUT signal cables that hung closer than 0.4 m to the Horizontal metal ground 0.3 m ~ 0.4 m long. The power cord was bundles in the center. All peripheral equipment was powered from a sub LISN. The LISN and ISN were positioned 0.8 m from the EUT. Peak and Average detection were used in preliminary testing and Quasi-peak and Average detections were used at final measurement. Both lines of power cord, hot and neutral, were measured.


6.1.3 Used equipments

Equipment	Model	Serial No.	Makers	Next Cal. Date	Used
Test Receiver	ESCI7	100732	R&S	2015.01.27	☐
Test Receiver	ESCI	100001	R&S	2014.07.25	☒
Test Receiver	ESCI	100710	R&S	2014.10.28	☐
LISN	ENV216	101358	R&S	2014.10.04	☒
LISN	ESH3-Z5	100267	R&S	2014.07.08	☒
8-WIRE ISN	NTFM 8158 CAT5	CAT5-8158-0071	SCHWARZBECK	2015.02.25	☒
8-WIRE ISN	NTFM 8158 CAT3	CAT3-8158-0020	SCHWARZBECK	2015.03.07	☐


6.1.4 Photographs of test setup

* Telecommunication

#1- AC 24V

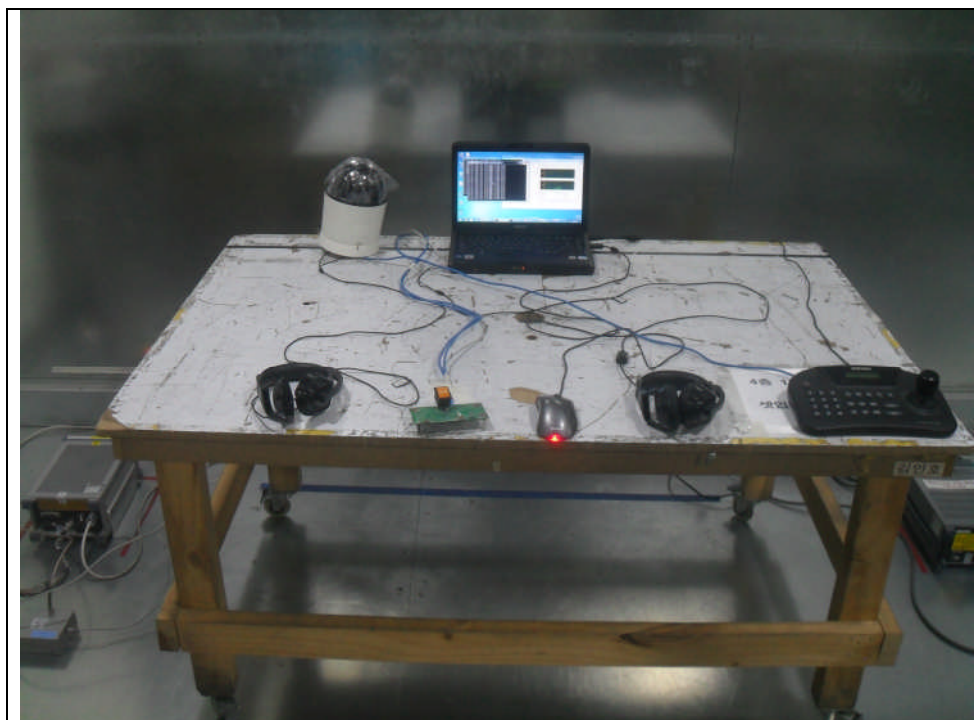


#2-PoE

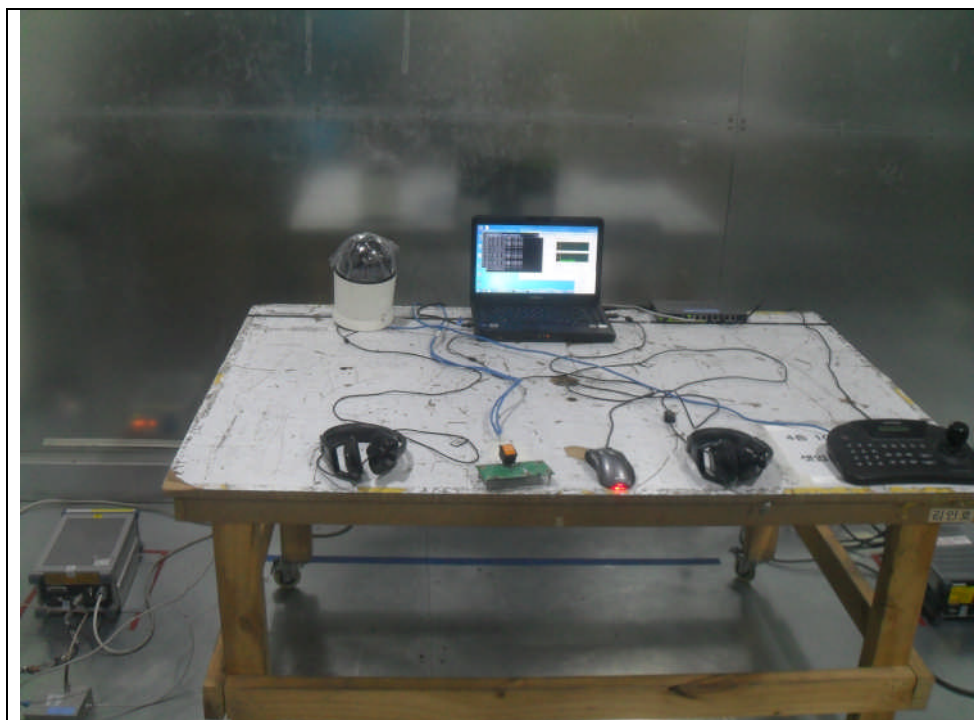

6.1.5 Conducted emission measurement result

* Telecommunication port


LAN Port (LCL 65 dB)_10 Mbps (SNP-5430N)_#1- AC 24V

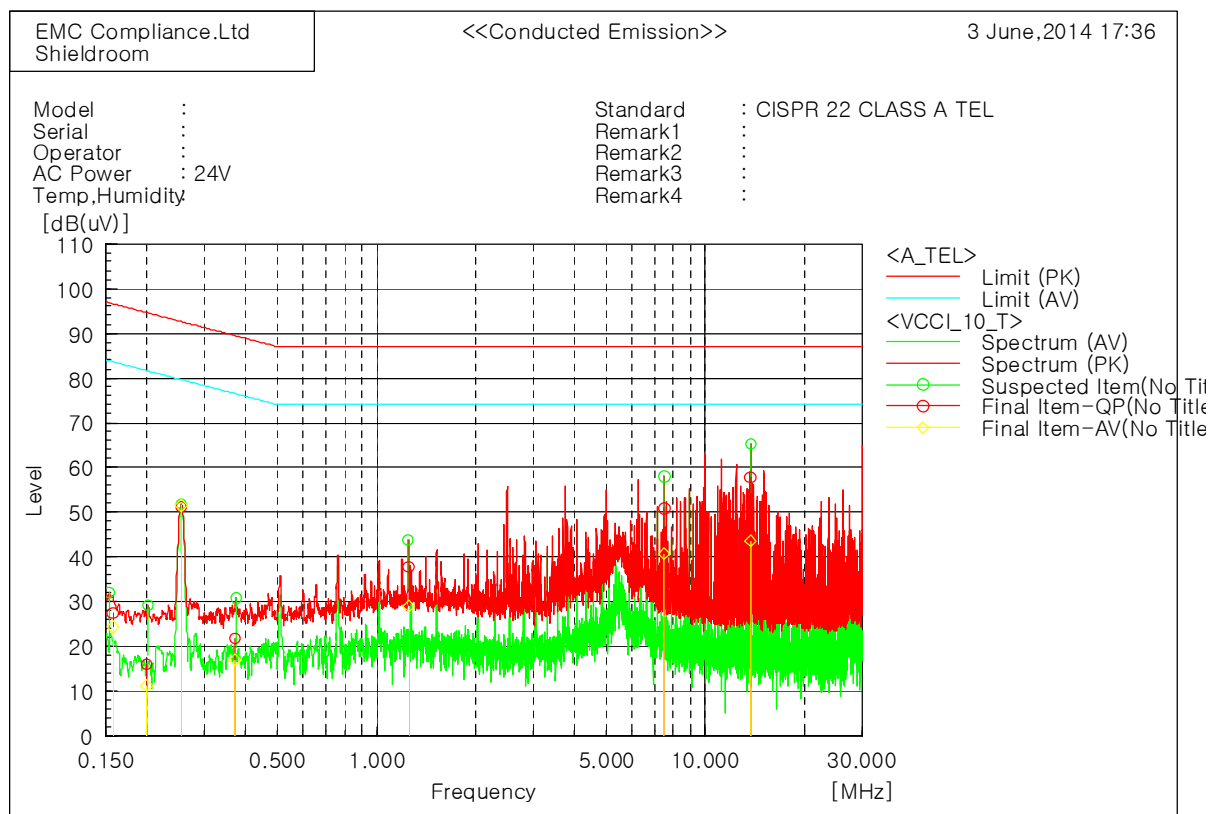

Final Result

--- ISN-CAT5 Phase ---										
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin
	[MHz]	QP	CAV		QP	CAV	QP	AV	QP	CAV
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.1578	17.5	14.5	9.8	27.3	24.3	96.6	83.6	69.3	59.3
2	0.200	6.2	1.5	9.7	15.9	11.2	94.6	81.6	78.7	70.4
3	0.25517	41.4	41.7	9.7	51.1	51.4	92.6	79.6	41.5	28.2
4	0.37125	12.2	7.5	9.5	21.7	17.0	89.5	76.5	67.8	59.5
5	1.25089	28.3	19.5	9.4	37.7	28.9	87.0	74.0	49.3	45.1
6	7.49986	41.5	31.3	9.4	50.9	40.7	87.0	74.0	36.1	33.3
7	13.74797	48.4	34.1	9.4	57.8	43.5	87.0	74.0	29.2	30.5

LAN Port (LCL 65 dB)_100 Mbps (SNP-5430N)_#1- AC 24V

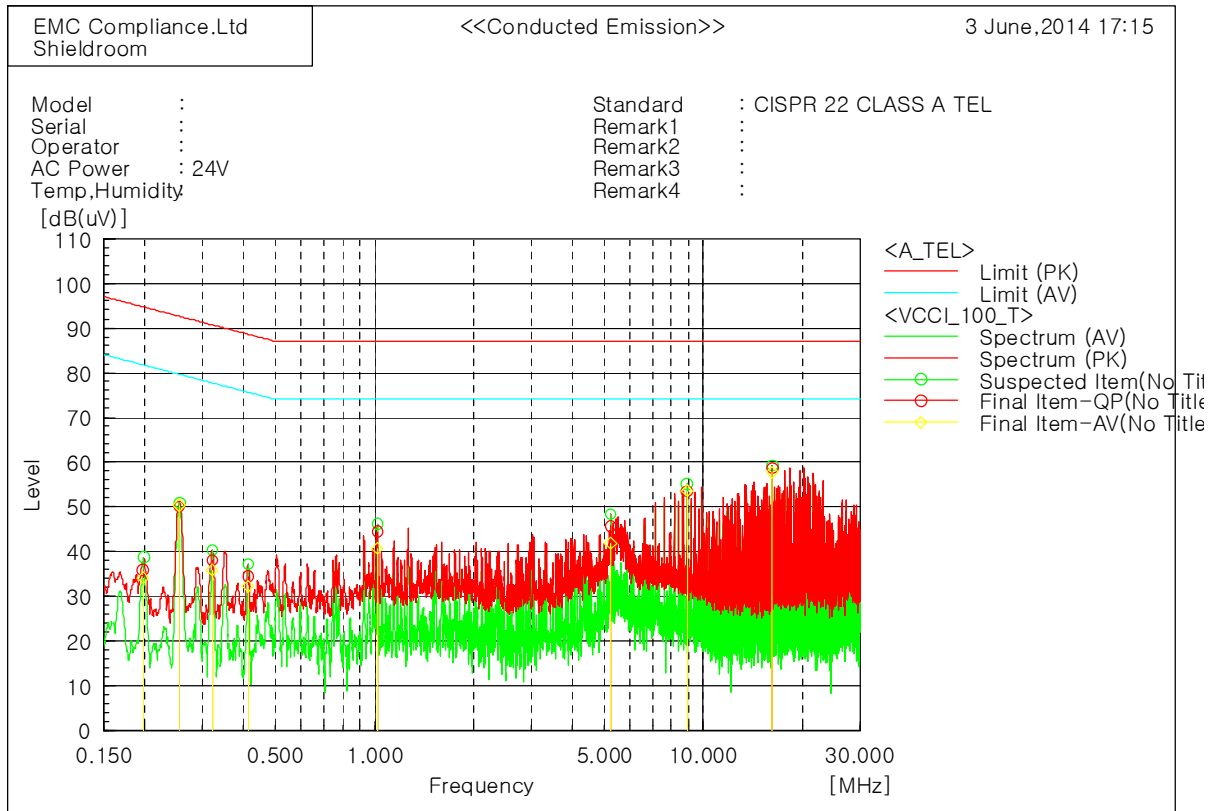


Final Result

--- ISN-CAT5 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.19776	26.2	24.4	9.7	35.9	34.1	94.7	81.7	58.8	47.6
2	0.25474	40.4	40.7	9.7	50.1	50.4	92.6	79.6	42.5	29.2
3	0.32097	28.4	26.3	9.6	38.0	35.9	90.7	77.7	52.7	41.8
4	0.41245	25.0	22.7	9.5	34.5	32.2	88.6	75.6	54.1	43.4
5	1.02216	35.0	31.3	9.4	44.4	40.7	87.0	74.0	42.6	33.3
6	5.23443	36.2	32.5	9.4	45.6	41.9	87.0	74.0	41.4	32.1
7	8.91918	44.0	44.1	9.4	53.4	53.5	87.0	74.0	33.6	20.5
8	16.22651	49.3	48.4	9.4	58.7	57.8	87.0	74.0	28.3	16.2


LAN Port (LCL 65 dB)_10 Mbps (SNP-5430N)_#2- PoE

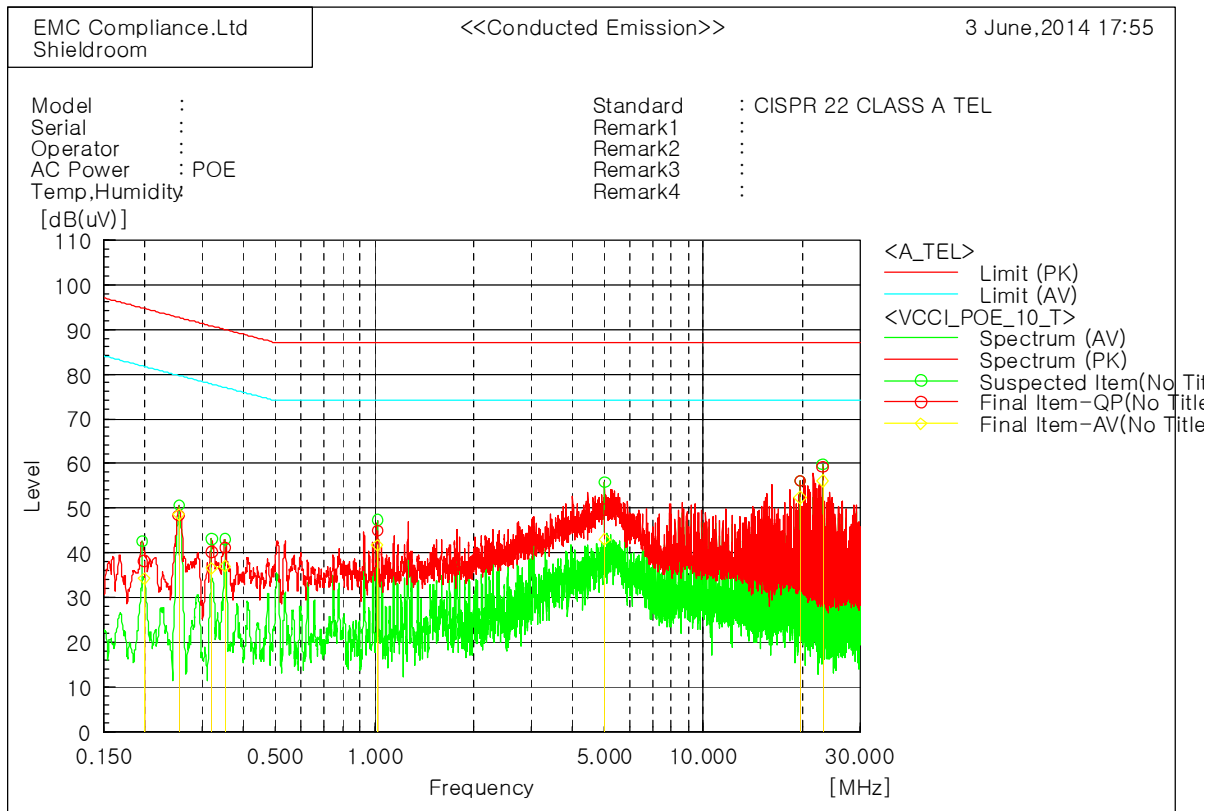

Final Result

--- ISN-CAT5 Phase ---										
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin
	[MHz]	QP	CAV		QP	CAV	QP	AV	QP	CAV
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.19953	28.5	24.6	9.7	38.2	34.3	94.6	81.6	56.4	47.3
2	0.25424	38.7	38.8	9.7	48.4	48.5	92.6	79.6	44.2	31.1
3	0.32036	30.5	26.9	9.6	40.1	36.5	90.7	77.7	50.6	41.2
4	0.35082	31.6	27.4	9.6	41.2	37.0	89.9	76.9	48.7	39.9
5	1.02199	35.6	32.3	9.4	45.0	41.7	87.0	74.0	42.0	32.3
6	5.02399	40.2	33.6	9.4	49.6	43.0	87.0	74.0	37.4	31.0
7	19.70825	46.6	42.9	9.5	56.1	52.4	87.0	74.0	30.9	21.6
8	23.1279	49.6	46.5	9.6	59.2	56.1	87.0	74.0	27.8	17.9

LAN Port (LCL 65 dB)_100 Mbps (SNP-5430N)_#2- PoE

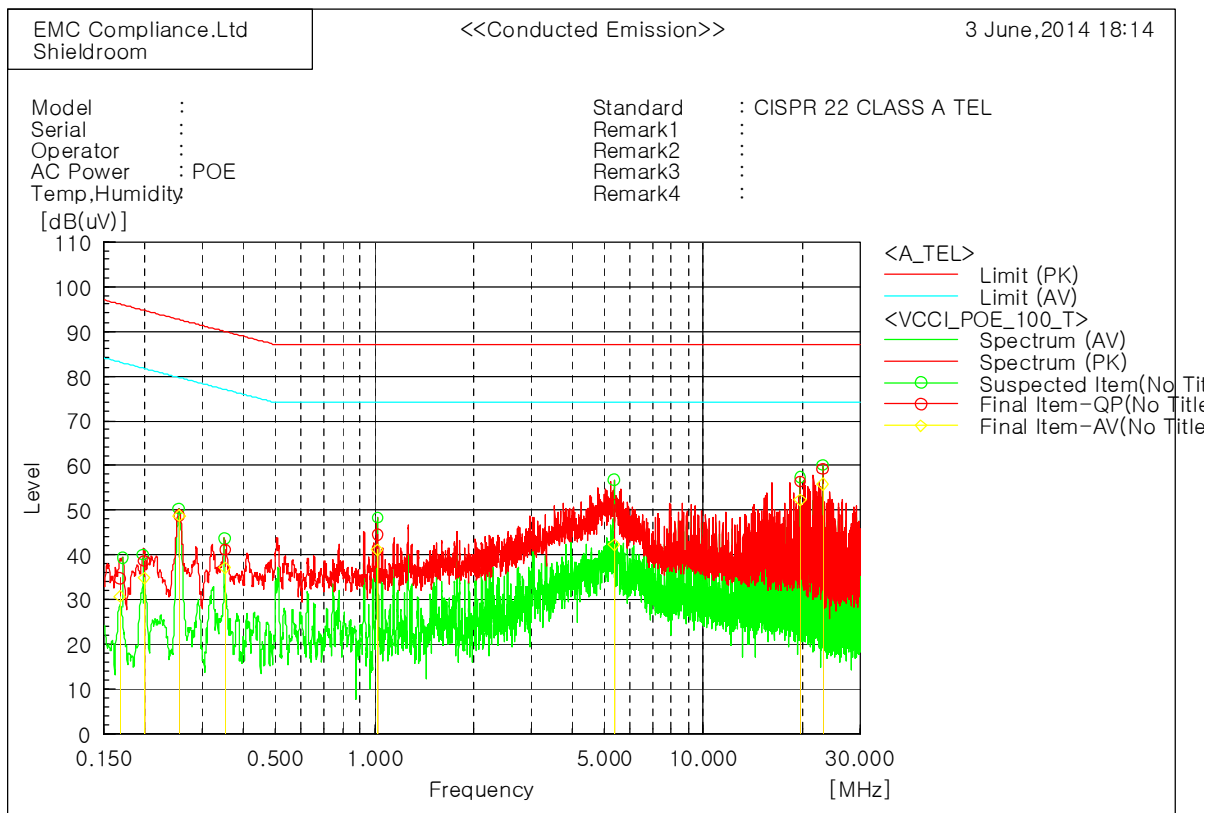

Final Result

--- ISN-CAT5 Phase ---										
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin
	[MHz]	QP	CAV		QP	CAV	QP	AV	QP	CAV
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.16821	25.0	20.9	9.8	34.8	30.7	96.0	83.0	61.2	52.3
2	0.1994	28.9	25.1	9.7	38.6	34.8	94.6	81.6	56.0	46.8
3	0.25522	39.0	39.0	9.7	48.7	48.7	92.6	79.6	43.9	30.9
4	0.35185	31.6	27.5	9.6	41.2	37.1	89.9	76.9	48.7	39.8
5	1.02354	35.1	31.7	9.4	44.5	41.1	87.0	74.0	42.5	32.9
6	5.35145	41.8	32.8	9.4	51.2	42.2	87.0	74.0	35.8	31.8
7	19.70833	46.9	42.7	9.5	56.4	52.2	87.0	74.0	30.6	21.8
8	23.12806	49.6	46.1	9.6	59.2	55.7	87.0	74.0	27.8	18.3

6.2 Radiated Emission

Test specification	VCCI V-3 / 2013.04, Class A		
Testing voltage	AC 24 V, PoE		
Test facility	10 m Chamber (#F4)		
Test distance	10 m, 3 m		
Date	2014. 06. 05		
Temperature (°C)	19.0 °C	Humidity (% R.H.)	54.9 % R.H.
Remarks	Complied		

6.2.1 Limits of radiated emission measurement

☒ Limits below 1 GHz

Frequency [MHz]	Class A (dB(μV/m)) @10 m	Class B (dB(μV/m)) @10 m
30 ~ 230	40	30
230 ~ 1000	47	37

☒ Limits above 1 GHz

Frequency [GHz]	Class A @ 3 m		Class B @ 3 m	
	Average limit (dB(μV/m))	Peak limit (dB(μV/m))	Average limit (dB(μV/m))	Peak limit (dB(μV/m))
1 ~ 3	56	76	50	70
3 ~ 6	60	80	54	74

Note - The lower limit applies at the transition frequency.

6.2.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
Test Receiver	ESCI7	100732	R&S	2015.01.27	☒
Test Receiver	ESCI	100001	R&S	2014.07.25	☐
Test Receiver	ESCI	100710	R&S	2014.10.28	☐
Test Receiver	ESR	101078	R&S	2015.02.24	☐
Bi-Log Antenna	VULB 9168	375	SCHWARZBECK	2015.10.16	☒
Amplifier	310	186280	SONOMA INSTRUMENT	2015.01.27	☒
3 dB Attenuator	8491A	16861	HP	2014.07.08	☒
Antenna Mast	AM4.0	079/3440509	MATURO	-	☒
Turn Table	CO2000-SOFT	-	MATURO	-	☒
Amplifier	8449B	3008A01802	AGILENT	2014.09.03	☒
Horn ANT	3115	00086706	ETS	2014.09.05	☒
Spectrum Analyzer	FSP7	100289	R&S	2014.11.25	☐

6.2.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 3 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G= Amplifier Gain

3 dB Att = 3 dB Attenuator



If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 3 dB, A.G 35 dB

The result is



$$30 + 12 + 5 + 3 - 35 = 15 \text{ dB}(\mu\text{V/m})$$

6.2.5 Photographs of test setup



* 30 MHz ~ 1 GHz (#1- AC 24V)

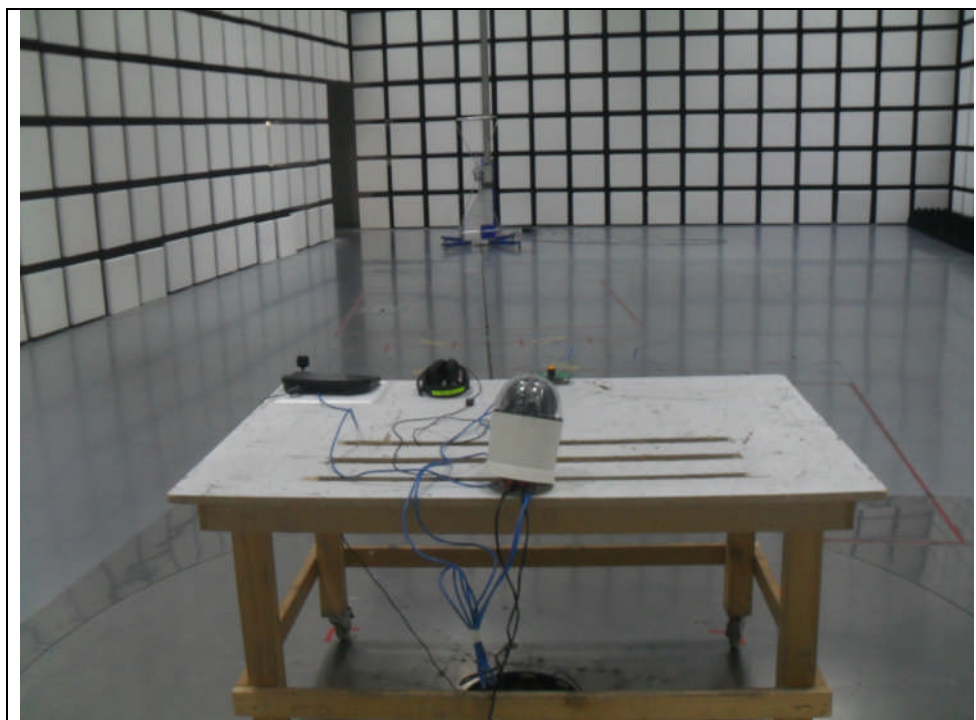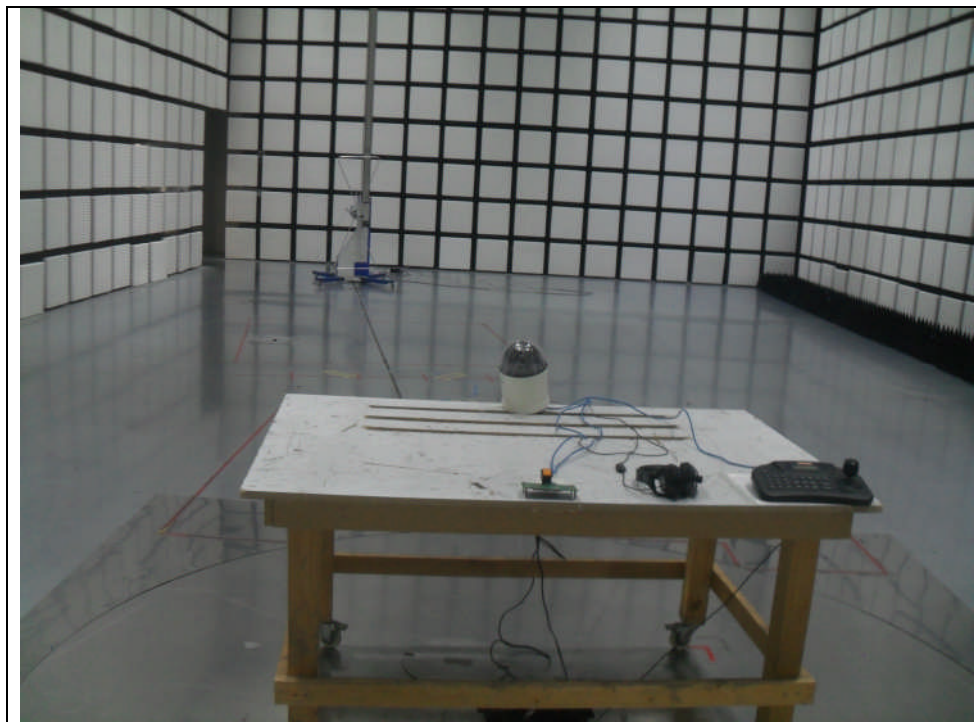



* 1 GHz ~ 6 GHz (#1- AC 24V)

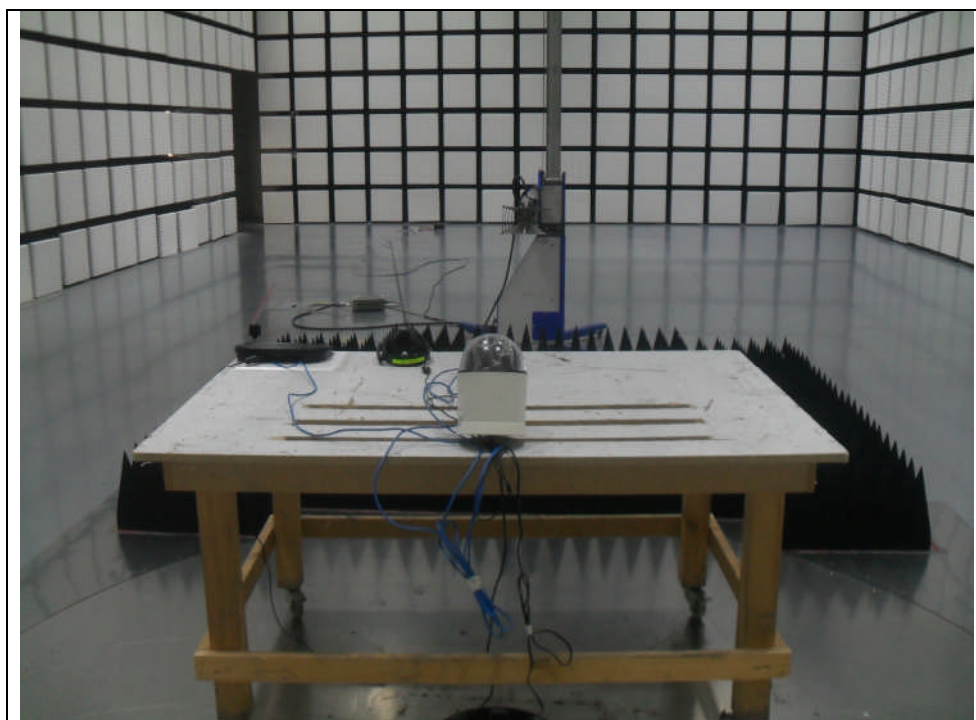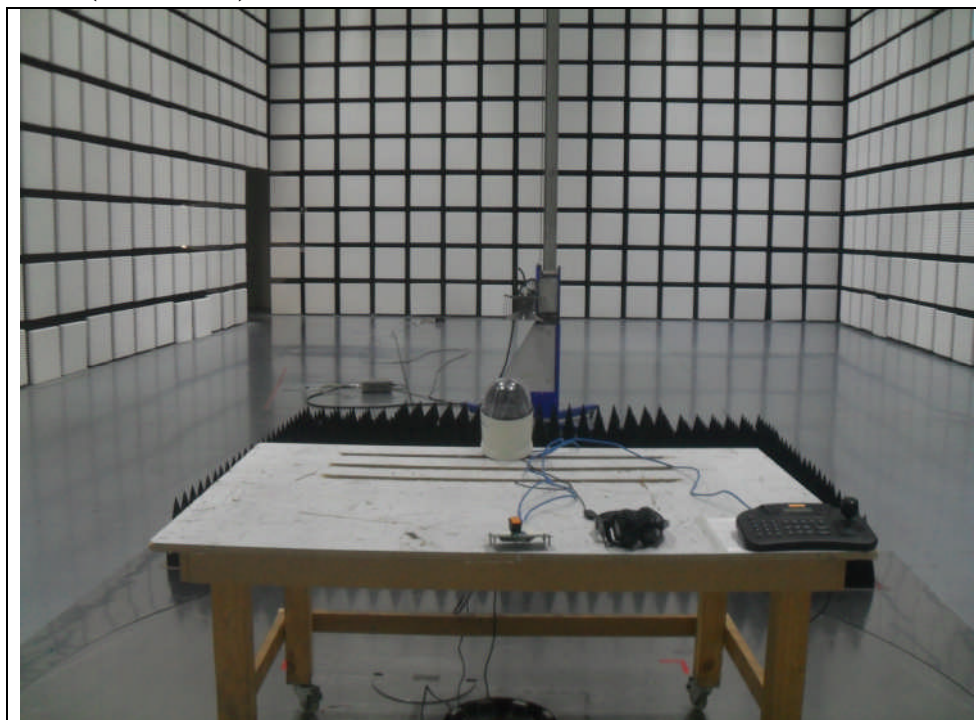

* 30 MHz ~ 1 GHz (#2-PoE)

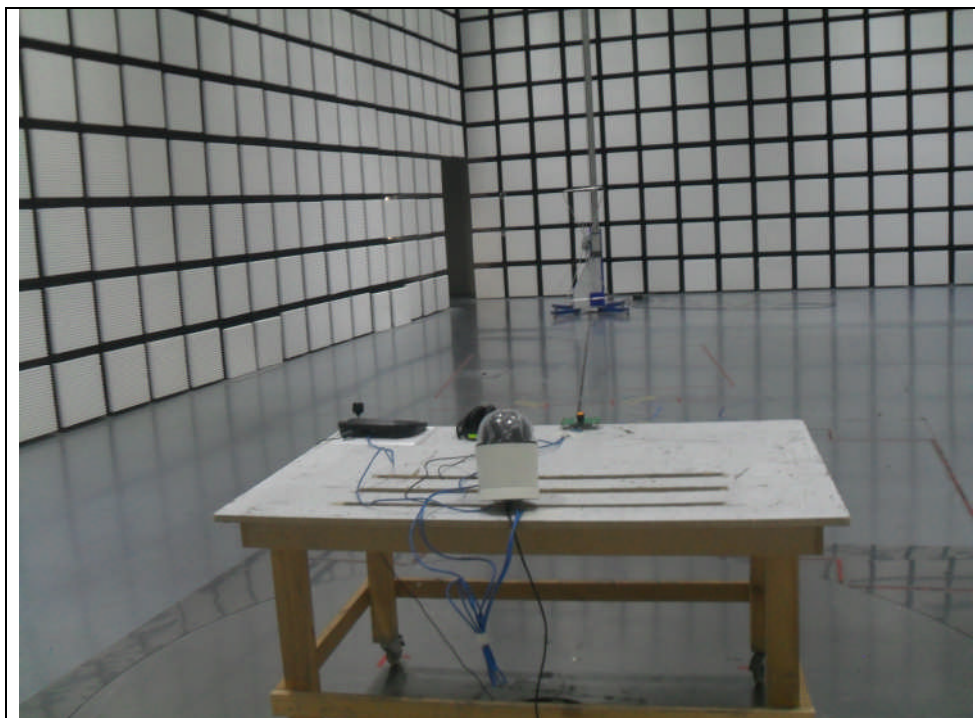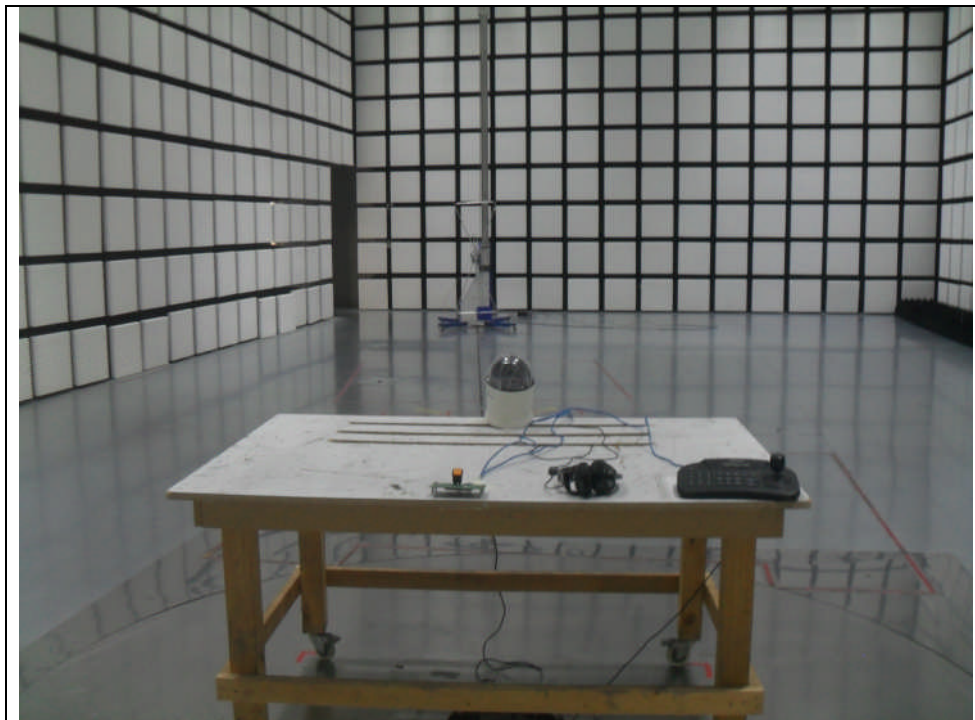


* 1 GHz ~ 6 GHz (#2-PoE)

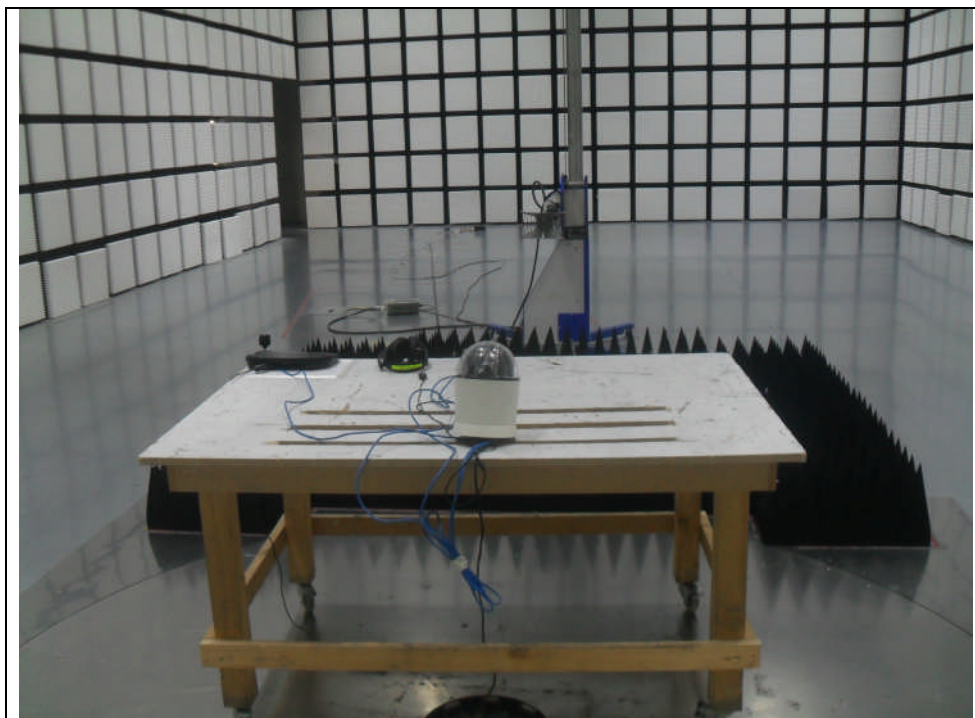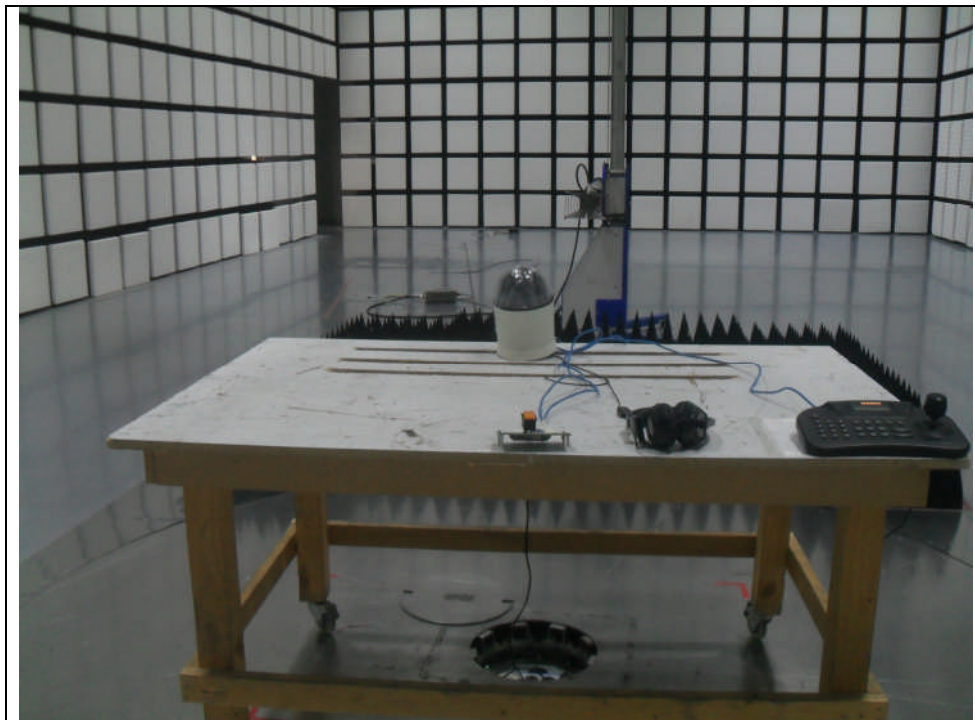

6.2.6 Radiated emission measurement result

* Graph and Data


* 30 MHz ~ 1 GHz (SNP-5430N)_#1- AC 24V

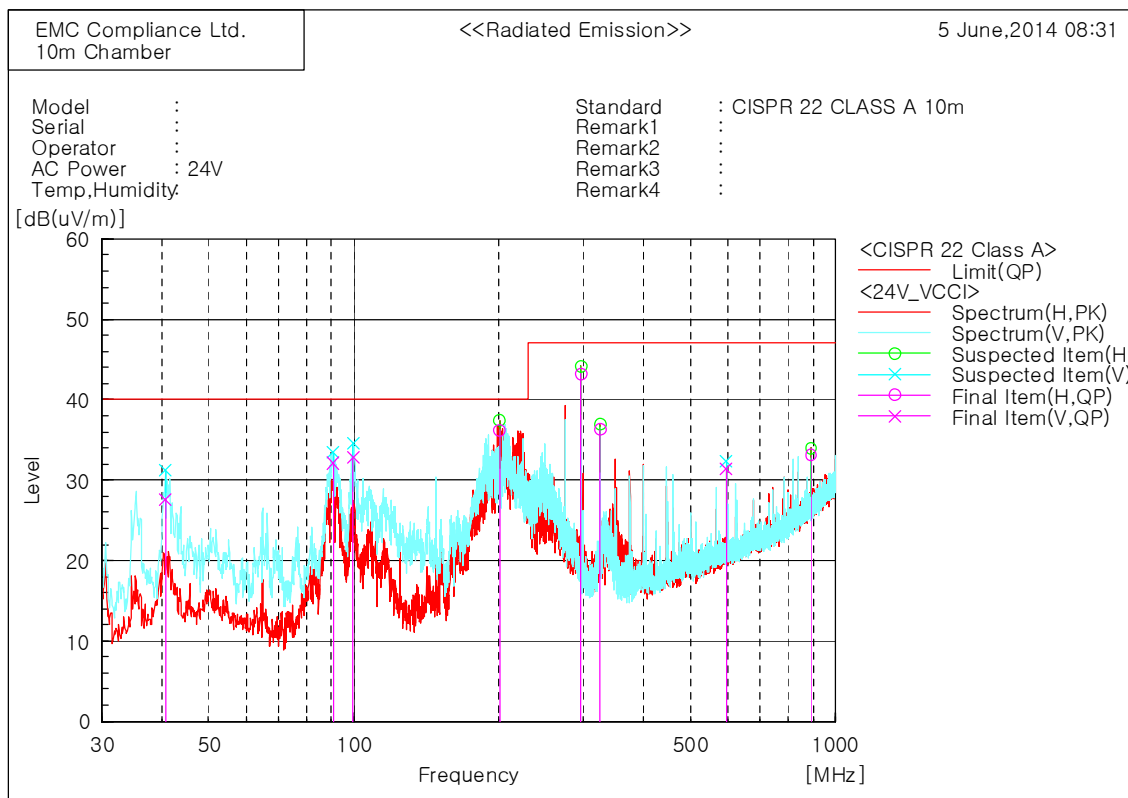

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	40.670	V	42.4	-14.8	27.6	40.0	12.4	298.0	152.5
2	90.746	V	51.3	-19.2	32.1	40.0	7.9	100.0	64.4
3	99.840	V	51.4	-18.6	32.8	40.0	7.2	100.0	349.6
4	201.205	H	52.9	-16.7	36.2	40.0	3.8	400.0	337.6
5	296.993	H	55.4	-12.2	43.2	47.0	3.8	400.0	116.5
6	325.001	H	47.8	-11.5	36.3	47.0	10.7	202.0	346.0
7	594.055	V	36.0	-4.6	31.4	47.0	15.6	298.0	235.4
8	891.117	H	32.1	1.0	33.1	47.0	13.9	100.0	80.3


* 1 GHz ~ 6 GHz (SNP-5430N)_#1- AC 24V

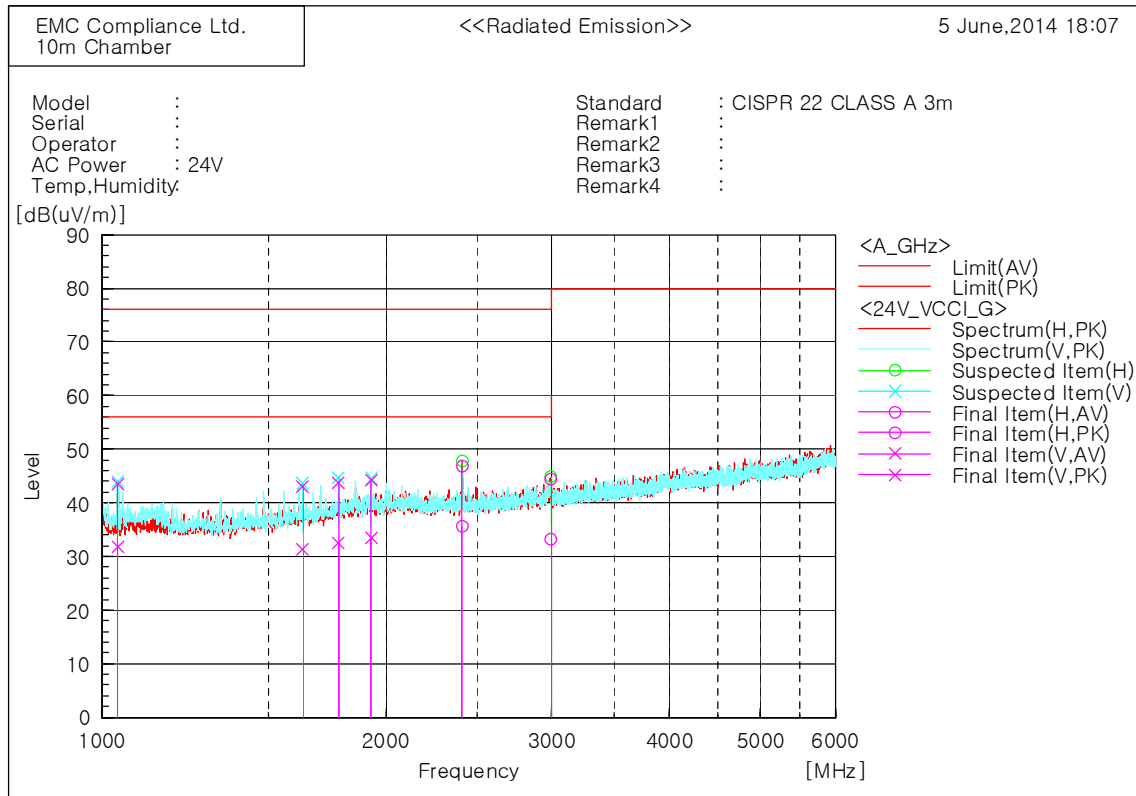

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	c.f [dB(1/m)]	Result AV [dB(uV/m)]	Result PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1039.375	V	43.4	55.0	-11.5	31.9	43.5	56.0	76.0	24.1	32.5	100.0	257.1
2	1632.500	V	38.4	50.2	-7.1	31.3	43.1	56.0	76.0	24.7	32.9	100.0	348.6
3	1781.875	V	38.2	49.5	-5.7	32.5	43.8	56.0	76.0	23.5	32.2	100.0	338.1
4	1930.625	V	38.0	48.8	-4.6	33.4	44.2	56.0	76.0	22.6	31.8	100.0	0.1
5	2411.250	H	39.4	50.6	-3.7	35.7	46.9	56.0	76.0	20.3	29.1	100.0	32.5
6	2994.375	H	35.4	46.6	-2.2	33.2	44.4	56.0	76.0	22.8	31.6	100.0	346.0


* 30 MHz ~ 1 GHz (SNP-5430N)_#2- PoE

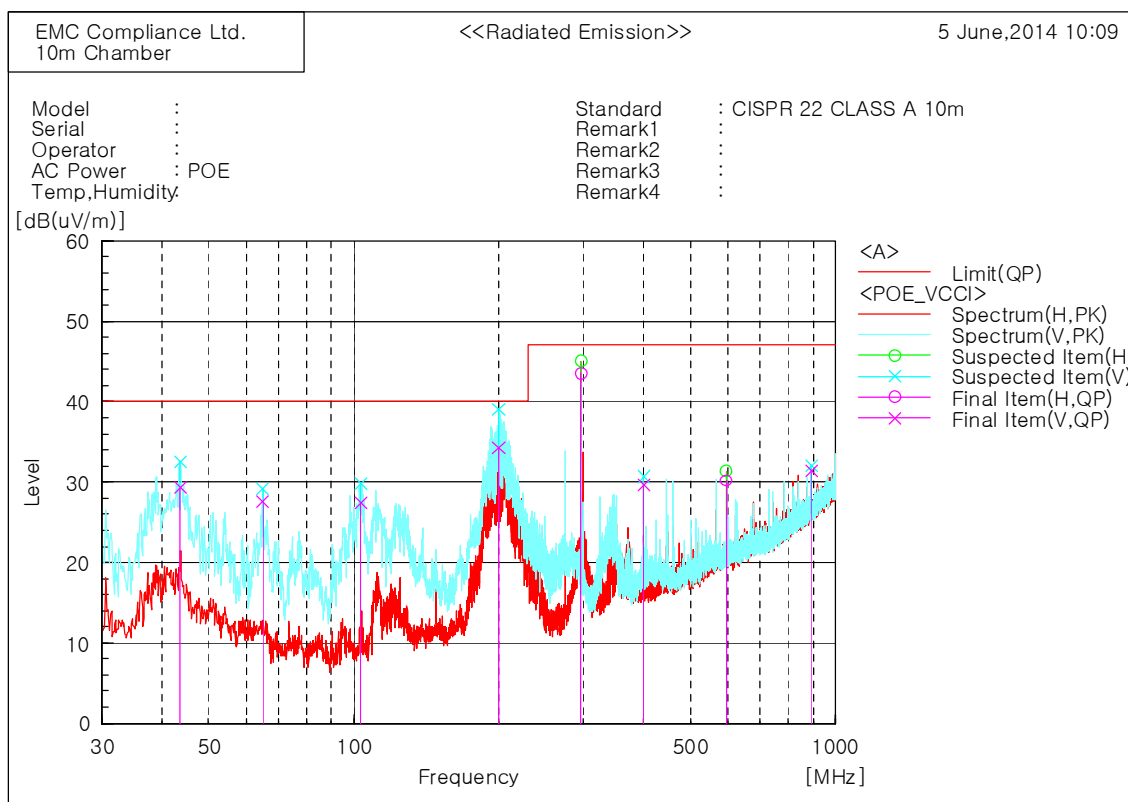

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	43.701	V	43.7	-14.4	29.3	40.0	10.7	298.0	22.3
2	64.799	V	43.7	-16.1	27.6	40.0	12.4	100.0	13.8
3	103.356	V	45.8	-18.3	27.5	40.0	12.5	100.0	351.6
4	199.993	V	50.9	-16.7	34.2	40.0	5.8	100.0	228.1
5	296.993	H	55.7	-12.2	43.5	47.0	3.5	400.0	107.6
6	399.934	V	38.7	-9.1	29.6	47.0	17.4	100.0	178.9
7	594.055	H	34.8	-4.6	30.2	47.0	16.8	201.0	285.6
8	891.117	V	30.4	1.0	31.4	47.0	15.6	298.0	239.2

* 1 GHz ~ 6 GHz (SNP-5430N)_#2- PoE

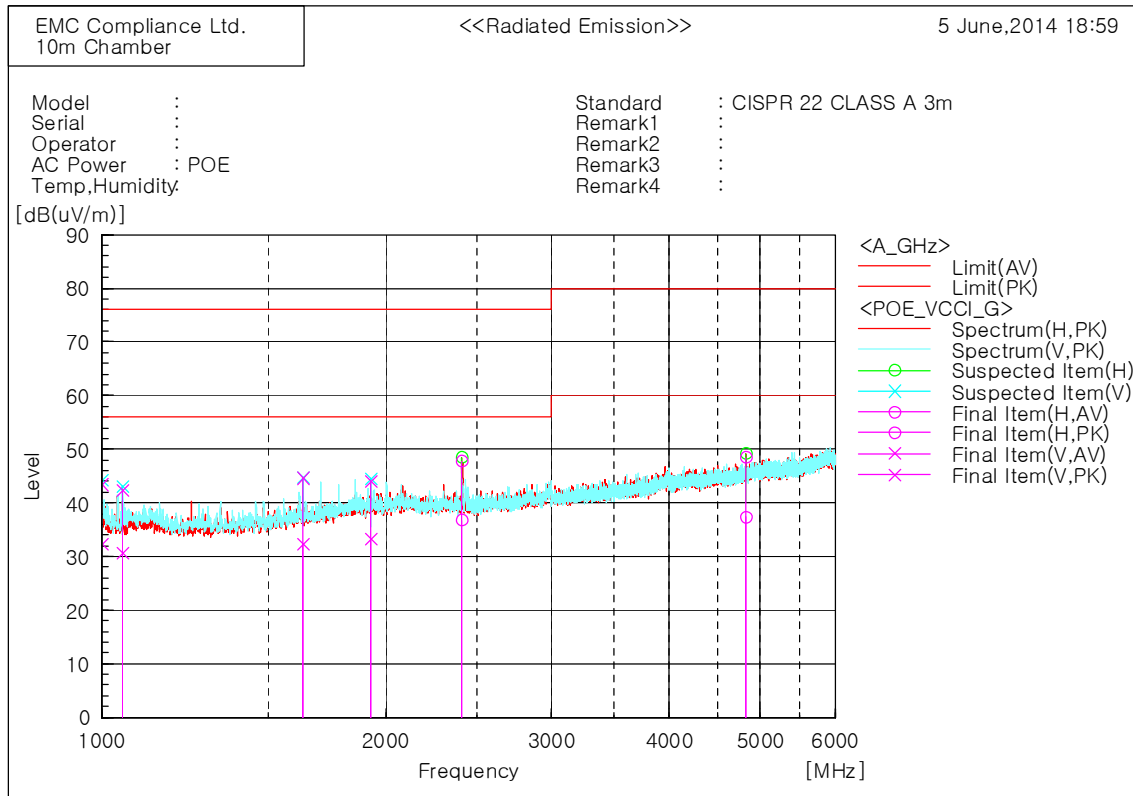

Final Result


No.	Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	c.f [dB(1/m)]	Result AV [dB(uV/m)]	Result PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1000.000	V	44.0	55.1	-11.7	32.3	43.4	56.0	76.0	23.7	32.6	100.0	249.2
2	1053.125	V	42.1	53.7	-11.4	30.7	42.3	56.0	76.0	25.3	33.7	100.0	348.5
3	1633.750	V	39.5	51.7	-7.1	32.4	44.6	56.0	76.0	23.6	31.4	100.0	338.0
4	1930.625	V	37.9	48.5	-4.6	33.3	43.9	56.0	76.0	22.7	32.1	100.0	7.2
5	2410.000	H	40.5	51.4	-3.7	36.8	47.7	56.0	76.0	19.2	28.3	100.0	73.4
6	4826.250	H	32.9	44.0	4.5	37.4	48.5	60.0	80.0	22.6	31.5	100.0	167.9

7. E.U.T. photographs

Front View




Rear View

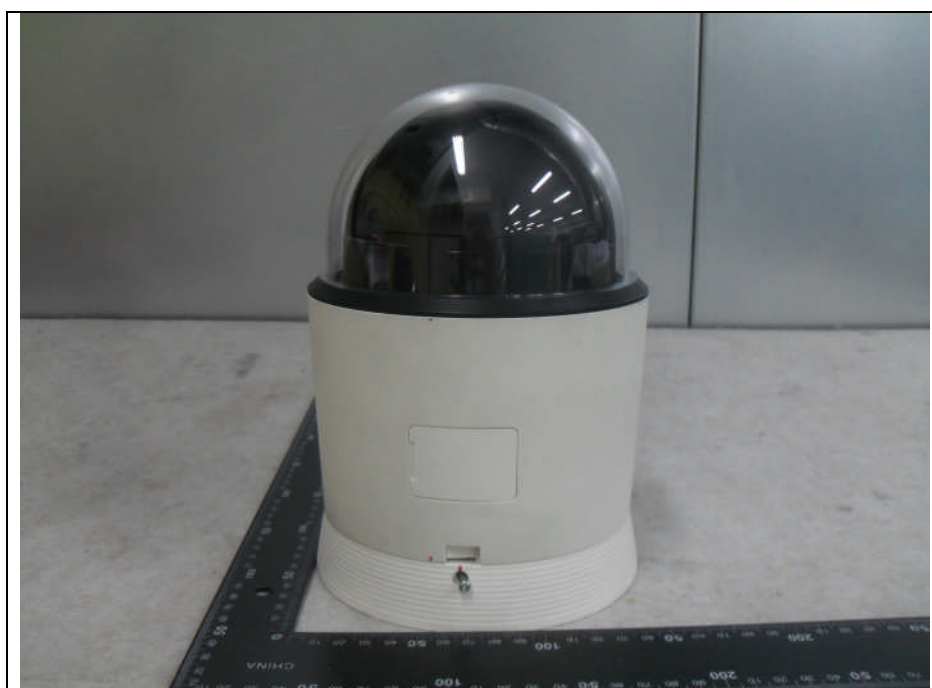


Left View



Right View

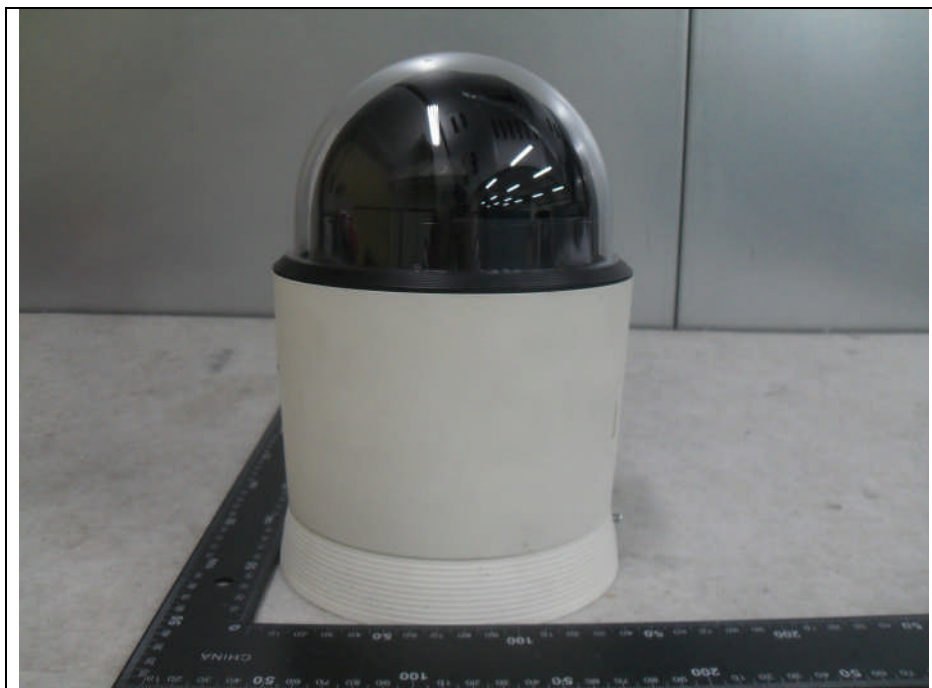


Top View

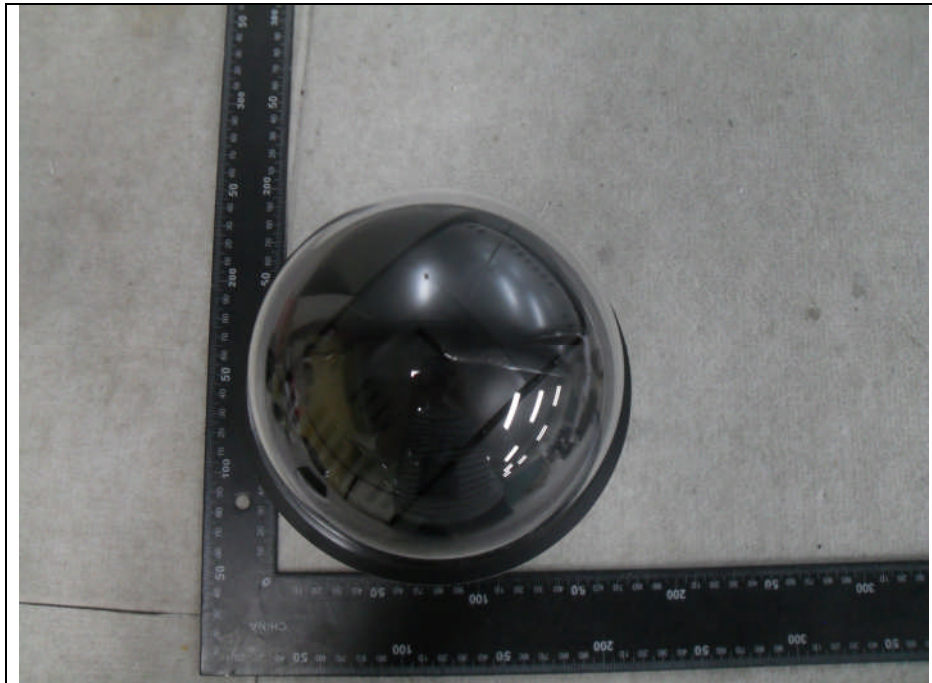



Bottom View





Inside

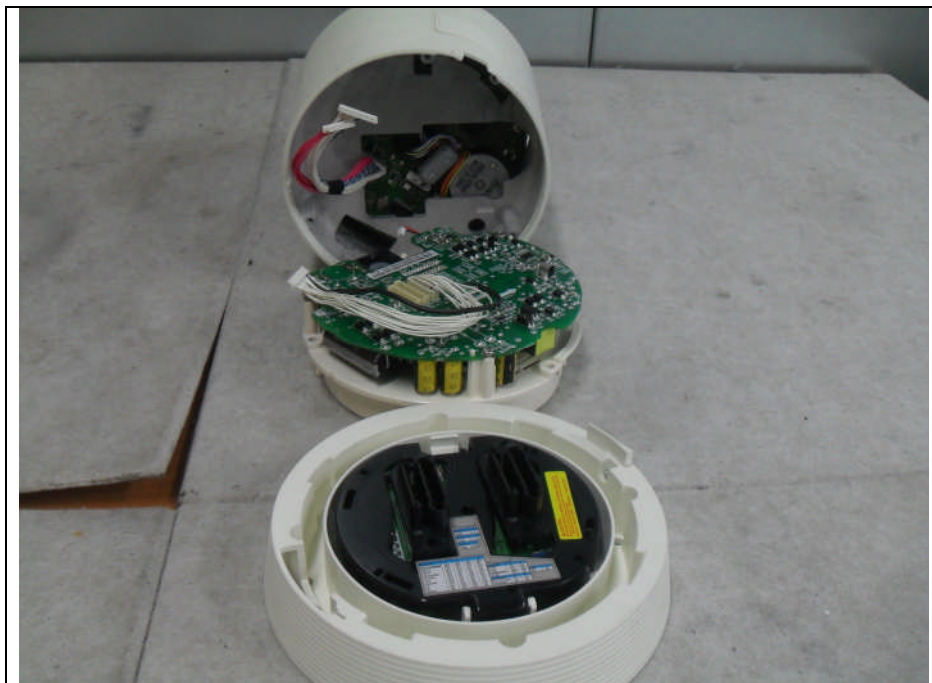



Main Board

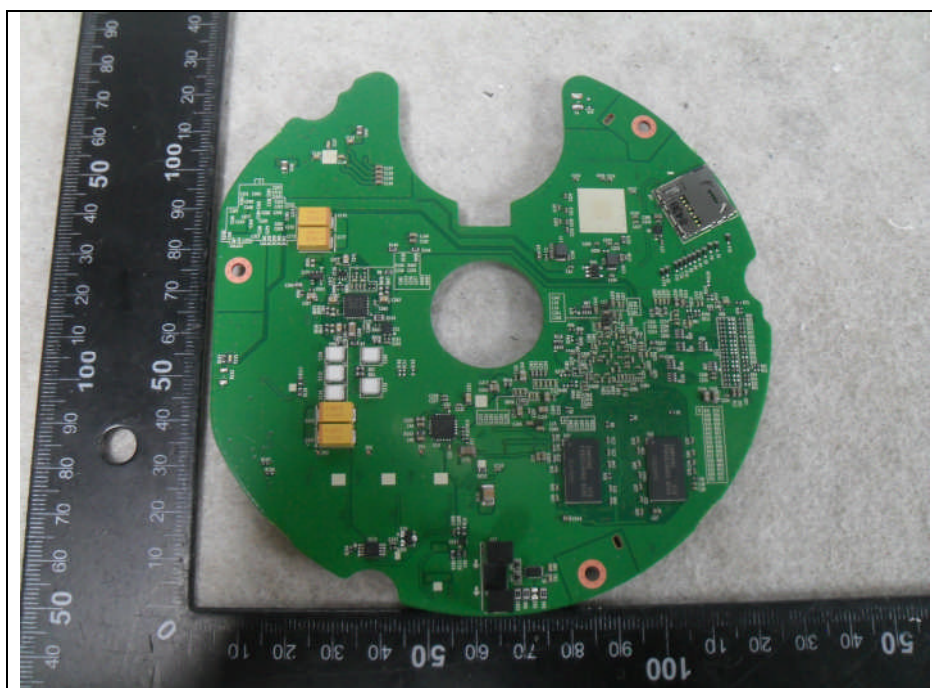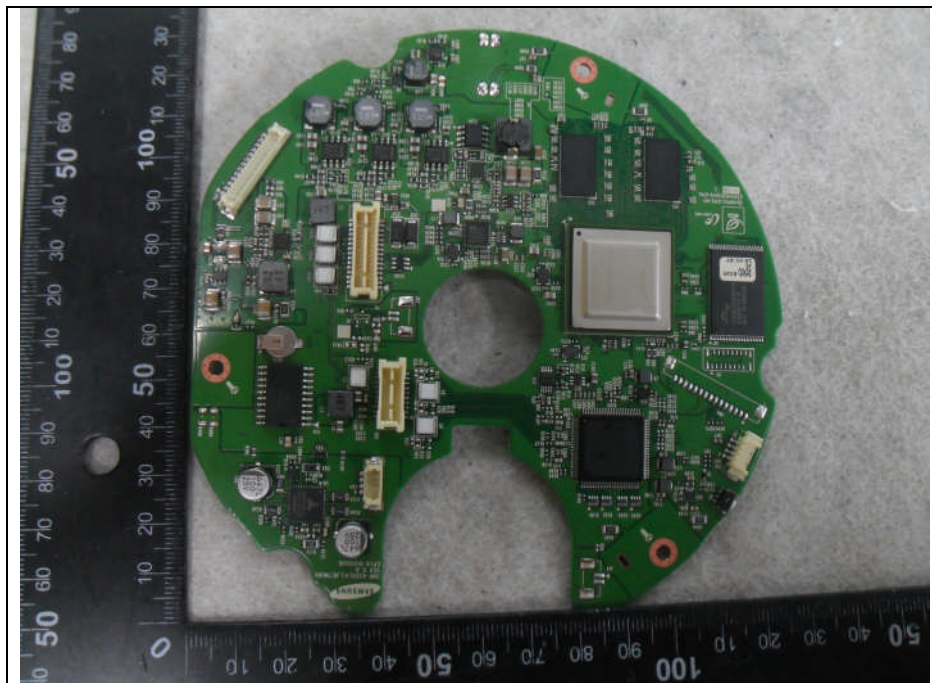



SUB Board

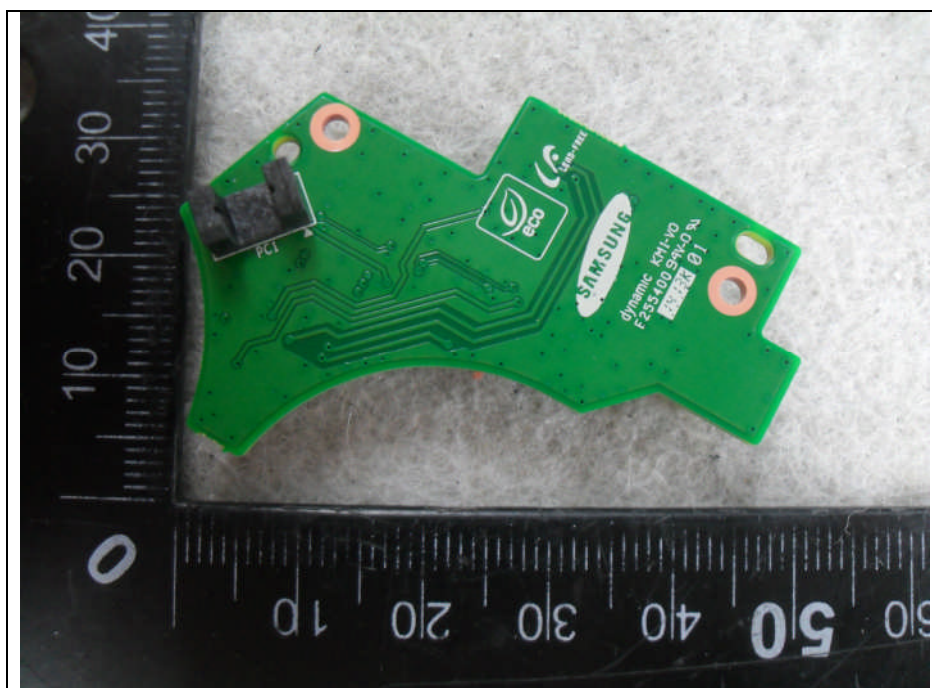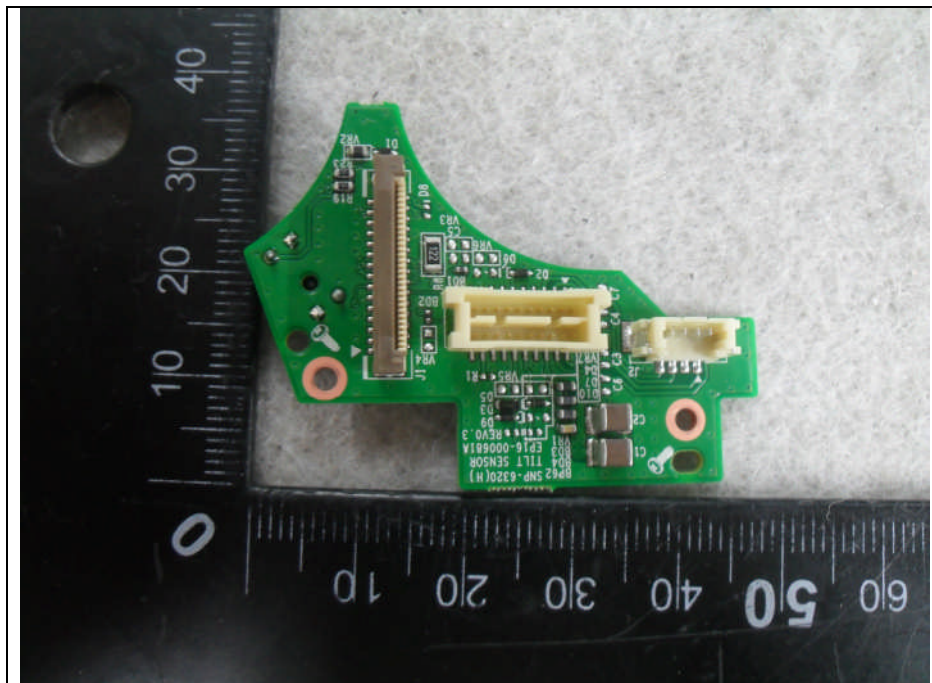



CCD Board

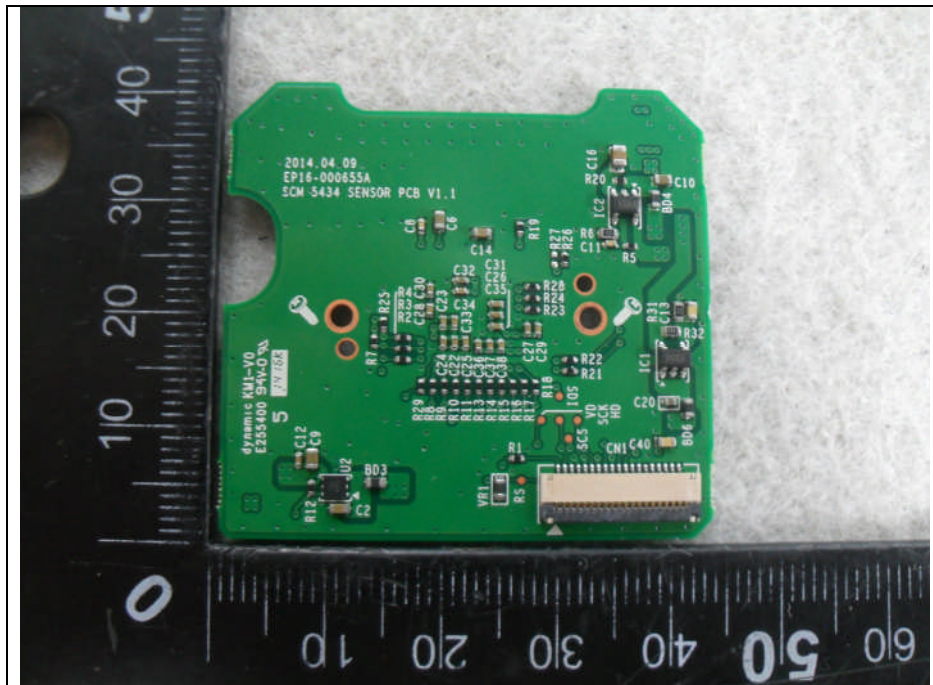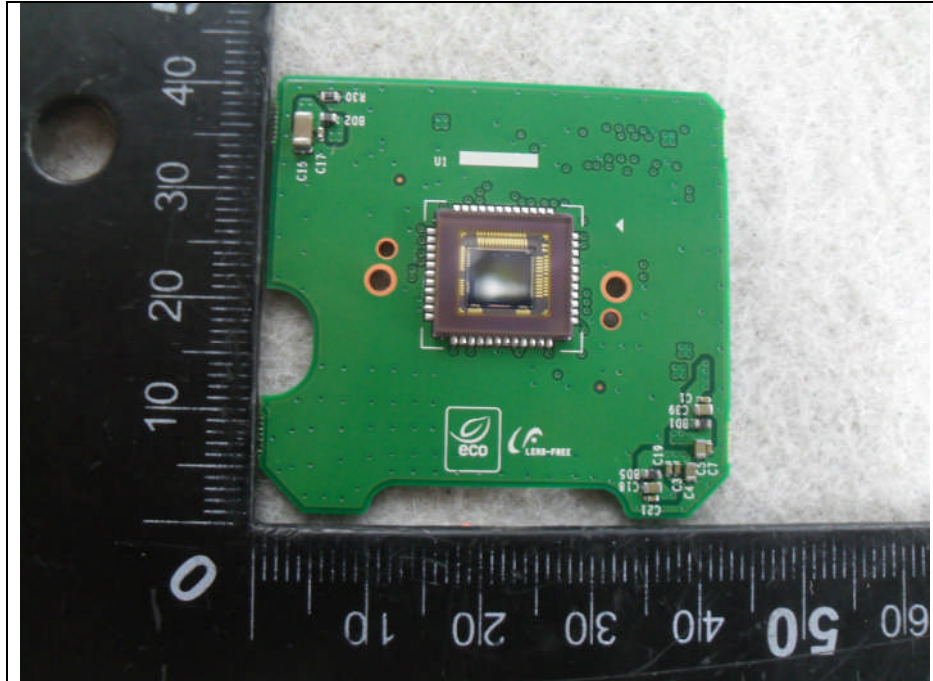

Interface Board

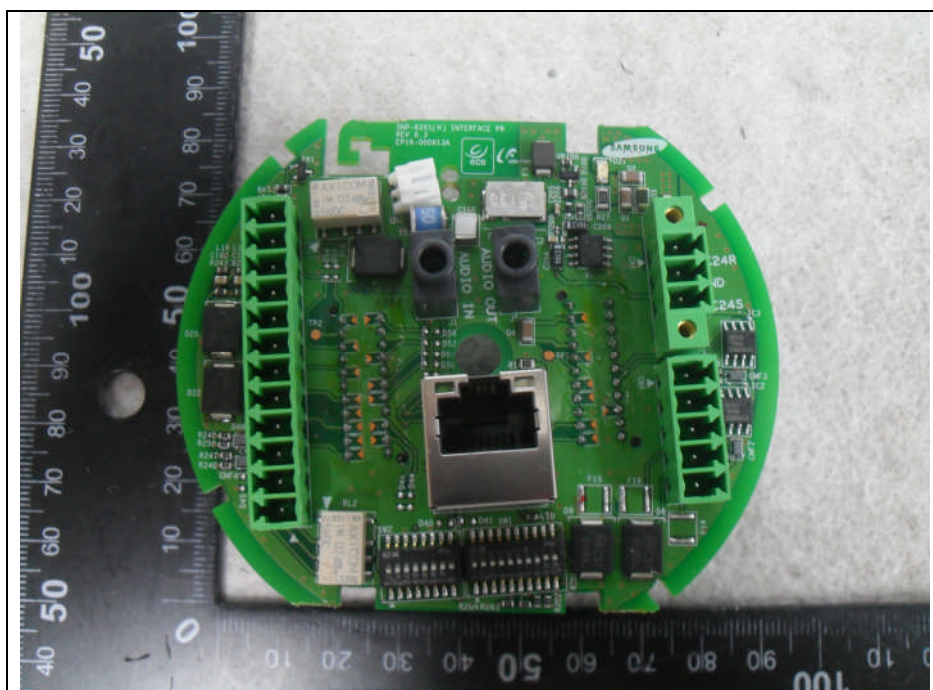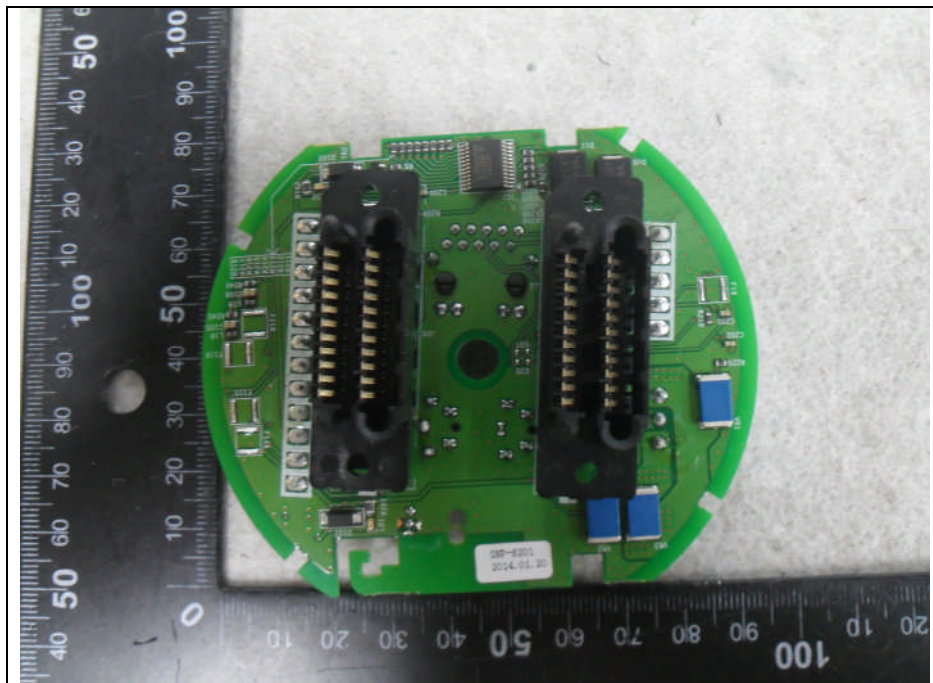

Camera Main Board

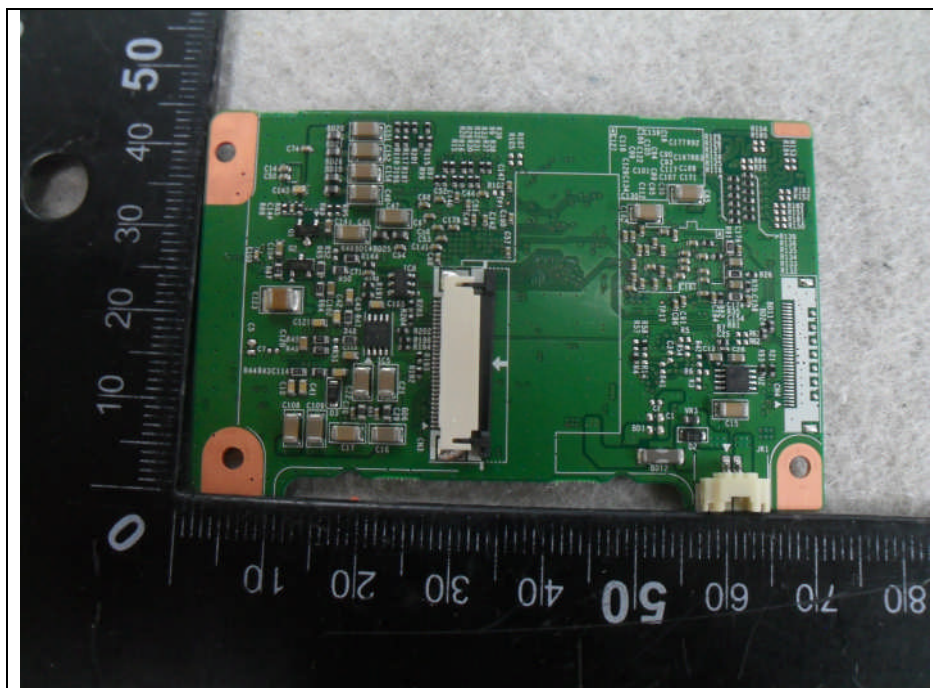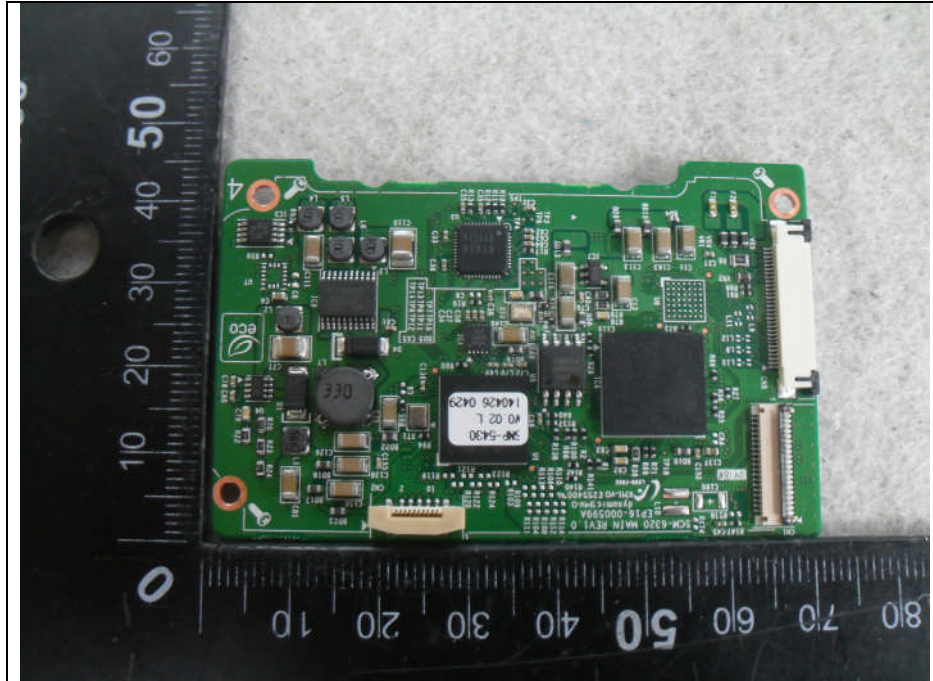

Power Board

