SPA-B1000

IP Audio Bridge

Key Features

- Maximum Input Level: L, R : +6dBV Max
- Power: PoE (IEEE 802.3 af type 1 Class 0), DC 24V
- Internal Memory: 1 GBytes
- External Memory (Micro SD): SDHC upto 32GB (SANDISK)
- Supported Protocol: IPv4, HTTP, HTTPS, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
- Supported Supported Audio Format: WAV, MP3 in mono/stereo from 64 kbps to 320 kbps (File Streaming). Sampling rate from 16 kHz up to 48 kHz

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPA-B1000

IP Audio Bridge

Specifications

Product	
IP Audio Type	IP Audio Module
Line Input	
Maximum Input Level	L, R : +6 dBV Max
Amplifier	
Description	Built in 10W Class D
Network	
Ethernet	10/100 Base-T
Memory	
Internal Memory	1 GBytes
External Memory (Micro SD)	SDHC upto 32GB (SANDISK)
Contact	
Contact Input. Dry contact	One Channel
Contact Output. Dry contact (NO)	One channel
General	
Operating Temperature	-20°~+50°C(-4°F~+122°F)
Operating Humidity	10~95%RH(Non-Condensing)
IP Code	N/A
Weight	0.24Kg (0.53lb)
Size	123(W)*80(H)*30.6(W)mm
Color	White
Certificate	EMC : KS C 9832/9835,EN 55.32/55035,FCC Part 15 Subpart B,ICES-003, Safety : UL 62368-1,CAN/CSA 62368-1
Power	
PoE	PoE (IEEE 802.3 af type 1 Class 3), Max.10W, DC24V
Power	N/A

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Network Protocol

Security	Password protection : admin, setup, user, guest (sha-2, Digest authentication, User access log)
Supported Protocols	IPv4, HTTP, HTTPS, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP

System Integration

Application Programming Interface	SUNAPI(HTTP API)
Event & Preset	Virtual Contact, Dry contact
Functional Monitoring	Connection verification, Built-in system logging

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPA-B1000

IP Audio Bridge



CAD

Unit: mm [inch]

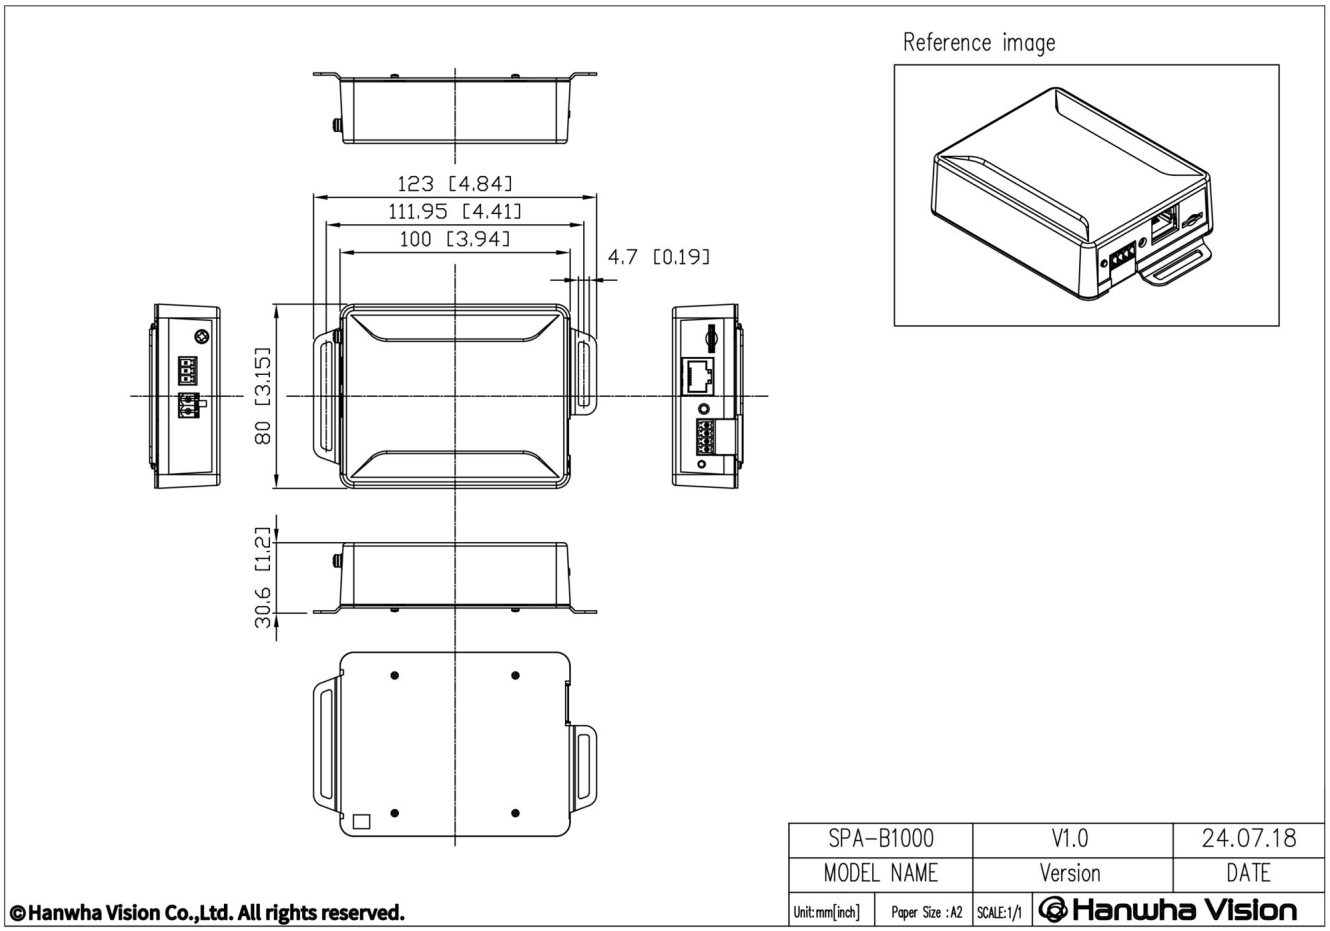

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.