



SPA-C110W

Alto-falante IP Cieling




Key Features

- 20Hz ~ 20kHz Frequency Response
- 100dB Max. Sound Pressure Level
- 90dB Sensitivity
- Built in 10W Class D Amplifier
- Nível de saída: +6dBV $\pm$ 3dB
- Resposta de frequência: 20Hz ~ 20kHz
- Amplificador: Classe D de 10 W integrado
- Alimentação: PoE (IEEE 802.3 af tipo 1 Classe 3), PoE+ (IEEE 802.3 af tipo 2 Classe 4)
- Memória interna: 1 GBytes
- Máx. Nível máximo de pressão sonora Nível de pressão sonora: 96dB
- Faixa de frequência (-10dB): 120Hz~20kHz
- Sensibilidade (1Watt): 90dB
- Protocolo compatível: IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
- TTS: inglês (EUA, Reino Unido), alemão, francês, espanhol, russo
- Monitoramento de áudio: Teste do alto-falante por meio de medidor de nível gráfico (ferramenta de teste integrada)

SPA-C110W

Alto-falante IP Cieling

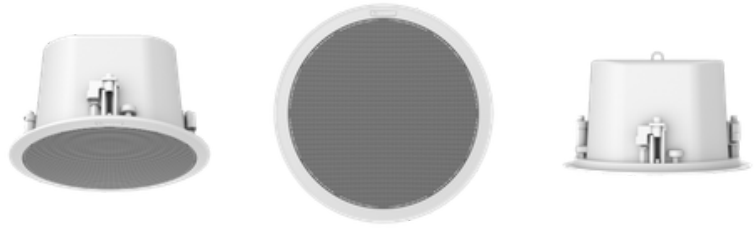

Specifications

Product

IP Audio Type	IP Ceiling Speaker
---------------	--------------------

Line Output

Output Level	+6 dBV $\pm$ 3 dB
Frequency Response	20Hz~20kHz
THD + N Ratio (AES17LPF)	Less than 0.1%
S/N Ratio (20kHz LPF, A-WTD)	Greater than 91 dB

Amplifier

Description	Built in 10W Class D
-------------	----------------------

Network

Ethernet	10/100 Base-T
----------	---------------

Memory

Internal Memory	1 GBytes
External Memory (Micro SD)	SDHC upto 32GB (SANDISK)

Contact

Contact Input. Dry contact	One Channel
Contact Output. Dry contact (NO)	One channel

General

Operating Temperature	-20°~+50°C(-4°F~+122°F)
Operating Humidity	10~85%RH(Non-Condensing)
IP Code	N/A
Weight	2.7Kg (5.95lb)
Size	ø269*156.5(H)mm
Color	White
Certificate	EMC : FCC Part 15 Subpart B,ICES-003, Safety : UL 2043,UL 62368-1,CAN/CSA 62368-1

Speaker

Speaker Component	2 Way 8" LF Drive & 2" HF Driver. Passive type
-------------------	--

Speaker

Max. Sound Pressure Level (PoE)	96 dB
Max. Sound Pressure Level (PoE+)	100 dB
Frequency Range (-10 dB)	120 Hz~20 kHz
Sensitivity (1 Watt)	90 dB
Coverage Pattern	(HxV) : 90° (1 kHz) / 60° (4 kHz)

Network Protocol


Supported Protocols	IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
---------------------	--

System Integration

Application Programming Interface	SUNAPI(HTTP API), ONVIF Profile S
Multi-source Dynamic PA control	Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH) (Up to 15 audio channels can be broadcast simultaneously), Up to 256 Zone Control (Multicast), Up to 20 Zone Control (Unicast), Up to 255 Groups
VoIP	Tested with SIP clients such as Grandstream, Yealink, Cisco, MicroSIP softphone and PBX supplier such as Asterisk, Supported SIP features : DTMF (RFC2833), Supported codecs : PCMU, PCMA, speex/8000, speex/16000
TTS	English (US, UK), German, French, Spanish, Russian
Audio Monitoring	Speaker test by graphic level meter (Built in test tool)
Event & Preset	Virtual Contact, Dry contact
Functional Monitoring	Connection verification, Built-in system logging


SPA-C110W

Alto-falante IP Cieling

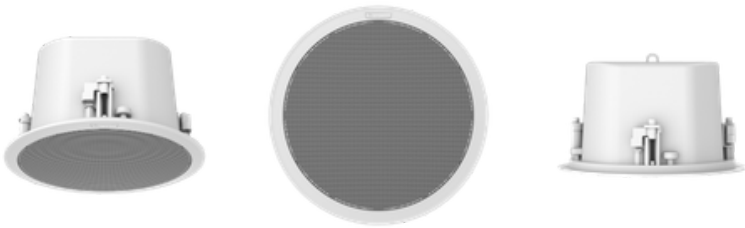

CAD

Unit: mm [inch]

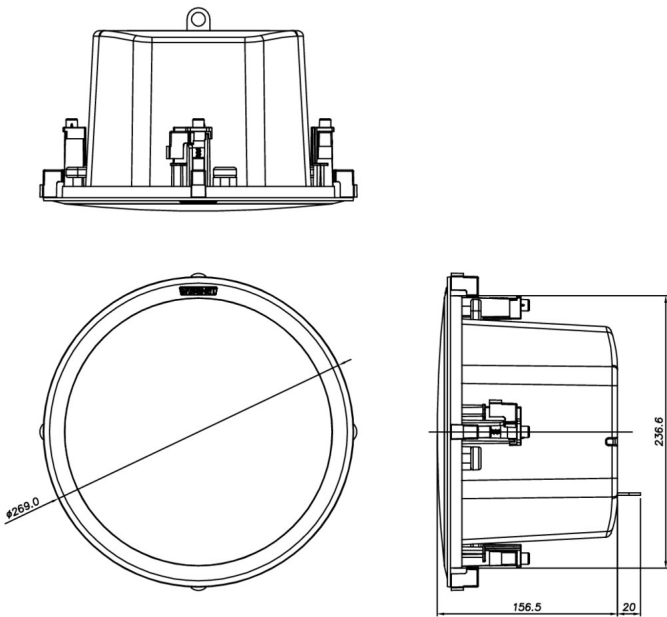

3	MODEL2	
2	MODEL1	
1	SPA-C110BW	23.05.10
No.	MODEL NAME	DATE
Unit: mm[inch] SCALE: 1/1  Hanwha Techwin		

© Hanwha Techwin Co., Ltd. All rights reserved.