



SPA-S1000

IP Audio Server



Key Features

- System Expansion: Up to 512 speakers
- Supported Protocol: IPv4, HTTP, HTTPS, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP, SNMP(v3)
- TTS: English(US, UK), German, French, Spanish, Russian
- Ethernet: 10/100 Base-T

SPA-S1000

IP Audio Server



Specifications

Product	
IP Audio Type	IP Audio Server
Network	
Ethernet	10/100 Base-T
General	
Operating Temperature	-10°~+40°C(-14°F~+104°F)
Operating Humidity	10~85%RH(Non-Condensing)
IP Code	N/A
Network Protocol	
Supported Protocols	IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
System Integration	
Application Programming Interface	SUNAPI(HTTP API)
Multi-source Dynamic PA control	Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH), UP to 512 Zone Control (Multicast), Up to 20 Zone Control (Unicast), Up to 255 Groups
Functional Monitoring	Connection verification, Built-in system logging


SPA-S1000

IP Audio Server



CAD

Unit: mm [inch]

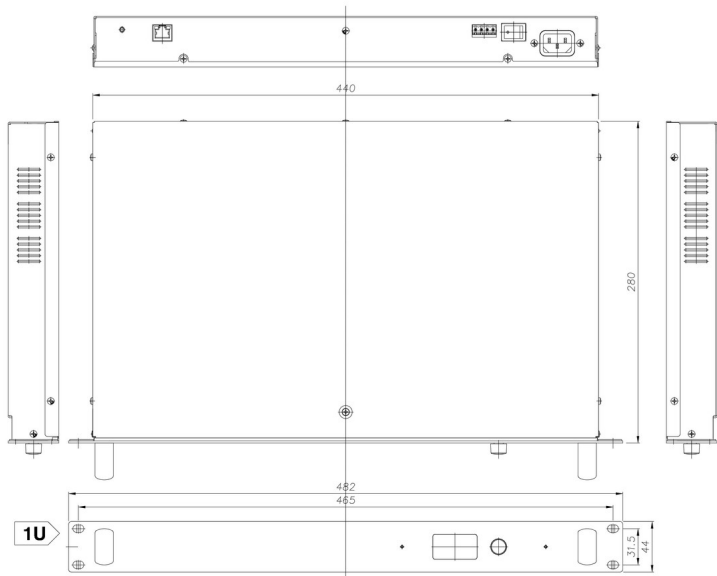

3	MODEL2	
2	MODEL1	
1	SPA-S1000	'22.7.15
No.	MODEL NAME	DATE
Unit: mm[inch] SCALE: 1/1  Hanwha Techwin		

© Hanwha Techwin Co., Ltd. All rights reserved.