SPA-S1000

IP audio server

Key Features

- Rozšíření systému: Až 512 reproduktorů
- Podporovaný protokol: IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
- TTS: Angličtina (US, UK), Němčina, Francouzština, Španělština, Ruština
- Ethernet: 10/100 Base-T

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPA-S1000

IP audio server

Specifications

Product	
IP Audio Type	IP Audio Server
Network	
Ethernet	10/100 Base-T
General	
Operating Temperature	-10°~+40°C(-14°F~+104°F)
Operating Humidity	10~85%RH(Non-Condensing)
IP Code	N/A
Network Protocol	
Supported Protocols	IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
System Integration	
Application Programming Interface	SUNAPI(HTTP API)
Multi-source Dynamic PA control	Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH) (Up to 15 audio channels can be broadcast simultaneously), UP to 512 Zone Control (Multicast), Up to 20 Zone Control (Unicast), Up to 255 Groups
Functional Monitoring	Connection verification, Built-in system logging

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPA-S1000

IP audio server

CAD

Unit: mm [inch]

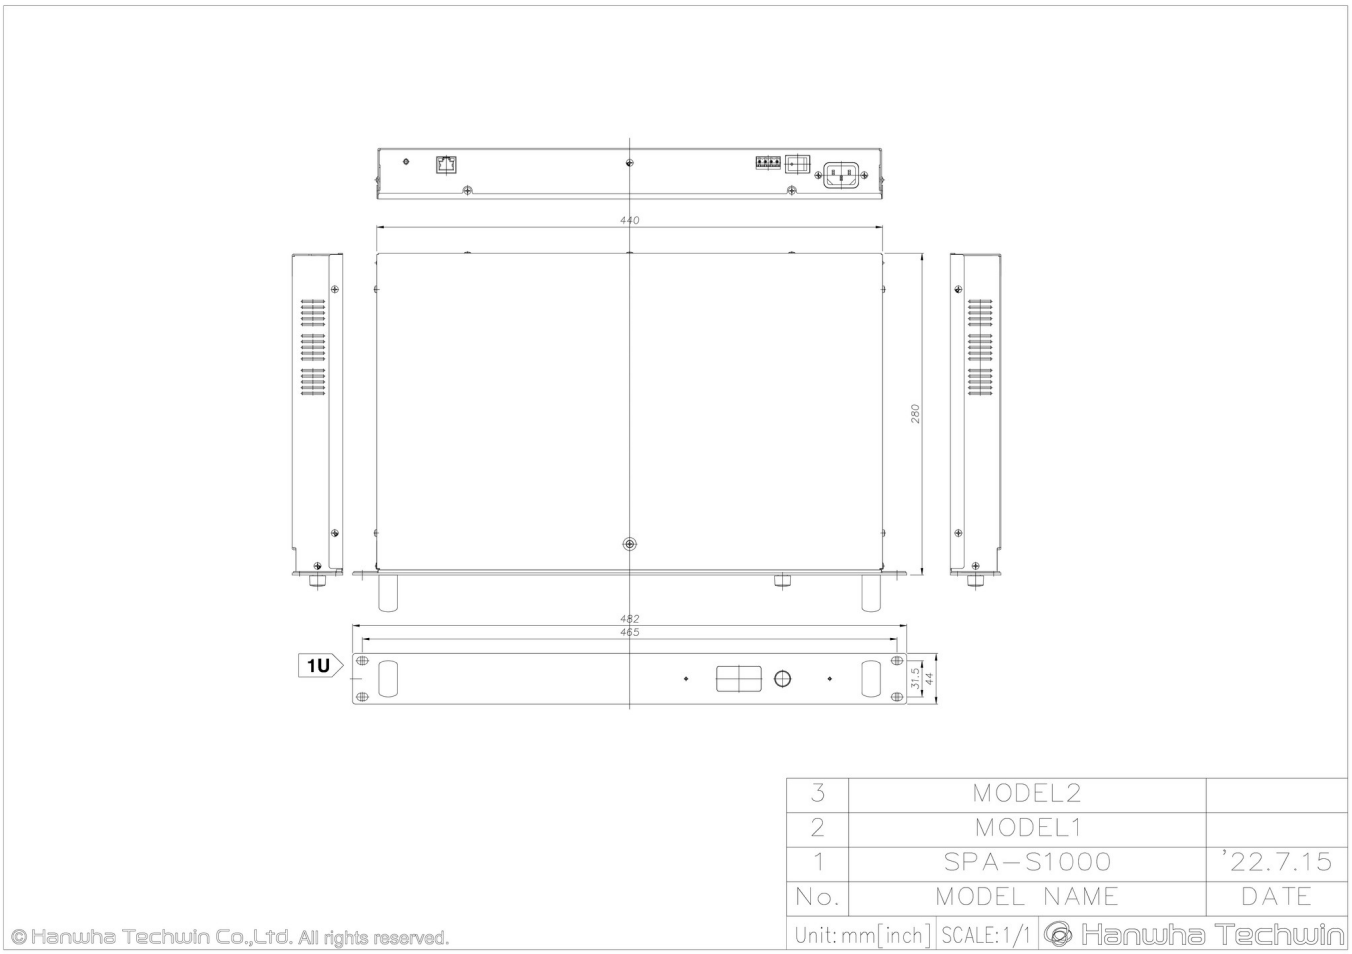

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.