



SPA-S1000

IP Ses Sunucusu



Key Features

- Sistem Genişletme: 512 hoparlöre kadar
- Desteklenen Protokol: IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
- TTS: İngilizce (ABD, İngiltere), Almanca, Fransızca, İspanyolca, Rusça
- Ethernet: 10/100 Base-T

SPA-S1000

IP Ses Sunucusu



Specifications

Product

IP Audio Type	IP Audio Server
---------------	-----------------

Network

Ethernet	10/100 Base-T
----------	---------------

General

Operating Temperature	-10°~+40°C(-14°F~+104°F)
Operating Humidity	10~85%RH(Non-Condensing)
IP Code	N/A

Network Protocol

Supported Protocols	IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
---------------------	--

System Integration

Application Programming Interface	SUNAPI(HTTP API)
Multi-source Dynamic PA control	Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH) (Up to 15 audio channels can be broadcast simultaneously), UP to 512 Zone Control (Multicast), Up to 20 Zone Control (Unicast), Up to 255 Groups
Functional Monitoring	Connection verification, Built-in system logging


SPA-S1000

IP Ses Sunucusu



CAD

Unit: mm [inch]

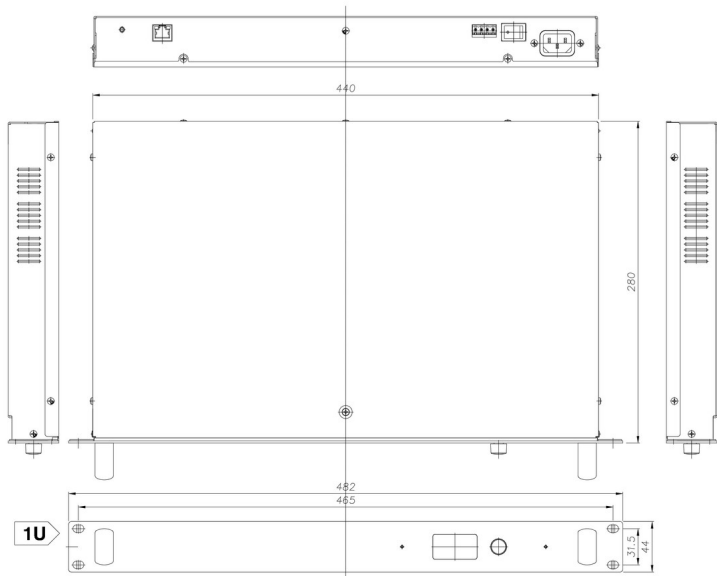

3	MODEL2	
2	MODEL1	
1	SPA-S1000	'22.7.15
No.	MODEL NAME	DATE
Unit: mm[inch] SCALE: 1/1  Hanwha Techwin		

© Hanwha Techwin Co., Ltd. All rights reserved.