

SPC-7000

System Control Keyboard

Key Features

- 5" TFT touch LCD
- Network/Analog cameras / SSM / DVR control
- User-friendly design and easy-to-use keypad
- 3 Axis joystick to control PTZ function
- Detachable joystick / jogshuttle for universe use (Right / Left hand use)
- USB interface support (1ea for SSM, 1ea for image snapshot / Upgrade)
- Fast camera-tile mapping, Config import / export

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPC-7000

System Control Keyboard



Specifications

Communication

Control Equipment		Network Camera / SSM / Analog Camera / DVR
Interface		Ethernet (Network camera), USB (SSM) 1ea, USB 1ea (Upgrade, Config import/export, Image snapshot), RS-485/422 (Analog Camera ,DVR) 1ea, RS-485/422 (Cascade among controllers) 1ea
Interface Protocol	Ethernet	SUNAPI
	USB	Dedicated
	RS-485/422	SRD, Pelco-D/P, Panasonic, Vicon, AD, Honeywell, Bosch, Elmo, GE, Samsung-T/E
	Units to Control	Network Camera : Max. 255ea, SSM : 1ea, Analog Camera / DVR : Max. 255ea
Baud Rate (RS-485/422)		2400 ~ 57,600bps
Network Protocol		TCP, HTTP, DHCP, IPv4

Operational

LCD Display	5" TFT LCD
Joystick	3 Axis twist zoom
Jog Shuttle	SSM / DVR playback control

Control

Camera	Pan / Tilt / Zoom, Focus, Auto focus, Preset, Group, Tour, Swing, Trace, Auto tracking, Alarm off/on, Freeze
Video Wall	Camera-tile (Channel) mapping, Layout (Display division mode) change
Recorder	Recording / Playback control, Alarm off, Menu
Device Management	Built-in device registration / Modification on LCD
User Management	Admin + 9 operators
Import / Export	Configuration import / export

Miscellaneous

Video Snapshot	Still image (Network camera) export using USB memory
Input	Alphabet input (Virtual keyboard)
Language	English, Spanish, French, Italian, German, Turkish, Polish, Russian, Korean, Chinese, Japanese

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Environmental

Operating Temperature	0°C ~ 40°C (+32°F ~ +104°F)
Operating humidity	20% ~ 85%

Electrical

Input Voltage	12V DC
Power Consumption	Max. 6.4W

Mechanical

Dimensions (WxhxD)	459.1x59.1x177.9mm (18.07"x2.33"x 7")
Weight	1.5Kg (3.3 lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPC-7000


System Control Keyboard





CAD

Unit: mm [inch]

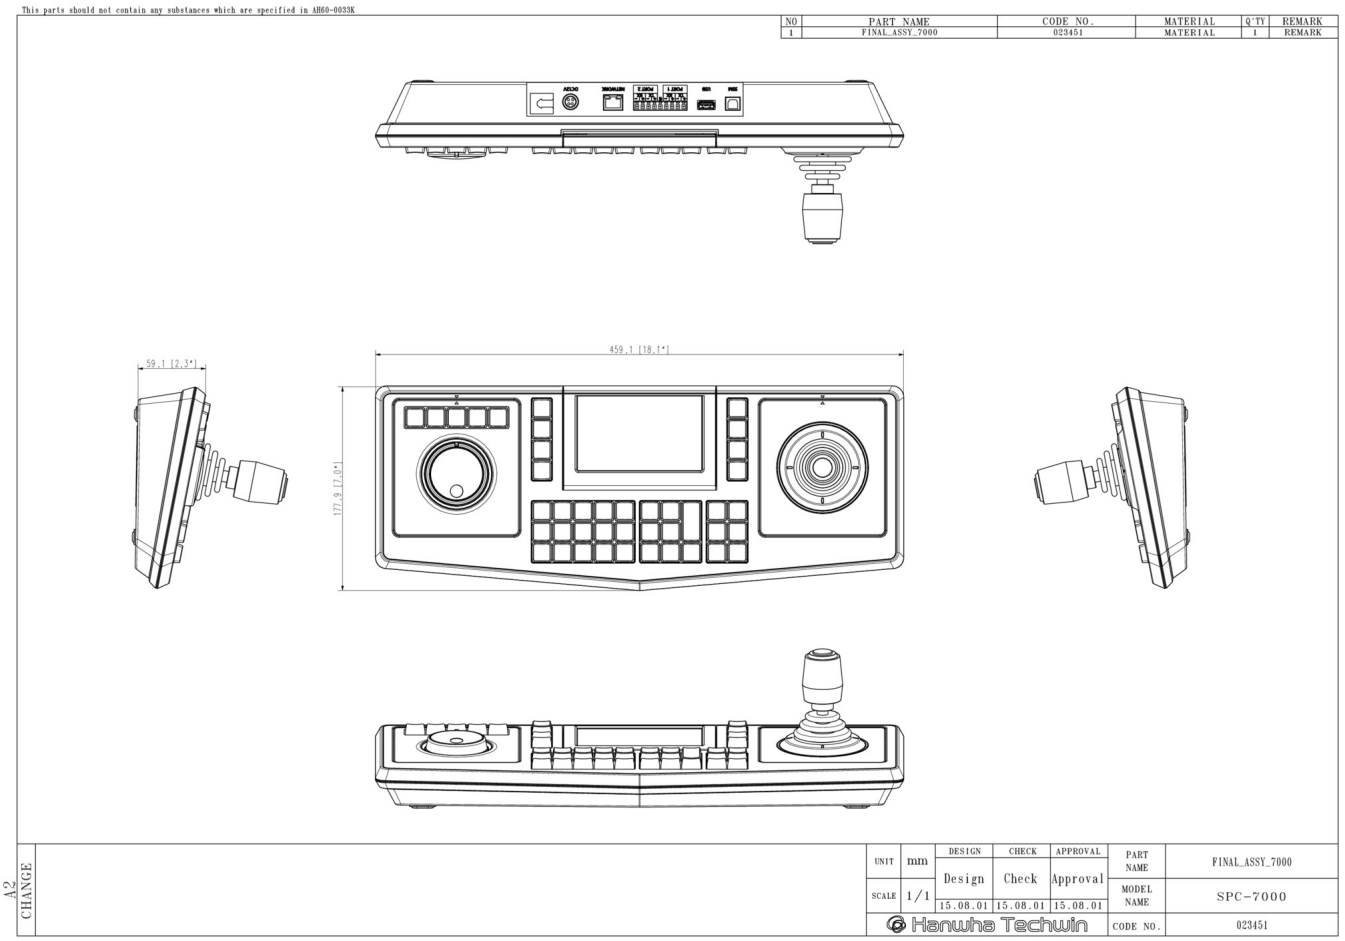

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.