

EMC TEST REPORT For RCM

Test Report No. : KES-E1-18T0655

Date of Issue : Nov. 22, 2018

Product name : DECORDER

Model/Type No. : SPD-151

Variant Model : -

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. Hanwha Techwin (Tianjin) Co.,Ltd.
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.

Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)

Date of Receipt : Nov. 12, 2018

Test date : Nov. 17, 2018 ~ Nov. 18, 2018

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong Hyun, Won
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (2) of (34)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 22, 2018	KES-E1-18T0655	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration	10
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Conducted Emissions at Telecommunication Ports.....	15
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
APPENDIX A – TEST DATA.....		18
Conducted Emissions at Mains Power Ports.....		18
Conducted Emissions at Telecommunication Ports		20
Radiated Electric Field Emissions(Below 1 GHz)		24
Radiated Electric Field Emissions(Above 1 GHz).....		26
Test Setup Photos and Configuration		28
Conducted Voltage Emissions		28
Conducted Telecommunication Emissions		29
Radiated Electric Field Emissions(Below 1 GHz)		30
Radiated Electric Field Emissions(Above 1 GHz).....		31
EUT External Photographs		32
EUT Internal Photographs		33

1.0 General Product Description

Main Specifications of EUT are:

항목			세부 설명
H/W	CPU		임베디드 CPU
	운영 체제		임베디드 리눅스
	출력	HDMI	1개 (최대 4K)
		VGA	1개 (최대 1080p)
		CVBS	1개
		비디오 출력 포맷	3840x2160@60HZ/30HZ(HDMI), 2560x1440@60HZ/30HZ(HDMI), 1920x1080@60HZ, 1280x1024@60H, 1280x720@60Hz
	외장장치	이더넷	1개 (10/100/1000BASE-T)
		USB	USB 2.0 2개 (Reserved)
		오디오 출력	1개
		LED	전원, 네트워크
	환경 사양	동작 온도	0°C ~ +40°C (+32°F ~ +104°F)
		동작 습도	20% ~ 85% RH
	전기적 사양	전원	12V DC, PoE (IEEE802.3af)
		소비 전력	최대 8.4W (12V DC), 최대 8.4W (PoE)
	외관	색상 / 재질	진회색 / 메탈
		외형 치수 (WxHxD)	178.0 x 34.0 x 187.8mm (7.01" x 1.34" x 7.39")
		무게	Approx. 0.68Kg (1.50 lb)

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (5) of (34)

항목			세부 설명
S/W	비디오	코덱	H.265/H.264/MJPEG
		디스플레이 성능	16x2M(1080P)@30fp, 8MP@30fps
		카메라 해상도	최대 12MP
		대역폭	200Mbps
		분할화면	(HDMI) 1/2x2/3x3/4x4/5x5/6x6(32Ch Only) (VGA) 1/2x2/3x3/4x4 (CVBS) 1
		레이아웃	최대 20개/모니터, 시퀀스 지원
	병합	모니터 병합	1x2, 2x1
		타일 병합	지원
	오디오	코덱	G.711/G.726/AAC
	관리 소프트웨어		Web-Viewer, SSM (Over 2.10.3)
	OS		Windows : 7, 8.1, 10 Mac OS X : 10.10, 10.11, 10.12, 10.13
	웹 브라우저		Google Chrome 63, Apple Safari 11 (Mac OS X only), MS Edge 41, MS Explorer 11
	시간 설정		NTP/수동
	내보내기 / 가져오기		Configuration Export/Import
	로그		최대 20000 (System log, Event log each)
	프로토콜		Over SUNAPI 2.3, S/NP support

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 240 Vac ☐ 100 Vac ☐ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
DECORDER	SPD-151	-	Hanwha Techwin (Tianjin) Co.,Ltd.	EUT

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (7) of (34)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	QND-6070RCH	-	Hanwha Techwin (Tianjin) Co.,Ltd.	-
PoE Adaptor	PD-3001GC/AC	RD935608201696 4200	Power Dsine	-
Notebook	LG15N54	410NZET022292	LG Electronics	-
Notebook Adaptor	PA-1900-08	9702591703	Dongguang Lite Power 2nd Plant	-
Monitor 1	A2514_DPN	CN07BN4400591 BSK28F5NK904	11ssan Elecom(shen yang) Co., Ltd	-
Monitor 1 Adaptor	A4514_DSM	CN078N4400721 ASE38GCOYOXSR · S	SAMSUNG ELECTRONIC JAPAN Co., Ltd.	-
Monitor 2	LT23C350	009MHYCH10638 8P	SAMSUNG Electronics	-
Monitor 2 Adaptor	A4514_DDY	CN07BN44- 00593BD07G690 189	SAMSUNG ELECTRONIC JAPAN Co., Ltd.	-
Monitor 3	SMT-2233	ZC6U67VH50019 4D	Weihai Daewoo Electronics Co., Ltd.	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
USB 2.0 Memory	-	-	-	4 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.6 External I/O Cabling

■ DC 12 V MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DECORDER (EUT)	RJ-45	PoE Adaptor	RJ-45	4.0	U
	D - SUB	Monitor 1	D - SUB	1.7	S
	HDMI	Monitor 2	HDMI	1.8	S
	BNC	Monitor 3	BNC	4.0	S
	3.5 mm	Speaker	3.5 mm	1.4	U
	USB	USB 2.0 Memory	USB	-	-
PoE Adaptor	RJ-45	Notebook	RJ-45	3.0	U
	RJ-45	Network Camera	RJ-45	3.0	

* Unshielded=U, Shielded=S

■ PoE MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DECORDER (EUT)	RJ-45	PoE Adaptor	RJ-45	4.0	U
	D - SUB	Monitor 1	D - SUB	1.7	S
	HDMI	Monitor 2	HDMI	1.8	S
	BNC	Monitor 3	BNC	4.0	S
	3.5 mm	Speaker	3.5 mm	1.4	U
	USB	USB 2.0 Memory	USB	-	-
PoE Adaptor	RJ-45	Notebook	RJ-45	3.0	U
	RJ-45	Network Camera	RJ-45	3.0	U

* Unshielded=U, Shielded=S

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (9) of (34)

1.7 EUT Operating Mode(s)

Test mode	operating
DC 12 V	EUT Monitoring, Ping Test
PoE	EUT Monitoring, Ping Test


EUT Test operating S/W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ DC 12 V MODE

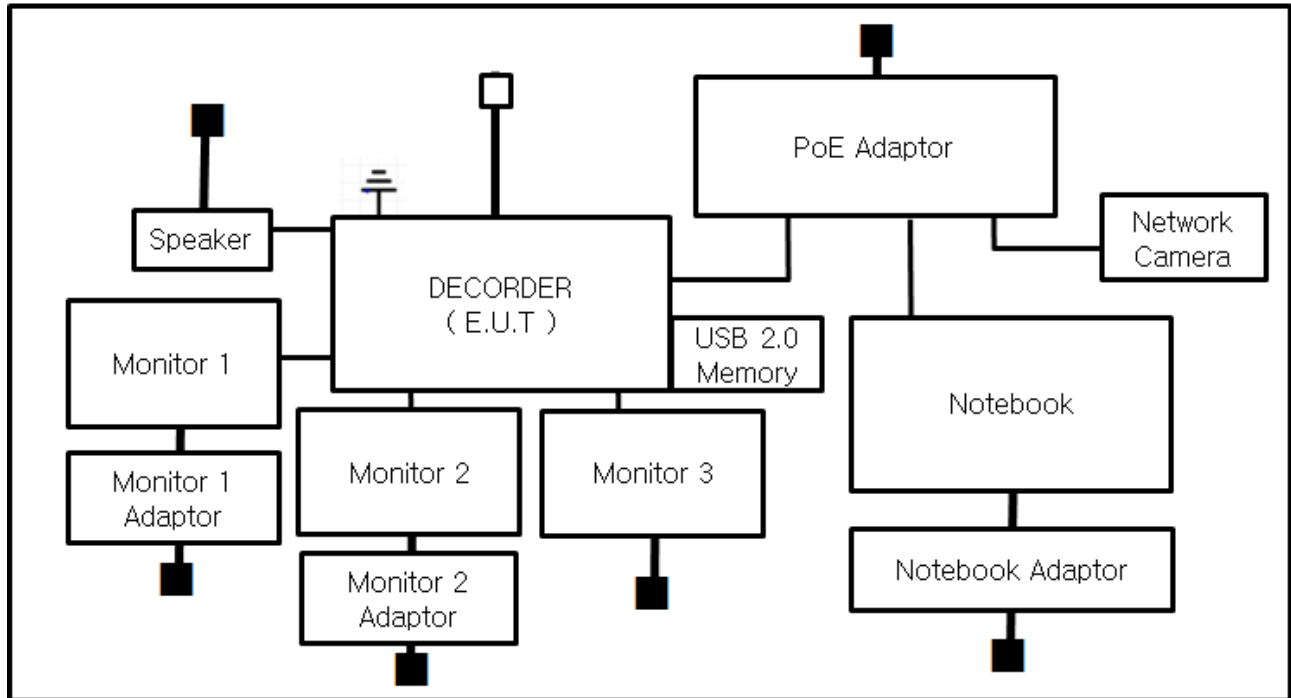

■ PoE MODE

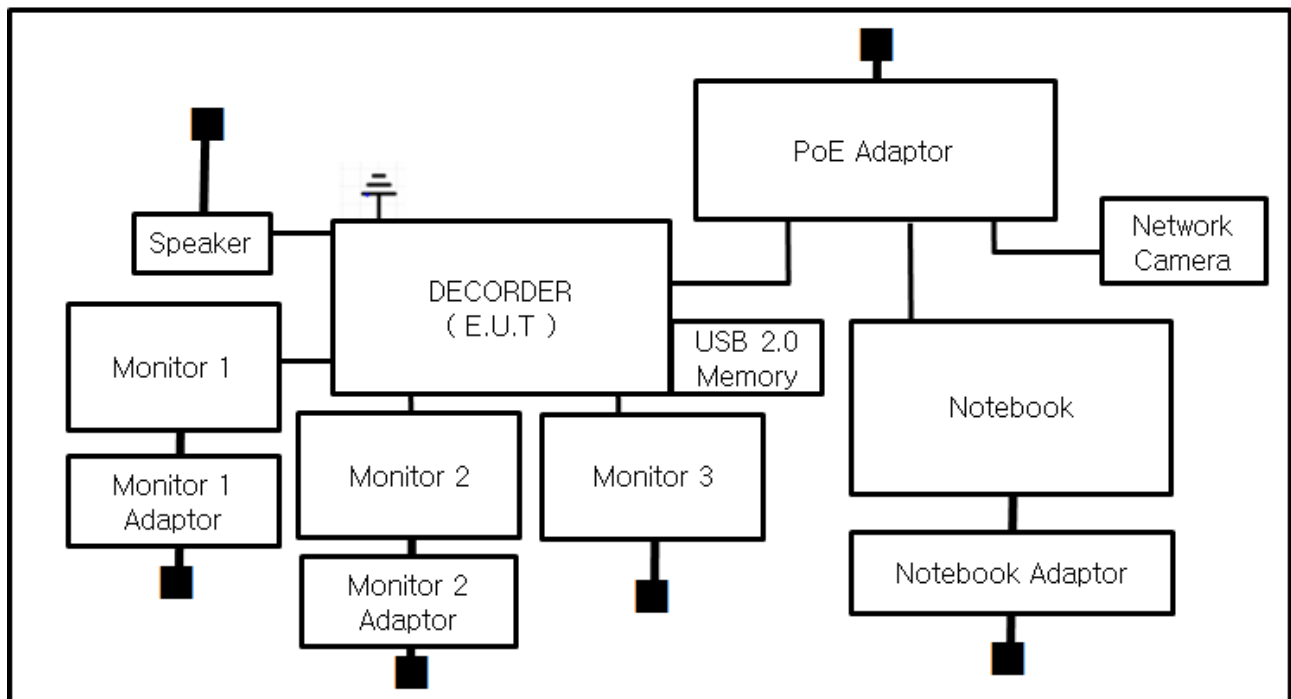

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Aechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Aechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Aechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 17 07 01633 001

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☒ AS/NZS CISPR32:2015 | ☒ Class A | ☐ Class B |
|
 | | |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
|
 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
 | | |
| ☐ RE- Directive 2014/53/EU | | |
|
 | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
 | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☐	LISN	ENV216	R & S	101787	01, 05, 2019
☐	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 27, 2018

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A: It is not tested apply because it is powered by DC and PoE.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Nov. 18, 2018

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☒	LISN	ENV216	R & S	101787	01, 05, 2019
☒	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 27, 2018
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2019
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2019

Test Conditions

Temperature: 23,1 °C
Relative Humidity: 53,0 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Nov. 17, 2018

Test Location☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	AMPLIFIER	SCU 01	R & S	100603	11, 27, 2018
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	714	11, 28, 2018

Test ConditionsTemperature: 22,6 °C
Relative Humidity: 53,4 % R.H.**Frequency Range of Measurement**

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Nov. 18, 2018

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2019
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2019
☐	ATTENUATOR	8491A	HP	35496	03, 21, 2019
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test ConditionsTemperature: 22,8 °C
Relative Humidity: 52,7 % R.H.**Frequency Range of Measurement**

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (18) of (34)

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (19) of (34)

NEUTRAL LINE

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ DC 12 V MODE

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	SPD-151
Mode	DC 10 Mbps
Operator Name:	KES

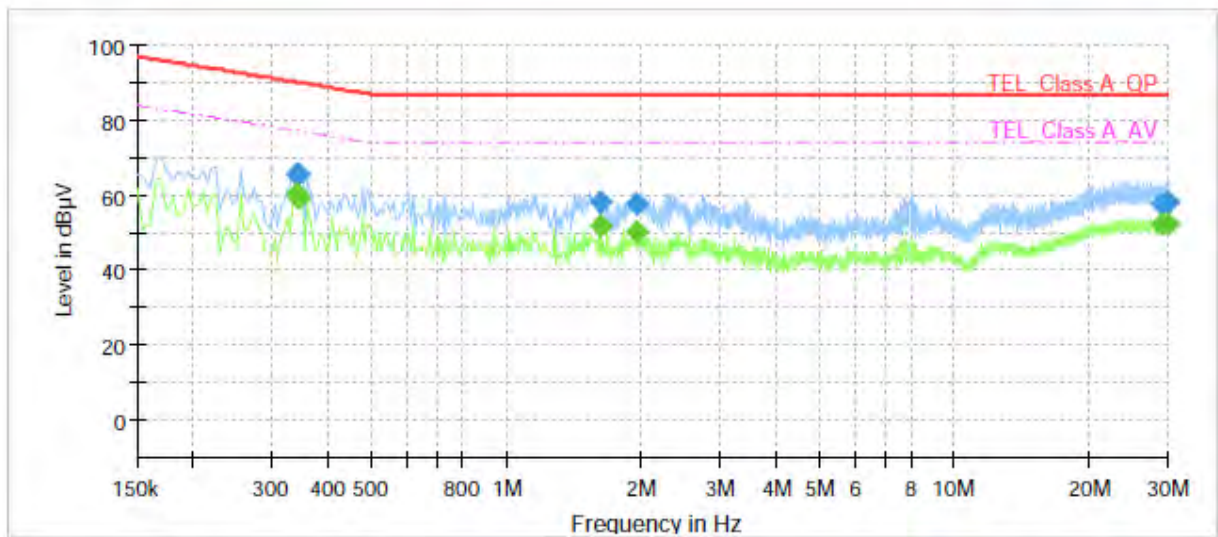


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.340000	---	60.27	77.20	16.93	1000.0	9.000	Single Line	19.5
0.340000	65.50	---	90.20	24.70	1000.0	9.000	Single Line	19.5
0.345000	---	59.46	77.08	17.62	1000.0	9.000	Single Line	19.5
0.345000	65.78	---	90.08	24.30	1000.0	9.000	Single Line	19.5
1.620000	---	52.12	74.00	21.88	1000.0	9.000	Single Line	20.0
1.620000	58.19	---	87.00	28.81	1000.0	9.000	Single Line	20.0
1.960000	---	50.21	74.00	23.79	1000.0	9.000	Single Line	20.0
1.960000	57.53	---	87.00	29.47	1000.0	9.000	Single Line	20.0
28.975000	---	52.28	74.00	21.72	1000.0	9.000	Single Line	20.7
28.975000	57.94	---	87.00	29.06	1000.0	9.000	Single Line	20.7
29.980000	---	52.47	74.00	21.53	1000.0	9.000	Single Line	20.8
29.980000	58.19	---	87.00	28.81	1000.0	9.000	Single Line	20.8

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	SPD-151
Mode	DC_1 000 Mbps
Operator Name:	KES

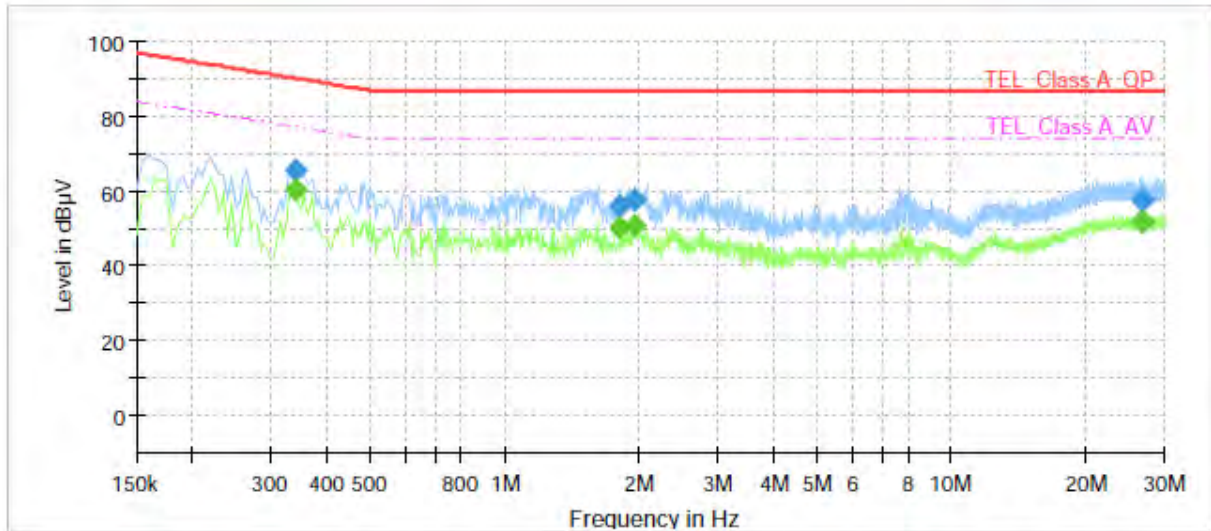

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.340000	---	60.37	77.20	16.83	1000.0	9.000	Single Line	19.7
0.340000	65.60	---	90.20	24.60	1000.0	9.000	Single Line	19.7
1.820000	---	50.23	74.00	23.77	1000.0	9.000	Single Line	20.1
1.820000	56.12	---	87.00	30.88	1000.0	9.000	Single Line	20.1
1.955000	---	50.62	74.00	23.38	1000.0	9.000	Single Line	20.1
1.955000	57.53	---	87.00	29.47	1000.0	9.000	Single Line	20.1
26.570000	---	51.71	74.00	22.29	1000.0	9.000	Single Line	20.2
26.570000	57.50	---	87.00	29.50	1000.0	9.000	Single Line	20.2
26.845000	---	51.74	74.00	22.26	1000.0	9.000	Single Line	20.2
26.845000	57.54	---	87.00	29.46	1000.0	9.000	Single Line	20.2

■ PoE MODE

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	SPD-151
Mode	PoE_ 10 Mbps
Operator Name:	KES

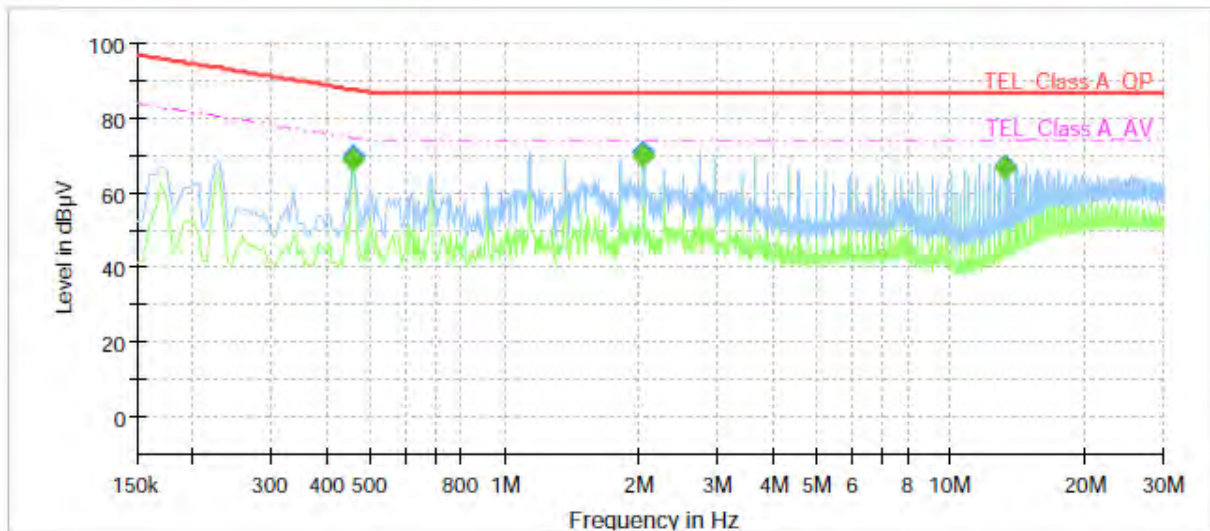


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.455000	---	68.58	74.78	6.20	1000.0	9.000	Single Line	19.6
0.455000	69.69	---	87.78	18.09	1000.0	9.000	Single Line	19.6
2.050000	---	70.07	74.00	3.93	1000.0	9.000	Single Line	20.0
2.050000	70.90	---	87.00	16.10	1000.0	9.000	Single Line	20.0
13.215000	---	66.68	74.00	7.32	1000.0	9.000	Single Line	19.9
13.215000	67.39	---	87.00	19.61	1000.0	9.000	Single Line	19.9

[1 000 Mbps]
Common Information

Test Description:	Telecommunication Emission
Model No.:	SPD-151
Mode	PoE_ 1 000 Mbps
Operator Name:	KES

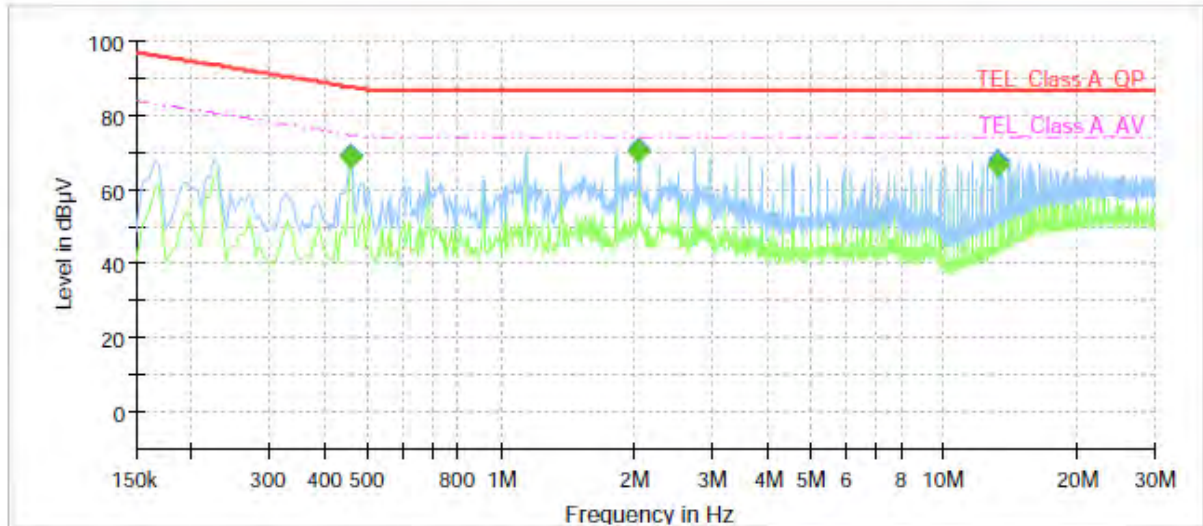
Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.455000	---	68.73	74.78	6.05	1000.0	9.000	Single Line	19.7
0.455000	69.34	---	87.78	18.44	1000.0	9.000	Single Line	19.7
2.050000	---	70.16	74.00	3.84	1000.0	9.000	Single Line	20.1
2.050000	70.84	---	87.00	16.16	1000.0	9.000	Single Line	20.1
13.215000	---	66.79	74.00	7.21	1000.0	9.000	Single Line	20.0
13.215000	67.55	---	87.00	19.45	1000.0	9.000	Single Line	20.0

◆ Calculation

$$\text{QuasiPeak [dBμV]} / \text{CAverage [dBμV]} = \text{Reading Value [dBμV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (24) of (34)

Radiated Electric Field Emissions(Below 1 GHz)

■ DC 12 V MODE

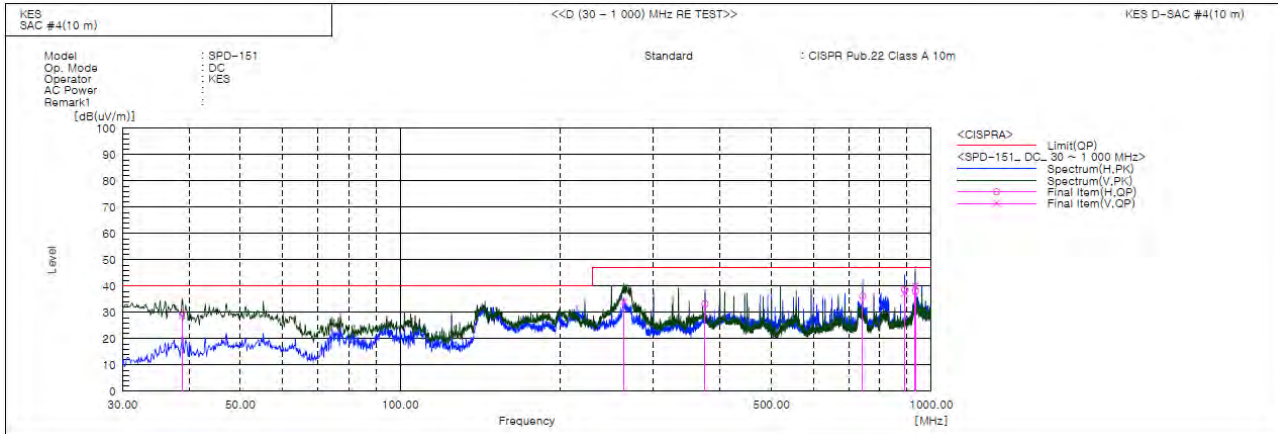

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.851	V	59.3	-30.5	28.8	40.0	11.2	110.0	258.0	
2	263.528	V	60.1	-25.9	34.2	47.0	12.8	131.0	8.0	
3	374.956	H	55.6	-22.3	33.3	47.0	13.7	318.0	195.0	
4	742.586	H	50.6	-14.5	36.1	47.0	10.9	364.0	290.0	
5	890.568	V	48.9	-11.6	37.3	47.0	9.7	165.0	339.0	
6	891.118	H	50.2	-11.6	38.6	47.0	8.4	368.0	287.0	
7	932.658	V	51.3	-11.2	40.1	47.0	6.9	150.0	331.0	
8	933.325	H	49.3	-11.2	38.1	47.0	8.9	347.0	159.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (25) of (34)

■ PoE MODE

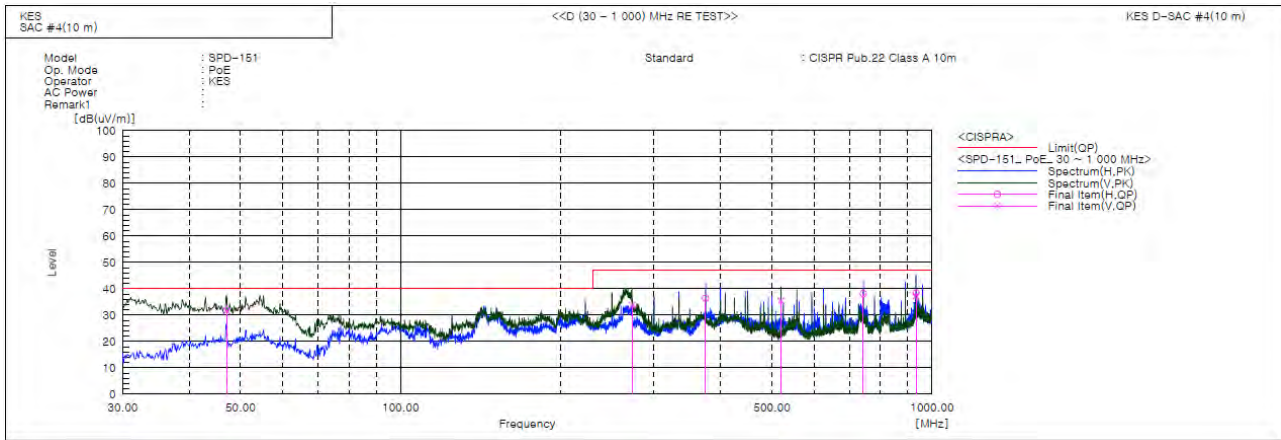

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.096	V	60.1	-28.5	31.6	40.0	8.4	128.0	286.0	
2	272.621	V	59.2	-25.6	33.6	47.0	13.4	132.0	341.0	
3	374.956	H	58.7	-22.3	36.4	47.0	10.6	342.0	207.0	
4	519.729	V	53.6	-18.2	35.4	47.0	11.6	211.0	169.0	
5	742.586	H	52.7	-14.5	38.2	47.0	8.8	345.0	223.0	
6	933.070	V	48.5	-11.2	37.3	47.0	9.7	154.0	170.0	
7	933.318	H	49.6	-11.2	38.4	47.0	8.6	356.0	330.0	

◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (26) of (34)

Radiated Electric Field Emissions(Above 1 GHz)

■ DC 12 V MODE

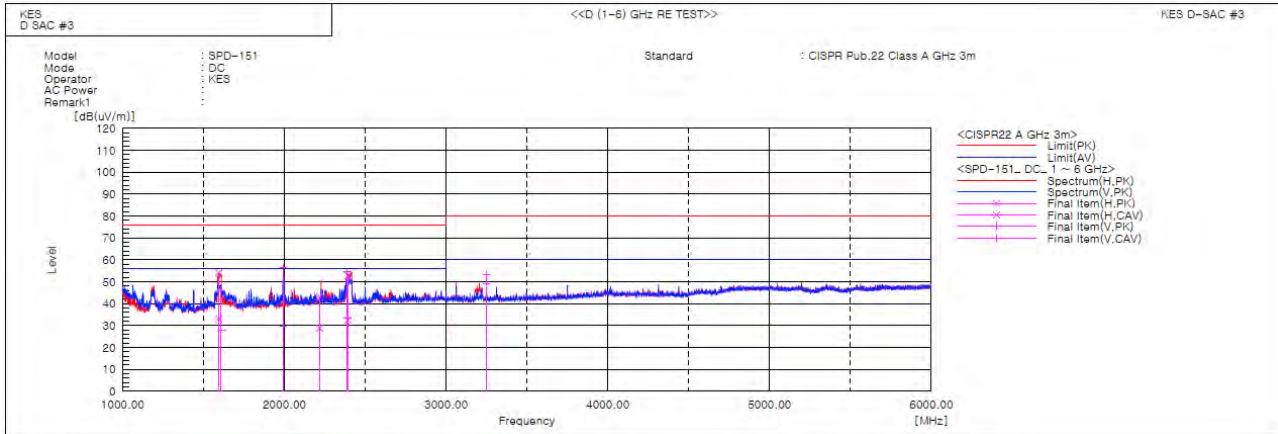

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1595.560	H	59.2	38.1	-5.0	54.2	33.1	76.0	56.0	21.8	22.9	100.0	333.5	
2	1610.127	V	50.6	32.9	-4.9	45.7	28.0	76.0	56.0	30.3	28.0	100.0	305.8	
3	1994.440	V	58.4	31.9	-2.1	56.3	29.8	76.0	56.0	19.7	26.2	100.0	4.2	
4	2218.672	H	44.1	29.8	-1.0	43.1	28.8	76.0	56.0	32.9	27.2	100.0	348.3	
5	2389.541	V	54.8	33.6	-0.4	54.4	33.2	76.0	56.0	21.6	22.8	100.0	304.0	
6	2394.375	H	53.2	33.1	-0.4	52.8	32.7	76.0	56.0	23.2	23.3	100.0	327.0	
7	3250.230	V	51.6	47.5	1.7	53.3	49.2	80.0	60.0	26.7	10.8	100.0	191.4	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0655
Page (27) of (34)

■ PoE MODE

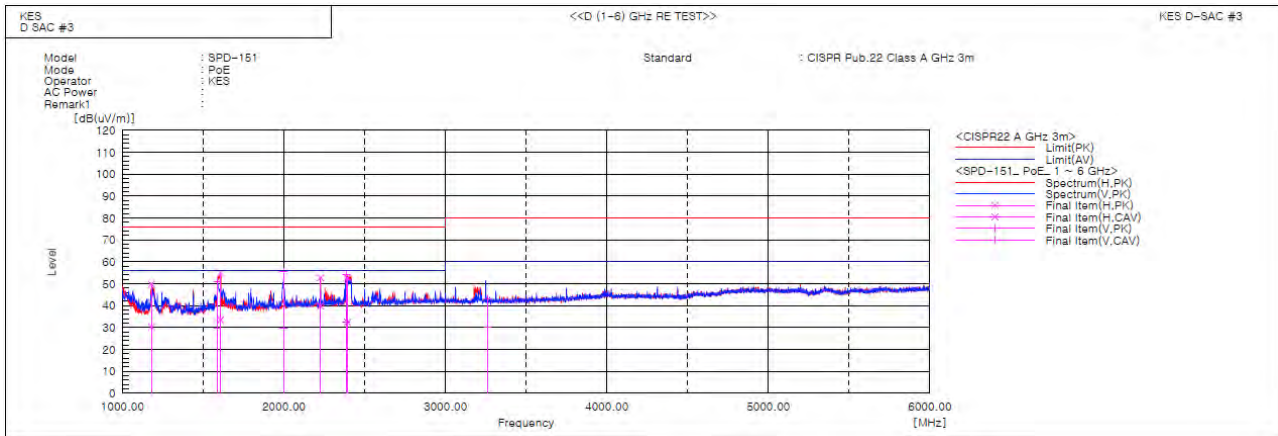

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1180.562	H	56.9	37.5	-7.2	49.7	30.3	76.0	56.0	26.3	25.7	100.0	316.2	
2	1588.870	V	55.7	34.9	-5.0	50.7	29.9	76.0	56.0	25.3	26.1	100.0	309.7	
3	1607.819	H	59.8	38.4	-4.9	54.9	33.5	76.0	56.0	21.1	22.5	100.0	330.4	
4	1997.650	V	57.7	31.9	-2.1	55.6	29.8	76.0	56.0	20.4	26.2	100.0	0.6	
5	2227.350	H	53.7	40.8	-1.0	52.7	39.8	76.0	56.0	23.3	16.2	100.0	347.4	
6	2384.500	V	54.7	32.8	-0.4	54.3	32.4	76.0	56.0	21.7	23.6	100.0	301.9	
7	2394.445	H	53.1	32.9	-0.4	52.7	32.5	76.0	56.0	23.3	23.5	100.0	318.5	
8	3260.428	V	41.6	28.3	1.7	43.3	30.0	80.0	60.0	36.7	30.0	100.0	194.9	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A

N/A

Conducted Telecommunication Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs

(Internal View)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Main Board (Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr