



EMC TEST REPORT For CE

Test Report No. : KES-EM-21T0252
Date of Issue : Apr. 16, 2021
Product name : NETWORK VIDEO ENCODER
Model/Type No. : SPE-1620
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Mar. 15, 2021
Test date : Apr. 02, 2021 ~ Apr. 08, 2021
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Jun Soo, Jung
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (2) of (60)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Apr. 16, 2021	KES-EM-21T0252	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications.....	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments.....	6
1.6	External I/O Cabling.....	7
1.7	EUT Operating Mode(s).....	8
1.8	Configuration.....	9
1.9	Remarks when standards applied	9
1.10	Calibration Details of Equipment Used for Measurement.....	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports.....	13
2.2	Conducted Emissions at Telecommunication Ports	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz).....	16
2.5	Harmonic Current Emissions.....	17
2.6	Voltage Fluctuations and Flicker	18
3.0	Criteria for compliance.....	19
3.1	Electrostatic Discharge.....	21
3.2	Radiated Electric Field Immunity	25
3.3	Electrical Fast Transients/Bursts	28
3.4	Surge Transients.....	31
3.5	Conducted Disturbance	34
3.6	Voltage Dips and Short Interruptions	37
APPENDIX A – TEST DATA.....		39
Conducted Emissions at Mains Power Ports.....		39
Conducted Emissions at Telecommunication Ports		41
Radiated Electric Field Emissions(Below 1 GHz)		42
Radiated Electric Field Emissions(Above 1 GHz).....		43
Harmonic Current Emissions and Voltage Fluctuations and Flicker		44
Test Setup Photos and Configuration		47
Conducted Emissions at Mains Power Ports.....		47
Conducted Emissions at Telecommunication Ports		48
Radiated Electric Field Emissions(Below 1 GHz)		49
Radiated Electric Field Emissions(Above 1 GHz).....		50
Harmonic Current Emissions and Voltage Fluctuations and Flicker		51
Electrostatic Discharge		52
Radiated Electric Field Immunity		52
Electrical Fast Transients/Bursts.....		53
Surge Transients.....		53
Conducted Disturbance.....		54
Voltage Dips and Short Interruptions.....		54
EUT External Photographs.....		55
EUT Internal Photographs		56



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (4) of (60)

1.0 General Product Description

Main Specifications of EUT are:

Video	
Input Channel	16CH BNC, 1.0 Vp-p / 75Ω composite NTSC/PAL
Input Signal & Resolution	CVBS, AHD/CVI/TVI (1, 2MP) Auto Detection
Video Out	1 HDMI OUT (16 multi Image, 1920x1080)
Operational	
Motion Detection	Off / On
Privacy Masking	Off / On (4ea rectangular zones)
De-Interlacing	support
Alarm I/O	16 Input/ 4 Output
Alarm Trigger	Motion Detection, Alarm Input, Video Loss, Tampering, Network disconnect
Alarm Events	File Upload Via FTP, E-mail
Audio I/O	4 Line Input / 1 Line Output(1 NO/COM/NC, 3 NO/COM)
OSD	Date&Time, Title
Remote Control Interface	1ea RS-485(Half Duplex)
RS-485 Protocol	SAMSUNG-T, PELCO-P/D
Coaxial Control	CVBS(Pelco-C) AHD, TVI, CVI
Network	
Ethernet	1 RJ-45 10/100/1000 Base-T
Video Compression Format	H.265, H.264 (MPEG-4 Part 10/AVC) : Main / Baseline / High, MJPEG
Resolution	1920x1080, 1280x720, 928x480(N), 928x240(N), 704x480(N), 704x240(N), 640x360, 352x240(N) 928x576(P), 928x288(P), 704x576(P), 704x288(P), 640x360, 352x288(P)
Max. Framerate	- Main/Sub Stream • 1080P Input 1080p/720p/WD1/4CIF/CIF : 15fps/CH(N), 12fps/CH(P) • under 720P Input 720p/WD1/4CIF/CIF : 30fps/CH(N), 25fps/CH(P) - MJPEG : 2fps @ 1920x1080, 1280x720, 960H, D1 ※ Main/Sub Stream 동시 출력 시 Max. Framerate은 1920x1080 15fps + 640x360 15fps 단, OSD 사용시 Max. Framerate 저하됨
Video-Quality Adjustment	-
Bitrate Control Method	H.265, H.264 : CBR or VBR
Streaming Capability	Multiple Streaming (Up to 2 Profiles per channel)
Audio Compression	G.711 u-law
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, ONVIF, Bonjour
Security	HTTPS (SSL) Login Authentication, Digest Login Authentication IP Address Filtering, User Access Log, 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	rtsp max. 48 users(4 Users/CH) at Unicast Mode , http max.32 users
Webpage Languages	English, French, German, Spanish, Italian, Russian, Turkish, Polish, Dutch, Swedish, Portuguese, Czech, Chinese, Japanese, Korean, Hungarian, Greek
Web Viewer	Supported OS : Windows 10 이상, Mac OS X 10.13 이상 Non-plugin WebViewer Supported Browser : Google Chrome 80 이상, MS Edge 83 이상, Mozilla Firefox 72 이상, Apple Safari 11.0.1 이상 * Web Viewer의 영상 재생 성능은 사용자의 CPU/GPU 성능에 따름
Application Programming Interface	ONVIF profile S, SUNAPI (HTTP API)
Compatible Software & Recorder	SmartViewer, NVR(Hanwha Techwin, P/X/Q series)
Environmental	
Operating Temperature / Humidity	-10°C ~ +45°C / 20% ~ 80% RH (-10°C ~ +40°C when installed in RACK)
Electrical	
Input Voltage / Current	DC12V/5A
Power Consumption	MAX : 16W (12V, 1.33A)
Mechanical	
Color / Material	Black / Metal
Dimension (WxHxD)	(W) 370.0 × (H) 44.0 × (D) 320.0(include Connector 330.9)mm
Weight	2.32kg(5.115lb)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V, 50 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK VIDEO ENCODER	SPE-1620	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD./D-TECH CO.,LTD.	EUT
Adapter	FSP060-DHAN3	-	-	EUT

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0252

Page (6) of (60)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK VIDEO ENCODER 1	SPE-410	-	-	-
NETWORK VIDEO ENCODER 1 Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
NETWORK VIDEO ENCODER 2	SPE-410	-	-	-
NETWORK VIDEO ENCODER 2 Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
Note book	P95G001	9JM8HT2	Wistron Infocom (Chengdu) Company Limited	-
Note book Adapter	LA65NS2-01	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	-
Monitor	SMT-2232	C95V67VF90002 5B	Weihai Daewoo Electronics Co., Ltd.	-
Controller	SPC-1010	C60E67WD60100 3	SamSung Techwin Co.,Ltd.	-
Controller Adapter	FJ-SW1203000K	-	SHENZHEN FUJIA APPLIANCE CO.,LTD.	-
MiC	MP1000	-	-	-
Camera 1	SCD-6083R	-	-	-
Camera 1 Adapter	MC12D-1200500	-	Shenzhen MaCable Technology co.,ltd	-
Camera 2	HCD-7030RA	-	Hanwha Techwin Co., Ltd.	-
Camera 2 Adapter	MC12D-1200500	-	Shenzhen MaCable Technology co.,ltd	-
Alarm	-	-	-	-
Alarm button	-	-	-	-
Speaker	E5	-	PreSonus®	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK VIDEO ENCODER (EUT)	RJ-45	Note book	RJ-45	3.0	U
	HDMI	Monitor	HDMI	1.4	S
	RS-485	Controller	RS-485	3.0	U
	BNC1	NETWORK VIDEO ENCODER 1	BNC1	0.5	S
	BNC2		BNC2	0.5	S
	BNC3		BNC3	0.5	S
	BNC4		BNC4	0.5	S
	BNC5		BNC5	0.5	S
	BNC6		BNC6	0.5	S
	BNC7		BNC7	0.5	S
	BNC8		BNC8	0.5	S
	BNC9	NETWORK VIDEO ENCODER 2	BNC9	0.5	S
	BNC10		BNC10	0.5	S
	BNC11		BNC11	0.5	S
	BNC12		BNC12	0.5	S
	BNC13		BNC13	0.5	S
	BNC14		BNC14	0.5	S
	BNC15		BNC15	0.5	S
	BNC16		BNC16	0.5	S
	RCA	Speaker	RCA	1.6	U
	RCA	MiC	3.5 mm	1.7	U
	Alarm OUT	Alarm	Alarm OUT	3.0	U
	Alarm IN	Alarm button	Alarm IN	3.0	U
NETWORK VIDEO ENCODER 1	BNC	Camera 1	BNC	1.2	S
NETWORK VIDEO ENCODER 2	BNC	Camera 2	BNC	1.5	S

* Unshielded=U, Shielded=S



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (8) of (60)

1.7 EUT Operating Mode(s)


Test Mode	operating
Operation mode	1. Make sure that the camera's images are output normally from the laptop and monitor. 2. Continuous PING test between EUT and laptop was conducted to verify that the network was connected properly.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.8 Configuration

■ AC Main
 □ DC Main

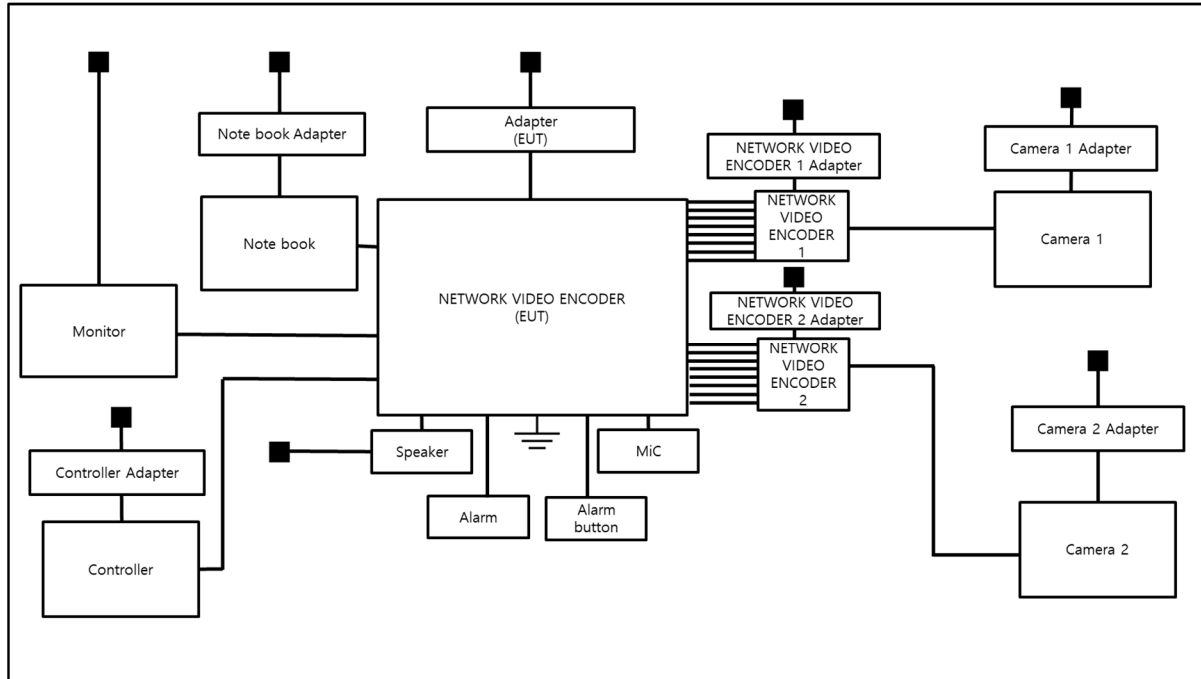

1.9 Remarks when standards applied

- Since the VGA OUT port is not used, it was excluded from the test.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☐ EN 61326-1:2013

☒ **EMC – Regulations 2016/1091**

☒ BS EN 55032:2012/A1:2013

☒ BS EN 50130-4:2011



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (12) of (60)

-
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Apr. 03, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: (23,9 ± 0,1) °C

Relative Humidity: (45,0 ± 0,2) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Apr. 03, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 30, 2021
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 30, 2021
☐	CDN	CDNS502A	TESEQ	40431	12, 29, 2021

Test Conditions

Temperature: (23,9 ± 0,1) °C
Relative Humidity: (45,0 ± 0,2) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Apr. 03, 2021

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (23,4 ± 0,1) °C

Relative Humidity: (45,0 ± 0,2) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Apr. 03, 2021

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 20, 2021
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (23,5 ± 0,1) °C

Relative Humidity: (46,1 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

Apr. 08, 2021

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (23,6 ± 0,1) °C
Relative Humidity: (46,4 ± 0,2) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

Apr. 08, 2021

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (23,6 ± 0,1) °C
Relative Humidity: (46,4 ± 0,2) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.



Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Apr. 03, 2021

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	02, 01, 2022
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (23,7 ± 0,1) °C
Relative Humidity: (46,8 ± 0,3) % R.H.
Atmospheric Pressure: (99,4 ± 0,1) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---


Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Location of Discharge:


Air
Contact



1




2

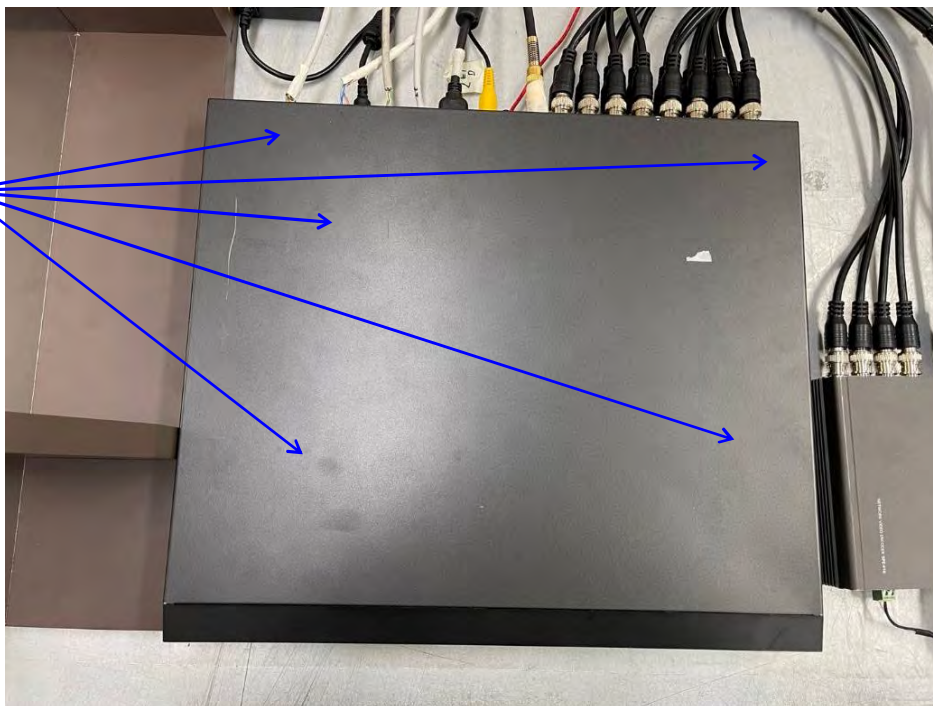

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

3

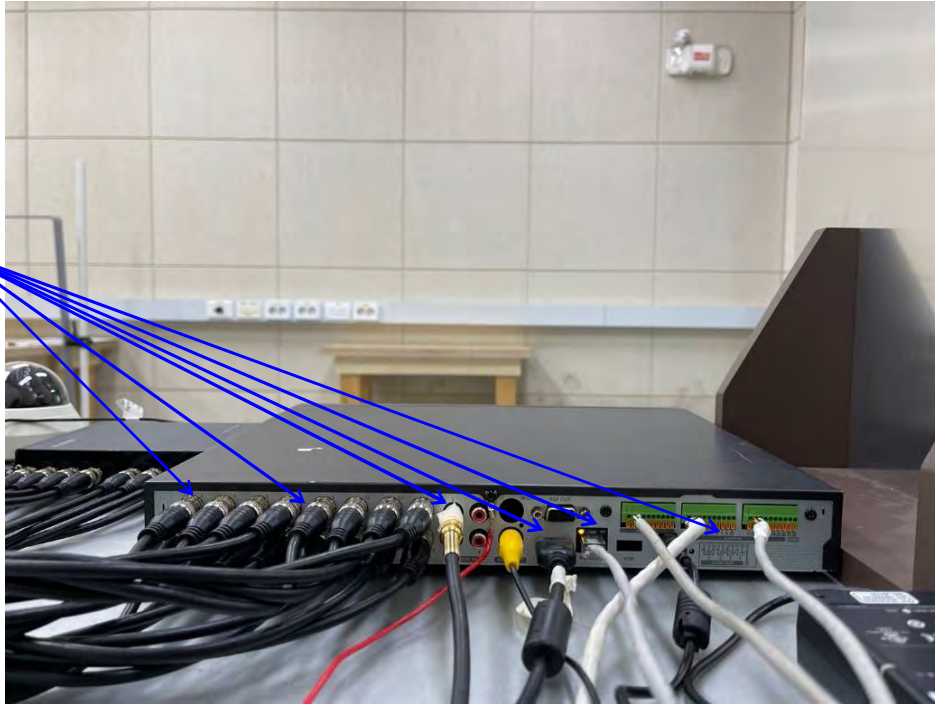

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (24) of (60)

Test Data

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1	Air Discharge	Complied	-
2	Enclosure 2	Contact Discharge	Complied	-
3	Port	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Apr. 02, 2021

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	9.12.00	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 05, 2021
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	04, 01, 2022
☒	CW POWER SENSOR	E4412A	Agilent	US38488240	04, 01, 2022
☒	CW POWER SENSOR	E4412A	Agilent	MY41501662	04, 01, 2022
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (23,6 ± 0,1) °C
Relative Humidity: (44,9 ± 0,3) % R.H.
Atmospheric Pressure: (99,7 ± 0,0) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (26) of (60)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (27) of (60)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

[Audio output function]

☐ Electrical Measurements / ☐ Acoustic Measurements

Measured parts	Test method	Level (dB)		Performance criteria	Observations	
		Criteria	Measured		Horizontal	Vertical
-	-	-	-	-	-	-

* The SOUND ACOUSTIC TESTER mark characteristics indicate low if less than 50 dB.

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Apr. 03, 2021

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 26, 2021

Test Conditions

Temperature: (23,7 ± 0,1) °C
Relative Humidity: (46,8 ± 0,3) % R.H.
Atmospheric Pressure: (99,4 ± 0,1) kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
RJ-485	Complied	Complied
Alarm OUT	Complied	Complied
Alarm IN	Complied	Complied
BNC1	Complied	Complied
BNC2	Complied	Complied
BNC3	Complied	Complied
BNC4	Complied	Complied
BNC5	Complied	Complied
BNC6	Complied	Complied
BNC7	Complied	Complied
BNC8	Complied	Complied
BNC9	Complied	Complied
BNC10	Complied	Complied
BNC11	Complied	Complied
BNC12	Complied	Complied
BNC13	Complied	Complied
BNC14	Complied	Complied
BNC15	Complied	Complied
BNC16	Complied	Complied



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0252

Page (30) of (60)

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0252

Page (31) of (60)

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Apr. 03, 2021

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 27, 2021

Test Conditions

Temperature: (23,7 ± 0,1) °C
Relative Humidity: (46,8 ± 0,3) % R.H.
Atmospheric Pressure: (99,4 ± 0,1) kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (32) of (60)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude : Common Mode
☒ (0,5 / 1,0 / 2,0) kV
Differential Mode
☒ (0,5 / 1,0) kV

Number of Surges: ☒ 5 surges per angle

Angle: ☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity: ☒ Positive & Negative

Repetition Rate: ☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common Mode

Surge Amplitude: Common Mode
☒ (0,5 / 1,0) kV

Number of Surges: ☒ 5 Surges

Polarity: ☒ Positive & Negative

Repetition Rate: ☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (33) of (60)

Test Data

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45	CDN	Complied	Complied
	LINE	Complied	Complied
BNC 1~16	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Apr. 02, 2021

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 25, 2021
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 25, 2021
☒	CDN	CDN M016	TESEQ	43694	11, 25, 2021
☒	CDN	CDN M016	TESEQ	43697	11, 25, 2021
☒	CDN	CDN T8RJ45	EM TEST	0909-09	08, 05, 2021
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 26, 2021

Test Conditions

Temperature: (23,8 ± 0,1) °C
Relative Humidity: (45,0 ± 0,2) % R.H.
Atmospheric Pressure: (99,7 ± 0,1) kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (35) of (60)

Test Data☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N – PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
RJ-485	Complied	Complied
Alarm OUT	Complied	Complied
Alarm IN	Complied	Complied
BNC1	Complied	Complied
BNC2	Complied	Complied
BNC3	Complied	Complied
BNC4	Complied	Complied
BNC5	Complied	Complied
BNC6	Complied	Complied
BNC7	Complied	Complied
BNC8	Complied	Complied
BNC9	Complied	Complied
BNC10	Complied	Complied
BNC11	Complied	Complied
BNC12	Complied	Complied
BNC13	Complied	Complied
BNC14	Complied	Complied
BNC15	Complied	Complied
BNC16	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (36) of (60)

Notes: CDN = Coupling Decoupling Network

"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

Apr. 03, 2021

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021

Test Conditions

Temperature: (23,7 ± 0,1) °C
Relative Humidity: (46,8 ± 0,3) % R.H.
Atmospheric Pressure: (99,4 ± 0,1) kPa



Test Specifications & Observations/Remarks

- Voltage Dips and Short Interruptions

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Conducted Emission
 Model No.: SPE-1620
 Phase: L1
 Mode:
 Operator Name: KES

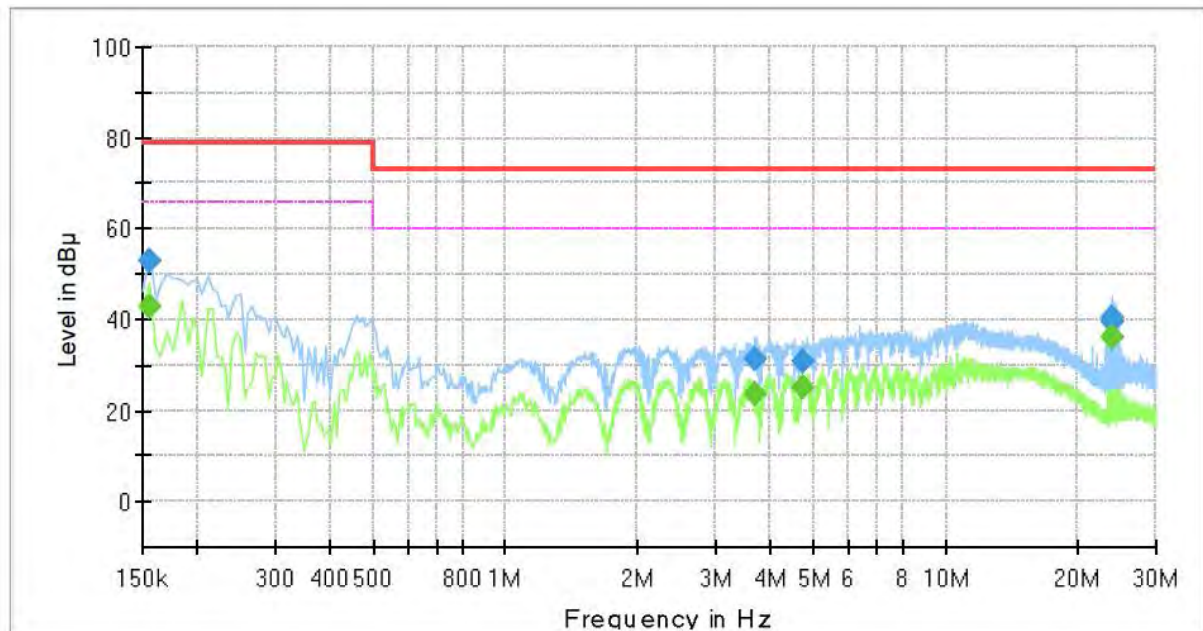


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	43.04	66.00	22.96	1000.0	9.000	L1	19.4
0.155000	52.94	---	79.00	26.06	1000.0	9.000	L1	19.4
3.685000	---	23.47	60.00	36.53	1000.0	9.000	L1	19.9
3.685000	31.47	---	73.00	41.53	1000.0	9.000	L1	19.9
4.720000	---	25.08	60.00	34.92	1000.0	9.000	L1	19.7
4.720000	31.05	---	73.00	41.95	1000.0	9.000	L1	19.7
23.980000	---	36.10	60.00	23.90	1000.0	9.000	L1	20.1
23.980000	39.62	---	73.00	33.38	1000.0	9.000	L1	20.1
24.015000	---	36.23	60.00	23.77	1000.0	9.000	L1	20.1
24.015000	40.48	---	73.00	32.52	1000.0	9.000	L1	20.1

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	SPE-1620
Phase:	N
Mode:	
Operator Name:	KES

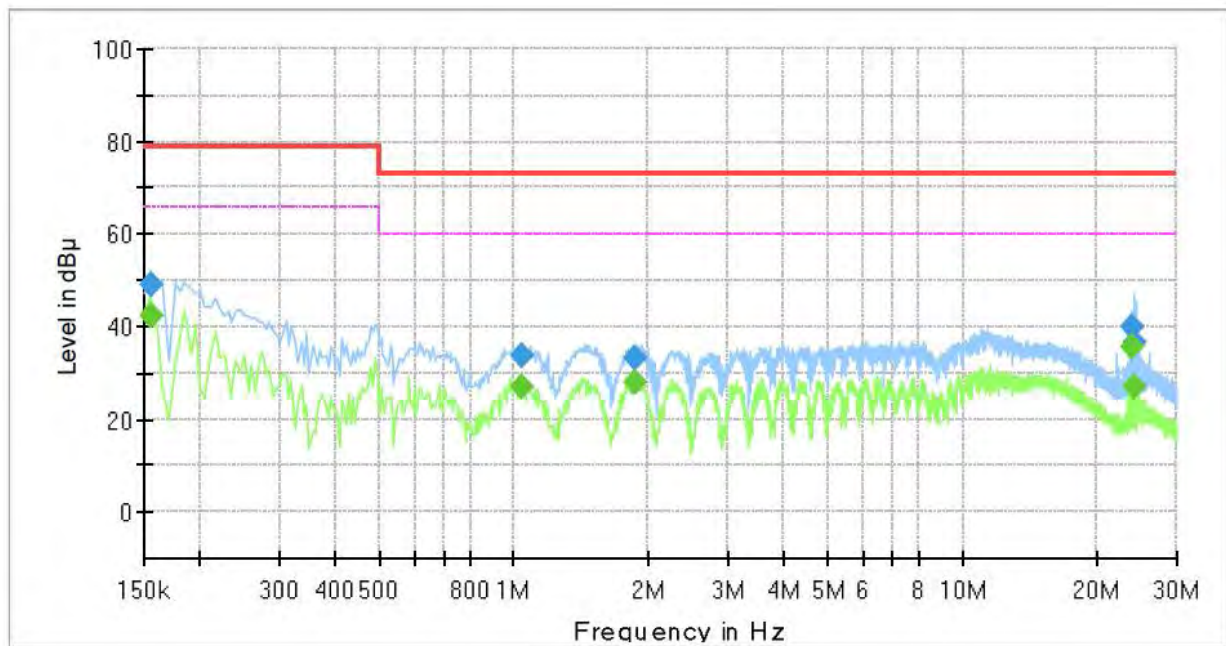

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	42.36	66.00	23.64	1000.0	9.000	N	19.4
0.155000	48.99	---	79.00	30.01	1000.0	9.000	N	19.4
1.035000	---	27.05	60.00	32.95	1000.0	9.000	N	20.0
1.035000	33.53	---	73.00	39.47	1000.0	9.000	N	20.0
1.870000	---	27.94	60.00	32.06	1000.0	9.000	N	20.2
1.870000	33.15	---	73.00	39.85	1000.0	9.000	N	20.2
24.015000	---	35.58	60.00	24.42	1000.0	9.000	N	20.1
24.015000	39.86	---	73.00	33.14	1000.0	9.000	N	20.1
24.120000	---	26.76	60.00	33.24	1000.0	9.000	N	20.1
24.120000	36.76	---	73.00	36.24	1000.0	9.000	N	20.1

♦ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Emissions at Telecommunication Ports

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	SPE-1620
Mode :	
Speed :	1 000 Mbps
Operator Name:	KES

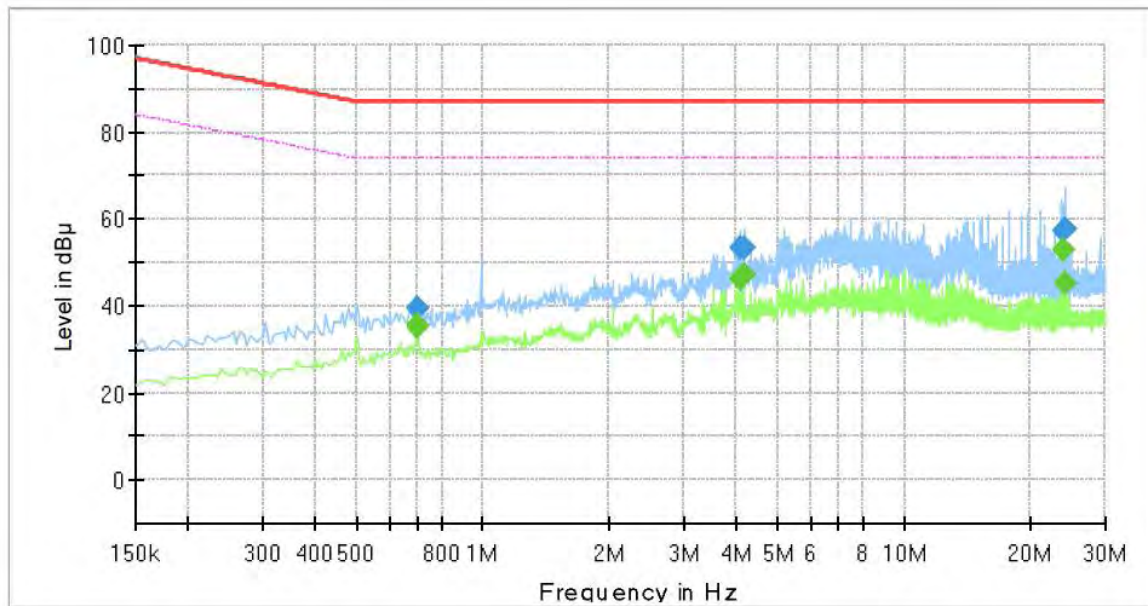

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.695000	---	35.73	74.00	38.27	1000.0	9.000	Single Line	19.9
0.695000	39.54	---	87.00	47.46	1000.0	9.000	Single Line	19.9
0.700000	---	35.19	74.00	38.81	1000.0	9.000	Single Line	19.9
0.700000	39.24	---	87.00	47.76	1000.0	9.000	Single Line	19.9
4.095000	---	46.14	74.00	27.86	1000.0	9.000	Single Line	19.6
4.095000	53.23	---	87.00	33.77	1000.0	9.000	Single Line	19.6
4.185000	---	47.16	74.00	26.84	1000.0	9.000	Single Line	19.6
4.185000	53.38	---	87.00	33.62	1000.0	9.000	Single Line	19.6
23.980000	---	53.14	74.00	20.86	1000.0	9.000	Single Line	19.9
23.980000	57.05	---	87.00	29.95	1000.0	9.000	Single Line	19.9
24.220000	---	45.16	74.00	28.84	1000.0	9.000	Single Line	19.9
24.220000	57.88	---	87.00	29.12	1000.0	9.000	Single Line	19.9

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

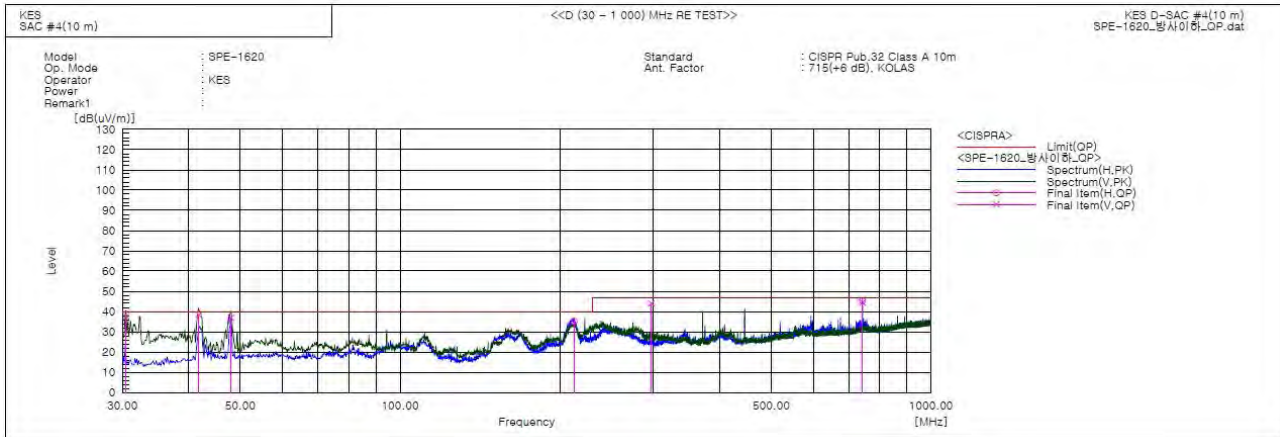

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	30.485	V	63.1	-25.3	37.8	40.0	2.2	100.0	136.0	
2	41.761	V	60.4	-22.0	38.4	40.0	1.6	325.0	260.0	
3	48.066	V	58.0	-21.1	36.9	40.0	3.1	112.0	273.0	
4	212.724	H	55.6	-20.4	35.2	40.0	4.8	381.0	174.0	
5	296.993	V	62.0	-18.0	44.0	47.0	3.0	105.0	219.0	
6	742.465	V	50.4	-5.9	44.5	47.0	2.5	369.0	168.0	
7	742.586	H	51.2	-5.9	45.3	47.0	1.7	396.0	310.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0252

Page (43) of (60)

Radiated Electric Field Emissions(Above 1 GHz)

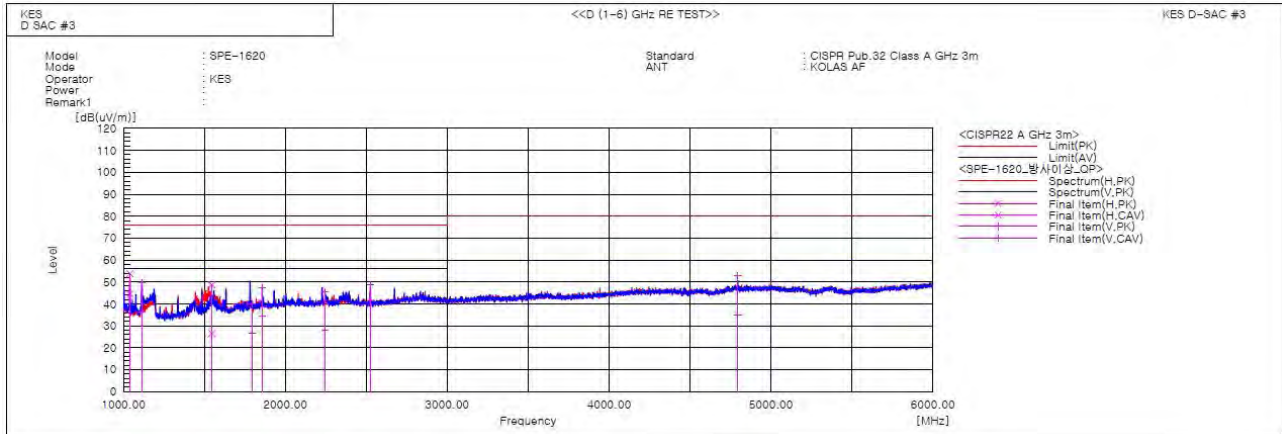

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1039.590	H	63.0	53.7	-9.3	53.7	44.4	76.0	56.0	22.3	11.6	100.0	42.6	
2	1114.030	V	58.9	45.1	-9.0	49.9	36.1	76.0	56.0	26.1	19.9	100.0	8.6	
3	1545.126	H	54.5	32.4	-5.9	48.6	26.5	76.0	56.0	27.4	29.5	100.0	42.5	
4	1793.358	V	42.9	29.6	-3.1	39.8	26.5	76.0	56.0	36.2	29.5	100.0	317.5	
5	1856.430	V	49.5	36.6	-2.3	47.2	34.3	76.0	56.0	28.8	21.7	100.0	349.9	
6	2245.157	V	46.1	28.6	-0.6	45.5	28.0	76.0	56.0	30.5	28.0	100.0	321.7	
7	2524.280	V	48.7	41.2	0.1	48.8	41.3	76.0	56.0	27.2	14.7	100.0	356.2	
8	4795.520	V	44.6	26.4	8.4	53.0	34.8	80.0	60.0	27.0	25.2	100.0	180.1	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.066			
2	0.003	0.318	1.080	n/a
3	0.060	2.624	2.300	PASS
4	0.003	0.796	0.430	n/a
5	0.059	5.179	1.140	PASS
6	0.004	1.436	0.300	n/a
7	0.058	7.503	0.770	PASS
8	0.003	1.414	0.230	n/a
9	0.056	14.114	0.400	PASS
10	0.003	1.685	0.184	n/a
11	0.054	16.472	0.330	PASS
12	0.003	2.068	0.153	n/a
13	0.052	24.651	0.210	PASS
14	0.003	2.354	0.131	n/a
15	0.049	32.582	0.150	PASS
16	0.003	2.511	0.115	n/a
17	0.046	34.703	0.132	PASS
18	0.003	2.789	0.102	n/a
19	0.043	36.087	0.118	PASS
20	0.003	2.935	0.092	n/a
21	0.039	24.380	0.161	PASS
22	0.003	3.248	0.084	n/a
23	0.036	24.462	0.147	PASS
24	0.002	3.220	0.077	n/a
25	0.032	23.976	0.135	PASS
26	0.002	3.241	0.071	n/a
27	0.029	23.092	0.125	PASS
28	0.002	3.447	0.066	n/a
29	0.025	21.837	0.116	PASS
30	0.002	3.262	0.061	n/a
31	0.022	20.098	0.109	PASS
32	0.002	3.236	0.058	n/a
33	0.019	18.269	0.102	PASS
34	0.002	3.087	0.054	n/a
35	0.016	16.116	0.096	PASS
36	0.001	2.761	0.051	n/a
37	0.013	13.789	0.091	PASS
38	0.001	2.737	0.048	n/a
39	0.010	11.581	0.087	PASS
40	0.001	2.390	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0252

Page (45) of (60)

Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.067			
2	0.004	0.246	1.620	n/a
3	0.061	1.761	3.450	PASS
4	0.004	0.641	0.645	n/a
5	0.060	3.501	1.710	PASS
6	0.005	1.149	0.450	PASS
7	0.058	5.064	1.155	PASS
8	0.004	1.099	0.345	n/a
9	0.057	9.487	0.600	PASS
10	0.004	1.567	0.276	n/a
11	0.055	11.089	0.495	PASS
12	0.004	1.570	0.230	n/a
13	0.052	16.539	0.315	PASS
14	0.004	1.802	0.197	n/a
15	0.049	21.845	0.225	PASS
16	0.003	2.011	0.173	n/a
17	0.046	23.345	0.199	PASS
18	0.003	2.151	0.153	n/a
19	0.043	24.157	0.178	PASS
20	0.003	2.376	0.138	n/a
21	0.039	24.525	0.161	PASS
22	0.003	2.489	0.125	n/a
23	0.036	24.586	0.147	PASS
24	0.003	2.490	0.115	n/a
25	0.033	24.116	0.135	PASS
26	0.003	2.495	0.106	n/a
27	0.029	23.259	0.125	PASS
28	0.003	2.799	0.099	n/a
29	0.026	22.015	0.116	PASS
30	0.002	2.482	0.092	n/a
31	0.022	20.302	0.109	PASS
32	0.002	2.550	0.086	n/a
33	0.019	18.392	0.102	PASS
34	0.002	2.403	0.081	n/a
35	0.016	16.261	0.096	PASS
36	0.002	2.162	0.077	n/a
37	0.013	14.084	0.091	PASS
38	0.002	2.091	0.073	n/a
39	0.010	11.804	0.087	PASS
40	0.001	1.894	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0252
Page (46) of (60)

Test Data - Voltage Fluctuations


Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

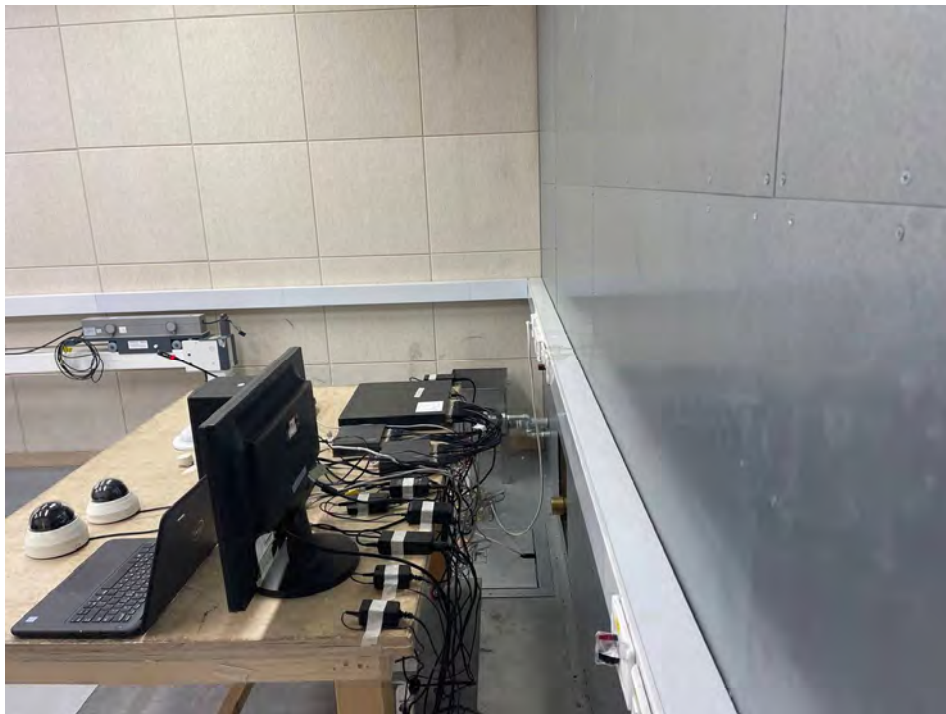


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Emissions at Telecommunication Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

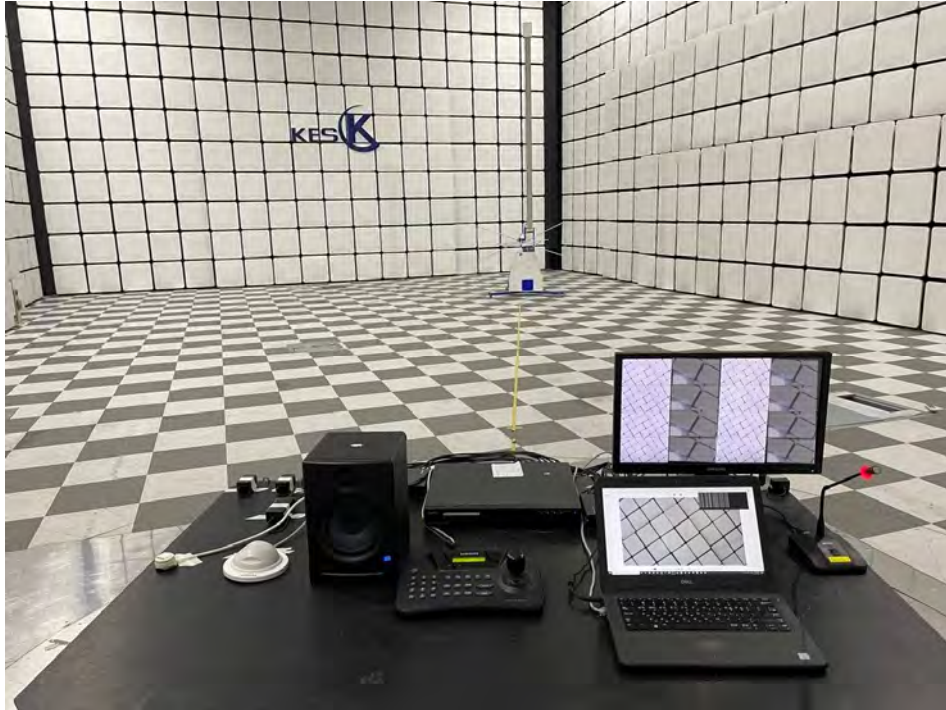

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

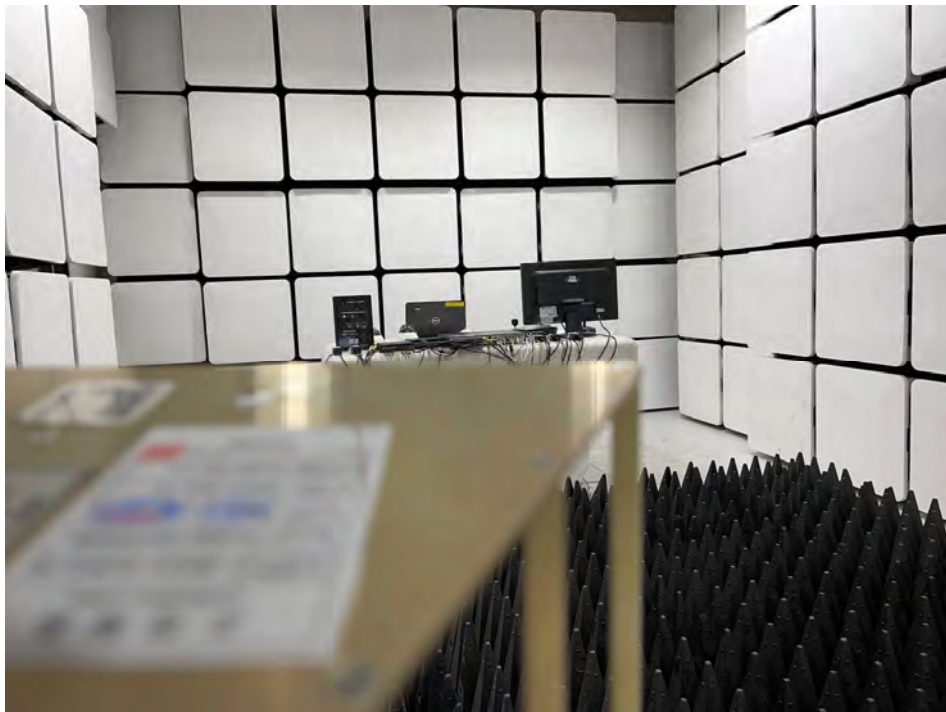

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrostatic Discharge



Radiated Electric Field Immunity

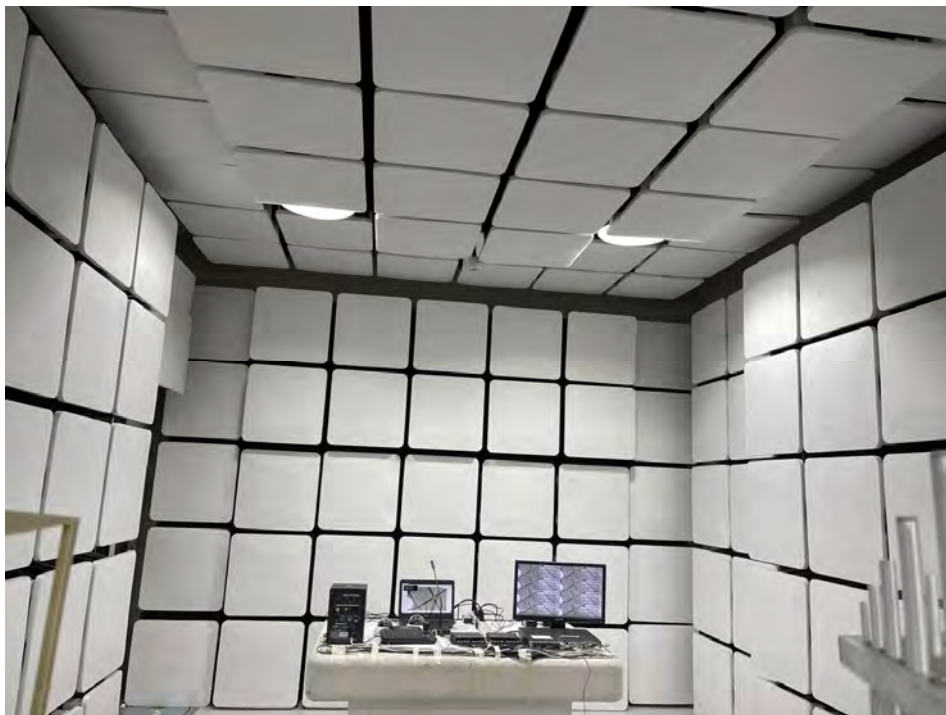

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 1

(Top)

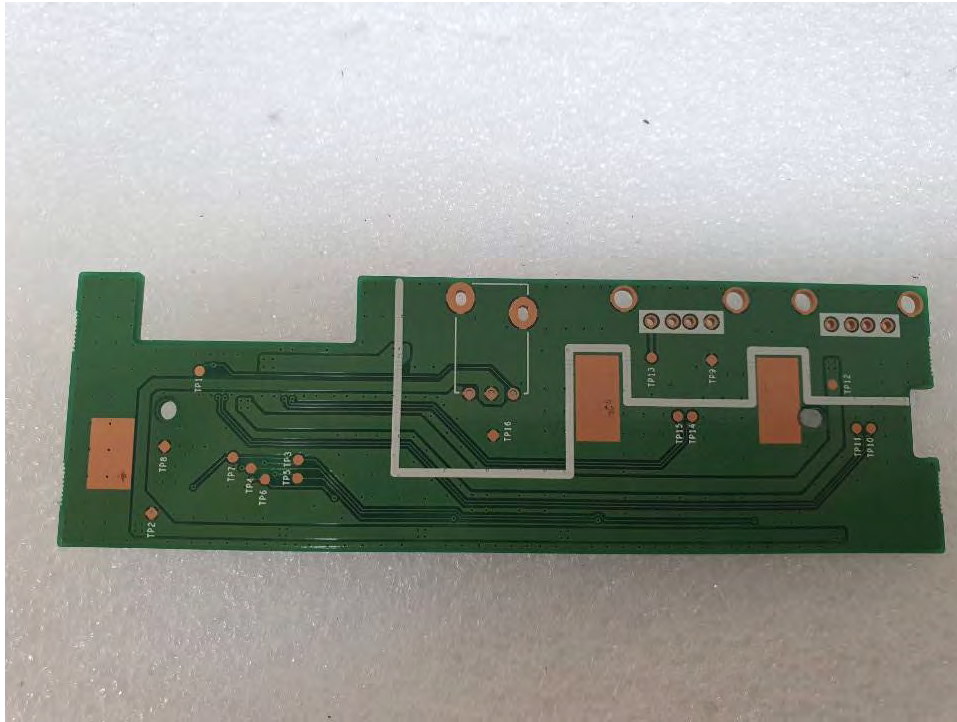


(Bottom)

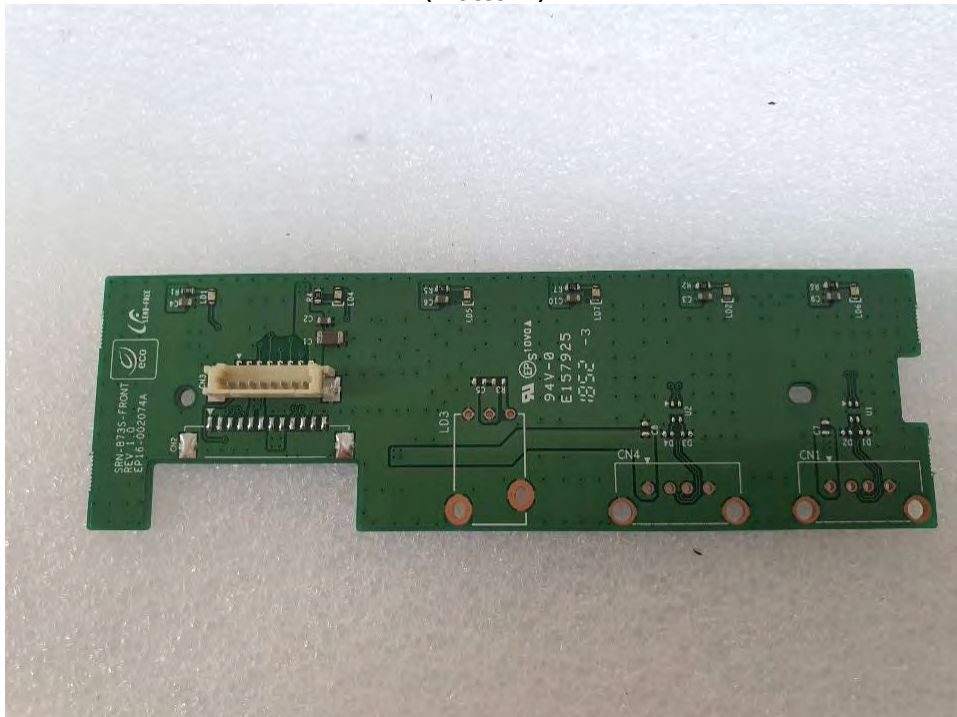


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 2

(Top)

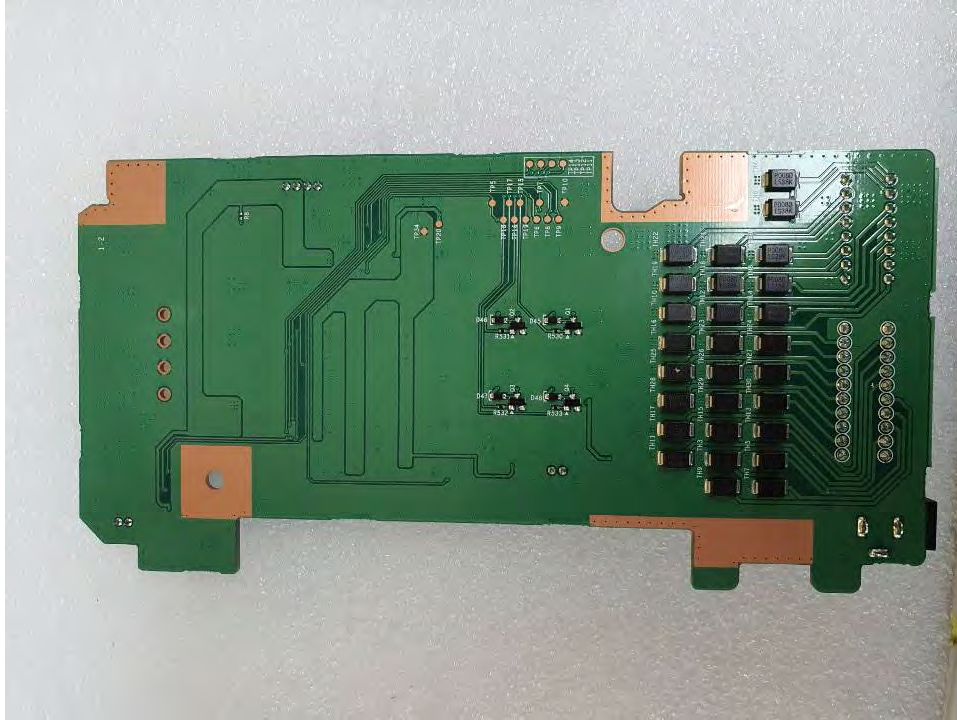


(Bottom)

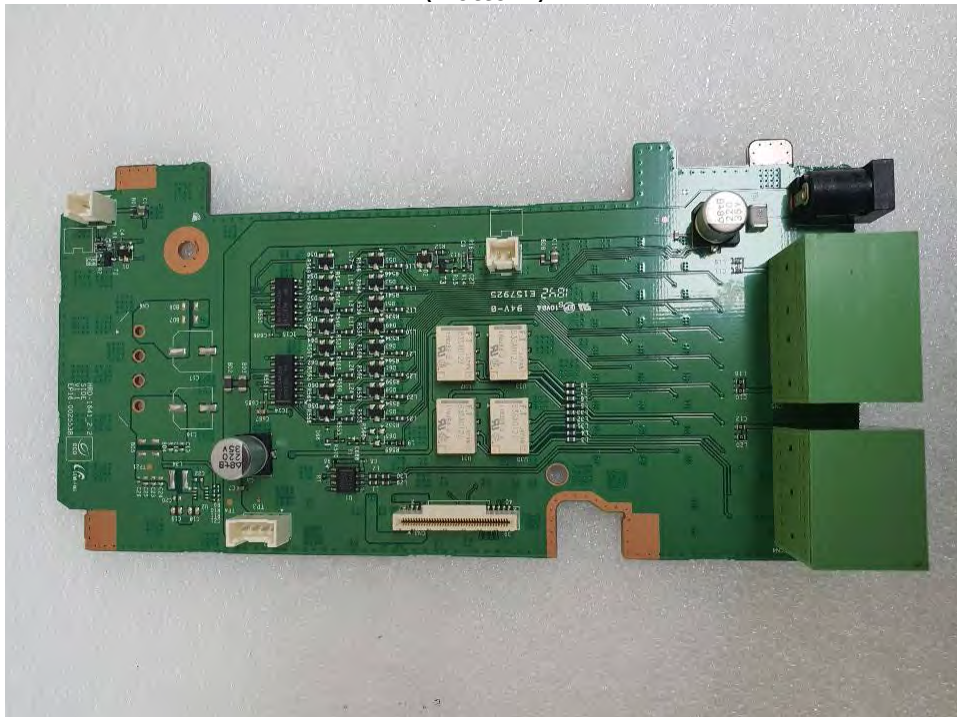


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 3

(Top)

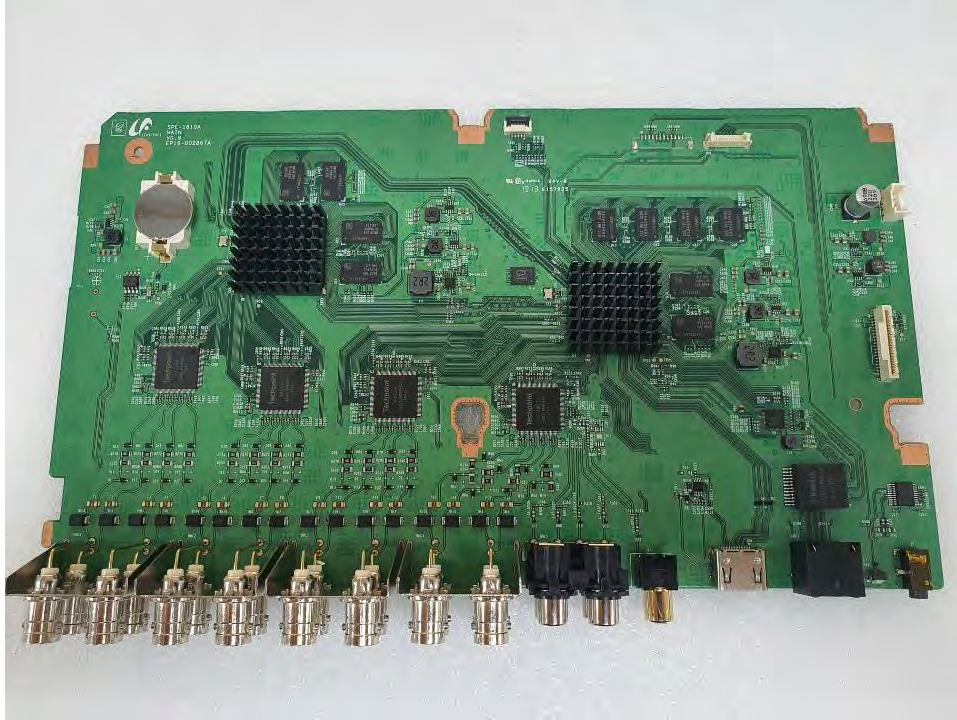


(Bottom)

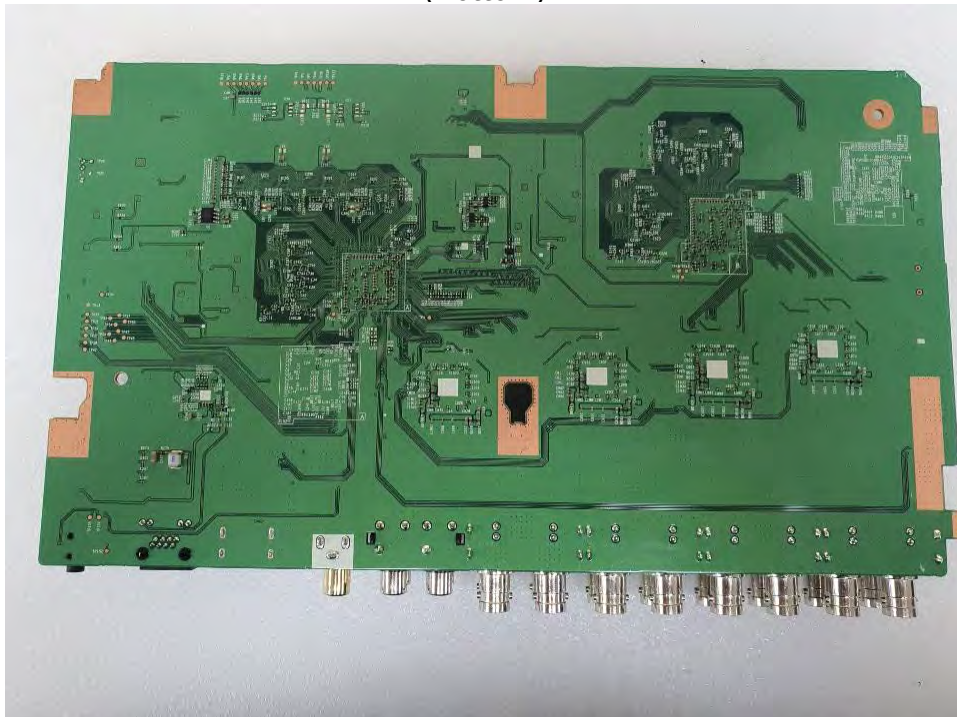

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label and Location

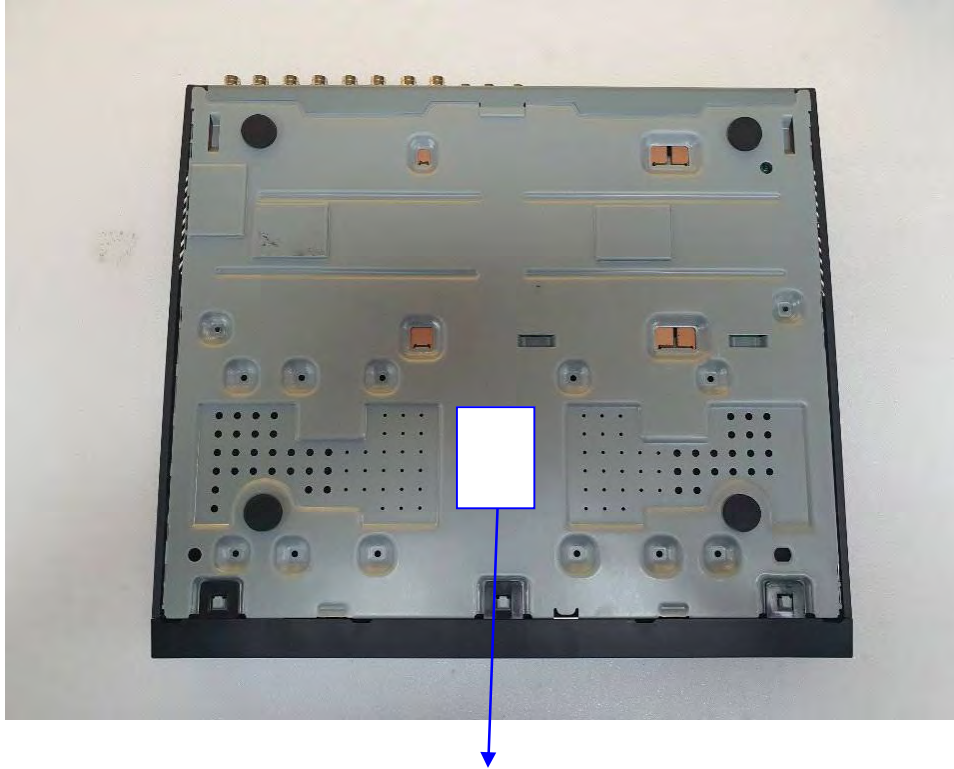

NETWORK VIDEO ENCODER

Model No : SPE-1620

Manufacturer : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.

Made in Vietnam

