

SPE-420

Codificador de video de 4 canales

Key Features

- Resolución máxima: 5MP
- Velocidad de fotogramas máxima: 12fps@5MP
- Compatibilidad con codecs H.265, H.264, MJPEG
- Transmisión múltiple (hasta 2 perfiles por CH)
- 1 RJ-45 10/100 Base-T

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPE-420

Codificador de video de 4 canales





Specifications

Vídeo

Canal de entrada	4 canales de vídeo BNC , 1,0 Vp-p / 75Ω compuesto NTSC/PAL
Señal de entrada y resolución	CVBS, AHD/CVI/TVI (1, 2, 4, 5 MP) detección automática
Salida de vídeo	1 SALIDA HDMI (4 imágenes múltiples, 1920 x 1080)

Operativo

Detección de movimiento	Apagado / encendido
Máscara de privacidad	Apagado / encendido (4 zonas rectangulares)
Desentrelazado	Soporte
Alarma de E / S	4 entradas/2 salidas (1 NA/COM/NC, 1 NA/COM)
Activadores de alarma	Detección de movimiento, entrada de alarma, pérdida de vídeo, manipulación y desconexión de red
Eventos de alarma	Carga de archivos por FTP y correo electrónico
Audio E/S	4 Entradas / 1 salida
OSD	Título, Fecha (A/M/D), Hora (H/M)
Interfaz de control remoto	1 RS-485 (Half Duplex)
Protocolo RS-485	Samsung-T y Pelco-P/D
Control coaxial	CVBS (Pelco-C) AHD, TVI, CVI

Red

Ethernet	1 RJ-45 10/100 Base-T
Formato de compresión de vídeo	H.265 / H.264 (MPEG-4 Parte 10/AVC) : Principal / Base / Alta; MJPEG
Resolución	2560x1920, 2560x1440, 1920x1080, 1280x720, 928x480(N), 928x240(N), 704x480(N), 704x240(N), 640x368, 352x240(N) 928x576(P), 928*288(P), 704x576(P), 704x288(P), 640x368, 352x288(P)
Máx. Frecuencia de cuadro	- Flujo principal, - MJPEG: 2 ips @ 640x368, 352x240,
Método de control del Bitrate	H.265 / H.264: CBR o VBR
Capacidad de flujo de datos	Flujo de datos múltiple (hasta 2 perfiles por canal)
Compresión de audio	G.711 u-law
IP	IPv4 e IPv6

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Red

Protocolo	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, ONVIF, Bonjour
Seguridad	Autenticación de inicio de sesión HTTPS (SSL)
Método de flujo de datos	Unicast / Multicast
Máx. Acceso de usuario	máx. 16 usuarios (4 usuarios por canal) en modo Unicast
Idioma de la página web	Inglés, francés, alemán, italiano, español, ruso, turco, polaco, neerlandés, sueco, checo, portugués, japonés, chino, coreano, húngaro y griego
Visor web	S.O. compatibles: Windows 10 o posterior, Windows 7, 8, 10, Mac OS X 10.13 o posterior, Navegador compatible con visor web sin plug-in
Interfaz de programación de la aplicación	ONVIF perfil S y SUNAPI (HTTP API)
Software y grabadores compatibles	SmartViewer, SSM, NVR (Hanwha Vision, series P/X/Q/L)

Medioambiental

Temperatura / humedad operativas	0°C ~ +50°C / 20% ~ 80% HR

Eléctrico

Voltaje / corriente de entrada	12VCC, PoE (IEEE 802.3af)
Consumo de corriente	MÁX: 5W (12V, 0,417A)

Mecánico

Color / Metálico	Gris oscuro / Metálico
Dimensiones (An. x Al. x L.)	178,0 × 34,0 × 127,8 (incluye conector 148,7) mm
Peso	520 g (1,15 lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPE-420


Codificador de video de 4 canales





CAD

Unit: mm [inch]

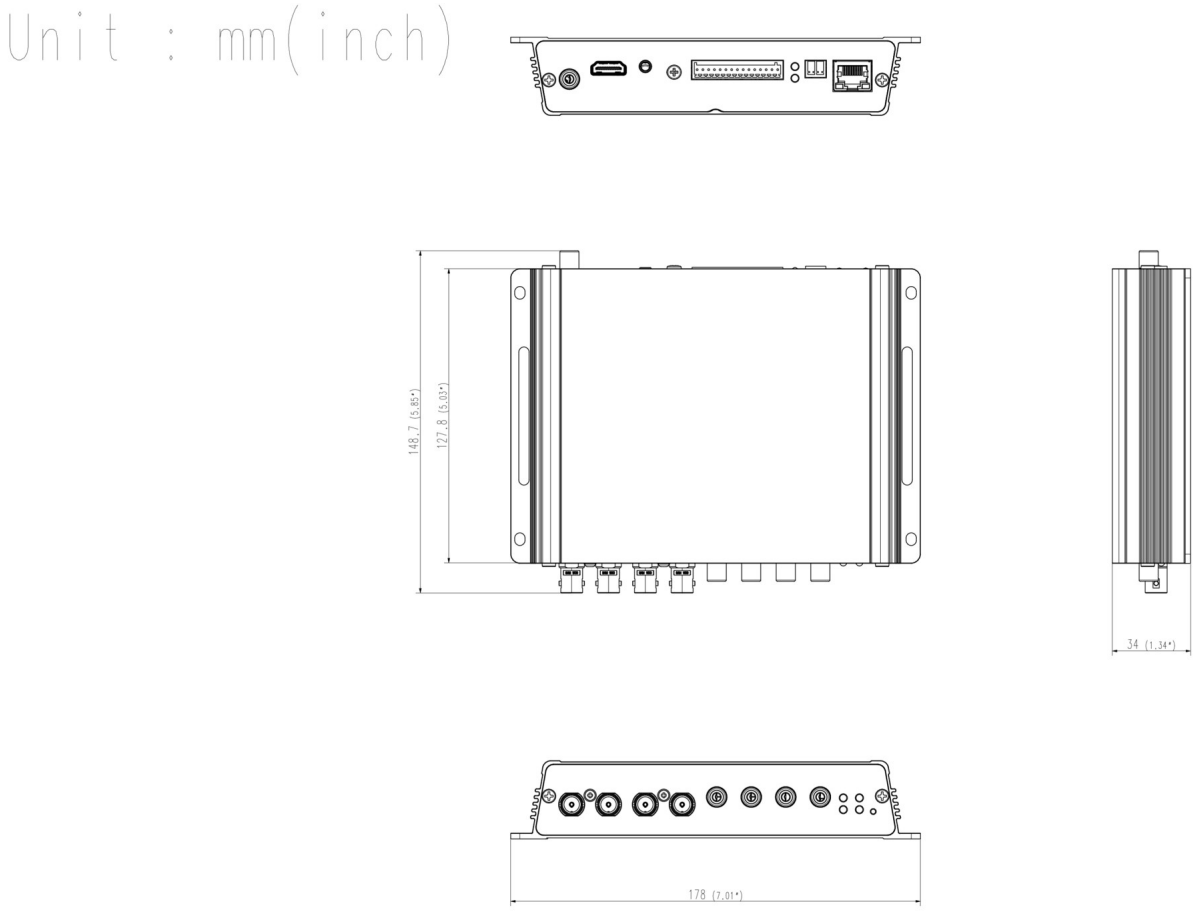

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.