

SPE-420

4 Kanallı Video Kodlayıcı

Key Features

- Maksimum çözünürlük: 5MP
- Maksimum kare hızı: 12fps@5MP
- H.265, H.264, MJPEG kodlama desteği
- Çoklu akış (her CH için en fazla 2 profil)
- 1 RJ-45 10/100 Base-T

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPE-420

4 Kanallı Video Kodlayıcı



Specifications

Video

Giriş Kanalı	4KN BNC, 1.0 Vp-p / 75Ω kompozit NTSC/PAL
Giriş Sinyali ve Çözünürlük	CVBS, AHD/CVI/TVI (1, 2, 4, 5MP) Otom. Algılama
Video Çıkışı	1 HDMI ÇIKIŞI (4 çoklu Görüntü, 1920x1080)

İşletimsel

Hareket Algılama	Kapalı / Açık
Gizlilik Maskesi	Kapalı / Açık (4 dikdörtgen bölge)
Görüntü Ayrıştırma	Destek
Alarm G/Ç	4 Giriş / 2 Çıkış(1 NO/COM/NC, 1 NO/COM)
Alarm Tetikleyicisi	Hareket Algılama, Alarm girişi, Video kaybı, Kurcalama, Ağ bağlantısı kesme
Alarm Olayları	FTP, E-posta üzerinden dosya yükleme
Ses Giriş/Çıkışı	4 Hat Giriş / 1 Hat Çıkış
OSD	Başlık, Tarih(Y/Ay/Gün), Saat(Saat/Dakika)
Uzaktan Kontrol Arayüzü	1 RS-485 (Yarı Dubleks)
RS-485 Protokolü	SAMSUNG-T, PELCO-P/D
Koaksiyel Kontrol	CVBS(Pelco-C) AHD, TVI, CVI

Ağ

Ethernet	1 RJ-45 10/100 Base-T
Video Sıkıştırma Biçimi	H.265, H.264 (MPEG-4 Part 10/AVC) : Ana / Temel / Yüksek, MJPEG
Çözünürlük	2560x1920, 2560x1440, 1920x1080, 1280x720, 928x480(N), 928x240(N), 704x480(N), 704x240(N), 640x368, 352x240(N) 928x576(P), 928*288(P), 704x576(P), 704x288(P), 640x368, 352x288(P)
En Fazla Kare hızı	- Ana Akış, - MJPEG : 2fps @ 640x368, 352x240,
Bit Hızı Kontrol Yöntemi	H.265, H.264 : CBR veya VBR
Yayın Akış Kapasitesi	Çoklu Yayın Akışı (Kanal başına 2 profile kadar)
Ses Sıkıştırma	G.711 u-law
IP	IPv4, IPv6

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Ağ

Protokol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, ONVIF, Bonjour
Güvenlik	HTTPS (SSL) Giriş Kimlik Doğrulaması,
Yayın Akışı Yöntemi	Unicast / Multicast
En Fazla Kullanıcı Erişimi	Unicast Modunda en fazla 16 kullanıcı (4 Kullanıcı/KN)
Web Sayfası Dili	İngilizce, Fransızca, Almanca, İspanyolca, İtalyanca, Rusça, Türkçe, Lehçe, Flemenkçe, İsveççe, Portekizce, Çekçe, Çince, Japonca, Korece, Macarca, Yunanca
Web Görüntüleyici	Desteklenen İS: Windows 10 veya üzeri,Windows 7,8,10,Mac OS X 10.13 veya üzeri, Eklentisiz WebViewer Destekli Tarayıcı :
Uygulama Programlama Arayüzü	ONVIF profil S, SUNAPI (HTTP API)
Uyumlu Yazılım ve Kaydedici	SmartViewer, SSM, NVR(Hanwha Techwin, P/X/Q/L serisi)

Çevresel

Çalışma Sıcaklığı / Nem Oranı	0°C ~ +50°C / %20 ~ %80 BN

Elektriksel

Giriş Gerilimi / Akımı	DC12V, PoE(IEEE 802.3af)
Güç Tüketimi	EN FAZLA: 5W (12V, 0,417A)

Mekanik

Renk/Metal	Koyu Gri / Metal
Ebatlar (GxYxD)	178,0 × 34,0 × 127,8 (Konektör 148,7 dahil)mm
Ağırlık	520 g (1,15 lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SPE-420


4 Kanallı Video Kodlayıcı





CAD

Unit: mm [inch]

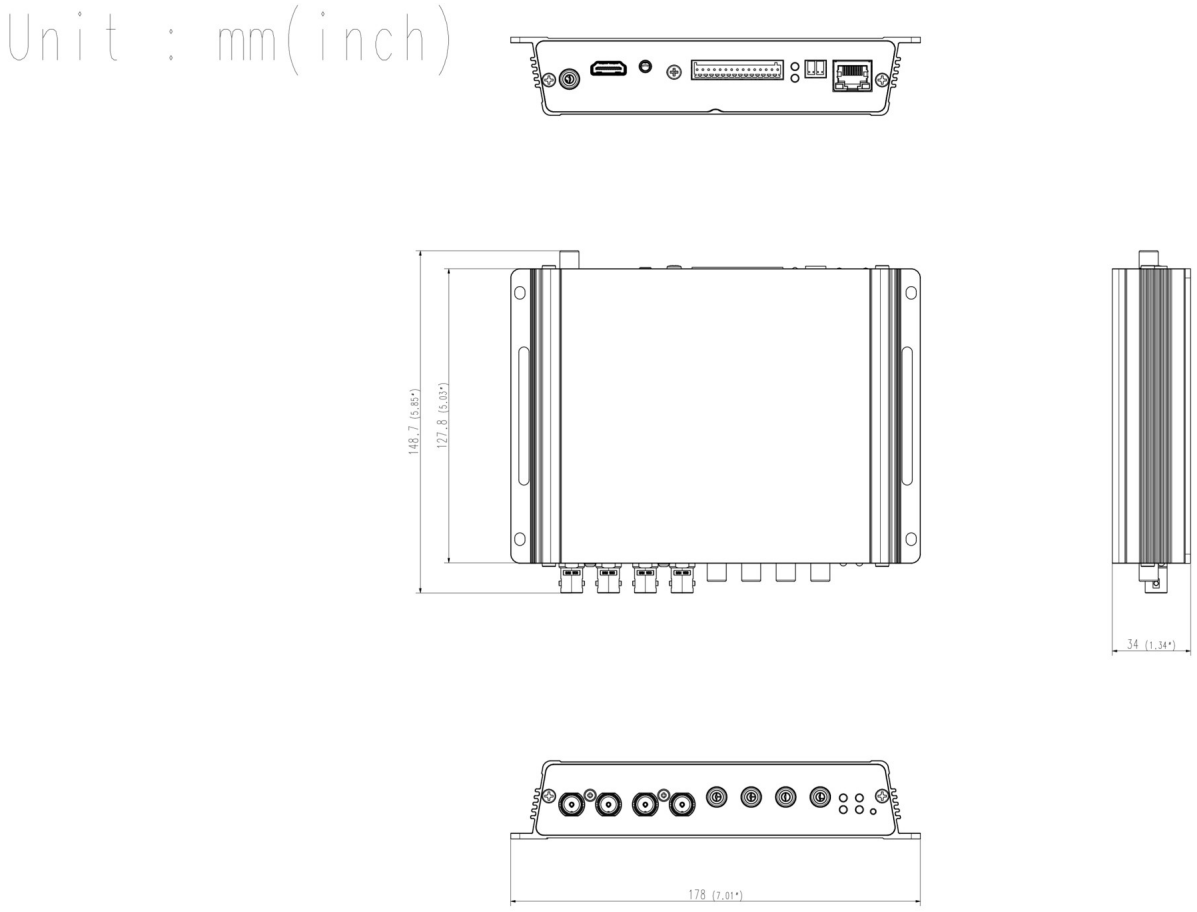

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.