



TEST REPORT



Report No. : KES-EM252985-R1

Page 1 / 22

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

1. Client

- Name : Hanwha Vision Co., Ltd.
- Address : 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

- Product item : LED MODULE
- Model name : SPI-BRN0
- Variant model : SPI-BRM0, SPI-BRM1, SPI-BRW0
- Manufacturer etc. : HANWHA VISION VIETNAM COMPANY LIMITED
- Manufacturer address : Lot O-2, Que Vo Industrial Zone Extended Area, Nam Son Ward, Bac Ninh Province, Vietnam
- Manufacturer etc. : D-TECH CO.,LTD.
- Manufacturer address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

3. Date of test : 2025. 09. 01. ~ 2025. 09. 01.

4. Location of Test : Permanent Testing Lab

- Address : 473-21, Gayeo-ro, Yeuju-si, Gyeonggi-do, 12658, Republic of Korea

5. Test method used : FCC 47 CFR Part 15, Subpart B (ANSI C63.4a-2017),
IC ICES-003 Issue 7 (ANSI C63.4a-2017)

6. Test result : PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager by
	Name : EunGu Jeon	Name : DongHun Jang

2025. 10. 22.

KES Co., Ltd.

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
2025. 09. 09.	KES-EM252985	Issued
2025. 10. 22.	KES-EM252985-R1	Reissue due to addition of derivatives

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

Use of uncertainty of measurement for decisions on conformity (decision rule):

- ☒ No decision rule is specified by the standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty("simple acceptance" decision rule, previously known as "accuracy method").
- ☐ Other (to be specified, for example when required by the standard or client)



TABLE OF CONTENTS

1	Laboratory Information	4
1.1	Test Location	4
1.2	Laboratory Accreditations and Listings	4
2	Test Summary	5
2.1	Class and Voltage	5
2.2	Summary of Test Results	5
2.3	Remarks when standards applied	5
2.4	Variant Model Differences	5
2.5	Device Modifications	5
3	General Product Description	6
4	EUT Setup and Operation Mode	7
4.1	EUT Configuration	7
4.2	System Configuration	7
4.3	External I/O Cabling	8
4.4	EUT Operating Mode(s)	8
4.5	Test operating S/W	8
4.6	Configuration	9
5	Measurement Procedure	10
6	Test Item	11
6.1	Conducted Emissions at Mains Power Ports	11
6.2	Radiated Emissions(Below 1 GHz).....	14
7	Test Setup Photos and EUT Photographs.....	17
7.1	Test Setup Photos	17
7.2	EUT Photographs.....	19
7.3	Label.....	22



1 Laboratory Information

1.1 Test Location

Category	Details
Address	473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Republic of Korea
Telephone Number	070-4910-6200
Facsimile Number	031-341-3838

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0008



2 Test Summary

2.1 Class and Voltage

Test Class	Test Voltage
Class A	AC 120 V, 60 Hz

2.2 Summary of Test Results

Regulation
47 CFR Part 15, Subpart B , ICES-003 Issue 7

Test Item	Test Standard	Test Result	Remark
Conducted Emissions at Mains Power Ports	ANSI C63.4a-2017	PASS	-
Radiated Emissions(Below 1 GHz)		PASS	-
Radiated Emissions(Above 1 GHz)		N/A	NOTE 1
* N/A: Not Applicable (NOTE 1) The maximum operating frequency is below 108 MHz.			

2.3 Remarks when standards applied

N/A

2.4 Variant Model Differences

- LED Lens difference for wide angle adjustment

Model name	Divergence angle
SPI-BRN0	12°
SPI-BRM0	25°
SPI-BRM1	43°
SPI-BRW0	60°

2.5 Device Modifications

N/A



3 General Product Description

Division		Specificity
Internal maximum operating frequency		120 Hz
Power		DC 24 V
Test Power		AC 220 V, 60 Hz
I/P Port		LED DRIVER 1 EA
Unused Port		N/A
Function	Product Features	LED MODULE
	Wireless Function	N/A
Components		EUT 1 EA

Model	SPI-BRN0
Electrical Input	24 VDC $\pm$ 10%
Max. Power Consumption	6.9 W
Wavelength	617nm
LED Quantity	16EA
Angle	FWHM : 12° 10-% : 32°
Operation Temperature / Humidity	-40°C ~ +55°C / 0~95% RH
Storage Temperature / Humidity	-40°C ~ +60°C / Less than 95% RH
Dimension	W101.2 x D53.8 x H78.2
Weight	200g
Ingress level	IP66, IP67(camera and front cover must be assembled)
Certification	FCC, UL, CE, KC, IEC 62471



4 EUT Setup and Operation Mode

4.1 EUT Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
LED MODULE	SPI-BRN0	-	Hanwha Vision Co., Ltd.	EUT
BARCODE READER	TNS-7000M	-	Hanwha Vision Co., Ltd.	-
Laptop	P95G001	9JM8HT2	DELL INC.	-
Laptop Adapter	HA65NM130	-	Chicony Power Technology(Suzhou)Co.,Ltd.	-
Micro SD Card	-	-	-	-
Switching Power Supply	LRS-350-24	-	MEAN WELL Enterprises Co., Ltd.	-

4.2 System Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
-	-	-	-	-



4.3 External I/O Cabling

Mode 1

Start		End		Cable Spec.	
Product Name	I/O Port	Product Name	I/O Port	Length(m)	Shield
LED MODULE (EUT)	LED DRIVER	BARCODE READER	LED DRIVER	-	-
BARCODE READER	12 Pin	Switching Power Supply	DC OUT	5.0	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
	8 Pin	Laptop	RJ-45	2.0	S
Laptop	DC Jack	Laptop Adapter	Line	1.5	U

* Unshielded=U, Shielded=S

4.4 EUT Operating Mode(s)


Category	Mode	Operating
Mode 1	Operation	Check the operation of BARCODE READER through the laptop's web viewer and check the LED operation of EUT.

4.5 Test operating S/W

Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd.



4.6 Configuration

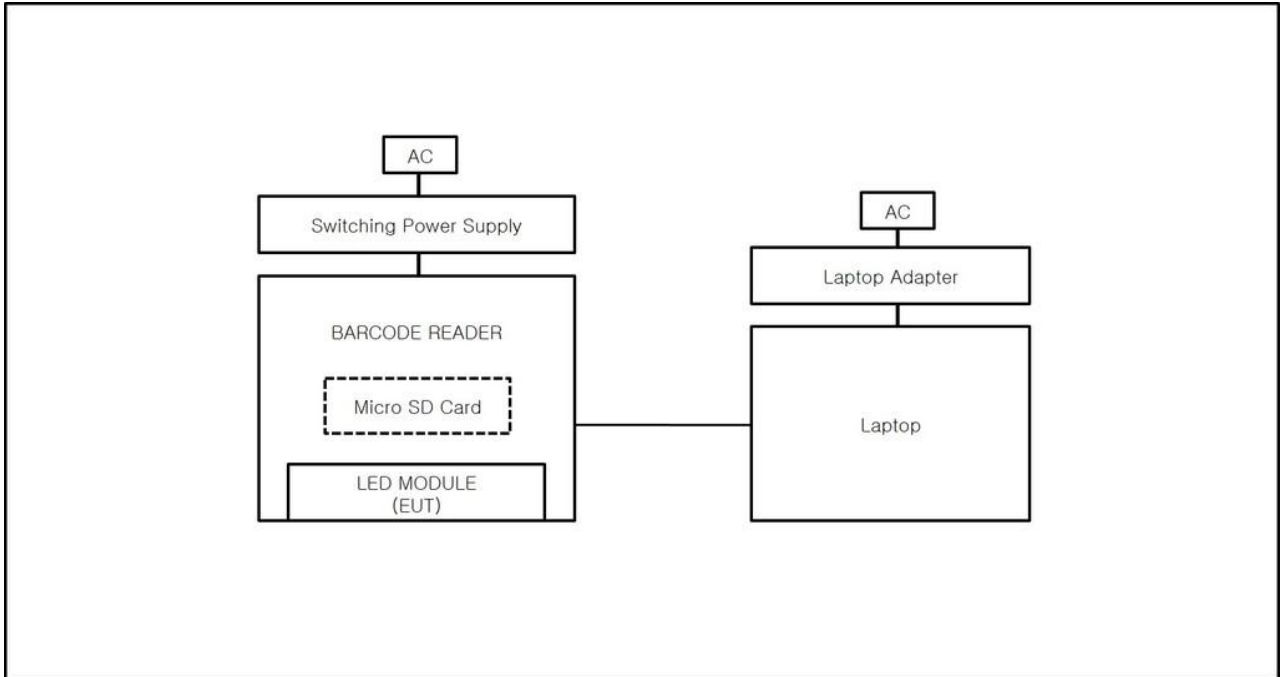

Mode 1



5 Measurement Procedure

- Conducted Emissions

The conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP".

- Radiated Electric Field Emissions

The test was done at a SEMI ANECHOIC CHAMBER with quasi-peak detector. The final test data was measured using a Quasi-Peak detector below 1 GHz at 10 m or 3 m distance and a Peak and Average detector above 1 GHz at 3 m distance. Test was proceeded worst case test mode and cable configuration. Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency.

Measurement procedures was In accordance with ANSI C63.4 or CISPR 32.



6 Test Item

6.1 Conducted Emissions at Mains Power Ports

6.1.1 Test Equipment


Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #6	-	DYMSTEC	-	-	-	■
EMC32 Measurement Software	EMC32	R&S	9.12.00	-	-	■
EMI TEST RECEIVER	ESR3	Rohde & Schwarz	101783	2024-11-06	2025-11-06	■
LISN	ENV216	Rohde & Schwarz	101786	2025-01-09	2026-01-09	■
ARTIFICIAL MAINS NETWORK	ESH2-Z5	Rohde & Schwarz	100450	2024-11-06	2025-11-06	■
PULSE LIMITER	ESH3-Z2	Rohde & Schwarz	101915	2024-11-06	2025-11-06	■

6.1.2 Test Location : SHIELD ROOM #6

6.1.3 Test Conditions :

Temperature	Relative Humidity
(26.4 ~ 26.6) °C	(58.3 ~ 58.5) % R.H.

6.1.4 Diagram of test setup

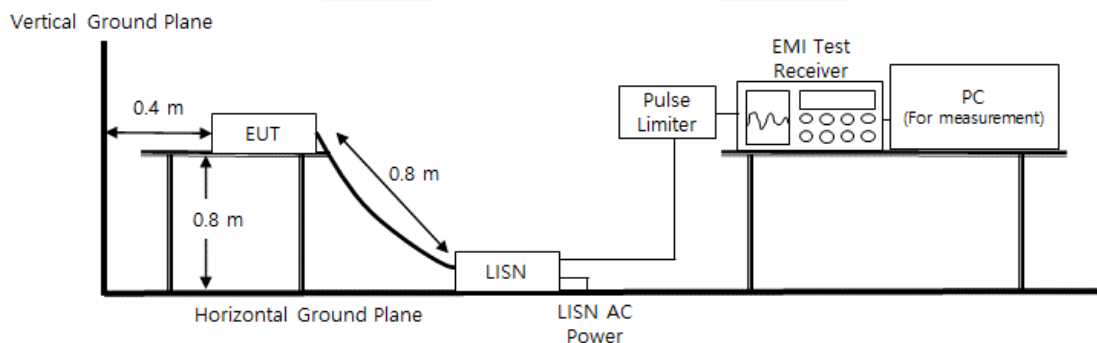




6.1.5 Test Result

- Test Date : 2025-09-01
- Test Mode : Mode 1

Test Report

Common Information

Test Description: Conducted Emission
Job No.: KES-EM252985
Phase: L
Mode:
Operator Name: KES

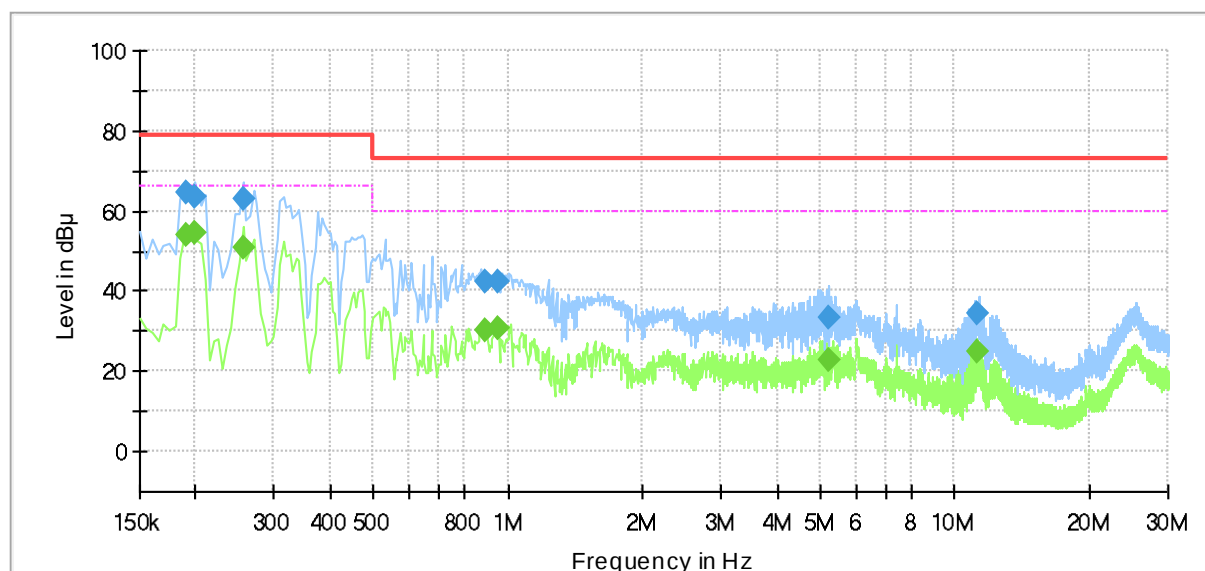

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.190000	64.71	—	79.00	14.29	1000.0	9.000	L1	19.5
0.190000	—	54.19	66.00	11.81	1000.0	9.000	L1	19.5
0.200000	—	54.53	66.00	11.47	1000.0	9.000	L1	19.5
0.200000	63.64	—	79.00	15.36	1000.0	9.000	L1	19.5
0.255000	62.90	—	79.00	16.10	1000.0	9.000	L1	19.5
0.255000	—	50.90	66.00	15.10	1000.0	9.000	L1	19.5
0.890000	—	30.44	60.00	29.56	1000.0	9.000	L1	19.6
0.890000	42.50	—	73.00	30.50	1000.0	9.000	L1	19.6
0.955000	—	30.69	60.00	29.31	1000.0	9.000	L1	19.6
0.955000	42.58	—	73.00	30.42	1000.0	9.000	L1	19.6
5.210000	—	22.83	60.00	37.17	1000.0	9.000	L1	19.9
5.210000	33.18	—	73.00	39.82	1000.0	9.000	L1	19.9
11.275000	—	24.78	60.00	35.22	1000.0	9.000	L1	20.1
11.275000	34.47	—	73.00	38.53	1000.0	9.000	L1	20.1




○ Test Date : 2025-09-01

● Test Mode : Mode 1

Test Report

Common Information

Test Description: Conducted Emission
Job No.: KES-EM252985
Phase: N
Mode:
Operator Name: KES

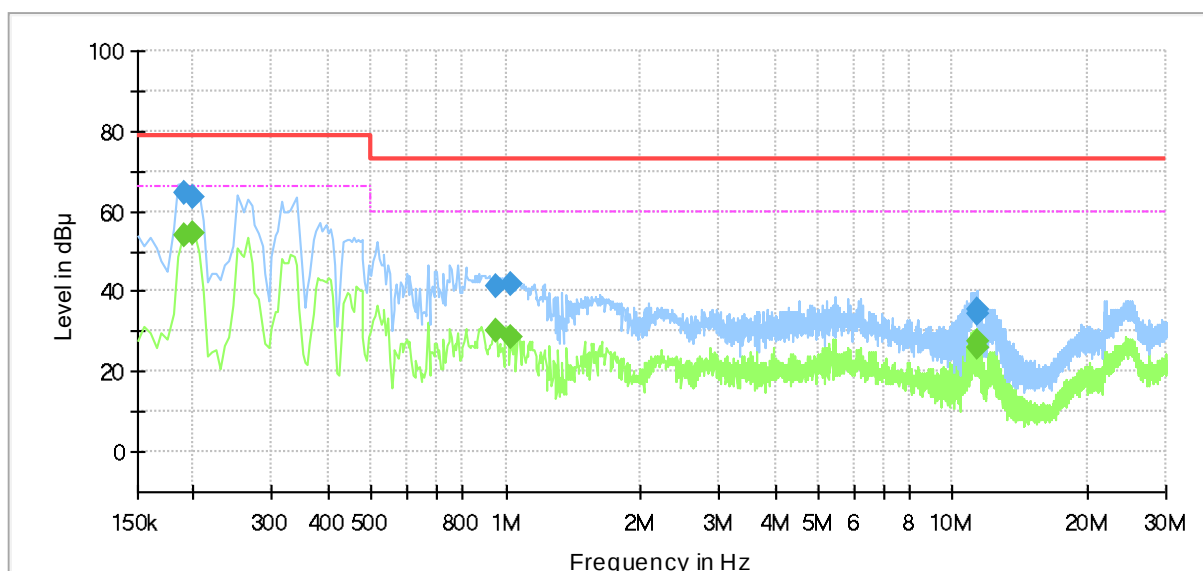

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.190000	—	54.12	66.00	11.88	1000.0	9.000	N	19.5
0.190000	64.49	—	79.00	14.51	1000.0	9.000	N	19.5
0.200000	—	54.40	66.00	11.60	1000.0	9.000	N	19.5
0.200000	63.47	—	79.00	15.53	1000.0	9.000	N	19.5
0.950000	—	30.44	60.00	29.56	1000.0	9.000	N	19.6
0.950000	41.54	—	73.00	31.46	1000.0	9.000	N	19.6
1.025000	—	28.51	60.00	31.49	1000.0	9.000	N	19.6
1.025000	41.85	—	73.00	31.15	1000.0	9.000	N	19.6
11.340000	—	27.31	60.00	32.69	1000.0	9.000	N	20.1
11.340000	35.63	—	73.00	37.37	1000.0	9.000	N	20.1
11.395000	—	25.78	60.00	34.22	1000.0	9.000	N	20.1
11.395000	34.58	—	73.00	38.42	1000.0	9.000	N	20.1

6.1.6 Remark

Complies with the test requirements.



6.2 Radiated Emissions(Below 1 GHz)

6.2.1 Test Equipment


Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #4(10 m)	-	DYMSTEC	-	-	-	■
EP5/RE Software	EP5/RE	TOYO	6.0.0	-	-	■
EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100551	2025-02-13	2026-02-13	■
AMPLIFIER	SCU 01	Rohde & Schwarz	100603	2024-11-06	2025-11-06	■
BILOG ANTENNA	VULB 9168	SCHWARZBEC K	9168-461	2024-05-09	2026-05-09	■
ATTENUATOR	6806.17.A	HUBER+SUHNER	-	2025-02-13	2026-02-13	■

6.2.2 Test Location : SEMI ANECHOIC CHAMBER #4(10 m)

6.2.3 Test Conditions :

Temperature	Relative Humidity
(26.2 ~ 26.4) °C	(56.0 ~ 56.2) % R.H.


6.2.4 Diagram of test setup

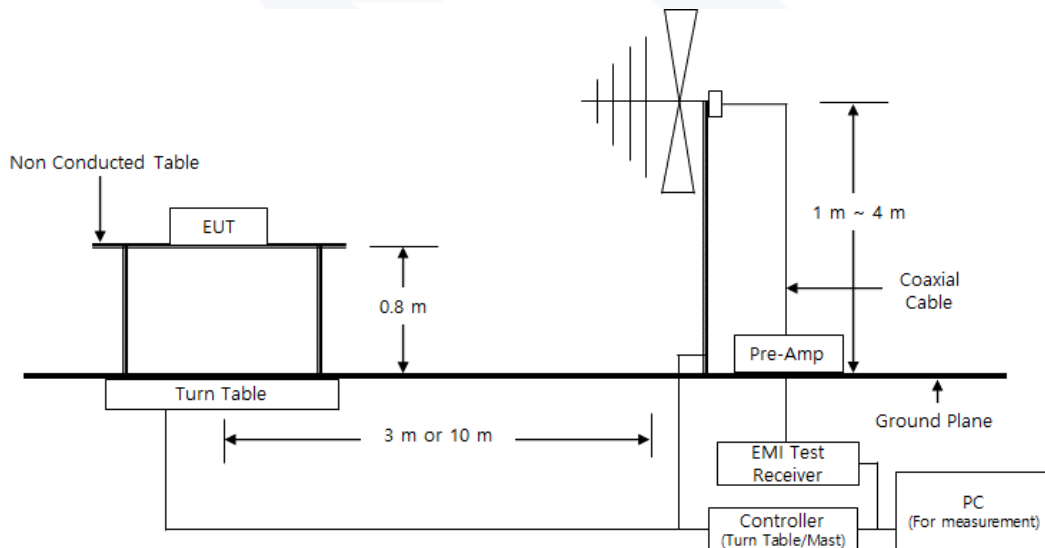



6.2.5 Test Result

- Test Date : 2025-09-01
- Test Mode : Mode 1(FCC)

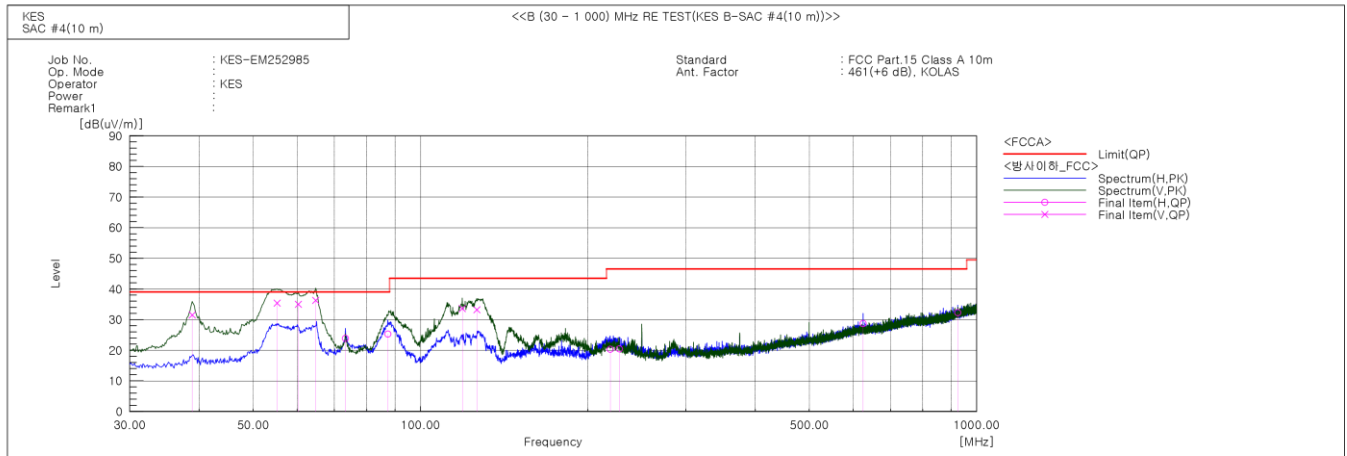

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.851	V	53.5	-22.0	31.5	39.0	7.5	141.0	103.0	
2	55.220	V	56.5	-21.1	35.4	39.0	3.6	144.0	241.0	
3	60.313	V	56.4	-21.4	35.0	39.0	4.0	121.0	305.0	
4	64.799	V	58.2	-21.9	36.3	39.0	2.7	143.0	335.0	
5	73.286	H	47.6	-23.7	23.9	39.0	15.1	272.0	153.0	
6	87.351	H	51.5	-26.2	25.3	39.0	13.7	362.0	150.0	
7	118.876	V	56.2	-22.6	33.6	43.5	9.9	157.0	290.0	
8	126.273	V	54.9	-21.7	33.2	43.5	10.3	133.0	279.0	
9	219.271	H	41.6	-21.3	20.3	46.5	26.2	362.0	202.0	
10	227.880	H	41.3	-20.9	20.4	46.5	26.1	344.0	168.0	
11	625.095	H	35.2	-6.5	28.7	46.5	17.8	392.0	3.0	
12	924.825	H	33.4	-1.1	32.3	46.5	14.2	296.0	318.0	


※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.



Report No. : KES-EM252985-R1

Page 16 / 22

- Test Date : 2025-09-01
- Test Mode : Mode 1(IC)

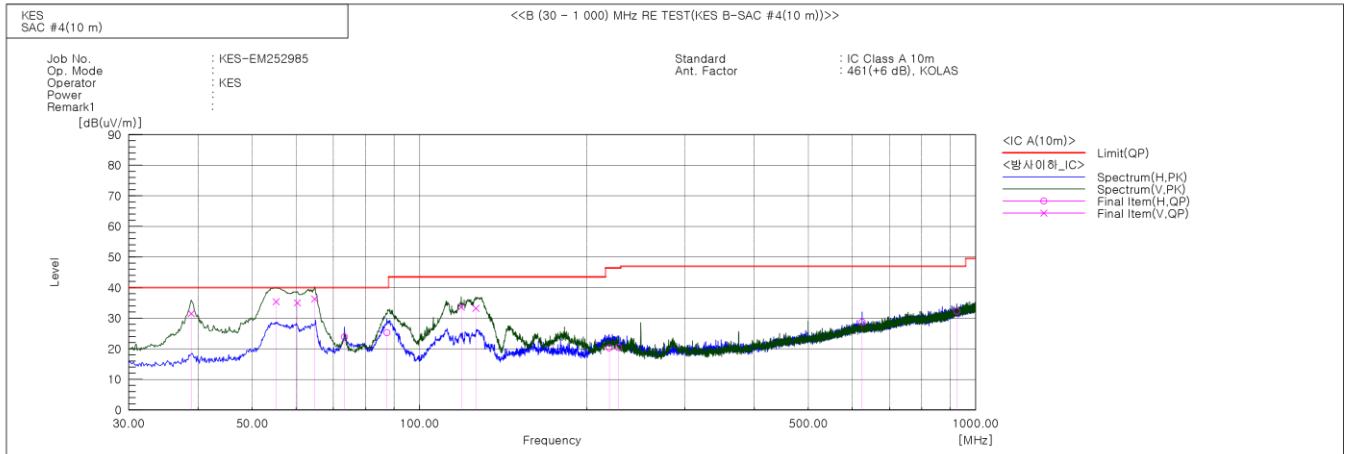

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.851	V	53.5	-22.0	31.5	40.0	8.5	141.0	103.0	
2	55.220	V	56.5	-21.1	35.4	40.0	4.6	144.0	241.0	
3	60.313	V	56.4	-21.4	35.0	40.0	5.0	121.0	305.0	
4	64.799	V	58.2	-21.9	36.3	40.0	3.7	143.0	335.0	
5	73.286	H	47.6	-23.7	23.9	40.0	16.1	272.0	153.0	
6	87.351	H	51.5	-26.2	25.3	40.0	14.7	362.0	150.0	
7	118.876	V	56.2	-22.6	33.6	43.5	9.9	157.0	290.0	
8	126.273	V	54.9	-21.7	33.2	43.5	10.3	133.0	279.0	
9	219.271	H	41.6	-21.3	20.3	46.4	26.1	362.0	202.0	
10	227.880	H	41.3	-20.9	20.4	46.4	26.0	344.0	168.0	
11	625.095	H	35.2	-6.5	28.7	47.0	18.3	392.0	3.0	
12	924.825	H	33.4	-1.1	32.3	47.0	14.7	296.0	318.0	

※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.

6.2.6 Remark

Complies with the test requirements.



7 Test Setup Photos and EUT Photographs


7.1 Test Setup Photos



<Conducted Emissions at Mains Power Ports - Front>



<Conducted Emissions at Mains Power Ports - Rear>

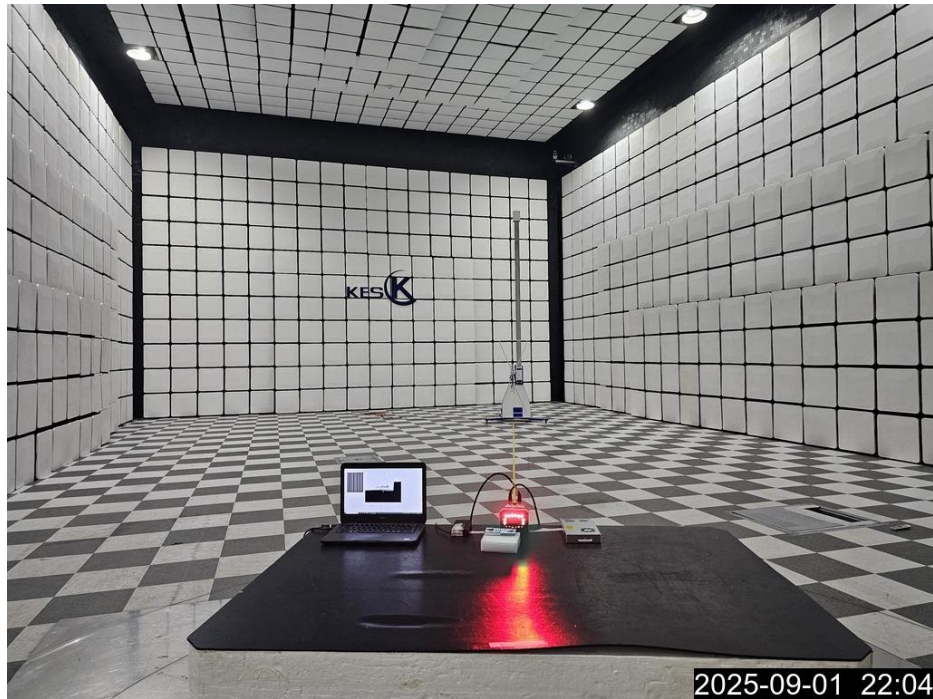

<Radiated Emissions(Below 1 GHz) - Front>



<Radiated Emissions(Below 1 GHz) - Rear>



7.2 EUT Photographs




<EUT External Photographs - Top>



<EUT External Photographs - Bottom>



<Port>

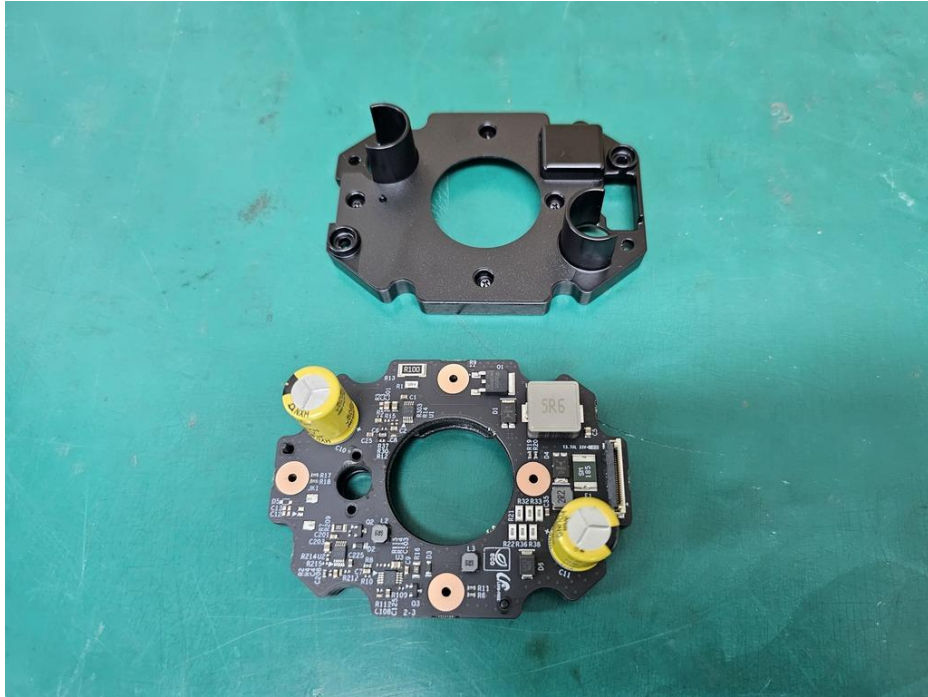

<EUT Internal Photographs>



7.3 Label

	Name : Hanwha Vision Co., Ltd. Product item : LED MODULE Model name : SPI-BRN0
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.	
The above label is only an example. The specific format is left to the manufacturer to decide, as long as the label includes the required information, in accordance with ICES-Gen. The requirements specified in ICES-Gen shall apply. An example ISED compliance label, to be placed on each unit of an equipment model (or in the user manual, if allowed), is given below:	

The End.