

CERTIFICATE of EMC Compliance

Report No : EMC-FCC-1704
Type of equipment : DIGITAL VIDEO RECORDER
Model Name : SRD-1673DN
Variant Model Name : SRD-1673N
Applicant : Samsung Techwin Co., Ltd.
#42 Seongju-Dong, Changwon-Shi,
Kyungsangnam-Do, Korea
Manufacturer#1 : Samsung Techwin Co., Ltd.
#42 Seongju-Dong, Changwon-Shi,
Kyungsangnam-Do, Korea
Manufacturer#2 : TIANJIN SAMSUNG TECHWIN
OPTO-ELECTRONIC CO., LTD
No.11 Weiliu Road. Micro-Electronic Industrial
Park Jingang Road Tianjin 300385, China
Test standards : FCC part 15 subpart B, Class A
Classification : Verification

The above equipment was tested by EMC compliance Testing Laboratory for with the requirements of FCC Rules and Regulations. The results of testing in this report apply to the product / system which was tested only.

These results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations.

Laboratory

EMC compliance Ltd.
480-5 Sin-dong, Yeongtong-gu,
Suwon-city, Gyeonggi-do, 443-390, Korea

Tel: 82 31 336 9919
Fax: 82 505 299 8311



Yeom, Han-Seok/ Manager

EMI TEST REPORT

Test report No : EMC-FCC-1704
Type of Equipment : DIGITAL VIDEO RECORDER
Model Name : SRD-1673DN
Variant Model Name : SRD-1673N
Applicant : Samsung Techwin Co., Ltd.
#42 Seongju-Dong, Changwon-Shi,
Kyungsangnam-Do, Korea
Manufacturer #1 : Samsung Techwin Co., Ltd.
#42 Seongju-Dong, Changwon-Shi,
Kyungsangnam-Do, Korea
Manufacturer #2 : TIANJIN SAMSUNG TECHWIN
OPTO-ELECTRONIC CO., LTD
No.11 Weiliu Road. Micro-Electronic Industrial
Park Jingang Road Tianjin 300385, China
Test standards : FCC part 15 subpart B, Class A
Classification : Verification
Test Procedure and Items
- AC Power Line Conducted Emissions Measurement: ANSI C63.4-2009
- Radiated Emissions Measurement : ANSI C63.4-2009
Testing Laboratory : EMC Compliance Ltd.
Test result : Complied

The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of FCC Rules and Regulations. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

These results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations.

Date of receipt: 2012. 09. 25

Date of testing: 2012. 10. 08

Issued date: 2012. 10. 15

Tested by:



AHN, DO-WON

Approved by:



YEOM, HAN-SEOK

Contents

1. Applicant information	3
2. Laboratory information	4
3. Test system configuration	5
3.1 Operation environment	5
3.2 Measurement Uncertainty	6
4. Description of E.U.T.	7
4.1 General information.....	7
4.2 Product description.....	8
4.3 Auxiliary equipments.....	8
4.4 Test configuration	9
4.5 Operating conditions	11
5. Summary of test results	12
5.1 Summary of EMI emission test results.....	12
6. Test results	13
6.1 Conducted Emission.....	13
6.2 Radiated Emission	18
7. E.U.T. photographs	24

1. Applicant information

Applicant: SAMSUNG TECHWIN CO., LTD.
Address: #42 Seongju-Dong, Changwon-Shi,
Kyungsangnam-Do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#1: SAMSUNG TECHWIN CO., LTD.
Address: #42 Seongju-Dong, Changwon-Shi,
Kyungsangnam-Do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#2: TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO., LTD
Address: No.11 Weiliu Road, Micro-Electronic Industrial Park
Jingang Road Tianjin 300385, China

2. Laboratory information

Address

EMC compliance Ltd.

480-5 Sin-dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, 443-390, Korea

Telephone Number: 82 31 336 9919

Facsimile Number: 82 505 299 8311


FCC CAB.: KR0040

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No.: 8035A

KOLAS NO.: 231

SITE MAP

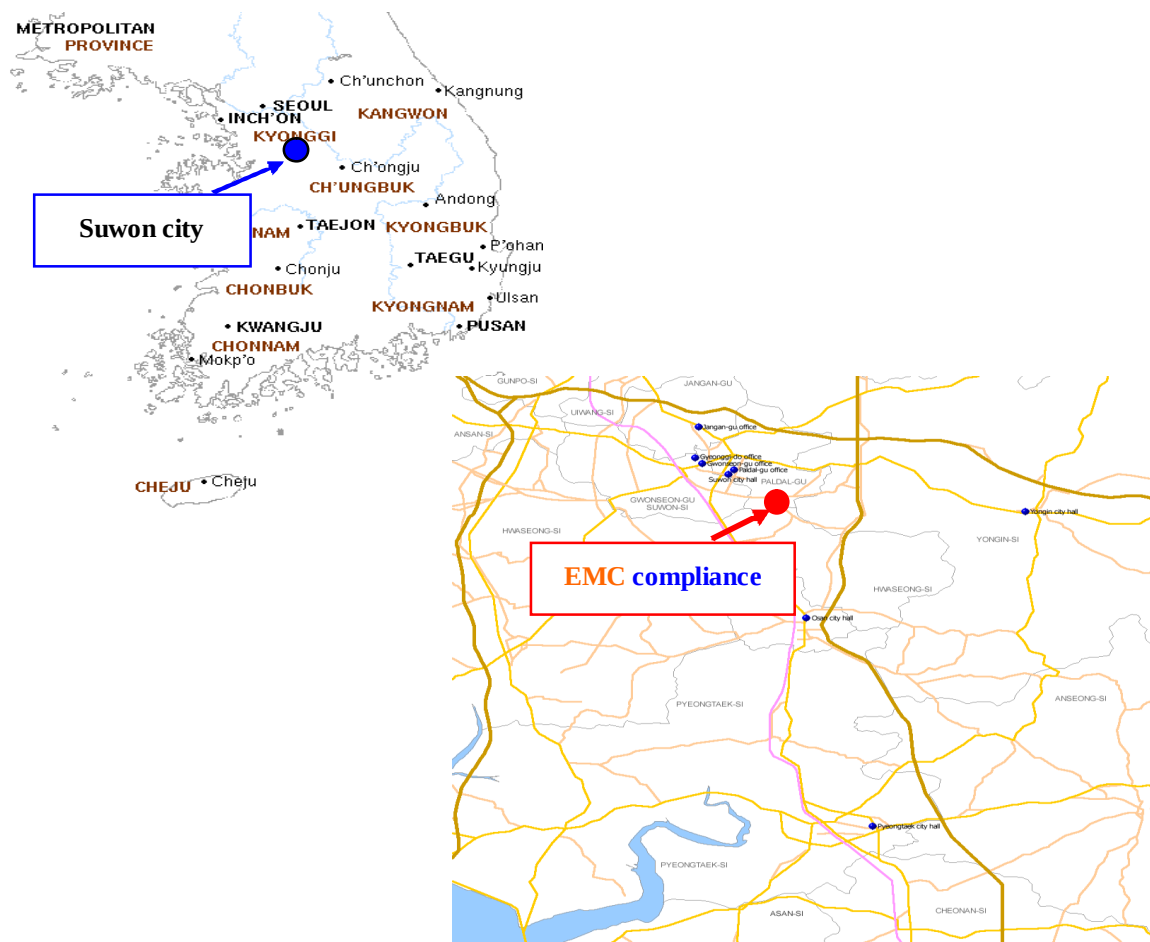

3. Test system configuration

3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber(10 m)	: 24 °C	46 % R.H.	-
Shielded Room (CE)	: 23 °C	48 % R.H.	-

Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted emission measurement (C.L: Approx 95 %, k = 2)		
Shielded Room (CE#1)	9 kHz ~ 150 kHz: ± 3.82 dB 150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz: ± 3.82 dB 150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#3)	9 kHz ~ 150 kHz: ± 4.00 dB 150 kHz ~ 30 MHz: ± 3.63 dB	
Radiated Emission measurement (C.L: Approx 95 %, k = 2)		
10 m Chamber (#F4)	30 MHz ~ 300 MHz	3 m: + 4.56 dB, - 4.58 dB 10 m: + 4.56 dB, - 4.56 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.84 dB, - 4.85 dB 10 m: + 4.71 dB, - 4.72 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB
	6 GHz ~ 18 GHz	3 m: + 6.41 dB, - 6.53 dB
10 m Chamber (#F2)	30 MHz ~ 300 MHz	3 m: + 4.86 dB, - 4.88 dB 10 m: + 4.86 dB, - 4.86 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.98 dB, - 4.99 dB 10 m: + 4.85 dB, - 4.87 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB
	6 GHz ~ 18 GHz	3 m: + 6.41 dB, - 6.53 dB

4. Description of E.U.T.

4.1 General information

Video	Inputs	16 composite video 0.5~1 Vpp, 75 ohm automatic termination
	Resolution	960x480 NTSC, 960x576 PAL / 720x480 NTSC, 720x576 PAL
Live	Frame rate	480fps NTSC, 400fps PAL
	Resolution	928x480 NTSC, 928x576 PAL(704x480 NTSC, 704x576 PAL)
	Multi Screen display	1/4/7/9/13/16A/16B/PIP/Sequence
Performance		
Operating System	Embedded	Linux
Recording	Compression	H.264
	Record Rate	NTSC: Up to 480fps @ 928x480 / PAL: Up to 400fps @ 928x576 NTSC: Up to 480fps @ 704x480 / PAL: Up to 400fps @ 704x576 NTSC: Up to 480fps @ 704x240 / PAL: Up to 400fps @ 704x288 NTSC: Up to 480fps @ 352x240 / PAL: Up to 400fps @ 352x288
	Mode	NTSC: Manual, Schedule (Continuous/Event), Event(Pre/Post), Time lapse (1~30 fps) PAL: Manual, Schedule (Continuous/Event), Event(Pre/Post), Time lapse (1~25 fps)
	Event	Video Loss, Motion(Level 1~10), Alarm, Tampering
	Overwrite modes	Continuous
	Pre-alarm	Up to 30 sec (5,10,20,30 Sec)
	Post-Alarm	Up to 6 hour (5,10,20,30 sec,1,3,5,10,20 min,1,2,3,4,5,6 hour)
	Search mode	Date/time, Event, Back up, Pos, Motion (* All Search Included Preview Function)
	Playback function	Fast Forward/Backward, Slow Forward/Backward, Step Forward/Backward
	Transmission speed	4CIF/2CIF/CIF 120/240/480fps NTSC, 100/200/400fps PAL
	Bandwidth	Up to 32Mbps
Search & Playback	Bandwidth control	Selectable
	Stream	H.264(4CIF/2CIF/CIF Selectable)
Network (IPv4)	Remote users Maximum	Search(3)/Live Unicast(10)/Live Multicast(20)
	Protocol support	TCP/IP,DHCP,PPPoE,SMTP,NTP,HTTP,DDNS,RTP,RTSP,SNMP
	Monitoring	Net-I Viewer,Smart viewer,Webviewer
Smart phone	Platform	Android, iOS
	Protocol support	RTP,RTSP,HTTP,CGI
	Remote users Maximum	Live(1)
Storage	Internal HDD	Up to 4 SATA HDDs
	External (e-SATA Interface)	Up to 2 expansion bay (* Model: SVS-5R/5E)
	DVD Writer (Back-up)	YES
	USB (Back-up)	2 USB Ports
	File Format (Back-up)	BU(DVR Player), EXE(Include Player)
Security	Password Protection	1 Admin, 10 Group, 10 User per 1 Group
	Data Authentication	Watermark
Interface		
Monitors	VGA	1 VGA (1024x720, 1280x1024, 1920x1080)
	HDMI	1 HDMI (1024x720, 1280x1024, 1920x1080)
	Main Composite	N/A
	Spot Composite	Digital Spot (2 BNC, 1 Vp-p, 75 ohm) * Included OSD On Screen
	Loop Outputs	N/A
Audio	Inputs/Output	16CH line in (Built in 4CH, Option : Audio Extension Cable)/ 1CH line out
	Compression	G.711
	Sampling rate	8KHz
Alarm	Inputs/Outputs	Terminal 16 Inputs (NO/NC) / Terminal 4 relay Outputs (NO/NC), Rating : 30V DC/2A, 250V AC/0.25A
	Remote notification	Notification via e-mail
Connections	Ethernet	1 RJ45 10/100/1000 Base-T
	Serial interface	RS-232/RS-485 for PTZ, Samsung System Keyboard
	USB	USB 2.0, 2 ports
	e-SATA	2 External SATA ports
	Application Support	Mouse, Remote Controller
	Protocol support	Samsung-E/ Samsung-T/ Pelco-D/ Pelco-p/Panasonic/ Phillips/ AD/ DIAMOND/ ERNA/ KALATEL/ PTZ Control via Coaxial Cable (Samsung CCVC, Pelco-C (Coaxitron))
General		
Electrical	Input Voltage/Current	100 to 240 VAC $\pm 10\%$; 50/60 Hz, Autoranging
	Power consumption	Max. 60 W (with 1x HDD)
Environmental	Operating Temperature/Humidity	+0°C to +40°C (+32°F to +104°F) / 20% to 85% RH
Mechanical	Dimension (W x H x D)	440 x 88 x 426.8 mm (17.32" x 3.46" x 16.8")
	Weight (With hard disks)	Approx. 7.5 kg (16.53 lb)
	Rack mount kit	2 EA


4.2 Product description

Type of product	DIGITAL VIDEO RECORDER
Model name (Basic)	SRD-1673DN
Model name (Variant)	SRD-1673N
Difference	Buyer model name
Trade name	-
Serial no	000000000000015R
Testing voltage	120 V, 60 Hz
Product rating	100 – 240 V, 50/60 Hz, 5 A
Internal clock frequency	930 MHz
Note	-

4.3 Auxiliary equipments

Type	Model / Part #	Serial number	Manufacturer
Note PC	C1320	44361086D437	Fujitsu
Monitor 1	PM24KO	ZQ9XH1HBA01632N	SAMSUNG
Monitor 2	GH19PS	N727HVZLC05002L	SAMSUNG
Monitor 3	PM24KO	YER8HVDBA00052A	SAMSUNG
Camera	SDC-435UP	-	SAMSUNG
JIG	-	-	-
HDD (320 GB)	XD1	001NMYSHX1354	LG
USB Memory (1 GB)	-	888120418	-

4.4 Test configuration

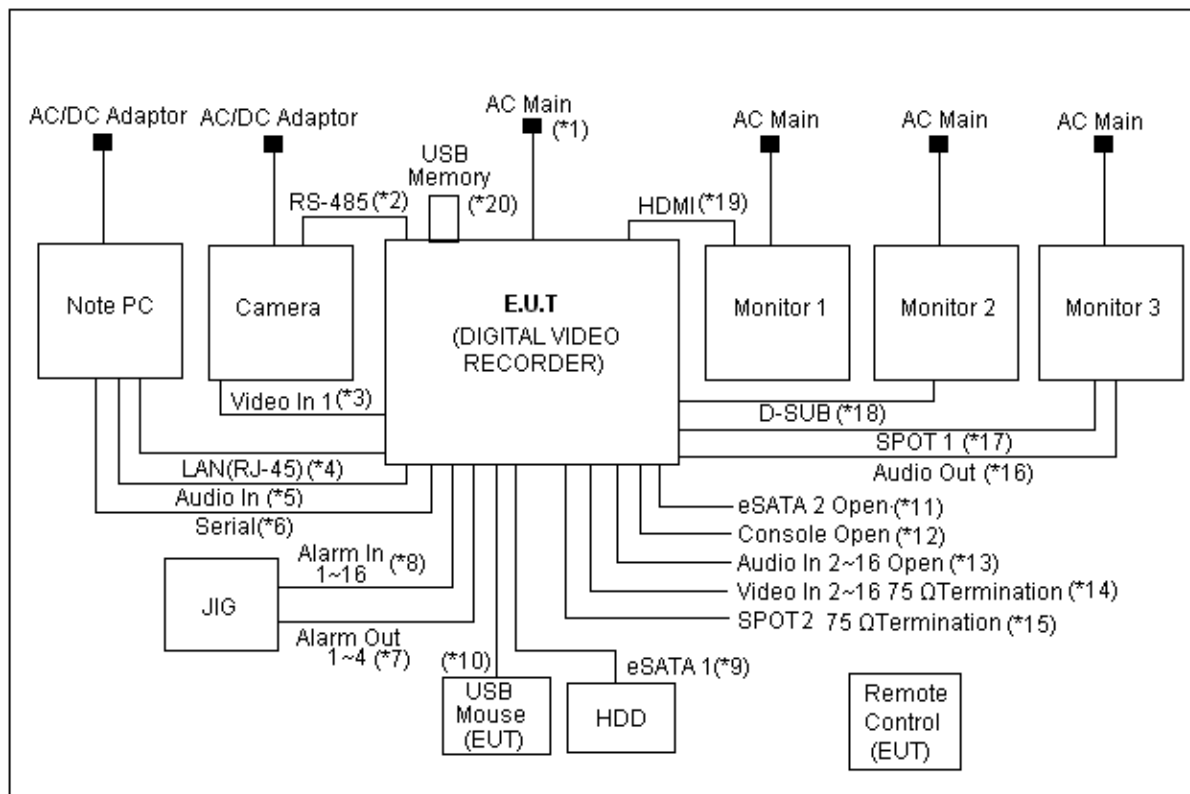

Note *	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (DIGITAL VIDEO RECORDER)	Power	AC Main	Power	1.5	Non-Shield
2		RS-485	Camera	RS-485	3.0	Non-Shield
3		Video In 1	Camera	Video Out	3.0	Shield
4		LAN(RJ-45)	Note PC	LAN(RJ-45)	3.0	Non-Shield
5		Audio In 1	Note PC	Audio Out	3.0	Shield
6		Serial	Note PC	Serial	1.5	Shield
7		Alarm Out 1~4	JIG	Alarm In 1~4	3.0	Shield
8		Alarm In 1~16	JIG	Alarm Out 1~16	3.0	Shield
9		eSATA 1	HDD	eSATA 1	0.5	Non-Shield
10		USB	USB Mouse (EUT)	USB	1.6	Shield
11		eSATA 2	Open	-	0.5	Non-Shield
12		Console	Open	-	1.6	Non-Shield
13		Audio In 2~16	Open	-	1.6	Shield
14		Video In 2~16	75 Ω Termination	-	3.0	Shield
15		SPOT 2	75 Ω Termination	-	3.0	Shield
16		Audio Out	Monitor 3	Audio In	3.0	Shield
17		SPOT 1	Monitor 3	SPOT 1	3.0	Shield
18		D-SUB	Monitor 2	D-SUB	1.6	Shield
19		HDMI	Monitor 1	HDMI	1.6	Shield
20		USB	USB Memory	USB	Direct	-

4.5 Operating conditions

The EUT was configured as normal intended use. This test was done at worst case.

Test mode	Normal operating
1	Web view monitoring test mode.
	Camera monitoring test mode.

5. Summary of test results

In the above configuration tested, The EUT complied with the requirement of the specification

5.1 Summary of EMI emission test results

FCC Part 15 Subpart B (Class A)

ANSI C63.4 – 2009

Applied	Test items	Test method	Result
☒	Conducted Emission	ANSI C63.4 – 2009	Complied
☒	Radiated Emission	ANSI C63.4 – 2009	Complied

6. Test results

6.1 Conducted Emission

Test specification	FCC Part 15, Section 15.107(b), Class A		
Testing voltage	120 V, 60 Hz		
Test facility	Shielded room (CE#1)		
Date	2012. 10. 08		
Temperature(°C)	23 °C	Humidity (% R.H.)	48 % R.H.
Remarks	Complied		

6.1.1 Limits of conducted emission measurement

Frequency [MHz]	Class A (dB(μ V))		Class B (dB(μ V))	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79	66	66 ~ 56 *	56 ~ 46*
0.5 ~ 5	73	60	56	46
5 ~ 30	73	60	60	50

*The limit decreases linearly with the logarithm of frequency.


6.1.2 Measurement procedure

The measurements were performed in a shielded room. EUT was setup as shown in photograph and placed on a non-metallic table height of 0.8 m above the reference ground plane. The rear of table was located 0.4 m to the vertical conducted plane. EUT was power through the LISN, which was bonded to the ground plane. The LISN power was filtered. Each EUT power lead, except ground (safety) lead was individually connected through a LISN to input power source. EUT signal cables that hung closer than 0.4 m to the Horizontal metal ground 0.3 m ~ 0.4 m long. The power cord was bundles in the center. All peripheral equipment was powered from a sub LISN. The LISN and ISN were positioned 0.8 m from the EUT. Peak and Average detection were used in preliminary testing and Quasi-peak and Average detections were used at final measurement.

6.1.3 Used equipments

Equipment	Model	Serial No.	Makers	Next Cal. Date	Used
Test Receiver	ESHS30	828765/009	R&S	2012.10.28	☒
LISN	ENV216	101358	R&S	2012.10.26	☒
LISN	L2-16A	0000J10705	PMM	-	☒


6.1.4 Photographs of test setup

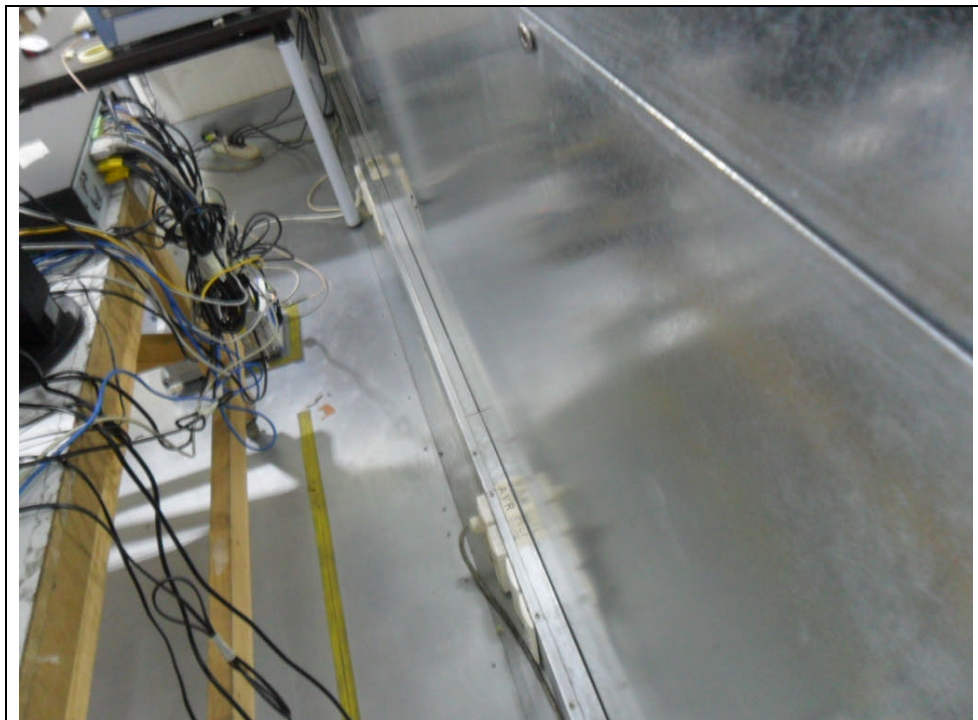


6.1.5 Conducted emission measurement result

Frequency	Correction Factor		Line	Quasi-peak				Average			
				Limit	Reading	Result	Margin	Limit	Reading	Result	Margin
[MHz]	LISN	Cable		[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]
0.153	9.82	0.02	N	79.00	25.54	35.38	43.62	66.00	8.01	17.85	48.15
0.165	9.82	0.02	H		11.99	21.83	57.17		6.54	16.38	49.62
0.189	9.90	0.03	N		20.15	30.08	48.92		6.77	16.70	49.30
0.201	9.90	0.03	N		30.44	40.37	38.63		22.20	32.13	33.87
0.204	9.90	0.03	H		29.82	39.75	39.25		24.85	34.78	31.22
0.309	9.93	0.03	H		14.47	24.43	54.57		7.46	17.42	48.58
3.300	9.64	0.05	H	73.00	17.27	26.96	46.04	60.00	11.78	21.47	38.53
14.740	9.64	0.10	N		27.91	37.65	35.35		18.50	28.24	31.76
15.000	9.63	0.10	H		28.33	38.06	34.94		19.83	29.56	30.44
16.570	9.64	0.10	N		33.01	42.75	30.25		16.66	26.40	33.60
16.610	9.63	0.10	H		24.65	34.38	38.62		15.95	25.68	34.32
20.320	9.64	0.10	H		34.58	44.32	28.68		21.47	31.21	28.79

[Hot-Line]

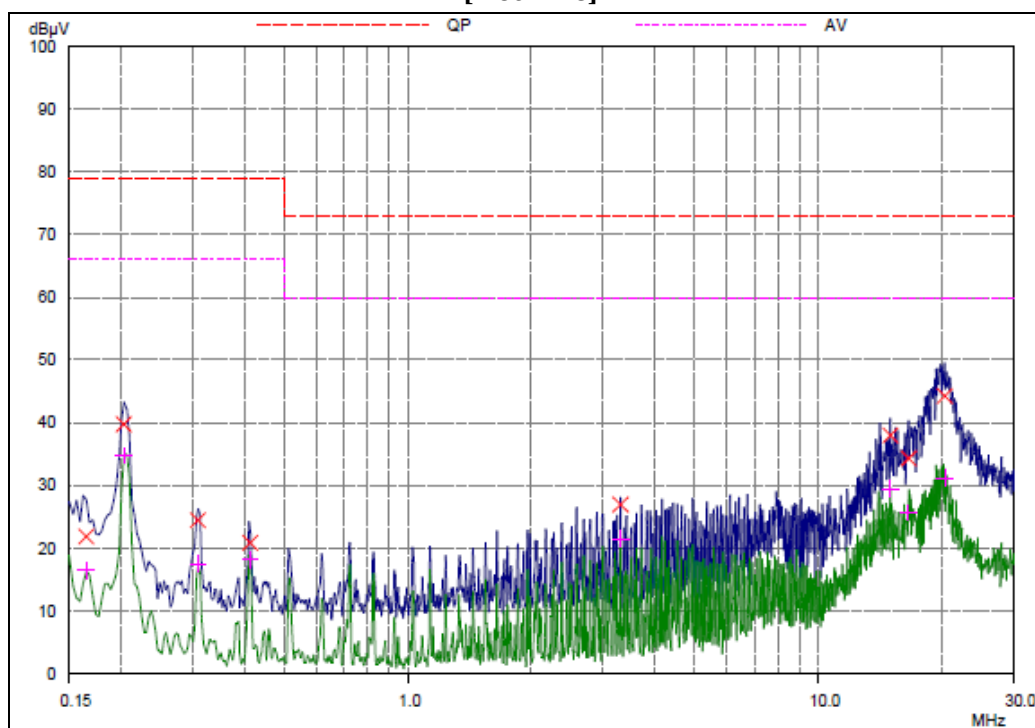

[Neutral-Line]

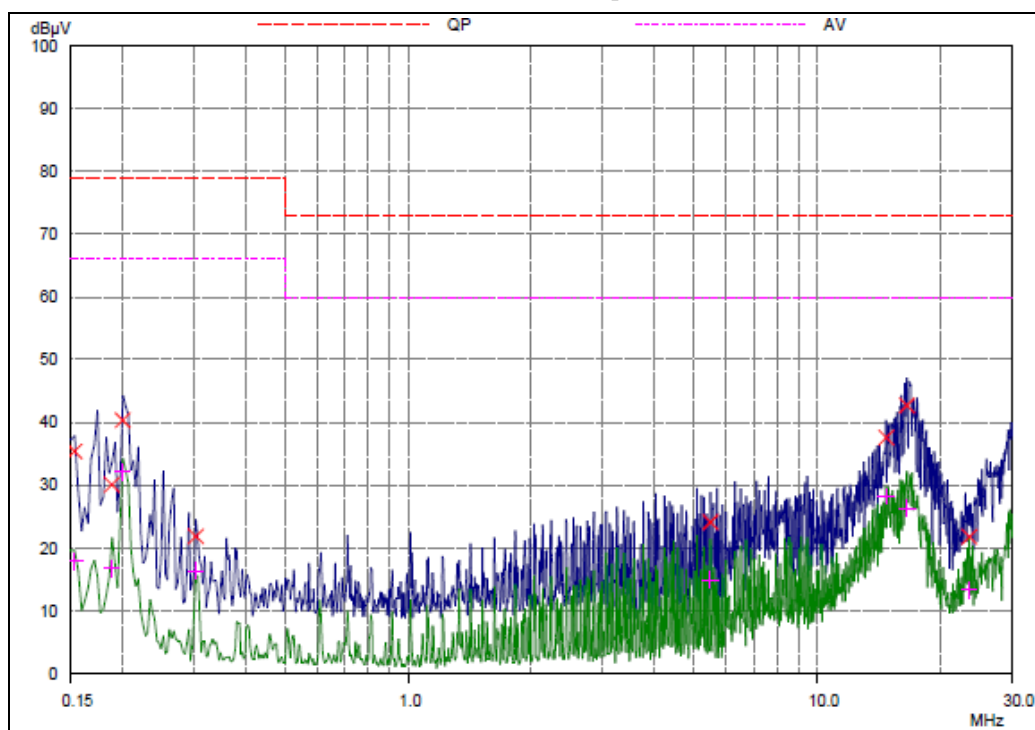

6.2 Radiated Emission

Test specification	FCC Part 15, Section 15.109(g), Class A		
Testing voltage	120 V, 60 Hz		
Test facility	10 m Chamber (#F2)		
Test distance	10 m, 3 m		
Date	2012. 10. 08		
Temperature (°C)	24 °C	Humidity (% R.H.)	46 % R.H.
Remarks	Complied		

6.2.1 Limits of radiated emission measurement

Frequency [MHz]	Class A (dB(μ V/m)) @ 10 m	Class B (dB(μ V/m)) @ 3 m
30-88	39	40
88-216	43.5	43.5
216-960	46.4	46
Above 960	49.5	54

*** Note- Alternative standard: CISPR, Pub. 22 ***

6.2.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane.

Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane. Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
Test Receiver	ESCI	100710	R&S	2012.11.28	☒
Bi-Log Antenna	VULB 9168	9168-440	SCHWARZBECK	2013.10.04	☒
Amplifier	310N	293004	SONOMA INSTRUMENT	2012.11.28	☒
3 dB Attenuator	8491A	27444	HP	2012.11.28	☒
Antenna Mast	MA4000-EP	303	Innco Systems	-	☒
Turn Table	DT2000S-1t	079	Innco Systems	-	☒
Horn ANT	3115	00086706	ETS	2013.11.21	☒
Amplifier	8449B	3008A01802	AGILENT	2013.05.04	☐
Amplifier	8449B	3008A02343	AGILENT	2012.11.28	☒
Spectrum Analyzer	FSP7	100289	R&S	2012.12.19	☒

6.2.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 3 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G= Amplifier Gain

3 dB Att = 3 dB Attenuator


If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 3 dB, A.G 35 dB

The result is



$$30 + 12 + 5 + 3 - 35 = 15 \text{ dB}(\mu\text{V/m})$$

6.2.5 Photographs of test setup

* 30 MHz ~ 1 GHz

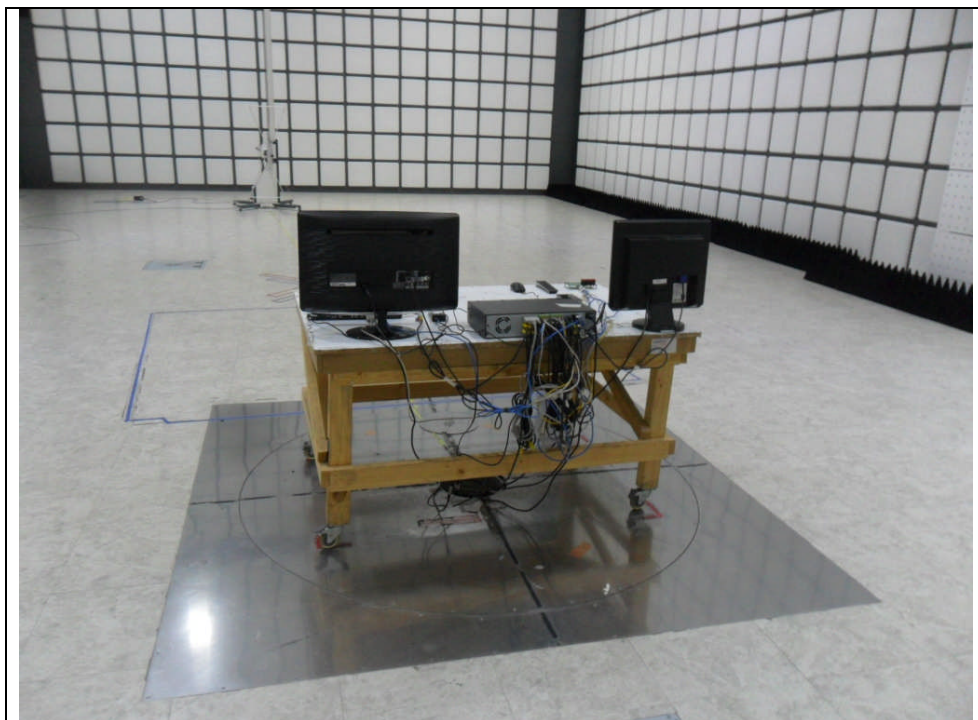


* 1 GHz ~ 5 GHz

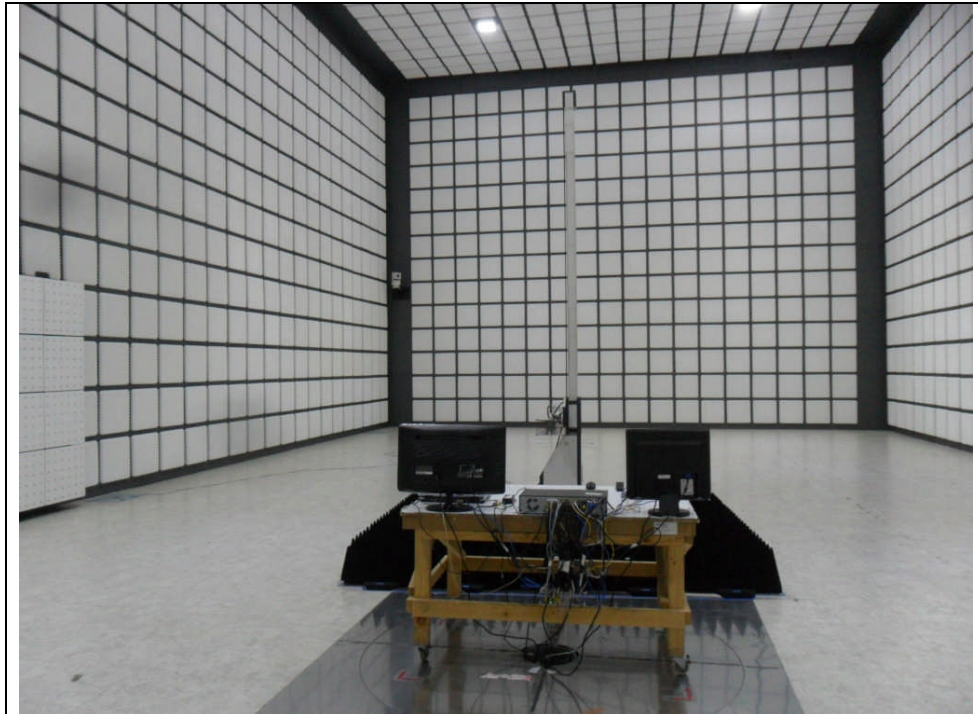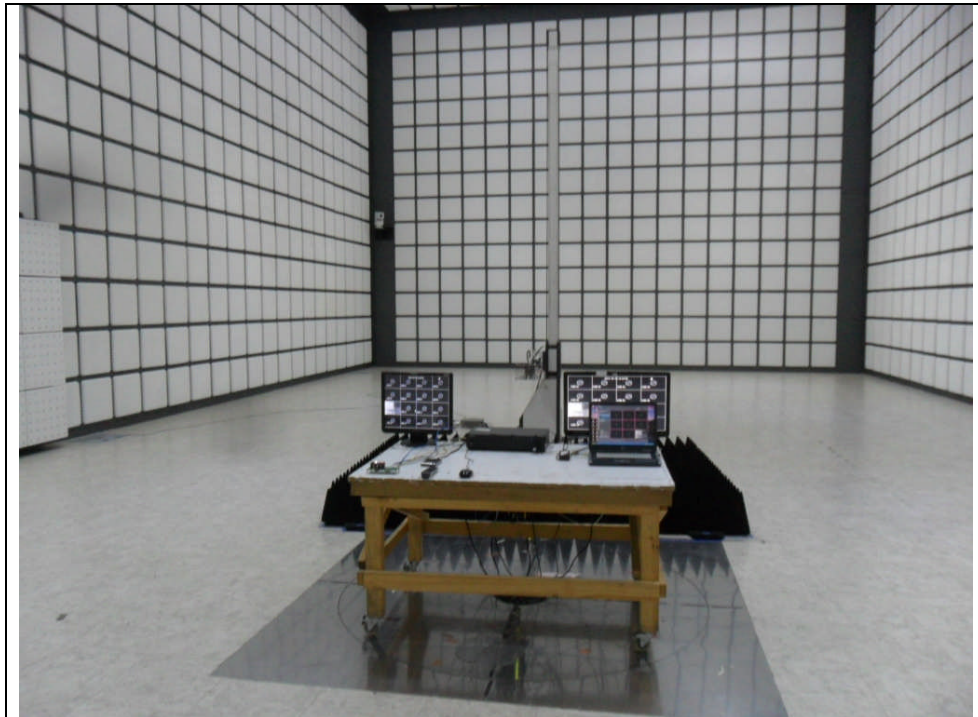

6.2.6 Radiated emission measurement result

* Graph and Data


* 30 MHz ~ 1 GHz

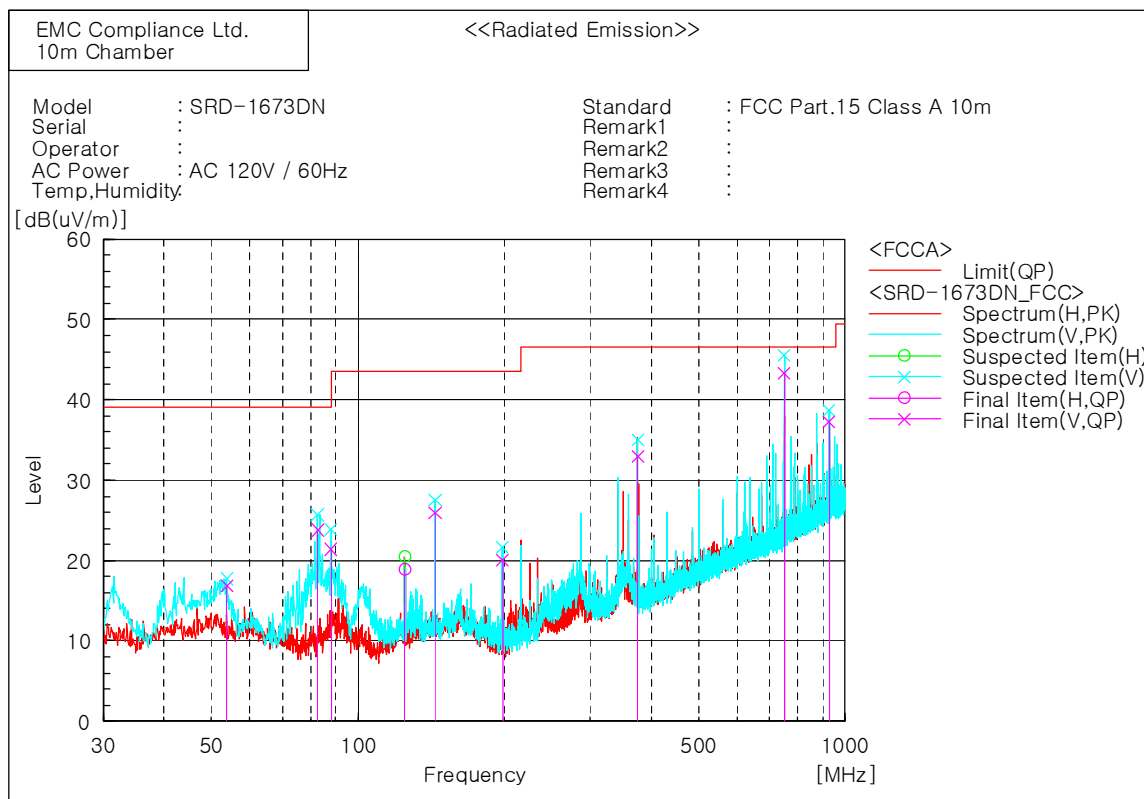

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	53.768	V	30.8	-13.9	16.9	39.0	22.1	199.0	105.2	
2	82.532	V	42.1	-18.3	23.8	39.0	15.2	199.0	259.0	
3	87.957	V	40.6	-19.2	21.4	39.0	17.6	199.0	29.9	
4	124.945	H	34.1	-15.2	18.9	43.5	24.6	400.0	5.1	
5	143.984	V	39.6	-13.7	25.9	43.5	17.6	199.0	276.7	
6	198.096	V	36.0	-16.0	20.0	43.5	23.5	199.0	175.9	
7	374.975	V	42.8	-9.8	33.0	46.5	13.5	400.0	33.3	
8	749.994	V	44.8	-1.5	43.3	46.5	3.2	199.0	353.1	
9	927.134	V	35.5	1.8	37.3	46.5	9.2	199.0	312.0	

* 1 GHz ~ 5 GHz

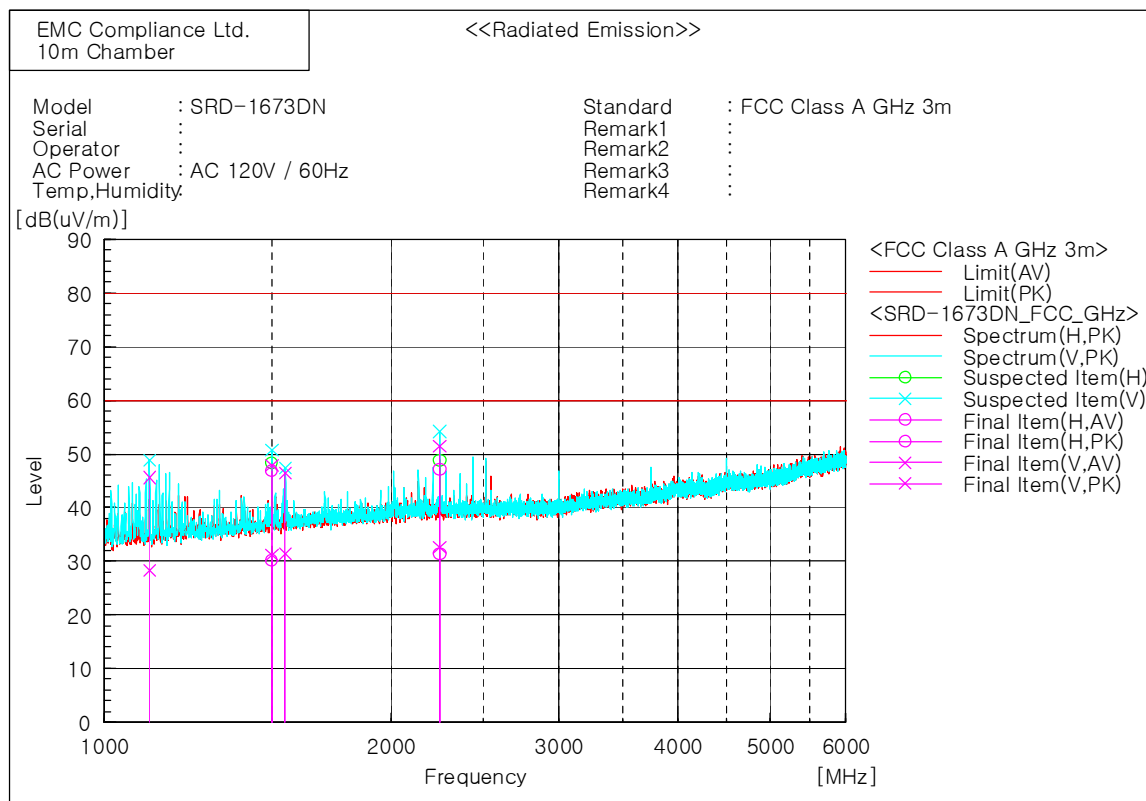

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1115.625	V	36.9	54.1	-8.5	28.4	45.6	60.0	80.0	31.6	34.4	100.0	358.6	
2	1500.000	V	36.3	53.0	-5.1	31.2	47.9	60.0	80.0	28.8	32.1	100.0	46.6	
3	1500.000	H	35.2	52.0	-5.1	30.1	46.9	60.0	80.0	29.9	33.1	100.0	149.4	
4	1550.000	V	36.1	51.2	-4.7	31.4	46.5	60.0	80.0	28.6	33.5	100.0	358.6	
5	2250.000	V	33.9	52.8	-1.3	32.6	51.5	60.0	80.0	27.4	28.5	100.0	358.6	
6	2250.000	H	32.8	48.5	-1.3	31.5	47.2	60.0	80.0	28.5	32.8	100.0	8.0	

7. E.U.T. photographs

Whole





Left View



Right View



Top View



Bottom View



Port





Label





FCC Label Location

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Inside





Main Board

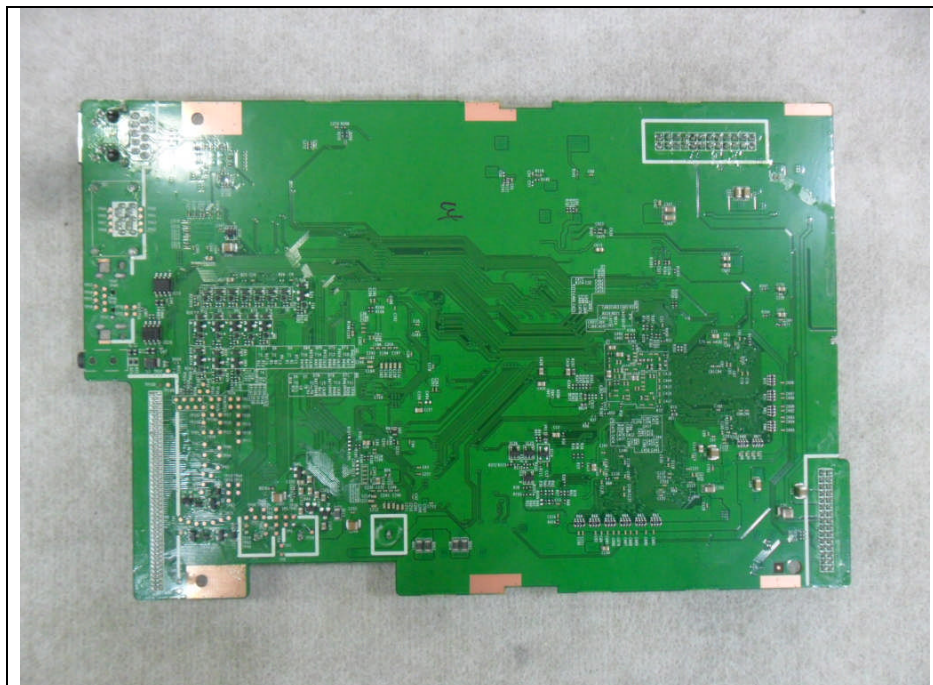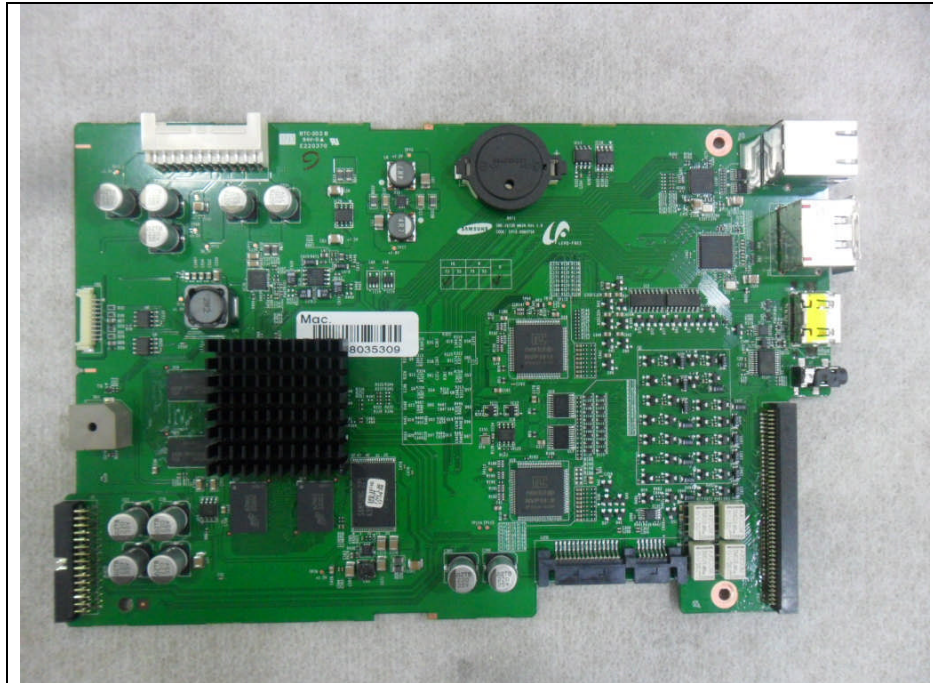


Main SUB Board

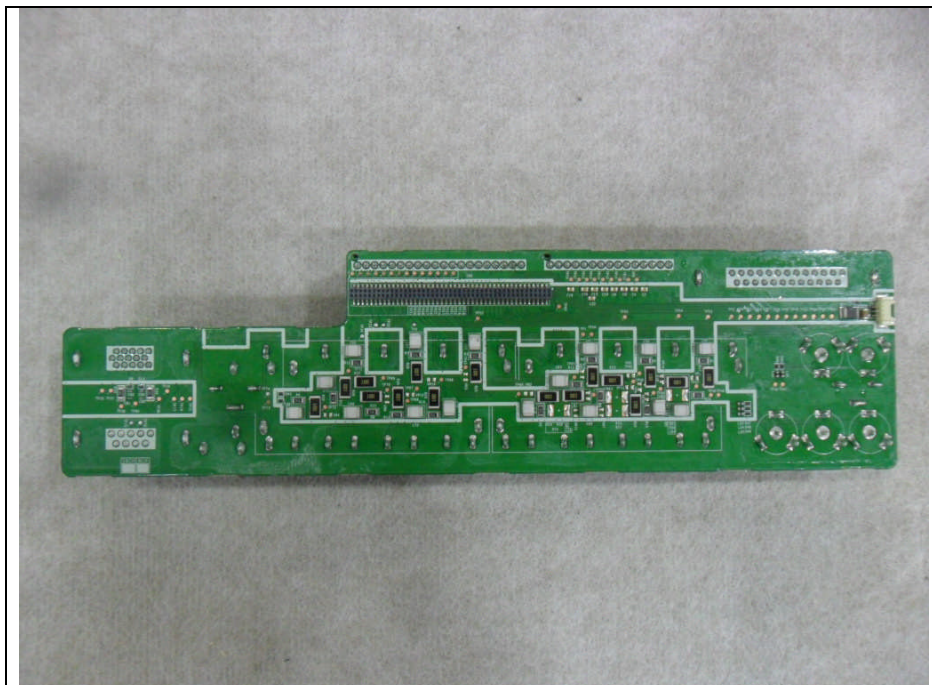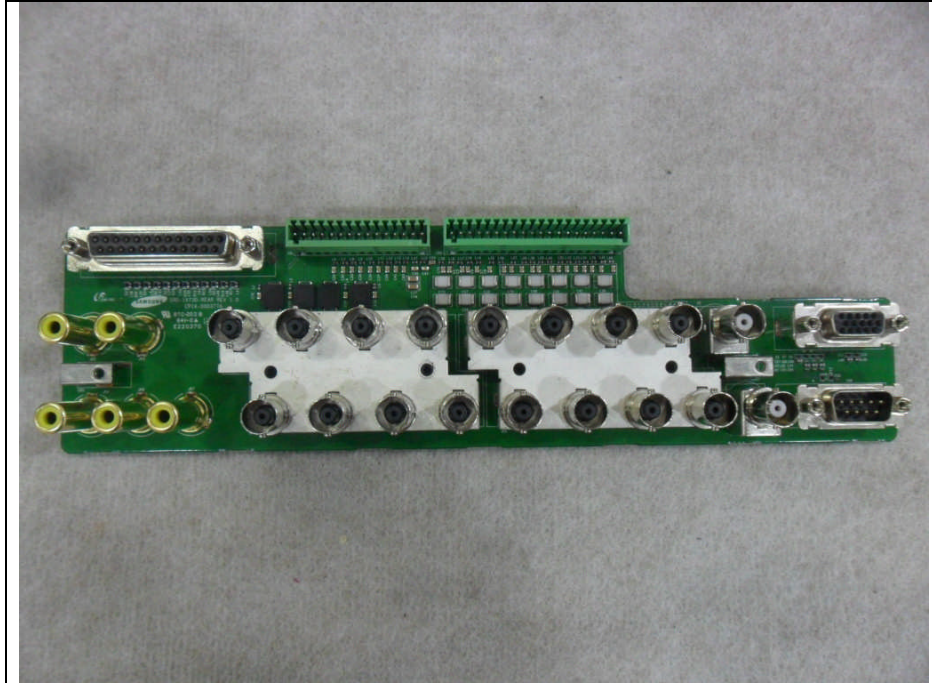

Front Board

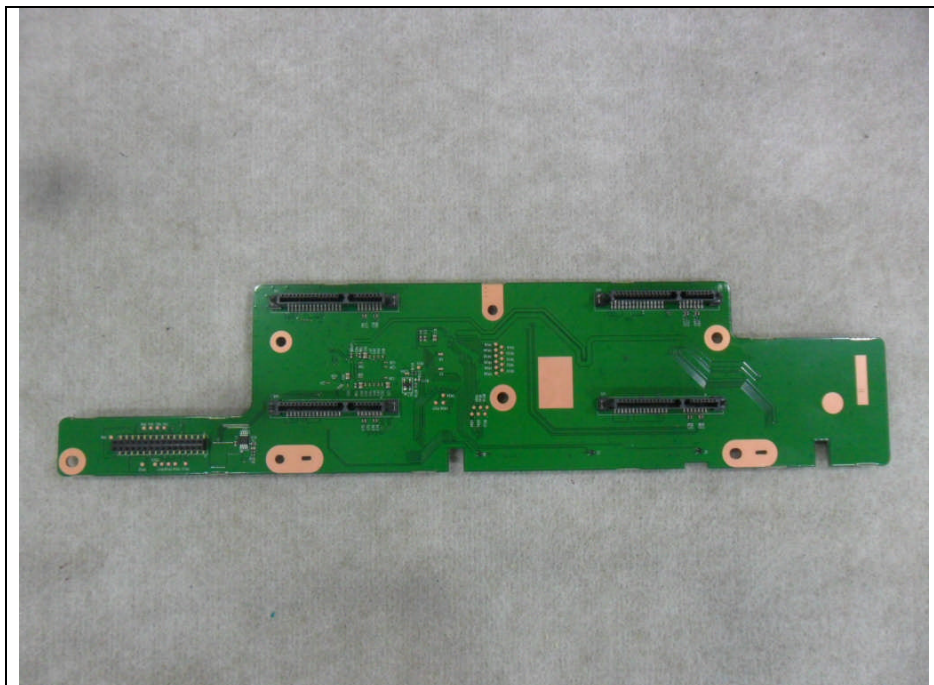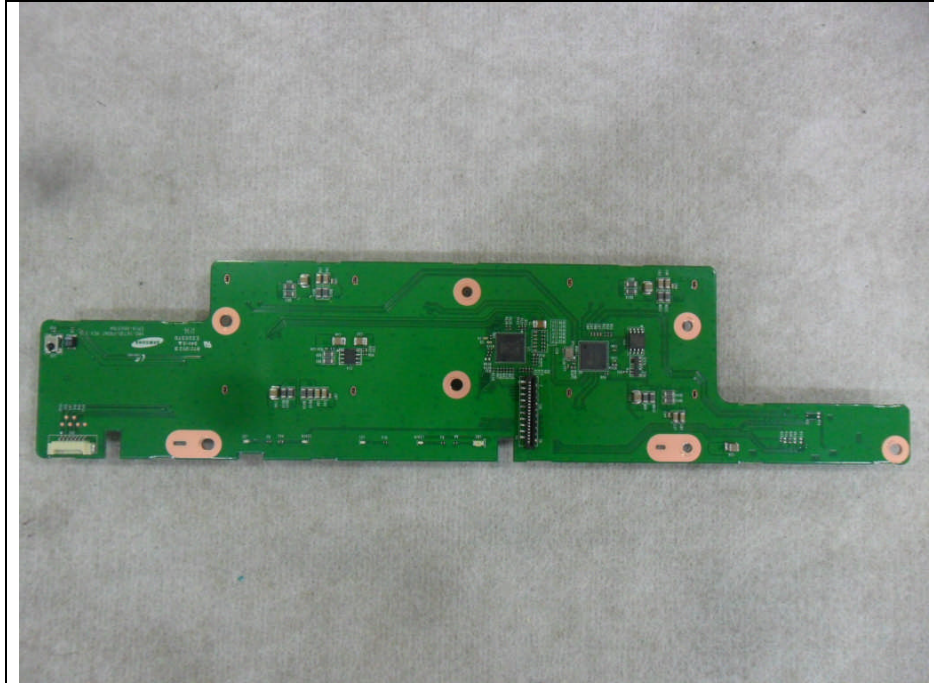


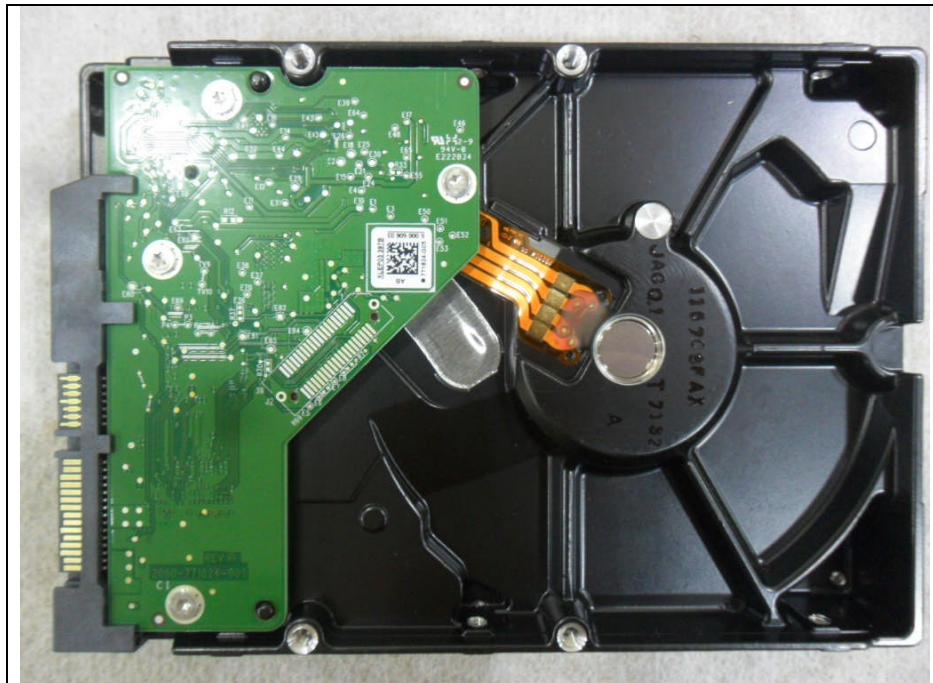





ODD





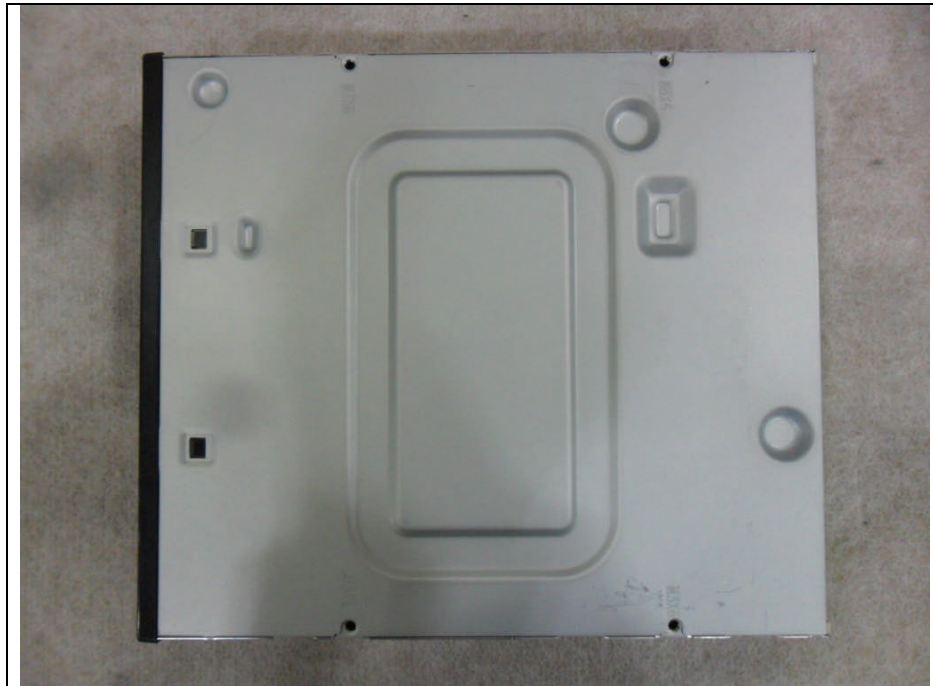

Touch Board

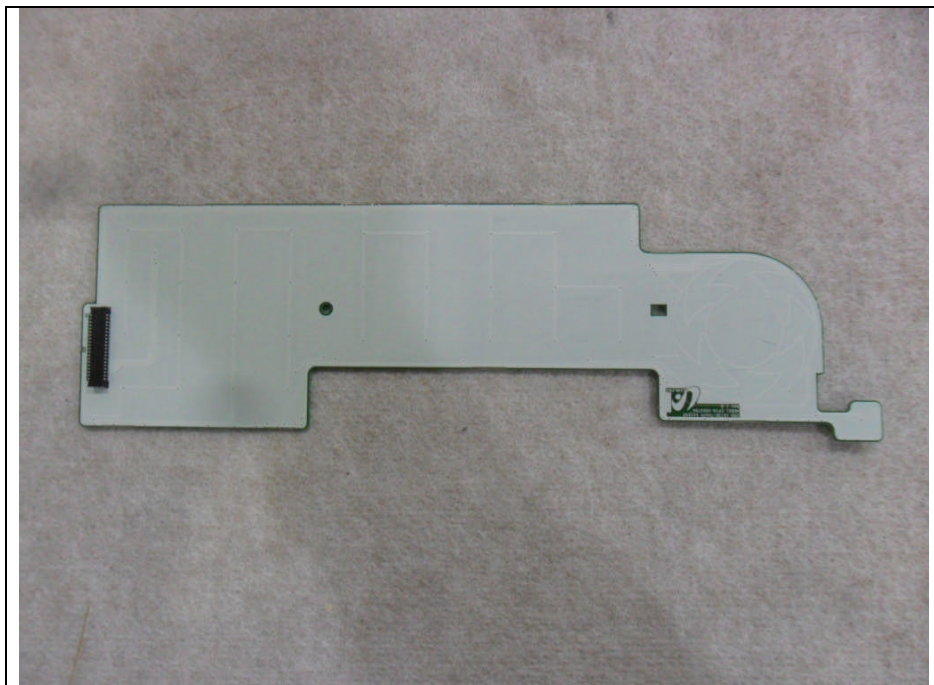
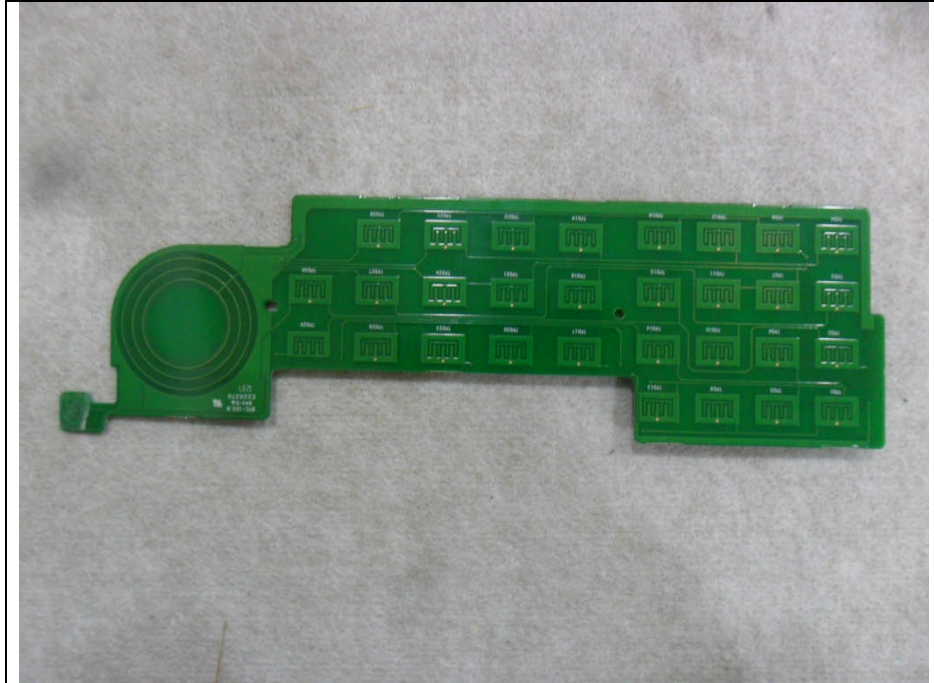



USB Board

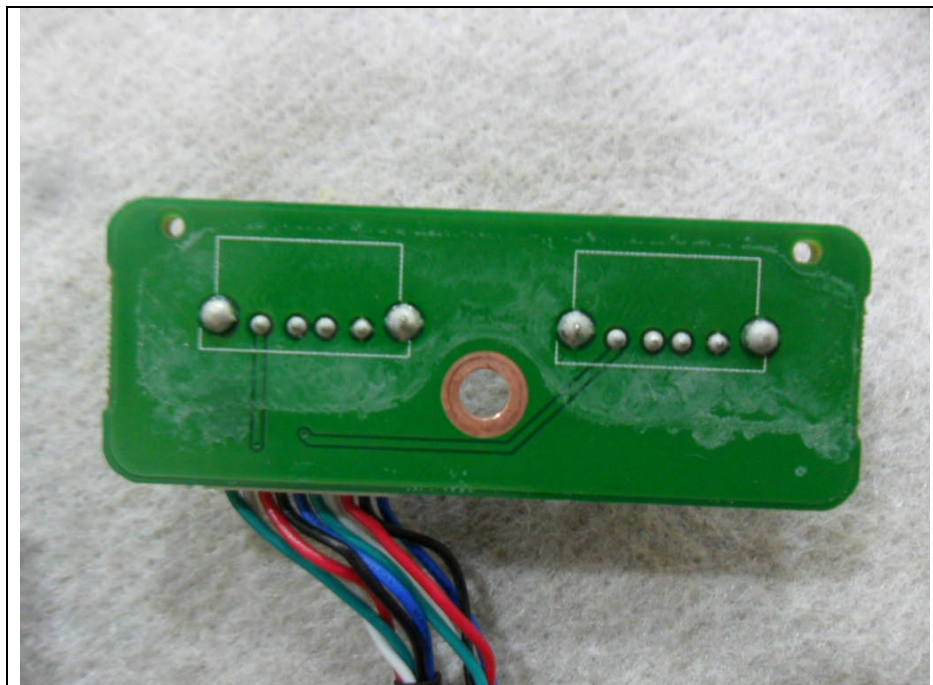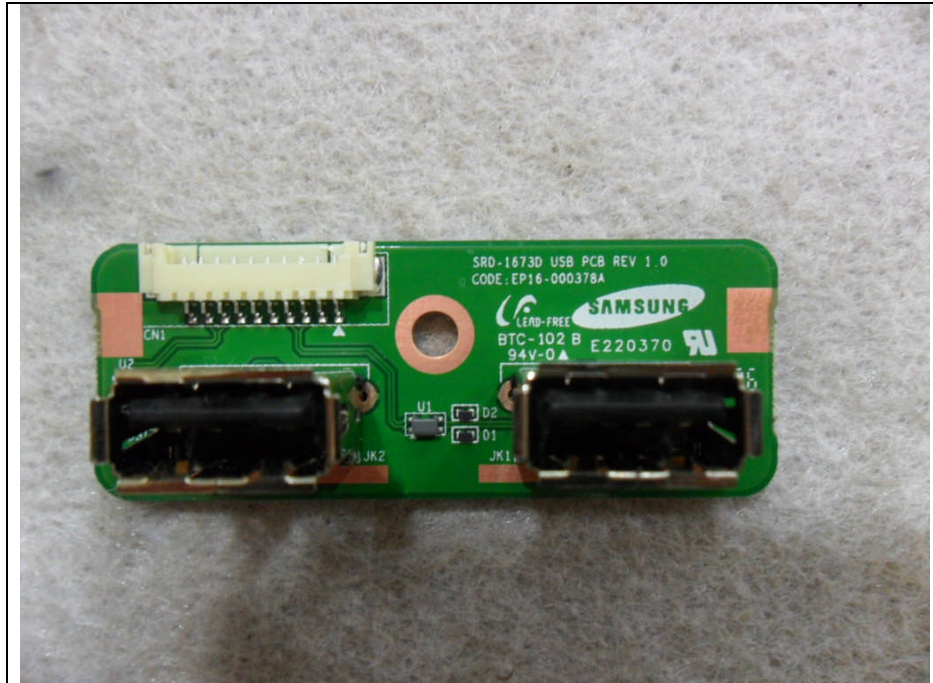

Power



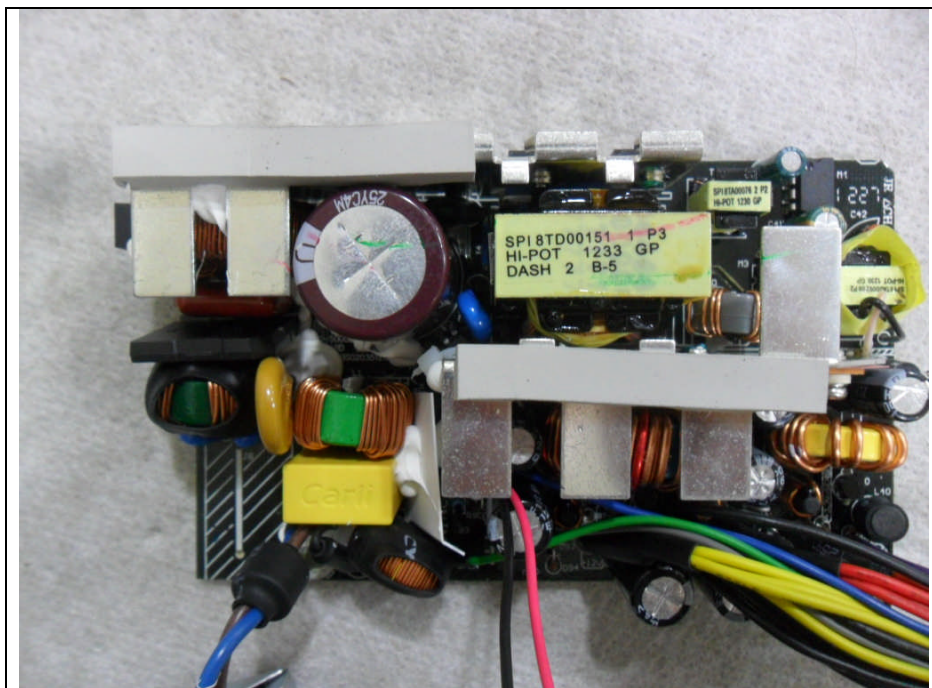
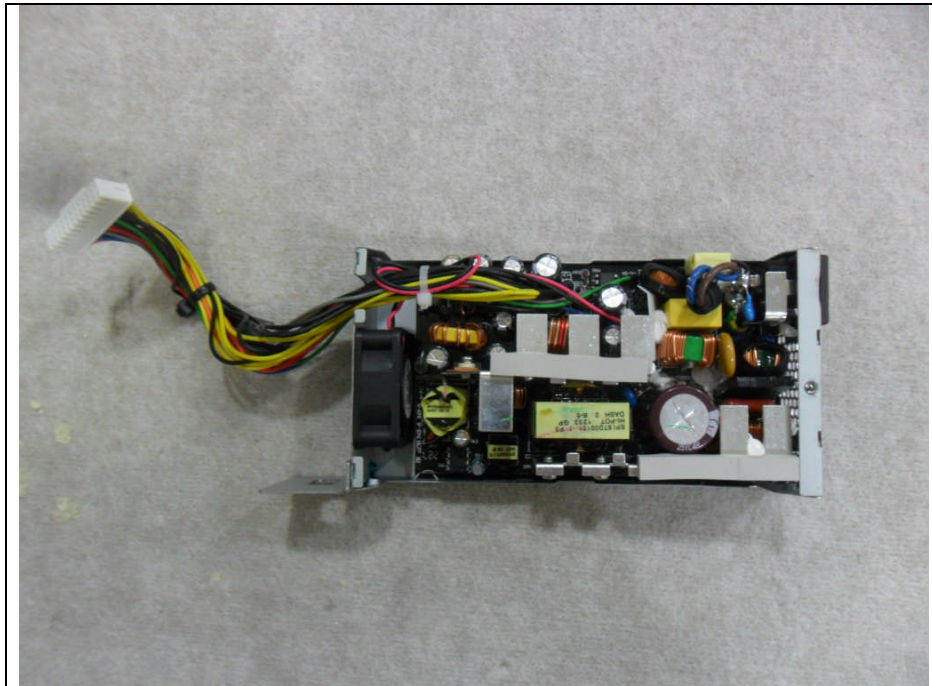


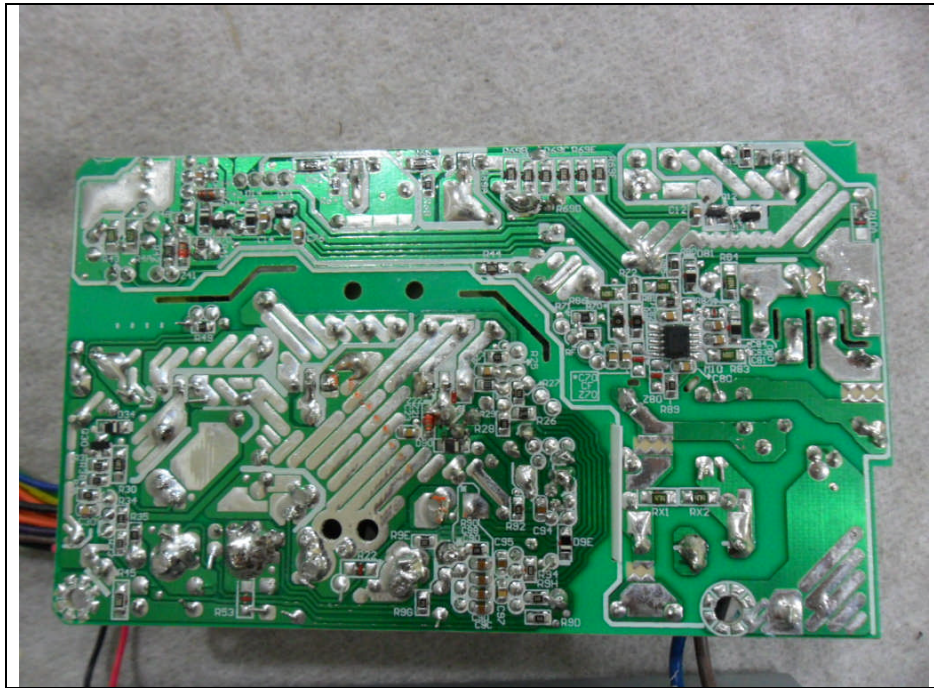

USB Mouse





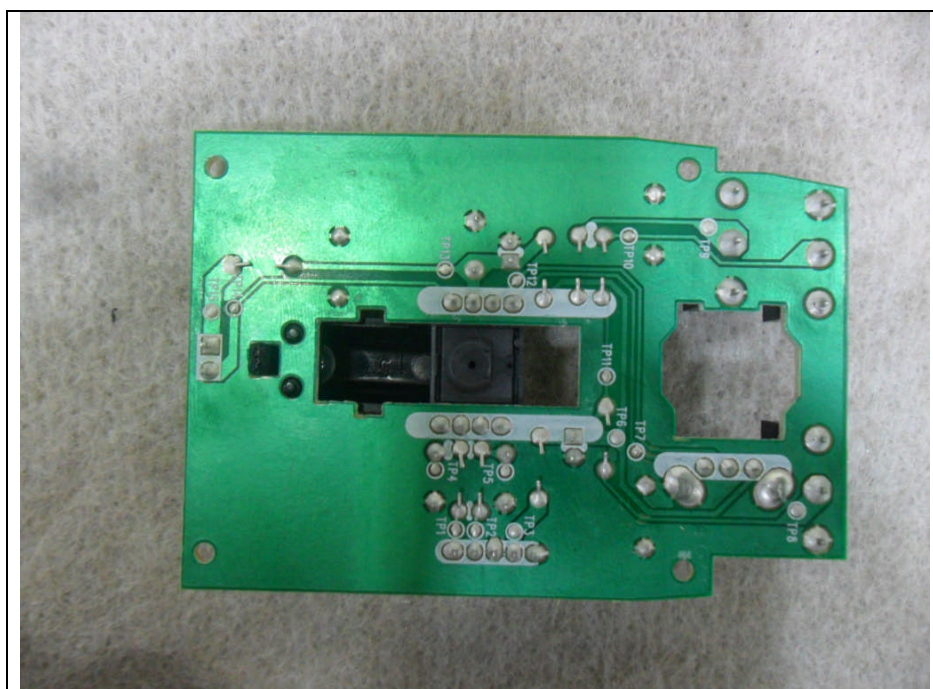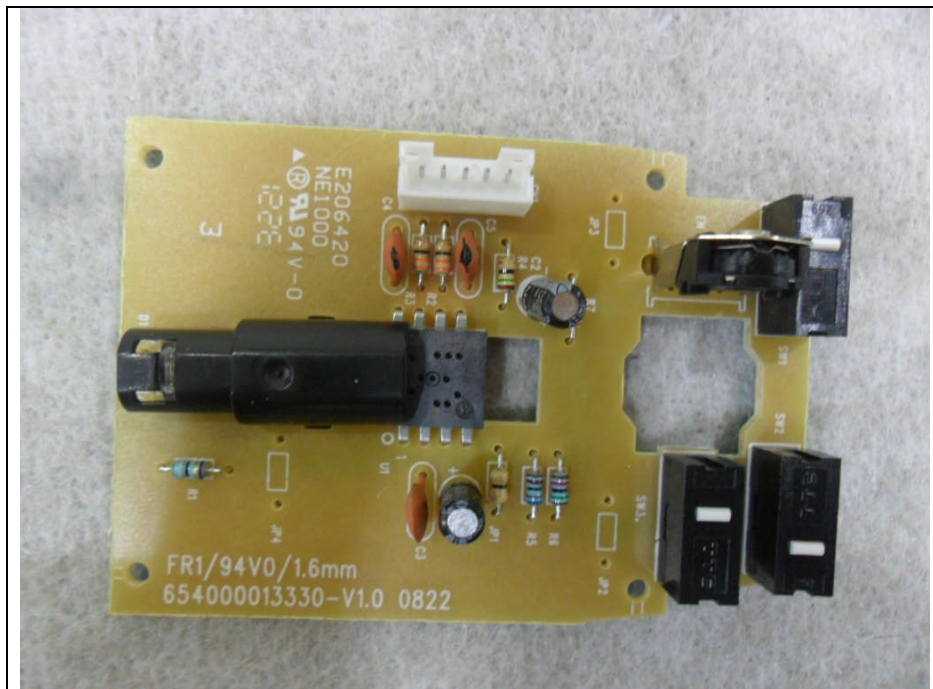

Remote Control



