

9/4CH High Quality Digital Video Recorder SVR-940/450/440




Specifications


Mode	SVR-940	SVR-450	SVR-440
Power Source	100-240V AC, 50/60Hz	12V DC (Adaptor)	12V DC (Adaptor)
Power Consumption	Max. 75W (1 HDD)	Max. 25W	Max. 25W
Video Input	9CH	4CH	4CH
Video Output	1 BNC (S-Video), VGA selectable	1 BNC, VGA selectable	1 BNC, VGA selectable
Compression	MPEG-4	MPEG-4	MPEG-4
Display	Speed / Resolution 225fps : 704 x 576 (PAL) Multi Screen 1 / 4 / 9	120fps : 704 x 480 100fps : 704 x 576 (PAL) 1 / 4	120fps : 704 x 480 100fps : 704 x 576 (PAL) 1 / 4
Recording	Speed / Resolution 30fps : 704 x 480, 25fps : 704 x 576 (PAL) 60fps : 704 x 240, 50fps : 704 x 288 (PAL) 120fps : 352 x 240, 100fps : 352 x 288 (PAL)	30fps : 704 x 480, 25fps : 704 x 576 (PAL) 120fps : 352 x 240, 100fps : 352 x 288 (PAL)	30fps : 704 x 480, 25fps : 704 x 576 (PAL) 120fps : 352 x 240, 100fps : 352 x 288 (PAL)
HDD	Mode Standard Installed 250GB 1HDD (Max. 1TB, 2 HDDs)	Normal, Schedule, Event 250GB 1HDD CD-RW, 1 USB (Front)	Normal, Schedule, Event 160GB 1HDD 1 USB (Front)
Back up / Copy	CD-RW, 1 USB (Front)	CD-RW, 1 USB (Front)	CD-RW, 1 USB (Front)
Serial Interface	RS-485/422	RS-485/422	RS-485/422
Sensor Input / Relay Output	9 / 4	4 / 1	4 / 1
Audio	Input / Output 4 / 1	4 / 1	4 / 1
Interface	RJ-45	RJ-45	RJ-45
Network	Protocol TCP/IP, DHCP, SMTP Software Network Manager (SNM-64S/P) Transport Speed 120fps, 100fps (PAL)	TCP/IP, DHCP, SMTP Network Manager (SNM-64S/P) 120fps, 100fps (PAL)	TCP/IP, DHCP, PPPoE Network viewer 440 120fps, 100fps (PAL)
Control	Remote control (Controllable up to 9 DVRs) System controller (SCC-3100A)	Remote control (Controllable up to 9 DVRs) System controller (SCC-3100A)	Remote control (Controllable up to 9 DVRs) System controller (SCC-3100A)
OSD (On Screen Display)	GUI, Multi-language, Hot function Screen SMS : ATM/POS support, Password : Multi-authority Image quality adjustment : 3 level (Super, High, Standard) support		Stylish icon, Multi-language
Temperature Operation	5°C ~ 40°C	5°C ~ 40°C	5°C ~ 40°C
Range Storage	-10°C ~ 60°C	-10°C ~ 60°C	-10°C ~ 50°C
Dimensions	430(W) x 88.8(H) x 362(D)mm	430(W) x 88.8(H) x 362(D)mm	350(W) x 65(H) x 260(D)mm
Weight	8.9Kg (1 HDD)	8.9Kg (1 HDD)	3.2Kg

Dimensions

Unit : mm

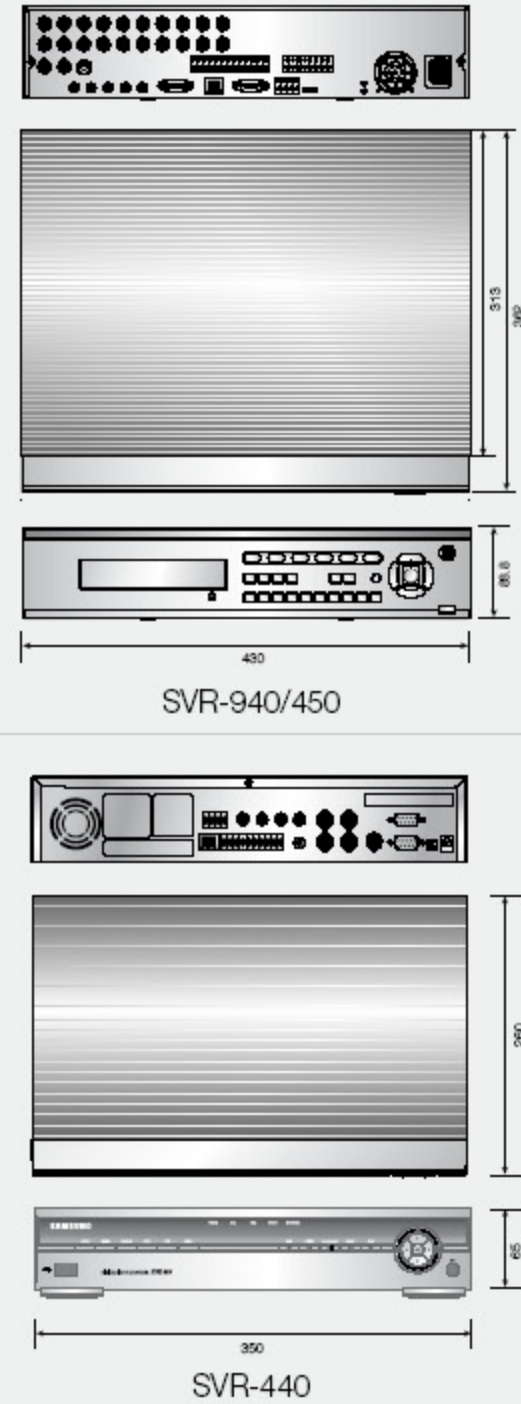

System Configuration

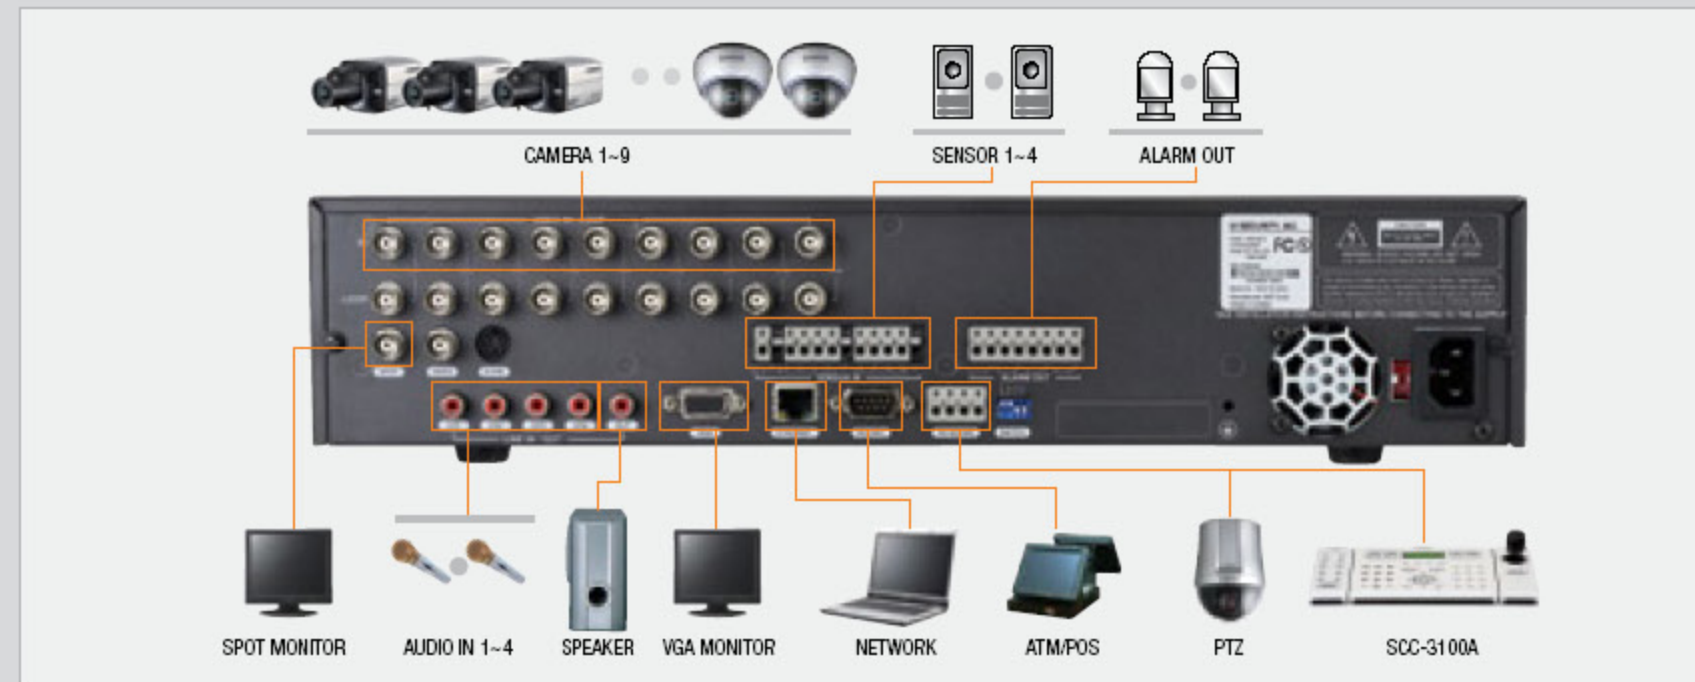

Rear Panel



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



I.D-0806



imagine the Compact & Versatile DVR Solution

The SVR-940/450/440 are the best DVR solutions for implementation of small and medium scale security systems. The solutions allow you to upgrade your CCTV system from analog to digital at an affordable price by integrating various DVR features. These features include MPEG-4 high quality compression, built-in support for up to 250GB as a standard HDD, real-time video recording for each channel at 30fps(SVR-450/440), a simple graphic interface menu, simple real-time monitoring of a remote site via a network, and a built-in CD-RW drive(SVR-940/450).



SAMSUNG TECHWIN CO., LTD.
145-3, Sangdaewon 1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do Korea 462-703
Tel : +82-31-740-8151 ~ 8 Fax : +82-31-740-8145
www.samsungcctv.com

SAMSUNG OPTO-ELECTRONICS UK, LTD.
Samsung House, 1000 Hillwood Drive,
Hillwood Business Park, Chertsey, Surrey KT16 0PS
Tel : +44-1932-455312 Fax : +44-1932-455325

TIANJIN SAMSUNG OPTO-ELECTRONICS CO., LTD.
7 Pingchang Rd., Nankai Dist. Tianjin 300190, P.R China
Tel : +86-22-2761-4724(33821) Fax : +86-22-2761-6514

SAMSUNG TECHWIN

