



EMC TEST REPORT

Test Report No. : KES-EM-21T0405
Date of Issue : May. 28, 2021
Product name : NETWORK INTERCOM
Model/Type No. : TID-600R
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : **Supplier's Declaration of Conformity**
Date of Receipt : May. 11, 2021
Test date : May. 26, 2021
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Jae Won, Lee
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (2) of (42)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
May. 28, 2021	KES-EM-21T0405	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0405

Page (3) of (42)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration.....	10
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Radiated Electric Field Emissions(Below 1 GHz)	15
2.3	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Radiated Electric Field Emissions(Below 1 GHz)		21
Radiated Electric Field Emissions(Above 1 GHz)		25
Test Setup Photos and Configuration		27
Conducted Emissions at Mains Power Ports.....		27
Radiated Electric Field Emissions(Below 1 GHz)		29
Radiated Electric Field Emissions(Above 1 GHz)		31
EUT External Photographs		33
EUT Internal Photographs		34

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0405

Page (4) of (42)

1.0 General Product Description

Main Specifications of EUT are:

	TID-600R
Video	
Imaging Device	1/2.8" CMOS
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264 : Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Min. Illumination	Color: 0.018lux (F1.6, 1/30sec) BW: 0 Lux (IR LED On)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation
Lens	
Focal Length (Zoom Ratio)	1.6mm fixed focal
Max. Aperture Ratio	F1.6
Angular Field of View	H: 180° / V: 114° / D: 180°
Min. Object Distance	0.3m
Focus Control	Fixed
Operational	
IR Viewable Length	5m
Camera Title	Displayed up to 85 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SDR
Wide Dynamic Range	WDR(150dB)
Digital Noise Reduction	SSNRV
Digital Image Stabilization	Support
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, polygonal zones - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Analytics	Directional detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Shock detection, Sound classification
Alarm I/O	Input 2ea / Output 1ea , Relay out 1ea (12VDC Max. 550mA with 2A adapter) Tampering switch, Touchless call
Alarm Triggers	Analytics, Network disconnect, Alarm input

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (5) of (42)

Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover Audio playback
Audio Streaming	Two-way/one-way selectable, Full duplex, Echo cancellation and noise reduction
Audio In	Built-in mic
Audio Out	Built-in speaker: 85dB at 0.5m
Network	
Ethernet	Metal shielded RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression	G.711 u-law / G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz Opus 8/16KHz
Smart Codec	Manual(Sea area), WiseStream II
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Multiple streaming(Up to 10 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, SRTP, SIP 2.0(RFC 3261 and companion RFCs)
SIP support (VoIP, Peer-to-peer, SIP/PBX integration)	Tested with Cisco, Grandstream, Yealink VoIP phones and Asterisk PBX software
Security	HTTPS(SSL) login authentication, Digest login authentication, IP address filtering, User access log, 802.1X authentication(EAP-TLS, EAP-LEAP), Device certificate(Hanwha Techwin Root CA)
Application Programming Interface	ONVIF Profile S SUNAPI(HTTP API) Wisenet open platform

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (6) of (42)

General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Edge Storage	Micro SD/SDHC/SDXC 1slot 256GB
Memory	2GB RAM
Environmental & Electrical	
Operating Temperature / Humidity	-30°C~+55°C(-22°F ~ +131°F) / Less than 95% RH
Storage Temperature / Humidity	-50°C~+55°C / Less than 95% RH
Certification	IP65, IK08, NEMA4X, Safety(UL), EMC(FCC, CE)
Input Voltage	PoE, 12VDC
Power Consumption	PoE: Max 12.95W, typical 9.1W 12VDC: Max 17.6W, typical 7W * 12VDC power consumption includes 12VDC/550mA relay out.
Mechanical	
Color / Material	Dark gray / Aluminium
RAL Code	RAL7022
Product dimensions / weight	49(W)x165(H)x48(D)mm(1.93x6.50x1.89") / 490g
DORI	
Detect (25PPM/ 8PPF)	25.04m
Observe (63PPM/ 19PPF)	10.02m
Recognize (125PPM/ 38PPF)	5.01m
Identify (250PPM/ 76PPF)	2.50m

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V, 60 Hz ☒ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK INTERCOM	TID-600R	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
PoE Adapter	PT-PSE109GBRO-AH	PT1850221049	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	P95G001	9JM8HT2	Wistron Infocom (Chengdu) Company Limited	-
Notebook Adapter	LA65NS2-01	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	-
Monitor	NT500R5M	0Q7491AJ800552 B	Samsung Electronics Co., Ltd.	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Button alarm	-	-	-	-
Door lock jig	-	-	-	-
Micro SD Card	-	-	SanDisk	4 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.6 External I/O Cabling

■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK INTERCOM (EUT)	RJ-45	Notebook	RJ-45	3.5	U
	BNC	Monitor	BNC	3.0	S
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button alarm	Alarm OUT	3.0	U
	2 Pin	Door lock jig	2 Pin	0.5	U
	SLOT	Micro SD Card	SLOT	-	-

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK INTERCOM (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.5	U
	BNC	Monitor	BNC	3.0	S
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button alarm	Alarm OUT	3.0	U
	2 Pin	Door lock jig	2 Pin	0.5	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	RJ-45 (LAN)	PoE Adapter	RJ-45 (LAN)	3.0	U

* Unshielded=U, Shielded=S



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (9) of (42)

1.7 EUT Operating Mode(s)

■ DC / PoE Mode

Test Mode	operating
Operation	Tested by checking camera video output from monitor and laptop and checking whether it works normally while doing PING TEST.


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ DC Mode

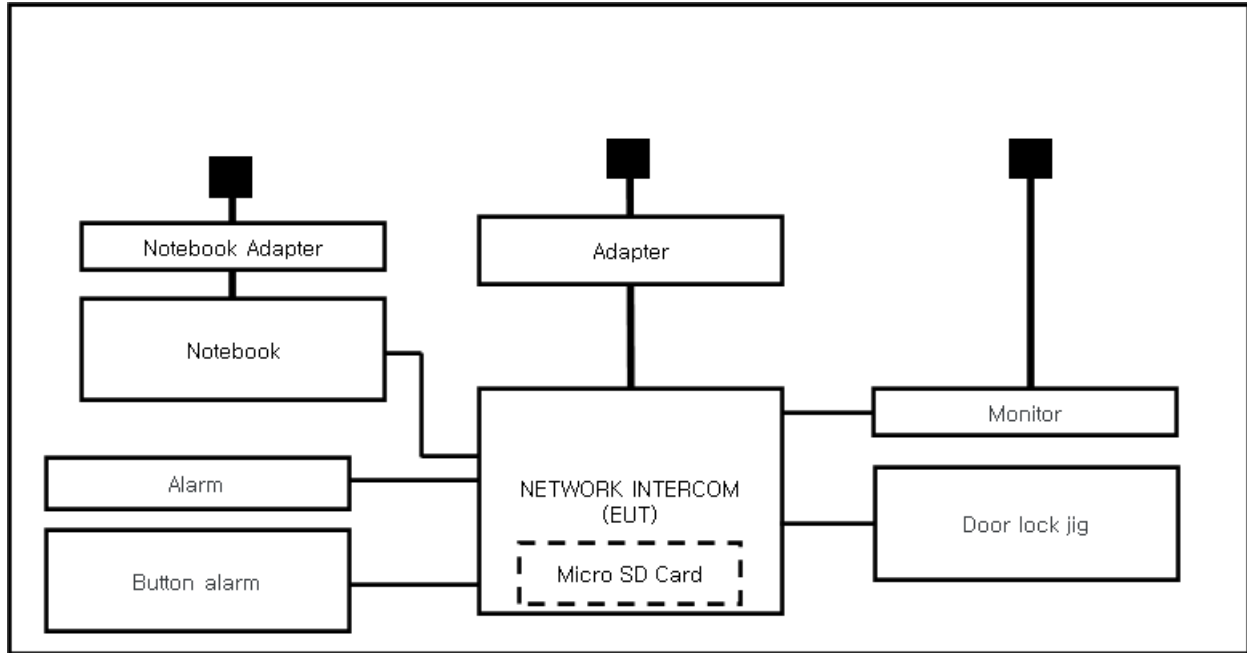

■ PoE Mode

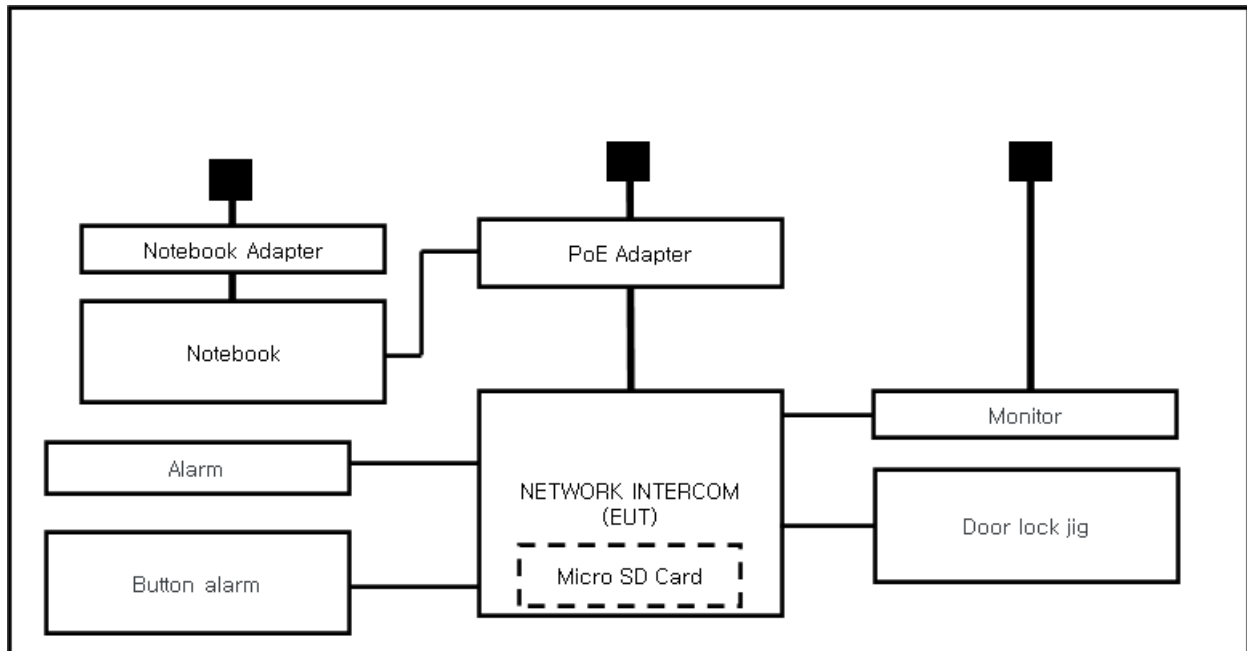

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (13) of (42)

- | | | |
|---|---|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☒ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ ANSI C63.4-2017 | ☒ Class A | ☐ Class B |
| ☒ IC Regulation ICES-003 Issue 7 | | |
| ☒ CAN/CSA CISPR 32:17 | ☒ Class A | ☐ Class B |
| ☐ ANSI C63.4-2017 | ☐ Class A | ☐ Class B |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V2.2.3 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

May. 26, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: (24.4 ± 0,4) °C

Relative Humidity: (43,7 ± 0,4) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

May. 26, 2021

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (24,2 ± 0,4) °C

Relative Humidity: (43,6 ± 0,4) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

May. 26, 2021

Test Location

SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	PREAMPLIFIER	8449B	AGILENT	3008A01742	12, 29, 2021
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 14, 2021

Test Conditions

Temperature: (24,2 ± 0,4) °C

Relative Humidity: (43,6 ± 0,4) % R.H.

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (17) of (42)

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: TID-600R
Phase: DC_L1
Mode:
Operator Name: KES

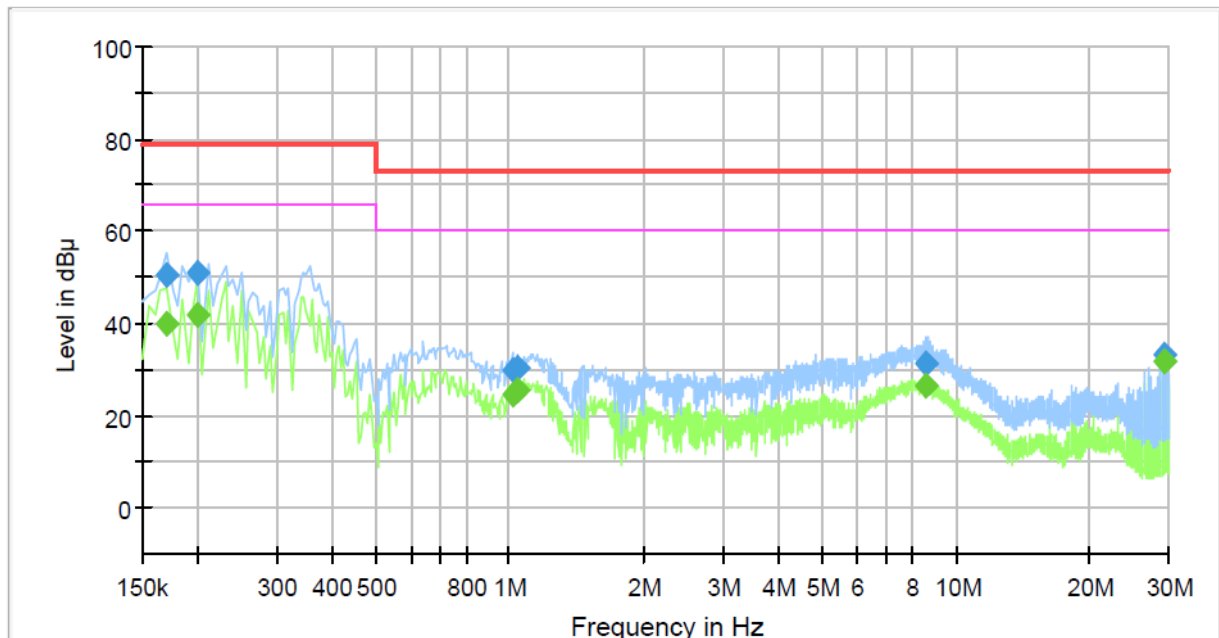

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.170000	---	40.07	66.00	25.93	1000.0	9.000	L1	19.4
0.170000	50.32	---	79.00	28.68	1000.0	9.000	L1	19.4
0.200000	---	42.07	66.00	23.93	1000.0	9.000	L1	19.4
0.200000	50.89	---	79.00	28.11	1000.0	9.000	L1	19.4
1.015000	---	24.75	60.00	35.25	1000.0	9.000	L1	20.0
1.015000	29.83	---	73.00	43.17	1000.0	9.000	L1	20.0
1.045000	---	25.64	60.00	34.36	1000.0	9.000	L1	20.1
1.045000	30.34	---	73.00	42.66	1000.0	9.000	L1	20.1
8.615000	---	26.33	60.00	33.67	1000.0	9.000	L1	19.7
8.615000	31.18	---	73.00	41.82	1000.0	9.000	L1	19.7
29.235000	---	31.77	60.00	28.23	1000.0	9.000	L1	20.4
29.235000	33.23	---	73.00	39.77	1000.0	9.000	L1	20.4

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (18) of (42)

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: TID-600R
Phase: DC_N
Mode:
Operator Name: KES

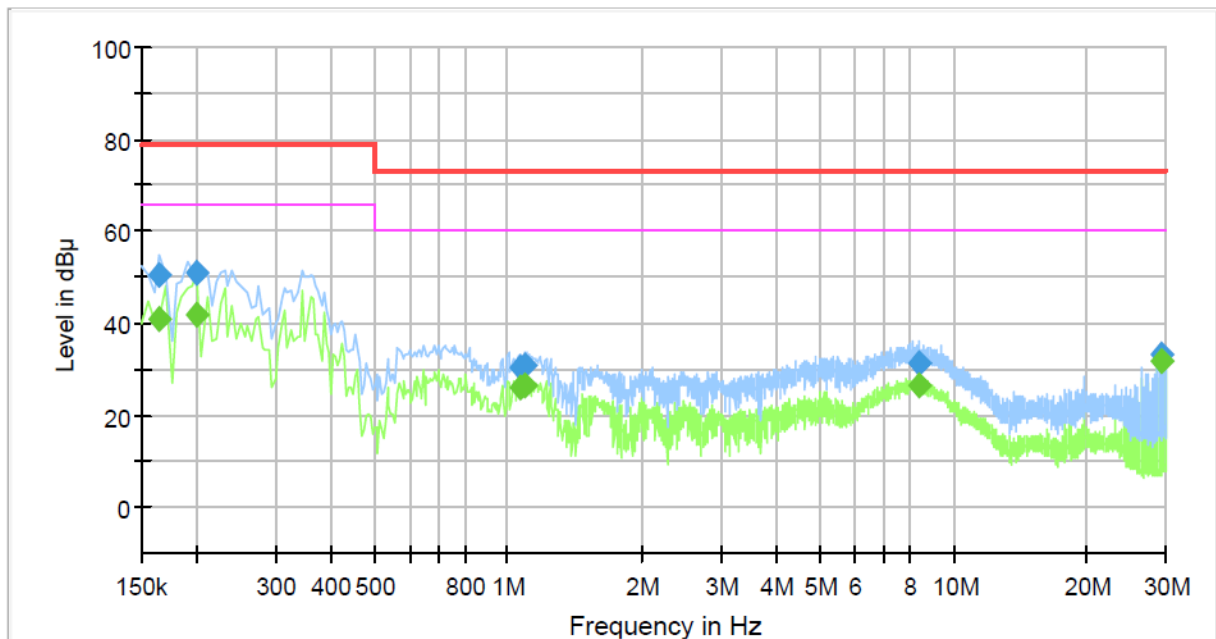

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.165000	---	40.88	66.00	25.12	1000.0	9.000	N	19.4
0.165000	50.56	---	79.00	28.44	1000.0	9.000	N	19.4
0.200000	---	42.05	66.00	23.95	1000.0	9.000	N	19.4
0.200000	50.91	---	79.00	28.09	1000.0	9.000	N	19.4
1.060000	---	26.11	60.00	33.89	1000.0	9.000	N	20.1
1.060000	30.46	---	73.00	42.54	1000.0	9.000	N	20.1
1.090000	---	26.39	60.00	33.61	1000.0	9.000	N	20.1
1.090000	30.77	---	73.00	42.23	1000.0	9.000	N	20.1
8.355000	---	26.54	60.00	33.46	1000.0	9.000	N	19.6
8.355000	31.40	---	73.00	41.60	1000.0	9.000	N	19.6
29.235000	---	31.79	60.00	28.21	1000.0	9.000	N	20.4
29.235000	33.28	---	73.00	39.72	1000.0	9.000	N	20.4

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-21T0405
Page (19) of (42)

■ PoE Mode

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: TID-600R
Phase: PoE_L1
Mode:
Operator Name: KES

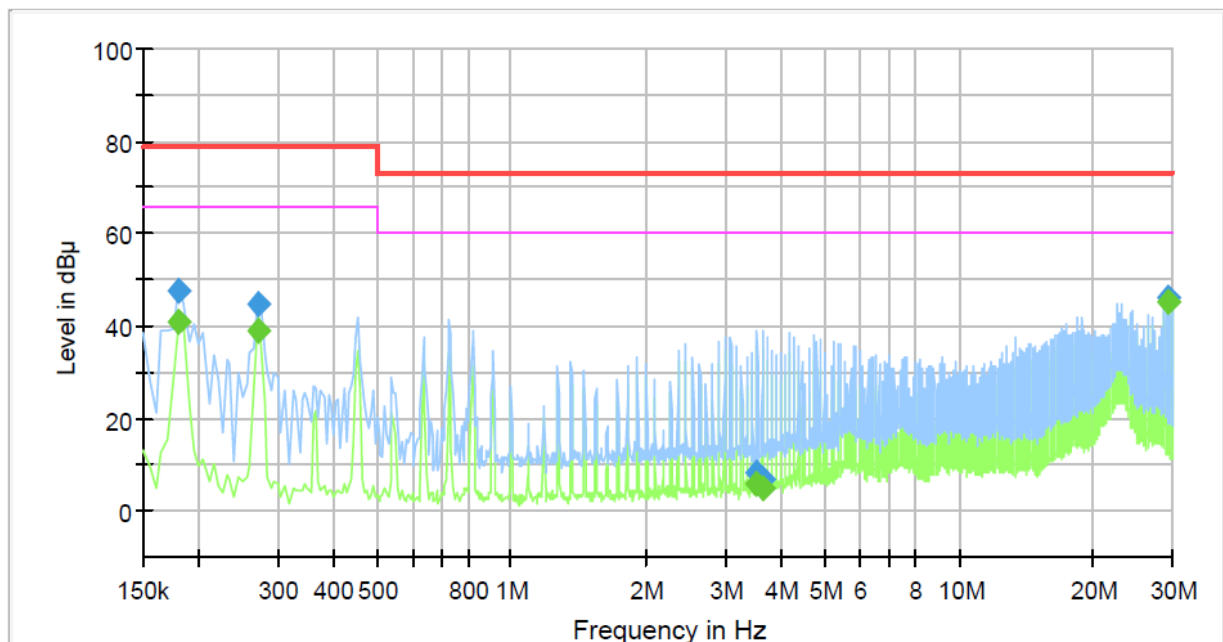

Final_Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.180000	---	41.10	66.00	24.90	1000.0	9.000	L1	19.4
0.180000	47.46	---	79.00	31.54	1000.0	9.000	L1	19.4
0.270000	---	38.97	66.00	27.03	1000.0	9.000	L1	19.5
0.270000	44.71	---	79.00	34.29	1000.0	9.000	L1	19.5
3.540000	---	5.84	60.00	54.16	1000.0	9.000	L1	20.0
3.540000	8.22	---	73.00	64.78	1000.0	9.000	L1	20.0
3.630000	---	5.11	60.00	54.89	1000.0	9.000	L1	20.0
3.630000	6.94	---	73.00	66.06	1000.0	9.000	L1	20.0
29.235000	---	45.41	60.00	14.59	1000.0	9.000	L1	20.4
29.235000	46.26	---	73.00	26.74	1000.0	9.000	L1	20.4

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
 Model No.: TID-600R
 Phase: PoE_N
 Mode:
 Operator Name: KES

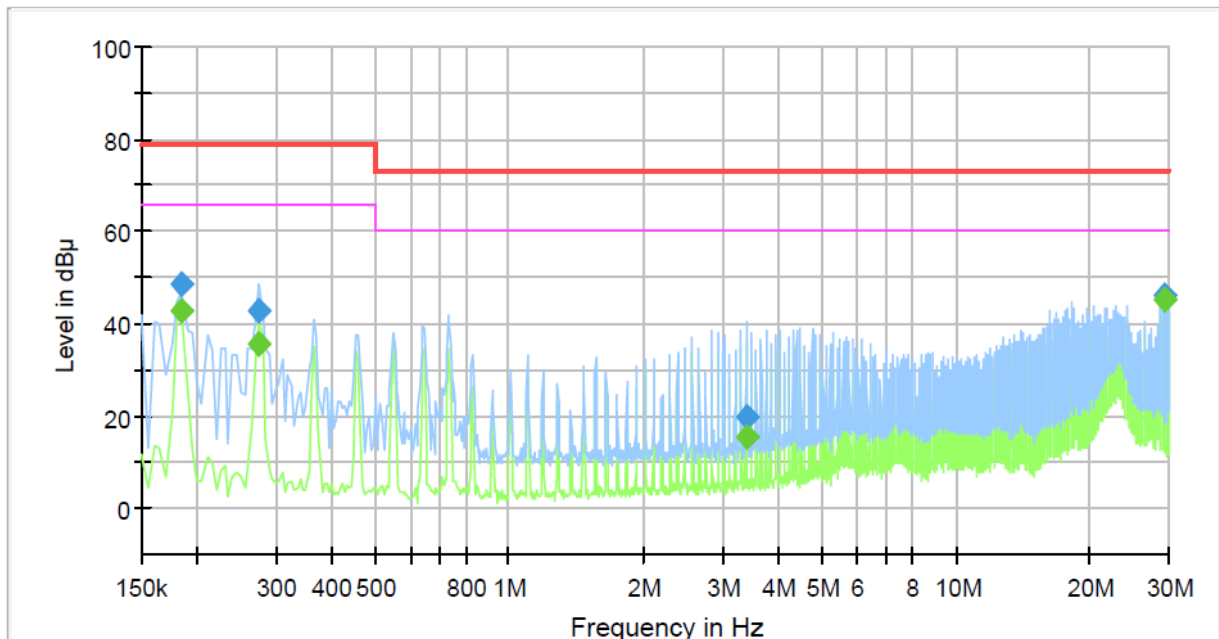

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.185000	---	42.74	66.00	23.26	1000.0	9.000	N	19.4
0.185000	48.48	---	79.00	30.52	1000.0	9.000	N	19.4
0.275000	---	35.86	66.00	30.14	1000.0	9.000	N	19.5
0.275000	42.62	---	79.00	36.38	1000.0	9.000	N	19.5
3.390000	---	15.50	60.00	44.50	1000.0	9.000	N	20.0
3.390000	19.79	---	73.00	53.21	1000.0	9.000	N	20.0
29.235000	---	45.45	60.00	14.55	1000.0	9.000	N	20.4
29.235000	46.14	---	73.00	26.86	1000.0	9.000	N	20.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:


KES-EM-21T0405

Page (21) of (42)

Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

■ DC Mode

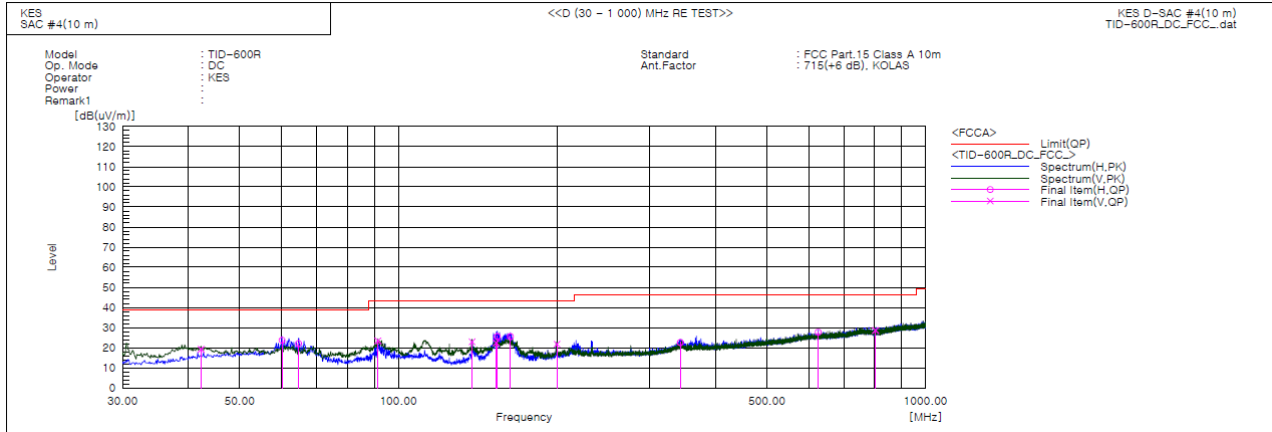

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	42.246	V	41.1	-21.9	19.2	39.0	19.8	111.0	304.0	
2	60.191	H	45.7	-22.0	23.7	39.0	15.3	198.0	142.0	
3	64.678	H	45.3	-23.2	22.1	39.0	16.9	189.0	154.0	
4	91.474	V	47.3	-23.9	23.4	43.5	20.1	142.0	11.0	
5	138.034	V	48.4	-25.4	23.0	43.5	20.5	115.0	274.0	
6	153.311	V	47.3	-24.9	22.4	43.5	21.1	114.0	191.0	
7	154.160	H	50.4	-24.8	25.6	43.5	17.9	396.0	141.0	
8	163.133	H	50.0	-24.4	25.6	43.5	17.9	388.0	67.0	
9	199.871	V	42.6	-20.8	21.8	43.5	21.7	104.0	195.0	
10	342.583	H	38.1	-15.5	22.6	46.5	23.9	199.0	255.0	
11	625.580	H	36.0	-8.2	27.8	46.5	18.7	115.0	223.0	
12	803.333	V	35.0	-6.3	28.7	46.5	17.8	113.0	105.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (22) of (42)

PoE Mode

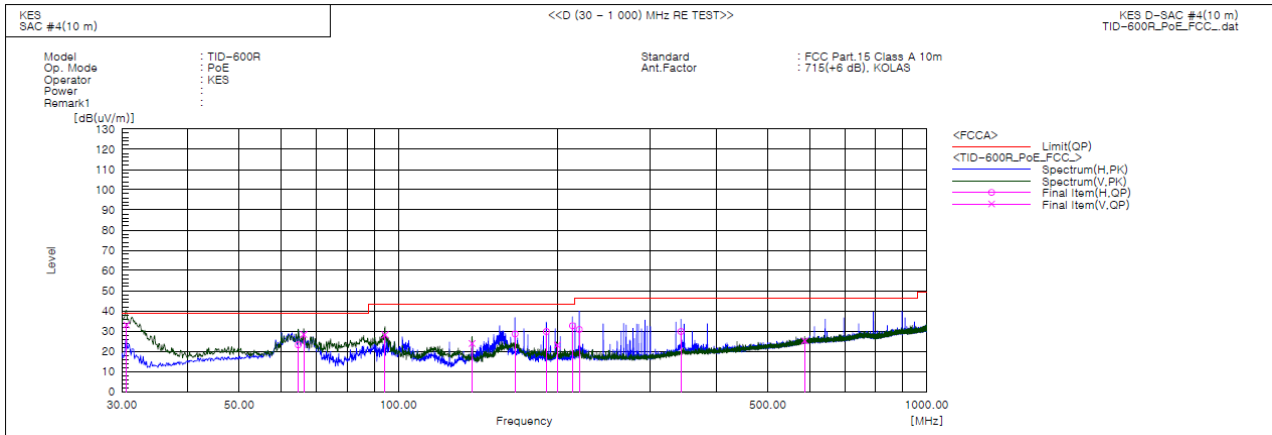

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	30.606	V	58.4	-25.3	33.1	39.0	5.9	111.0	218.0	
2	64.678	H	46.4	-23.2	23.2	39.0	15.8	198.0	342.0	
3	66.254	V	51.9	-23.6	28.3	39.0	10.7	147.0	259.0	
4	94.384	V	51.7	-23.6	28.1	43.5	15.4	144.0	244.0	
5	137.913	V	49.3	-25.4	23.9	43.5	19.6	111.0	304.0	
6	166.406	H	52.8	-24.2	28.6	43.5	14.9	198.0	293.0	
7	190.656	H	51.7	-21.9	29.8	43.5	13.7	195.0	293.0	
8	199.871	V	43.9	-20.8	23.1	43.5	20.4	142.0	218.0	
9	213.573	H	53.0	-20.4	32.6	43.5	10.9	197.0	293.0	
10	219.999	H	51.0	-20.2	30.8	46.5	15.7	193.0	293.0	
11	342.583	H	45.3	-15.5	29.8	46.5	16.7	389.0	169.0	
12	587.386	V	34.0	-8.8	25.2	46.5	21.3	111.0	14.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (23) of (42)

- IC Regulation ICES-003 Issue 7 ■ DC Mode

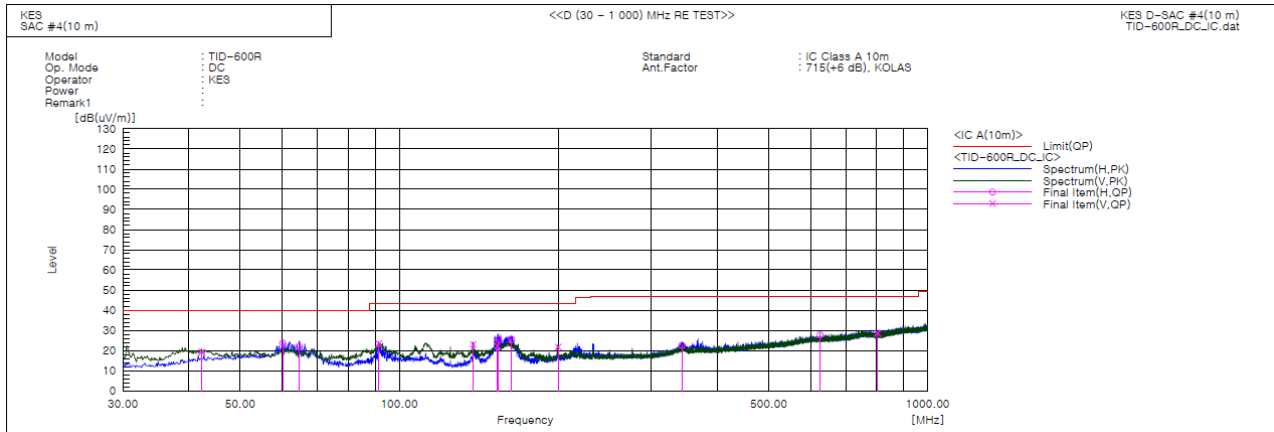

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	42.246	V	41.1	-21.9	19.2	40.0	20.8	111.0	304.0	
2	60.191	H	45.7	-22.0	23.7	40.0	16.3	198.0	142.0	
3	64.678	H	45.3	-23.2	22.1	40.0	17.9	189.0	154.0	
4	91.474	V	47.3	-23.9	23.4	43.5	20.1	142.0	11.0	
5	138.034	V	48.4	-25.4	23.0	43.5	20.5	115.0	274.0	
6	153.311	V	47.3	-24.9	22.4	43.5	21.1	114.0	191.0	
7	154.160	H	50.4	-24.8	25.6	43.5	17.9	396.0	141.0	
8	163.133	H	50.0	-24.4	25.6	43.5	17.9	388.0	67.0	
9	199.871	V	42.6	-20.8	21.8	43.5	21.7	104.0	195.0	
10	342.583	H	38.1	-15.5	22.6	47.0	24.4	199.0	255.0	
11	625.580	H	36.0	-8.2	27.8	47.0	19.2	115.0	223.0	
12	803.333	V	35.0	-6.3	28.7	47.0	18.3	113.0	105.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (24) of (42)

PoE Mode

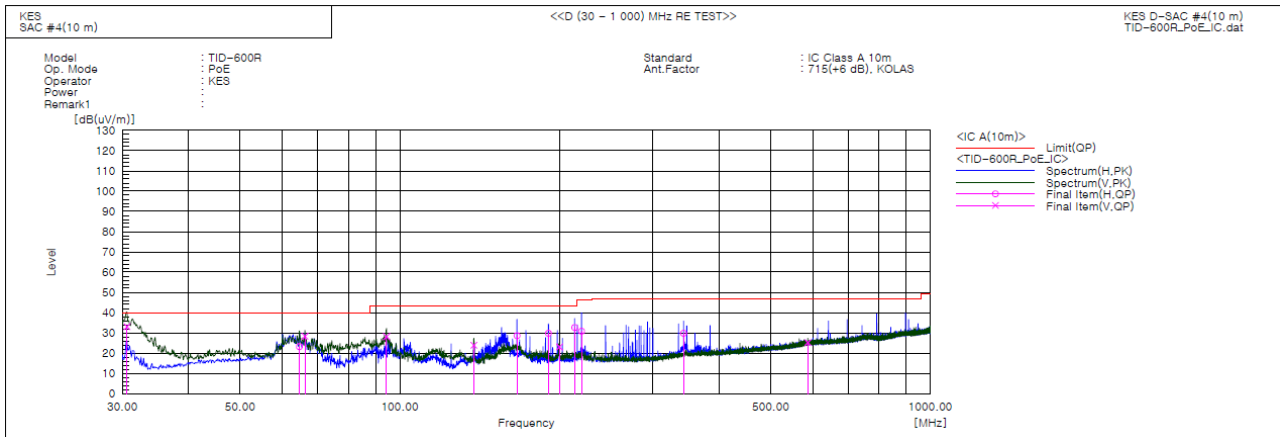

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	30.606	V	58.4	-25.3	33.1	40.0	6.9	111.0	218.0	
2	64.678	H	46.4	-23.2	23.2	40.0	16.8	198.0	342.0	
3	66.254	V	51.9	-23.6	28.3	40.0	11.7	147.0	259.0	
4	94.384	V	51.7	-23.6	28.1	43.5	15.4	144.0	244.0	
5	137.913	V	49.3	-25.4	23.9	43.5	19.6	111.0	304.0	
6	166.406	H	52.8	-24.2	28.6	43.5	14.9	198.0	293.0	
7	190.656	H	51.7	-21.9	29.8	43.5	13.7	195.0	293.0	
8	199.871	V	43.9	-20.8	23.1	43.5	20.4	142.0	218.0	
9	213.573	H	53.0	-20.4	32.6	43.5	10.9	197.0	293.0	
10	219.999	H	51.0	-20.2	30.8	46.4	15.6	193.0	293.0	
11	342.583	H	45.3	-15.5	29.8	47.0	17.2	389.0	169.0	
12	587.386	V	34.0	-8.8	25.2	47.0	21.8	111.0	14.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0405
Page (25) of (42)

Radiated Electric Field Emissions(Above 1 GHz)

DC Mode

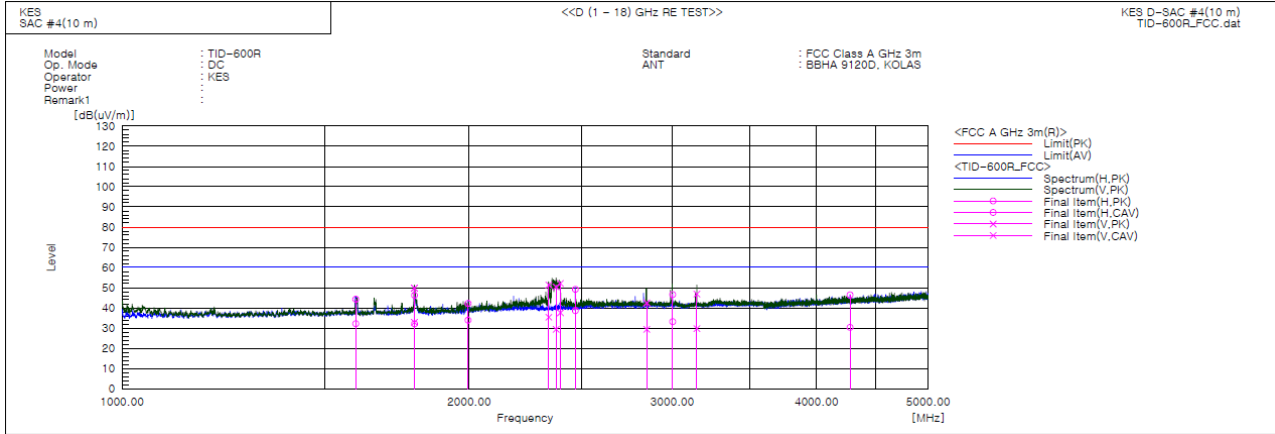

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1594.351	H	46.3	34.2	-2.0	44.3	32.2	80.0	60.0	35.7	27.8	100.0	150.0	
2	1792.000	V	51.0	34.1	-1.2	49.8	32.9	80.0	60.0	30.2	27.1	100.0	271.0	
3	1793.146	H	47.4	33.3	-1.2	46.2	32.1	80.0	60.0	33.8	27.9	100.0	143.0	
4	1995.532	H	42.4	34.1	-0.2	42.2	33.9	80.0	60.0	37.8	26.1	100.0	195.0	
5	2343.579	V	49.9	33.9	1.5	51.4	35.4	80.0	60.0	28.6	24.6	100.0	289.0	
6	2378.378	V	48.7	27.7	1.7	50.4	29.4	80.0	60.0	29.6	30.6	100.0	275.0	
7	2398.942	V	50.3	35.8	1.8	52.1	37.6	80.0	60.0	27.9	22.4	100.0	293.0	
8	2472.142	H	47.0	36.4	2.2	49.2	38.6	80.0	60.0	30.8	21.4	100.0	72.0	
9	2850.148	V	38.7	25.6	3.8	42.5	29.4	80.0	60.0	37.5	30.6	100.0	341.0	
10	3001.395	H	42.1	28.7	4.5	46.6	33.2	80.0	60.0	33.4	26.8	100.0	243.0	
11	3150.124	V	42.0	24.9	4.9	46.9	29.8	80.0	60.0	33.1	30.2	100.0	3.0	
12	4276.593	H	36.9	20.8	9.5	46.4	30.3	80.0	60.0	33.6	29.7	100.0	262.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0405

Page (26) of (42)

PoE Mode

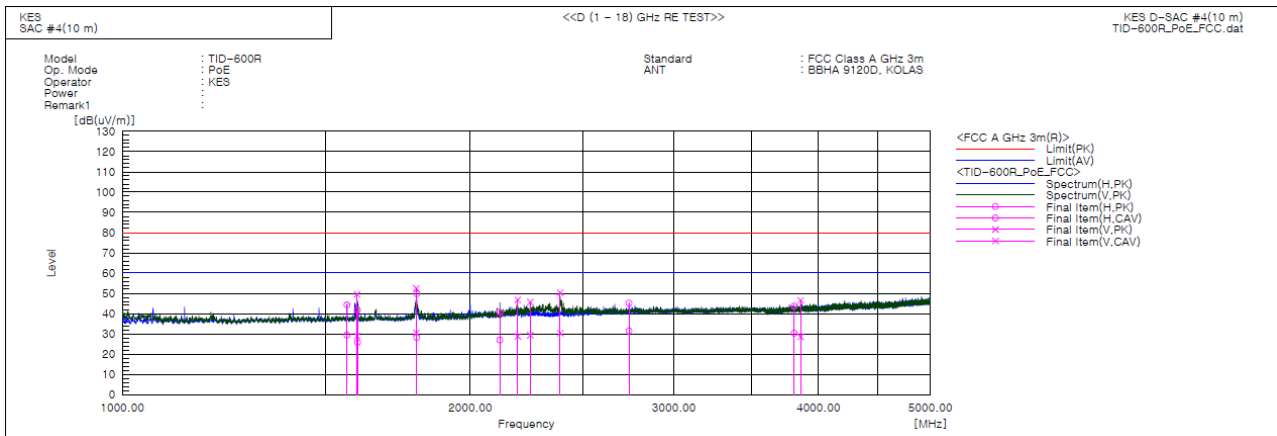

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1564.196	H	46.5	31.6	-2.2	44.3	29.4	80.0	60.0	35.7	30.6	100.0	83.0	
2	1596.296	V	51.6	31.0	-2.0	49.6	29.0	80.0	60.0	30.4	31.0	100.0	292.0	
3	1597.457	H	43.7	27.7	-2.0	41.7	25.7	80.0	60.0	38.3	34.3	100.0	287.0	
4	1795.784	V	53.6	31.6	-1.1	52.5	30.5	80.0	60.0	27.5	29.5	100.0	258.0	
5	1797.673	H	50.9	29.3	-1.1	49.8	28.2	80.0	60.0	30.2	31.8	100.0	184.0	
6	2121.196	H	40.4	26.6	0.3	40.7	26.9	80.0	60.0	39.3	33.1	100.0	30.0	
7	2197.468	V	46.1	28.1	0.7	46.8	28.8	80.0	60.0	33.2	31.2	100.0	240.0	
8	2253.124	V	44.7	28.3	1.0	45.7	29.3	80.0	60.0	34.3	30.7	100.0	288.0	
9	2391.964	V	48.5	28.5	1.8	50.3	30.3	80.0	60.0	29.7	29.7	100.0	292.0	
10	2743.196	H	41.8	28.1	3.3	45.1	31.4	80.0	60.0	34.9	28.6	100.0	23.0	
11	3811.142	H	36.3	22.8	7.5	43.8	30.3	80.0	60.0	36.2	29.7	100.0	169.0	
12	3860.211	V	38.7	20.7	7.8	46.5	28.5	80.0	60.0	33.5	31.5	100.0	44.0	

◆ Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV)[dB(uV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]


Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ DC Mode

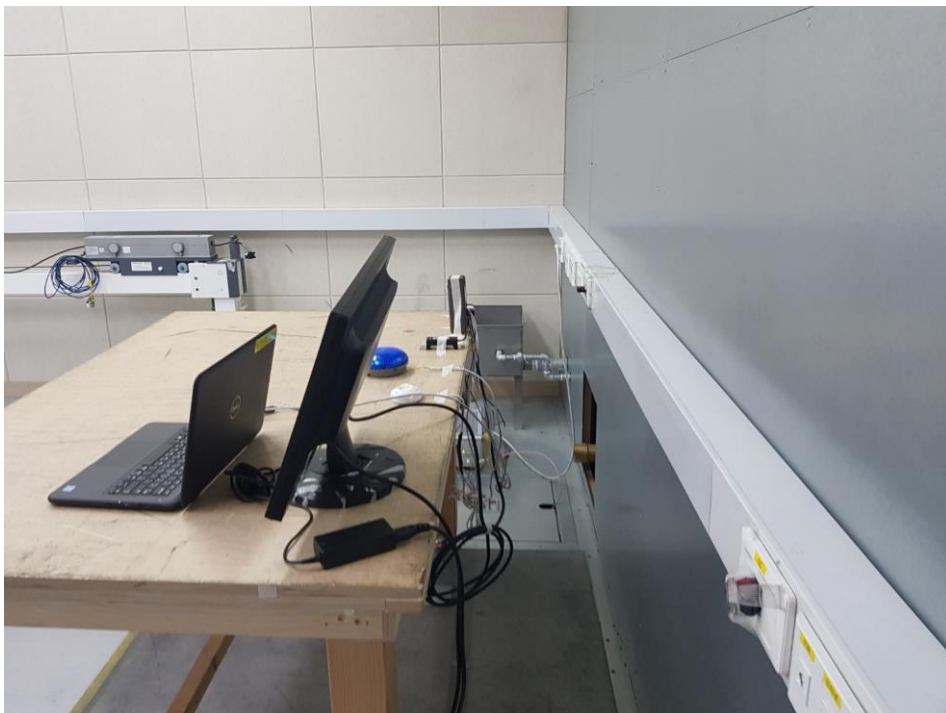

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

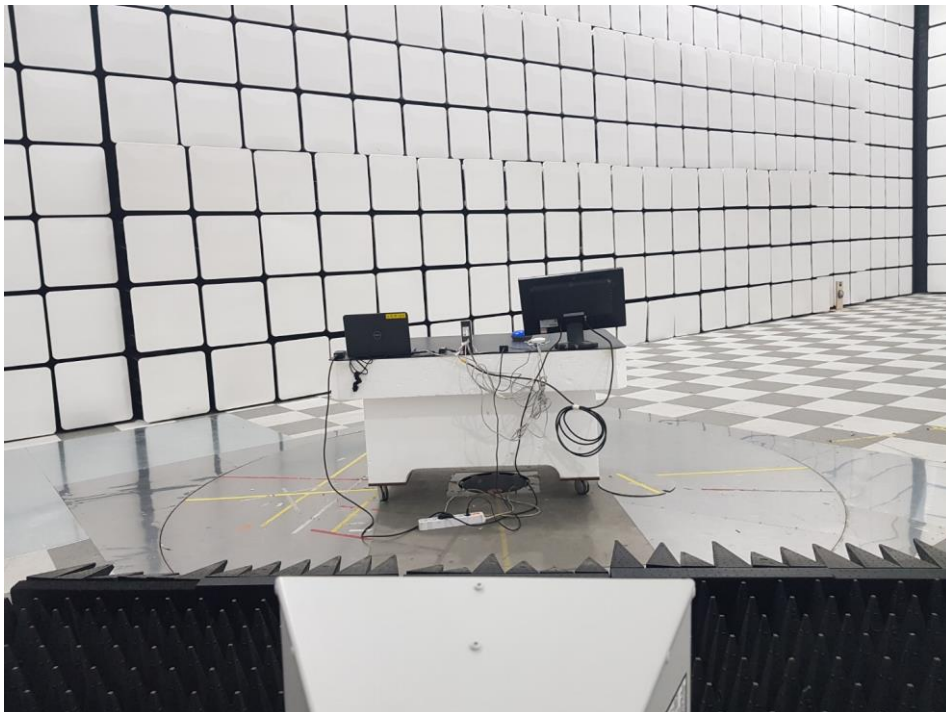

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

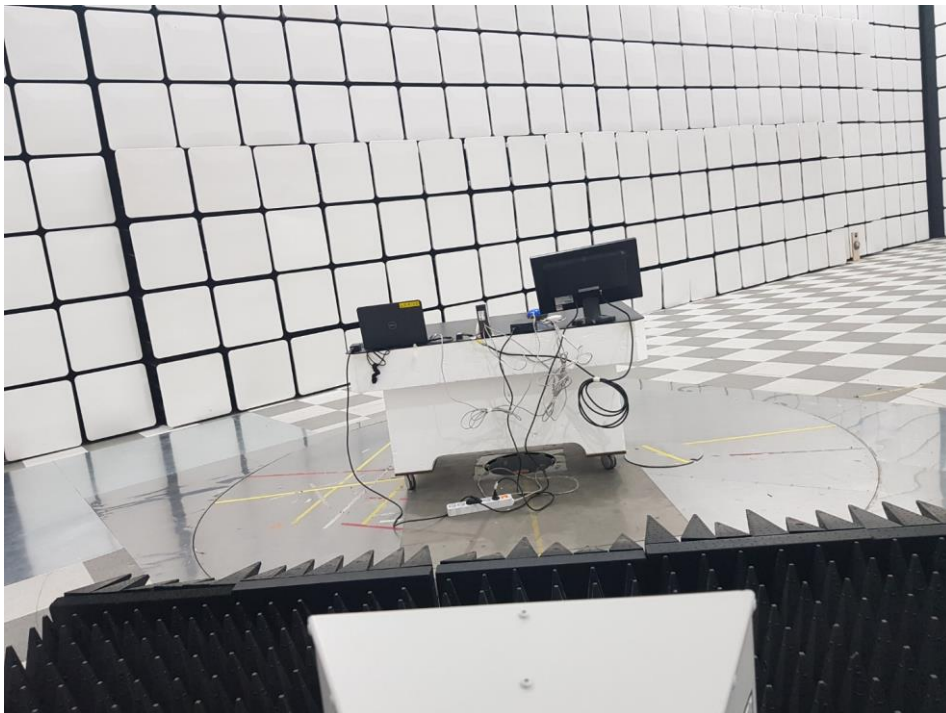

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)

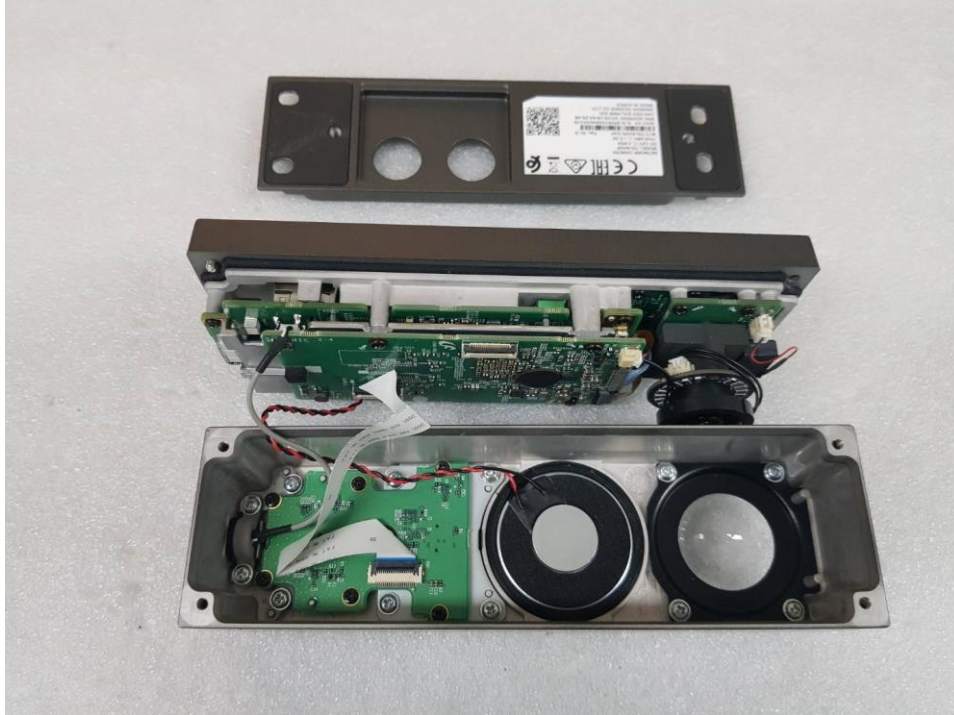


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Main Board

(Top)

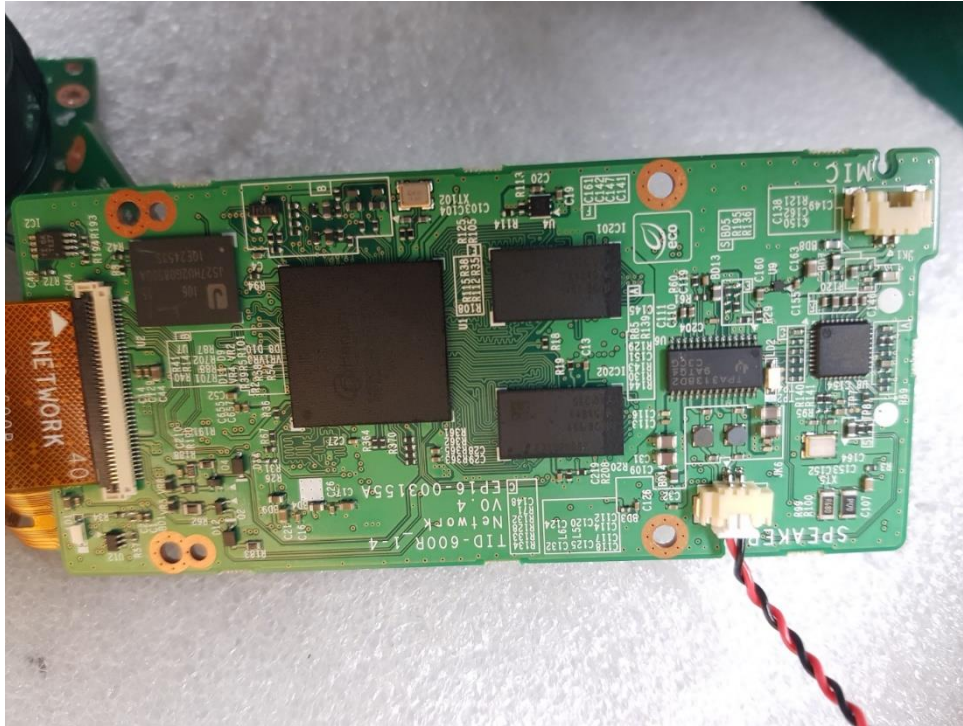


(Bottom)

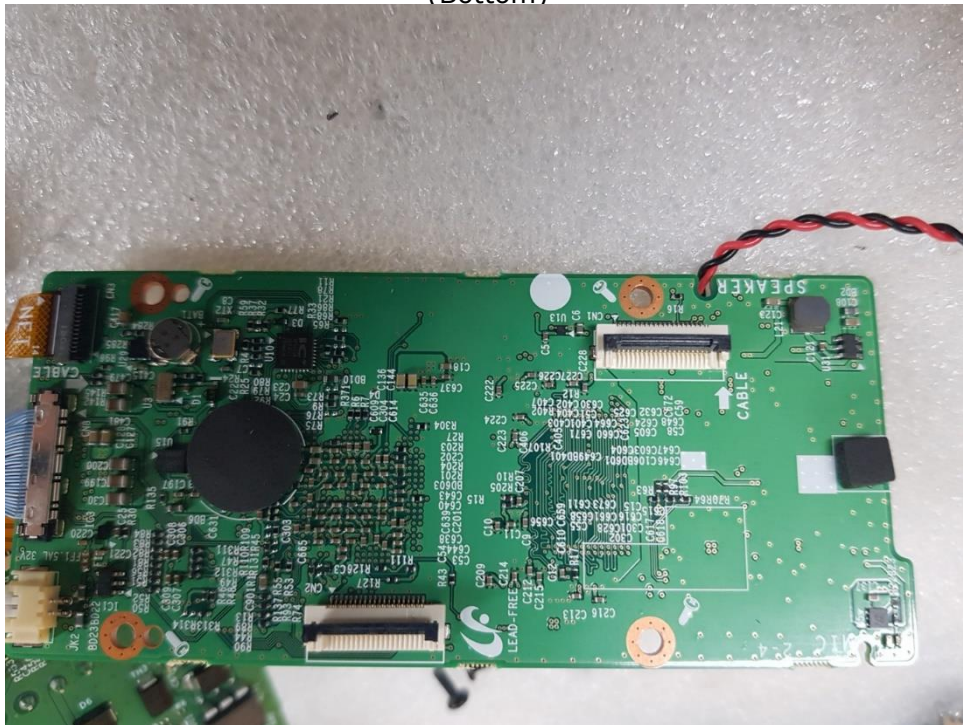


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Main Board 2

(Top)

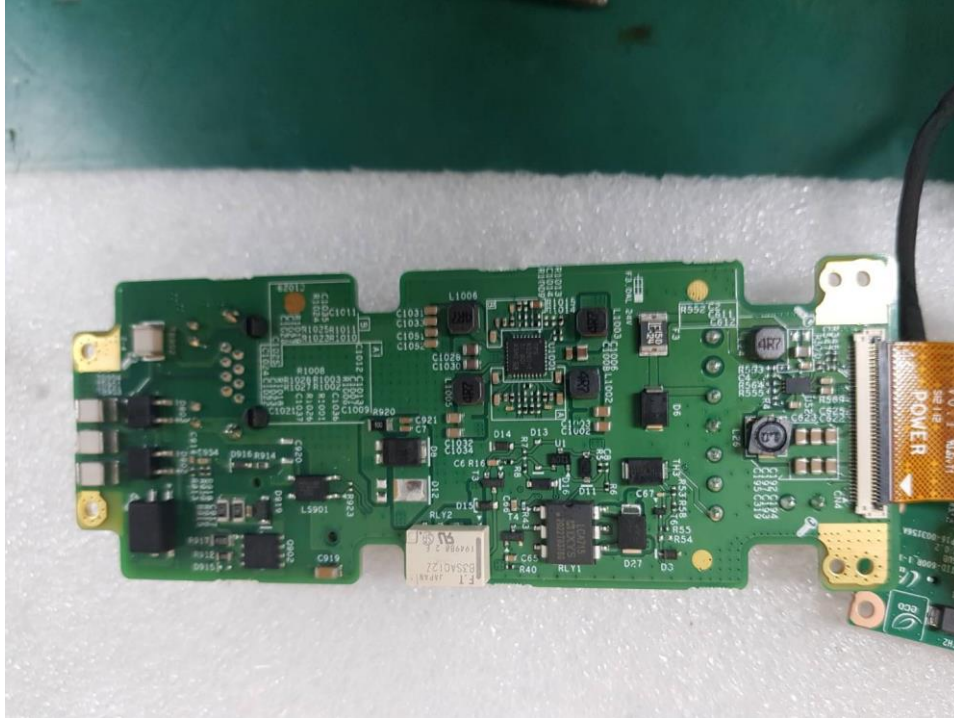

(Bottom)

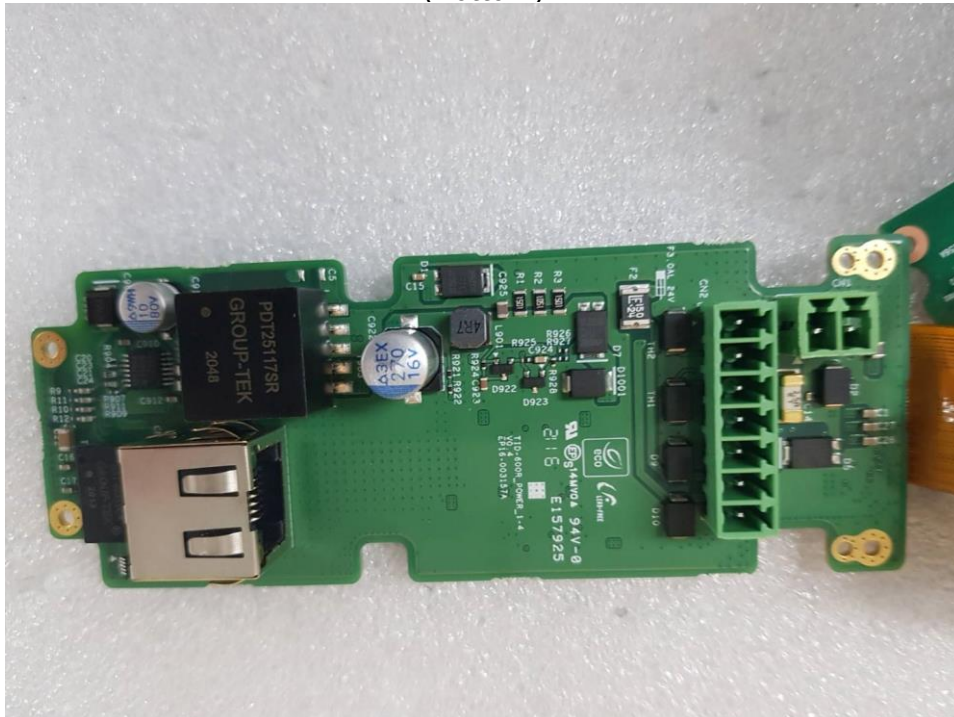


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Sub Board 1

(Top)



(Bottom)

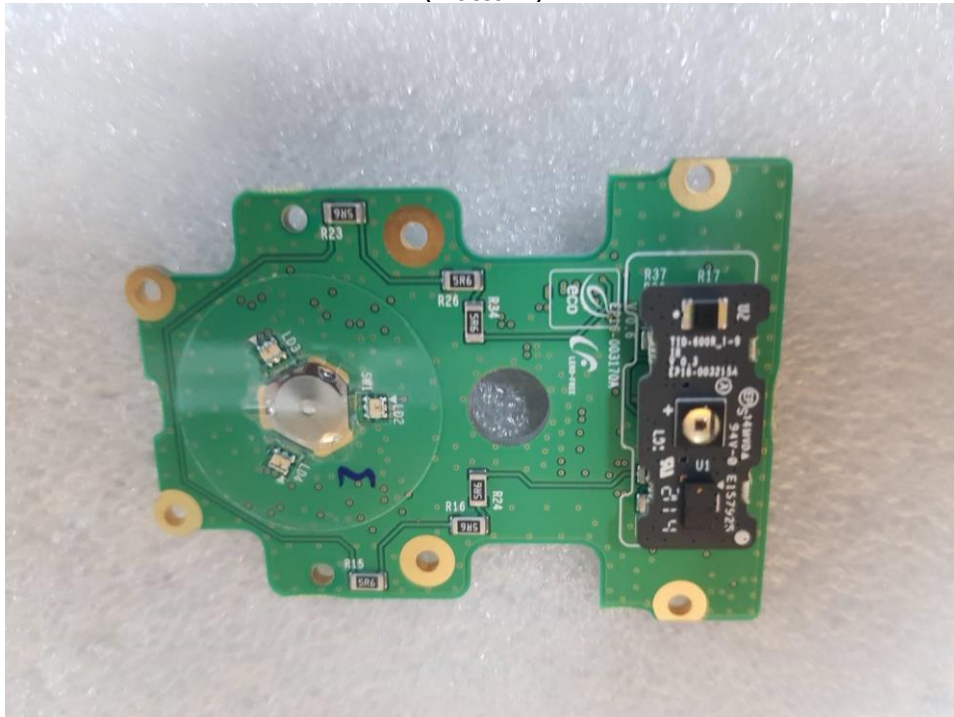

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Sub Board 2

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Speaker

(Top)

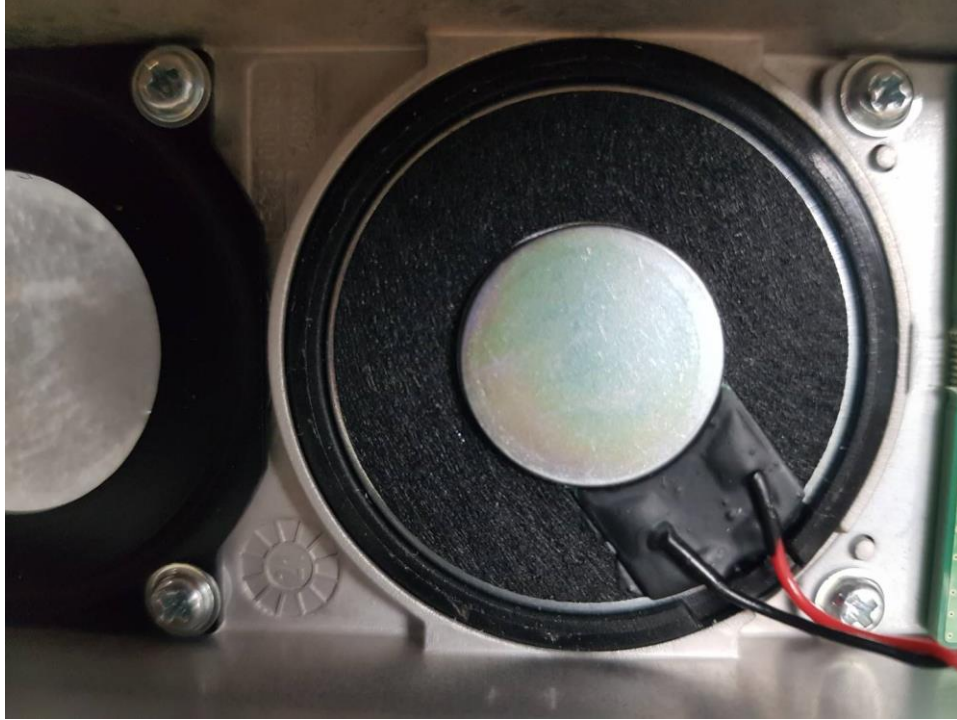

(Bottom)

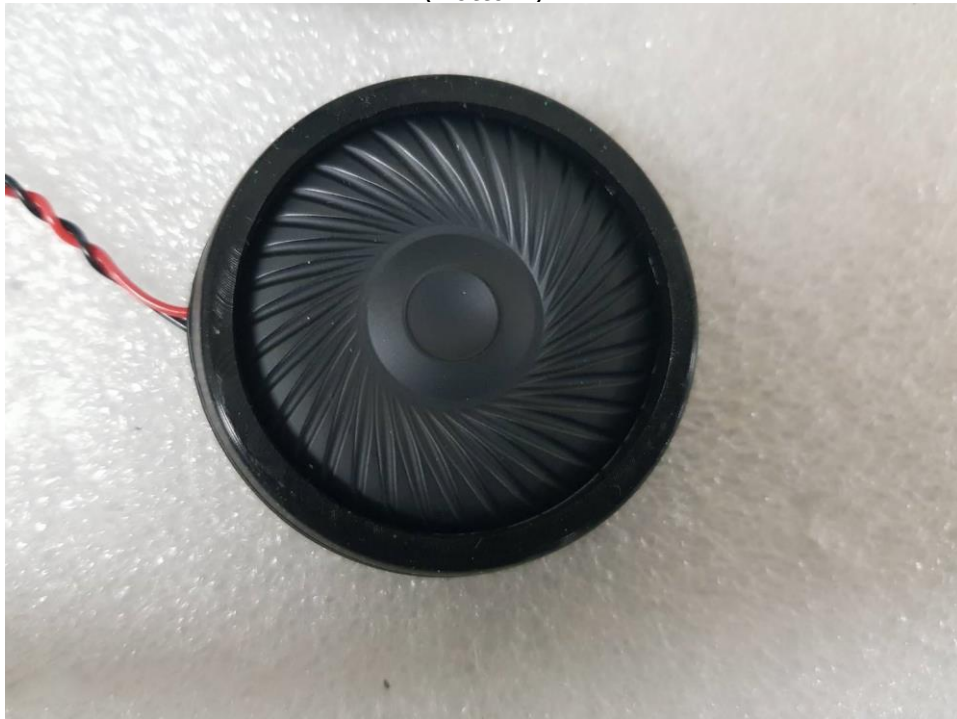

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Camera Lens

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Camera Board

(Top)

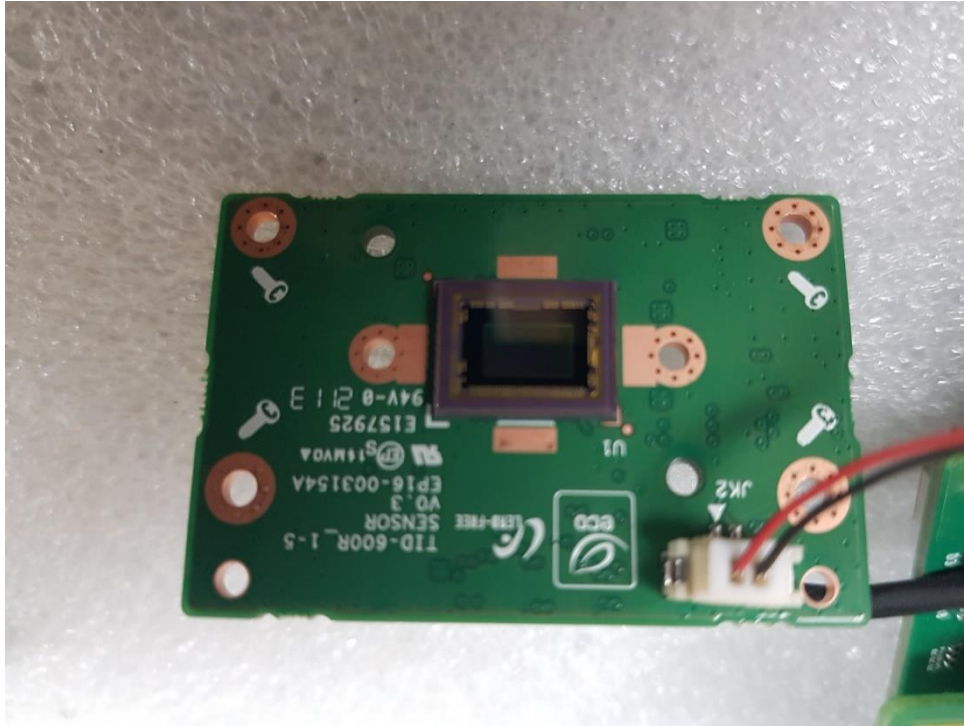

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label Photographs



CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.