



EMC TEST REPORT For RCM

Test Report No. : KES-EM-20T0771
Date of Issue : Nov. 05, 2020
Product name : THERMAL CAMERA
Model/Type No. : TNM-3620TDY
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Sep. 11, 2020
Test date : Oct. 24, 2020 ~ Oct. 25, 2020
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Min Seong, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0771

Page (2) of (44)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 05, 2020	KES-EM-20T0771	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement.....	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	15
2.2	Conducted Emissions at Telecommunication Ports.....	16
2.3	Radiated Electric Field Emissions(Below 1 GHz)	17
2.4	Radiated Electric Field Emissions(Above 1 GHz)	18
APPENDIX A – TEST DATA.....		19
Conducted Emissions at Mains Power Ports.....		19
Conducted Emissions at Telecommunication Ports		21
Radiated Electric Field Emissions(Below 1 GHz)		23
Radiated Electric Field Emissions(Above 1 GHz).....		25
Test Setup Photos and Configuration		27
Conducted Emissions at Mains Power Ports.....		27
Conducted Emissions at Telecommunication Ports		28
Radiated Electric Field Emissions(Below 1 GHz)		30
Radiated Electric Field Emissions(Above 1 GHz).....		32
EUT External Photographs.....		34
EUT Internal Photographs		35



1.0 General Product Description

Main Specifications of EUT are:

Video	Thermal	Visible
Imaging Device	Uncooled micro bolometer	1/2.8" 2MP CMOS
Effective Pixels	320(H)x240(V)	1945(H)x1109(V)
NETD	< 60mK	None
Pixel Size	12μm	None
Min. Illumination	None	Color: 0.05 lux(F1.6, 1/30sec) B/W: 0.005 lux(F1.6, 1/30sec)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB : Micro USB Type B, 1280x720 for installation	
Lens		
Focal Length (Zoom Ratio)	4.7mm fixed focal	4mm fixed focal
Max. Aperture Ratio	F1.0	F1.6
Angular Field of View	H: 50.0°, V: 36.4°, D: 65.3°	H: 87.6, V: 46.4°, D: 104.5°
Min. Object Distance	1m(3.28ft)	None
Focus Control	Fixed	Fixed
Lens Type	None	
Mount Type	None	
Optional Lens	None	
Pan / Tilt / Rotate		
Pan / Tilt / Rotate Range	None	
Pan Range	None	
Pan Speed	None	
Tilt Range	None	
Tilt Speed	None	
Rotate Range	None	
Sequence	None	
Preset Accuracy	None	
Azimuth	None	
Auto Tracking	None	
Operational		
IR Viewable Length	None	
Camera Title	Displayed up to 85 characters	
Day & Night	None	Auto(ICR)
Backlight Compensation	None	BLC, WDR, SDR
Wide Dynamic Range	None	extreme WDR
Digital Noise Reduction	None	SSNR V
Digital Image Stabilization	Support(built-in gyro sensor)	
Defog	None	None
Motion Detection	8ea, 8point polygonal zones	
Privacy Masking	32ea, polygonal zones - Color: Grey/Green/Red/Blue/Black/White - Mosaic	
Gain Control	None	Low / Middle / High
White Balance	None	ATW / AWC / Manual / Indoor / Outdoor
LDC	None	Support
Electronic Shutter Speed	None	Minimum / Maximum / Anti flicker(2~1/12,000sec)
Digital PTZ	None	None
Video Rotation	Flip, Mirror	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0771
Page (5) of (44)

Analytics	Normal mode : Directional detection, Motion detection, Enter/Exit, Tampering, Virtual line, Audio detection, Temperature detection EBT mode : Temperature detection, Blackbody abnormal	
Business Intelligence	None	None
Serial Interface	None	None
Alarm I/O	Input 1ea / Output 2ea	
Alarm Triggers	Analytics, Network disconnect, Alarm input	
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover (Normal mode only) Audio playback Beep alarm (EBT mode only)	
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm	
Audio Out	Line out, Max.output level: 1Vrms	
IR Illuminator (Optional)	None	None
Wiper	None	None
Coaxial Protocol	None	None
Video Transmission Distance	None	None
Color Palettes	Estimated Body Temperature Mode (Thermal Face detection) : Whitehot Estimated Body Temperature Mode (Visible Face detection) & Normal mode : Whitehot, Blackhot, Rainbow, Rainbow2, Sepia, Red, Iron, Custom	None
Radiometry		
Temperature detect range	Estimated Body Temperature Mode : 30~45°C(86°F~113°F) Normal mode : -20~+130°C(-4°F~+266°F)	None
Temperature accuracy	Estimated Body Temperature Mode : ±0.5°C(±0.3°C with Blackbody) Normal mode : ±5°C(≤100°C), ±20%(>100°C)	None
Temperature detection	3ea rectangular	None
Additional	Hybrid palettes (Normal mode), Spot temperature reading (Normal mode - Thermal image only), Estimated body temperature mode	None
Network		
Ethernet	RJ-45(10/100BASE-T)	
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG	
Resolution	320x240	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)	H.265/H.264 : Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Smart Codec	Manual(5ea area) (Visible image only), WiseStreamII (Thermal & Visible)	
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control	
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR	
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 6 profiles)	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0771

Page (6) of (44)

Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) login authentication Digest login authentication IP address filtering User access log 802.1X authentication(EAP-TLS, EAP-LEAP) Device certificate(Hanwha Techwin Root CA)
Edge Storage	Micro SD/SDHC/SDXC 1slot 256GB
Application Programming Interface	ONVIF Profile S/T SUNAPI(HTTP API)
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12, 10.13, 10.14 Recommended Browser: Google Chrome Supported Browser: MS Explorer11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Memory	4608MB RAM, 512MB Flash
Environmental	
Operating Temperature / Humidity	Body temperature simulation mode : +10°C~+35°C(+50°F~+95°F) / Less than 95% RH Normal mode : -10°C~+55°C(+14°F~+131°F) / Less than 95% RH
Storage Temperature / Humidity	-30°C~+60°C(-22°F~+140°F) / Less than 95% RH
Certification	None
Electrical	
Input Voltage	PoE+(IEEE802.3at), 12VDC
Power Consumption	PoE+: Max. 17.0W, typical 12.5W 12VDC: Max. 14.5W, typical 11.0W
Mechanical	
Color / Material	White / Aluminum
RAL Code	RAL-9003
Product dimensions / weight	135x75x188.5mm / 1.7Kg
Conduit hole	None
Hanging mount(Dome)	None
Skin cover(Dome)	None
Weather cap(Dome)	None
Power module	None
Backbox	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☒ 240 Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☒ PoE

Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
THERMAL CAMERA	TNM-3620TDY	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0771
Page (8) of (44)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC / DC Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
PoE Adapter	GS728TPP	-	NETGEAR	-
Notebook	ProBook4430s	-	HP	-
Notebook Adapter	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
MIC	MP1000	-	-	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Button Alarm	-	-	-	-
Micro SD Card	-	-	SanDisk	16 GB
Smart Phone	LG-SU760	108KPQJ0186212	LG Electronics Co., Ltd.	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.6 External I/O Cabling

■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (EUT)	PoE+	Notebook	RJ-45	3.0	U
	AUDIO OUT	Speaker	Line-Out (3.5 mm)	1.4	U
	LINE IN	MIC	XLR	1.4	U
	ALARM OUT	Alarm	ALARM IN	3.0	U
	ALARM IN	Button Alarm	ALARM OUT	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
	Ground	Ground	Ground	2.0	U
Notebook	MIC	Smart Phone	3.5 mm	1.0	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (EUT)	PoE+	PoE Adapter	PoE	3.0	U
	AUDIO OUT	Speaker	Line-Out (3.5 mm)	1.4	U
	LINE IN	MIC	XLR	1.4	U
	ALARM OUT	Alarm	ALARM IN	3.0	U
	ALARM IN	Button Alarm	ALARM OUT	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
	Ground	Ground	Ground	2.0	U
Notebook	RJ-45	PoE Adapter	DATA	1.5	U
	MIC	Smart Phone	3.5 mm	1.0	U

* Unshielded=U, Shielded=S



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0771
Page (10) of (44)

1.7 EUT Operating Mode(s)

Test mode	operating
DC Mode, PoE Mode	Monitoring EUT Using Web Viewer, Ping Test


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ DC Mode

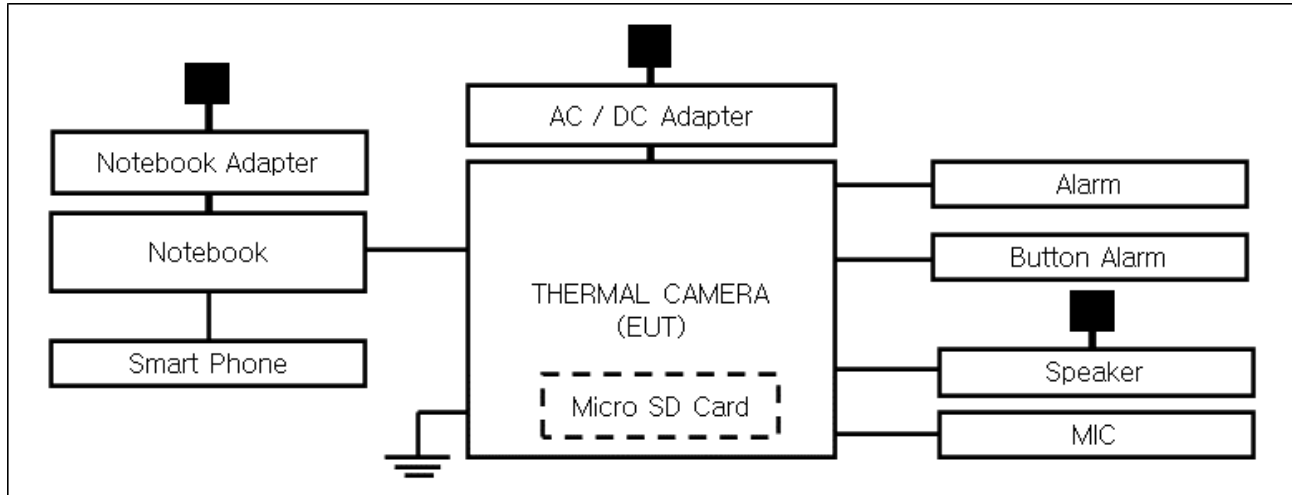

■ PoE Mode

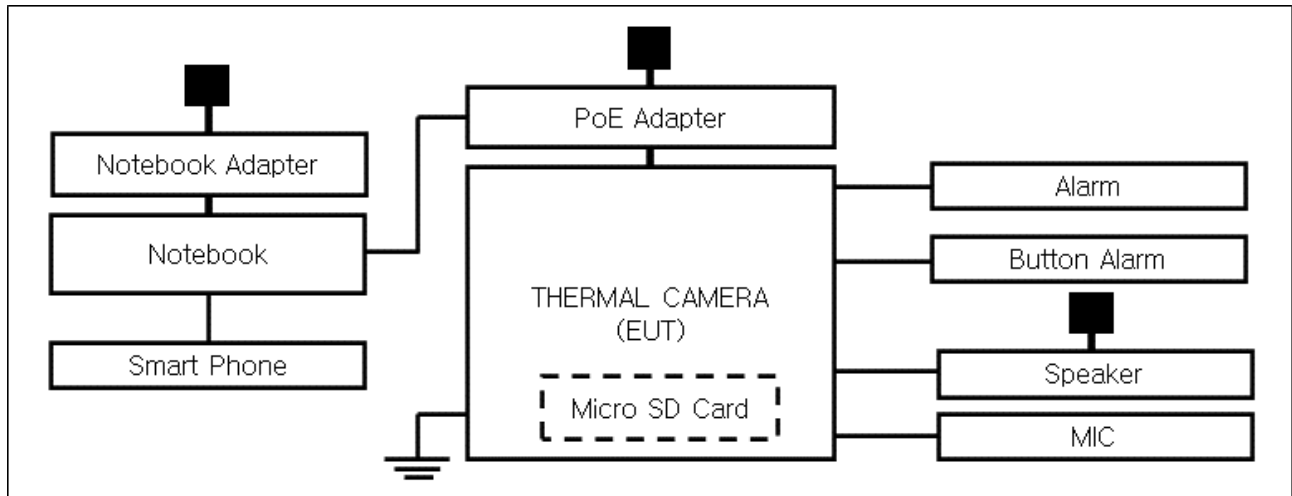

1.9 Remarks when standards applied

USB port and VIDEO port were excluded from testing as management ports.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0771
Page (14) of (44)

-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☒ AS/NZS CISPR32:2015 | ☒ Class A | ☐ Class B |
|
 | | |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
|
 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
 | | |
| ☐ RE- Directive 2014/53/EU | | |
|
 | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
 | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
|
 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0771

Page (15) of (44)

2.1 Conducted Emissions at Mains Power Ports

Test Date

Oct. 24, 2020

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 20, 2021
☒	LISN	ENV216	R & S	101787	01, 02, 2021
☒	LISN	ESH2-Z5	R & S	100450	01, 02, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	01, 02, 2021

Test Conditions

Temperature: 23.5 °C
Relative Humidity: 50.2 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Oct. 24, 2020

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 20, 2021
☒	LISN	ENV216	R & S	101787	01, 02, 2021
☒	LISN	ESH2-Z5	R & S	100450	01, 02, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	01, 02, 2021
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2021
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2021
☐	CDN	CDNS502A	TESEQ	40431	01, 02, 2021

Test Conditions

Temperature: 23,5 °C
Relative Humidity: 50,2 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0771

Page (17) of (44)

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Oct. 24, 2020

Test Location☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2021
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2020
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2021

Test Conditions

Temperature: 23,4 °C
Relative Humidity: 50,0 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Oct. 25, 2020

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 20, 2021
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2021
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2021

Test Conditions

Temperature: 23,6 °C
Relative Humidity: 50,2 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0771

Page (19) of (44)

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

Common Information

Test Description:

Model No.:

Phase:

Mode:

Operator Name:


Conducted Emission

TNM-3620TDY

H

DC

KES

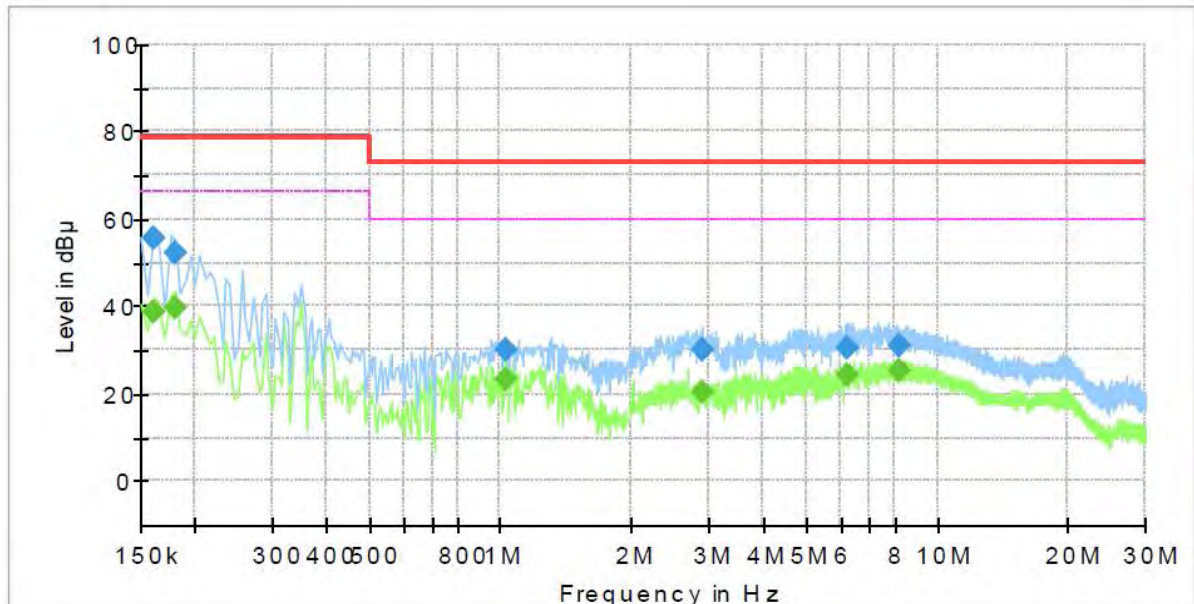

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	38.49	66.00	27.51	1000.0	9.000	L1	19.5
0.160000	55.66	---	79.00	23.34	1000.0	9.000	L1	19.5
0.180000	---	39.59	66.00	26.41	1000.0	9.000	L1	19.5
0.180000	52.12	---	79.00	26.88	1000.0	9.000	L1	19.5
1.030000	---	23.53	60.00	36.47	1000.0	9.000	L1	20.1
1.030000	30.06	---	73.00	42.94	1000.0	9.000	L1	20.1
2.910000	---	20.63	60.00	39.37	1000.0	9.000	L1	20.1
2.910000	29.84	---	73.00	43.16	1000.0	9.000	L1	20.1
6.230000	---	24.07	60.00	35.93	1000.0	9.000	L1	19.6
6.230000	30.75	---	73.00	42.25	1000.0	9.000	L1	19.6
8.190000	---	25.41	60.00	34.59	1000.0	9.000	L1	19.7
8.190000	31.00	---	73.00	42.00	1000.0	9.000	L1	19.7

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TNM-3620TDY
Phase:	N
Mode:	DC
Operator Name:	KES

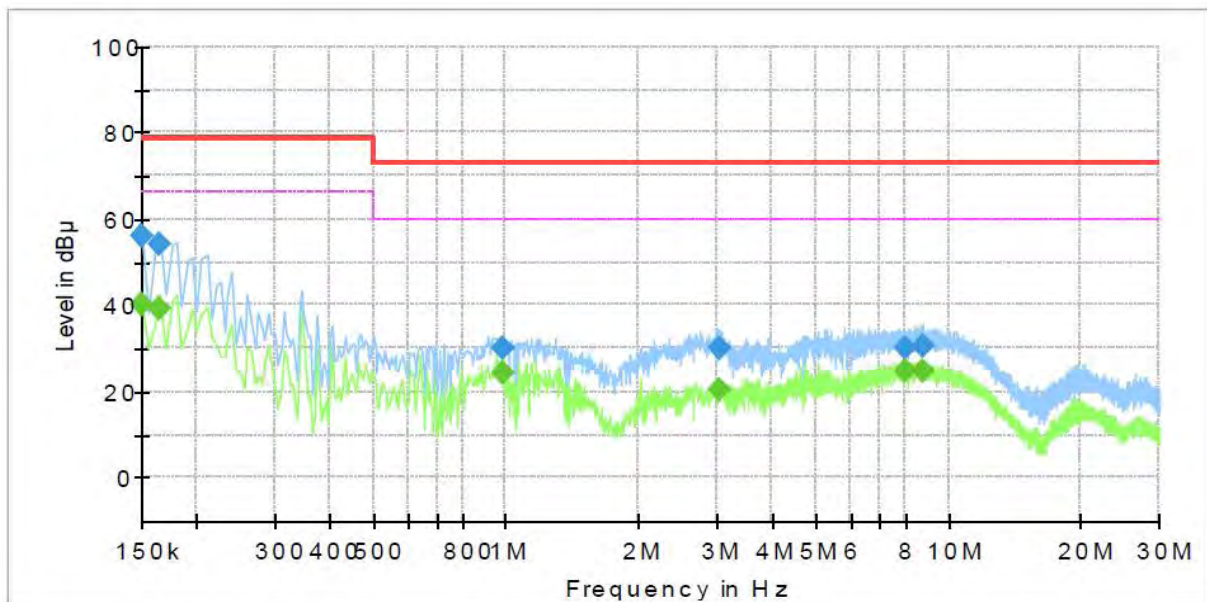

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	40.21	66.00	25.79	1000.0	9.000	N	19.4
0.150000	55.93	---	79.00	23.07	1000.0	9.000	N	19.4
0.165000	---	39.18	66.00	26.82	1000.0	9.000	N	19.4
0.165000	54.15	---	79.00	24.85	1000.0	9.000	N	19.4
0.980000	---	24.11	60.00	35.89	1000.0	9.000	N	20.1
0.980000	30.26	---	73.00	42.74	1000.0	9.000	N	20.1
3.045000	---	20.43	60.00	39.57	1000.0	9.000	N	20.1
3.045000	30.00	---	73.00	43.00	1000.0	9.000	N	20.1
7.985000	---	24.58	60.00	35.42	1000.0	9.000	N	19.7
7.985000	30.15	---	73.00	42.85	1000.0	9.000	N	19.7
8.730000	---	24.81	60.00	35.19	1000.0	9.000	N	19.8
8.730000	30.49	---	73.00	42.51	1000.0	9.000	N	19.8

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0771
Page (21) of (44)


Conducted Emissions at Telecommunication Ports

■ DC Mode

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: TNM-3620TDY
Mode : DC
Speed : 100 Mbps
Operator Name: KES

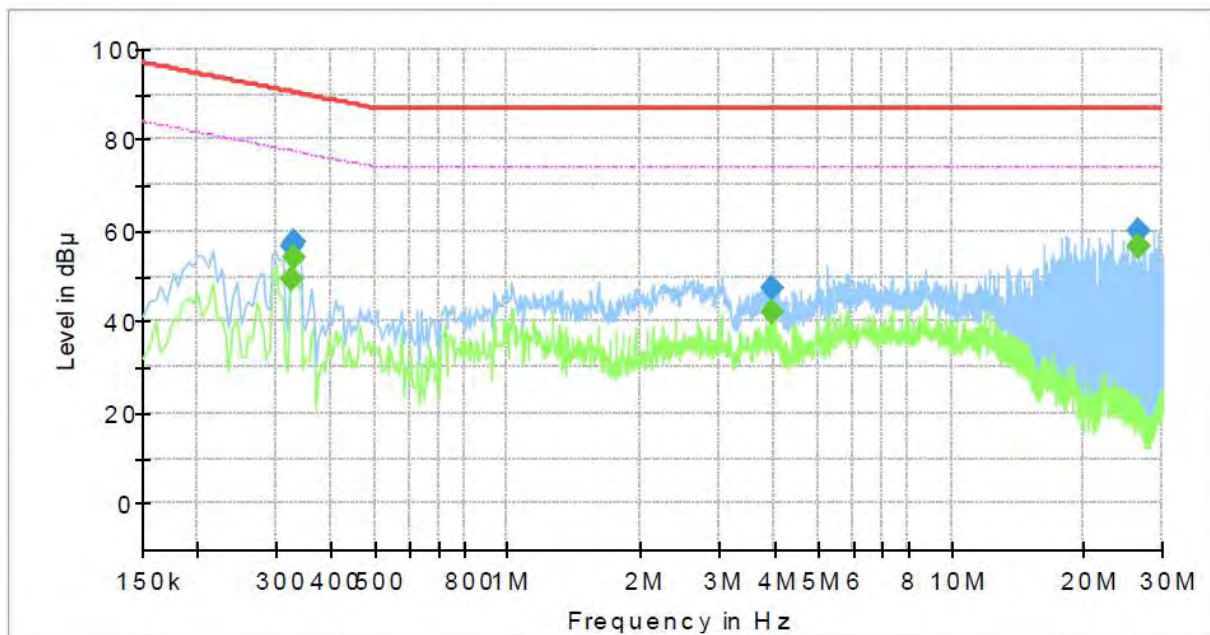

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.325000	---	49.49	77.58	28.09	1000.0	9.000	Single Line	19.7
0.325000	56.68	---	90.58	33.90	1000.0	9.000	Single Line	19.7
0.330000	---	54.25	77.45	23.20	1000.0	9.000	Single Line	19.7
0.330000	57.47	---	90.45	32.98	1000.0	9.000	Single Line	19.7
3.955000	---	42.20	74.00	31.80	1000.0	9.000	Single Line	19.6
3.955000	47.39	---	87.00	39.61	1000.0	9.000	Single Line	19.6
26.485000	---	56.77	74.00	17.23	1000.0	9.000	Single Line	20.3
26.485000	60.04	---	87.00	26.96	1000.0	9.000	Single Line	20.3
26.610000	---	56.63	74.00	17.37	1000.0	9.000	Single Line	20.3
26.610000	60.14	---	87.00	26.86	1000.0	9.000	Single Line	20.3


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	TNM-3620TDY
Mode :	PoE
Speed :	100 Mbps
Operator Name:	KES

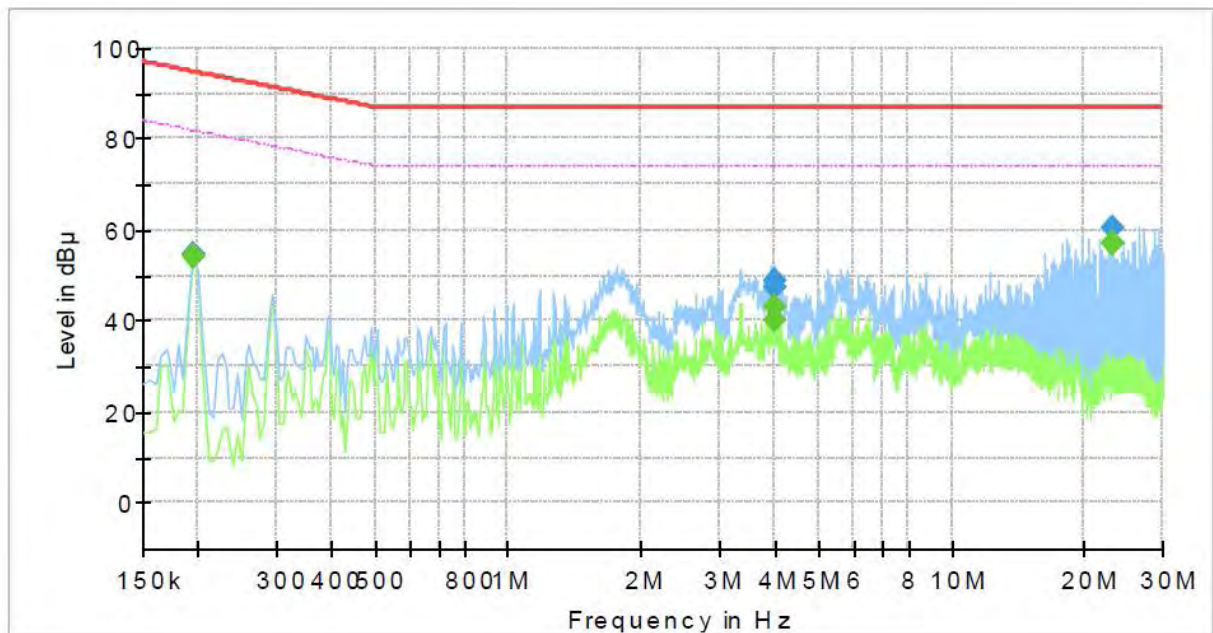

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.195000	---	54.14	81.82	27.68	1000.0	9.000	Single Line	19.7
0.195000	54.42	---	94.82	40.40	1000.0	9.000	Single Line	19.7
4.010000	---	40.14	74.00	33.86	1000.0	9.000	Single Line	19.5
4.010000	47.44	---	87.00	39.56	1000.0	9.000	Single Line	19.5
4.015000	---	42.86	74.00	31.14	1000.0	9.000	Single Line	19.5
4.015000	49.01	---	87.00	37.99	1000.0	9.000	Single Line	19.5
23.130000	---	56.83	74.00	17.17	1000.0	9.000	Single Line	20.1
23.130000	60.42	---	87.00	26.58	1000.0	9.000	Single Line	20.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode

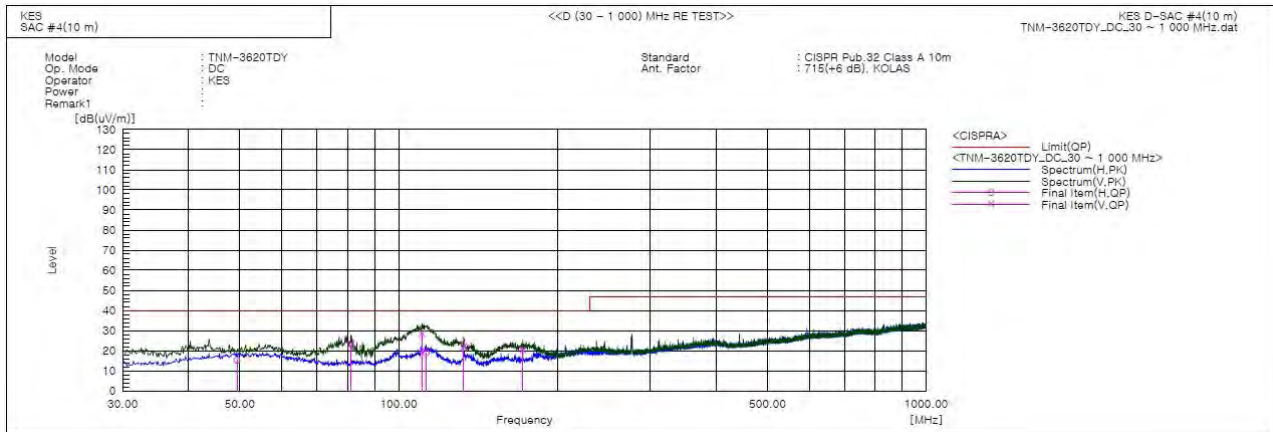

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	49.400	H	36.7	-21.4	15.3	40.0	24.7	312.0	155.0	
2	81.168	V	50.3	-27.5	22.8	40.0	17.2	127.0	202.0	
3	110.753	V	51.3	-22.8	28.5	40.0	11.5	100.0	329.0	
4	112.814	H	41.9	-23.0	18.9	40.0	21.1	378.0	116.0	
5	132.820	V	47.8	-25.8	22.0	40.0	18.0	100.0	358.0	
6	171.984	V	44.8	-24.4	20.4	40.0	19.6	105.0	286.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0771
Page (24) of (44)

■ PoE Mode

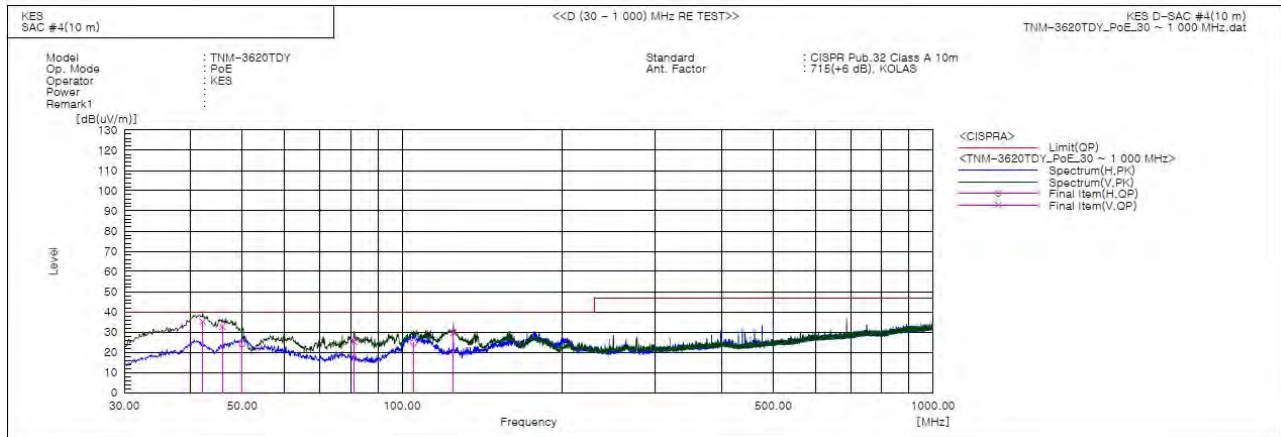

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	42.125	V	57.4	-22.3	35.1	40.0	4.9	123.0	274.0	
2	45.884	V	54.4	-21.8	32.6	40.0	7.4	217.0	186.0	
3	50.006	H	45.6	-21.4	24.2	40.0	15.8	400.0	20.0	
4	81.168	V	52.8	-27.5	25.3	40.0	14.7	112.0	274.0	
5	105.175	H	47.1	-22.5	24.6	40.0	15.4	400.0	195.0	
6	124.939	V	54.5	-24.8	29.7	40.0	10.3	132.0	230.0	

◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-20T0771

Page (25) of (44)

Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

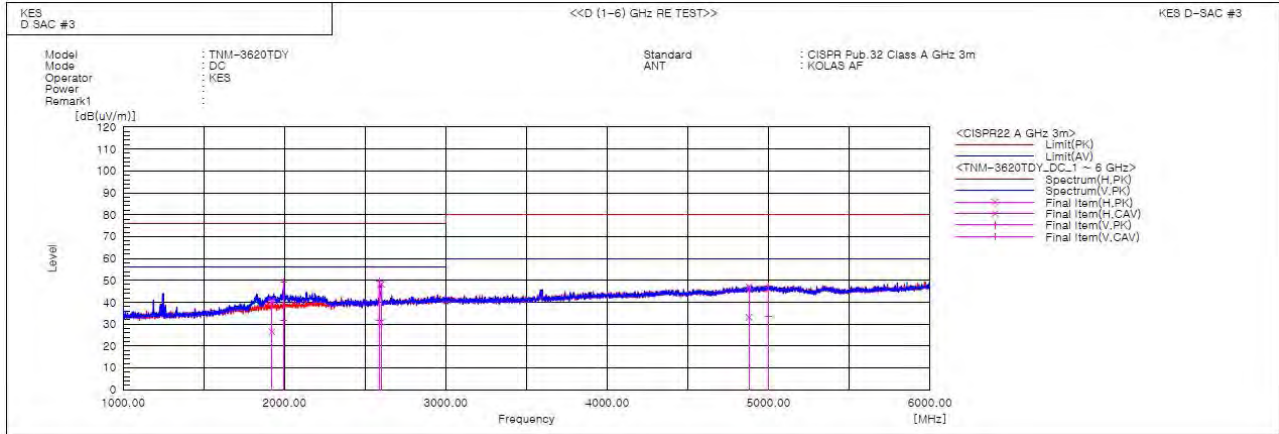

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1922.245	H	43.2	29.3	-2.8	40.4	26.5	76.0	56.0	35.6	29.5	100.0	247.8	
2	1996.949	V	51.5	33.9	-2.3	49.2	31.6	76.0	56.0	26.8	24.4	100.0	356.2	
3	2588.772	V	49.5	31.8	0.0	49.5	31.8	76.0	56.0	26.5	24.2	100.0	285.6	
4	2599.179	H	48.1	30.9	0.1	48.2	31.0	76.0	56.0	27.8	25.0	100.0	56.5	
5	4877.709	H	39.0	25.2	7.9	46.9	33.1	80.0	60.0	33.1	26.9	100.0	226.5	
6	5000.629	V	39.0	25.2	8.4	47.4	33.6	80.0	60.0	32.6	26.4	100.0	275.3	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0771

Page (26) of (44)

PoE Mode

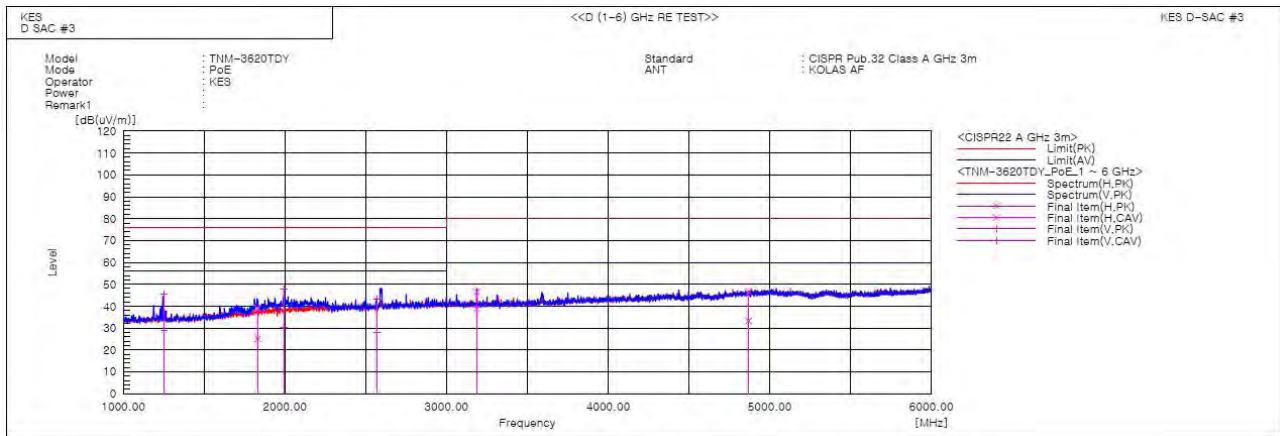

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1249.949	V	53.6	37.2	-8.2	45.4	29.0	76.0	56.0	30.6	27.0	100.0	203.5	
2	1832.016	H	42.5	28.7	-3.5	39.0	25.2	76.0	56.0	37.0	30.8	100.0	114.1	
3	1994.920	V	50.1	32.7	-2.3	47.8	30.4	76.0	56.0	28.2	25.6	100.0	3.5	
4	2569.465	V	43.0	27.9	0.0	43.0	27.9	76.0	56.0	33.0	28.1	100.0	352.5	
5	3187.610	H	44.9	37.2	1.6	46.5	38.8	80.0	60.0	33.5	21.2	100.0	229.9	
6	4868.493	H	38.6	25.4	7.9	46.5	33.3	80.0	60.0	33.5	26.7	100.0	160.8	

Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Mode

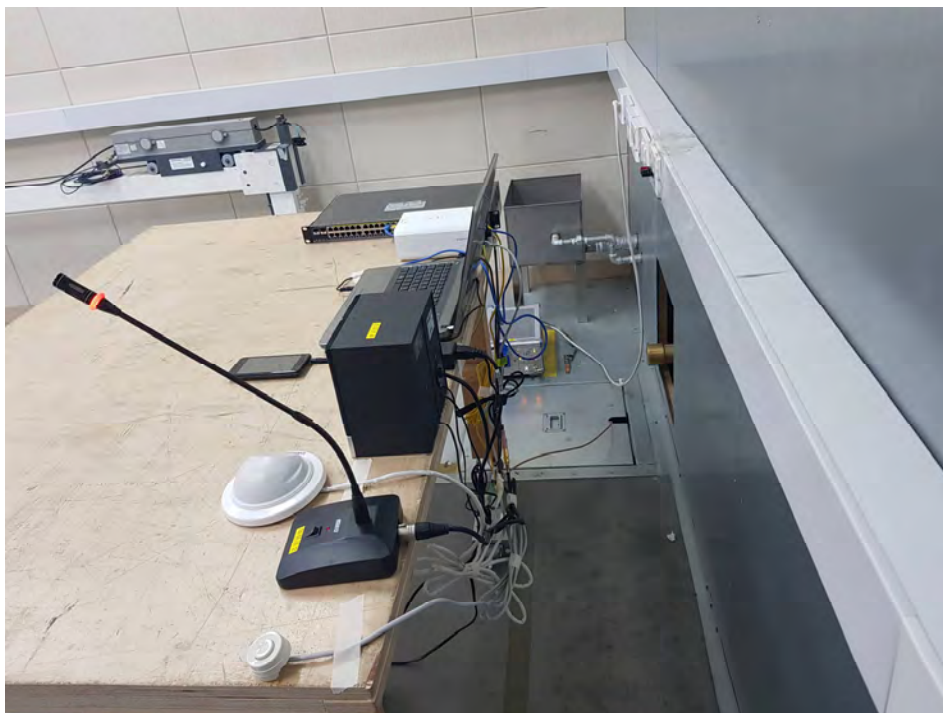

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode

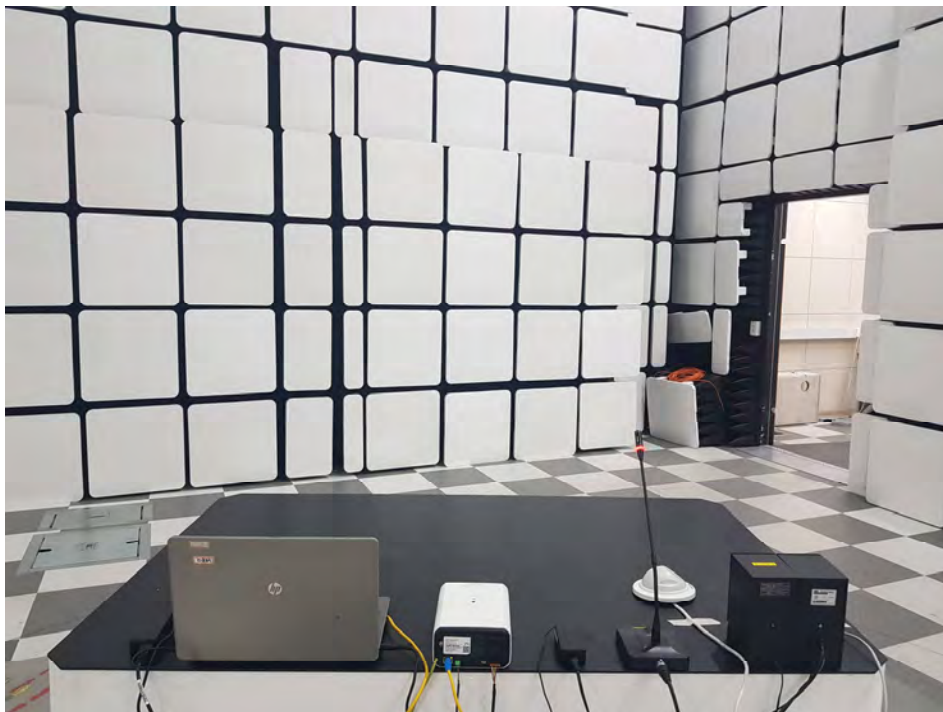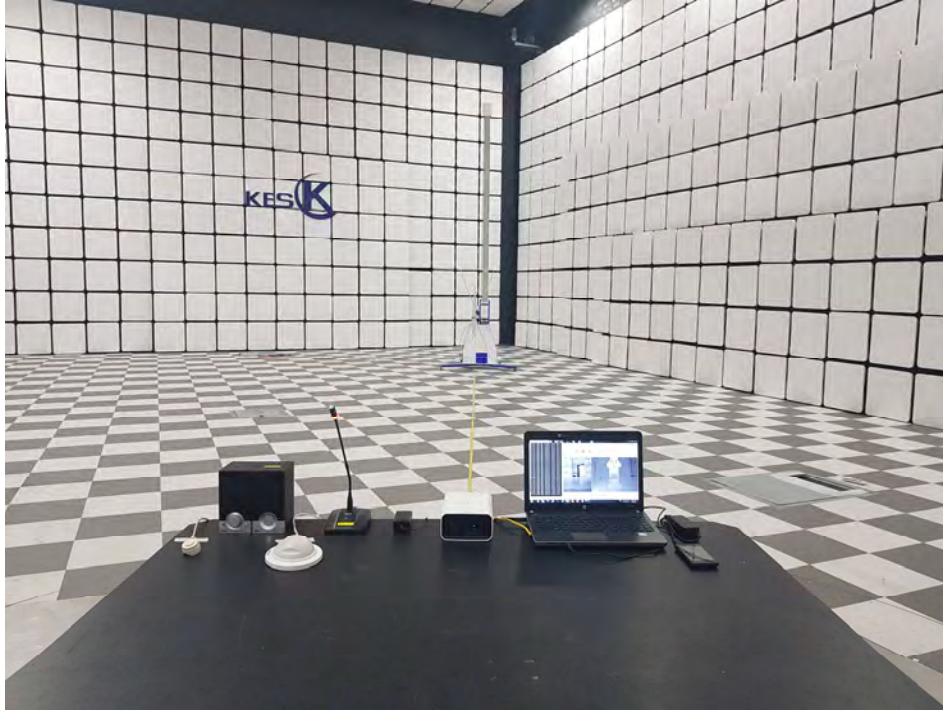

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

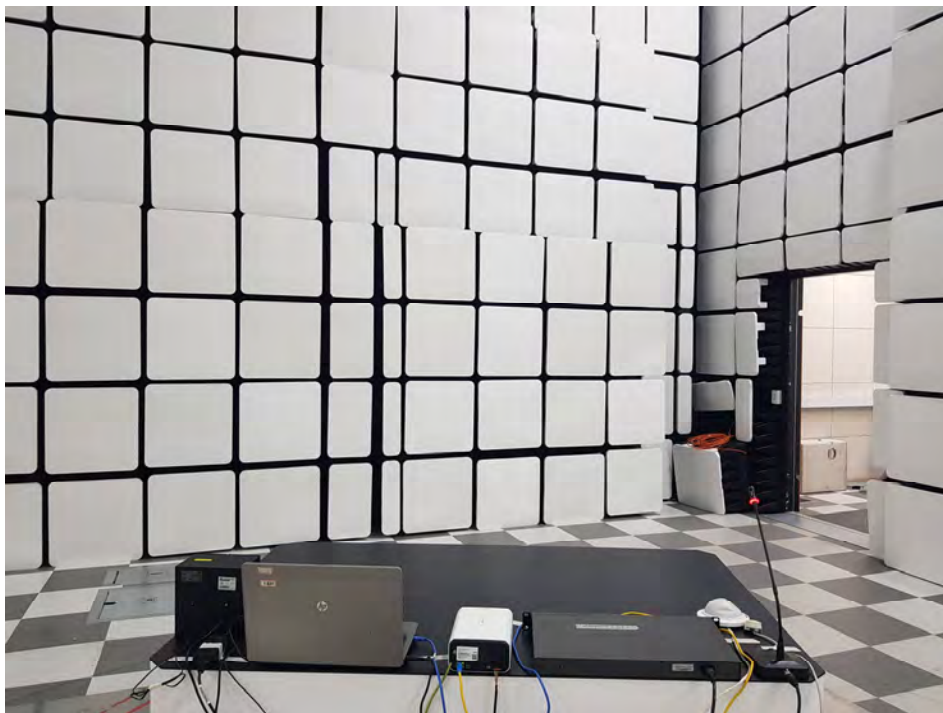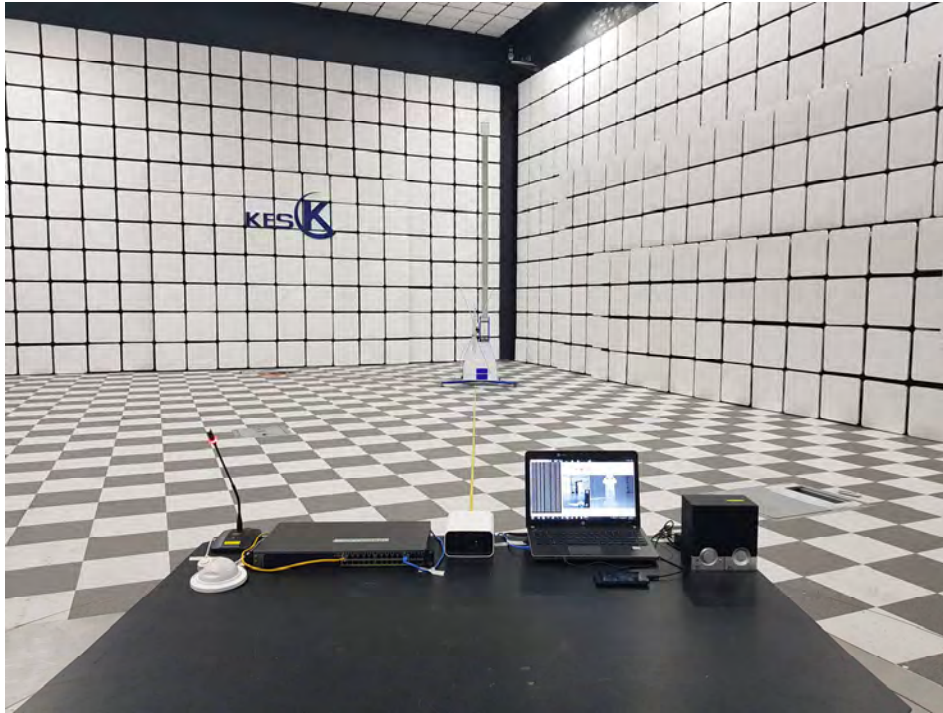

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

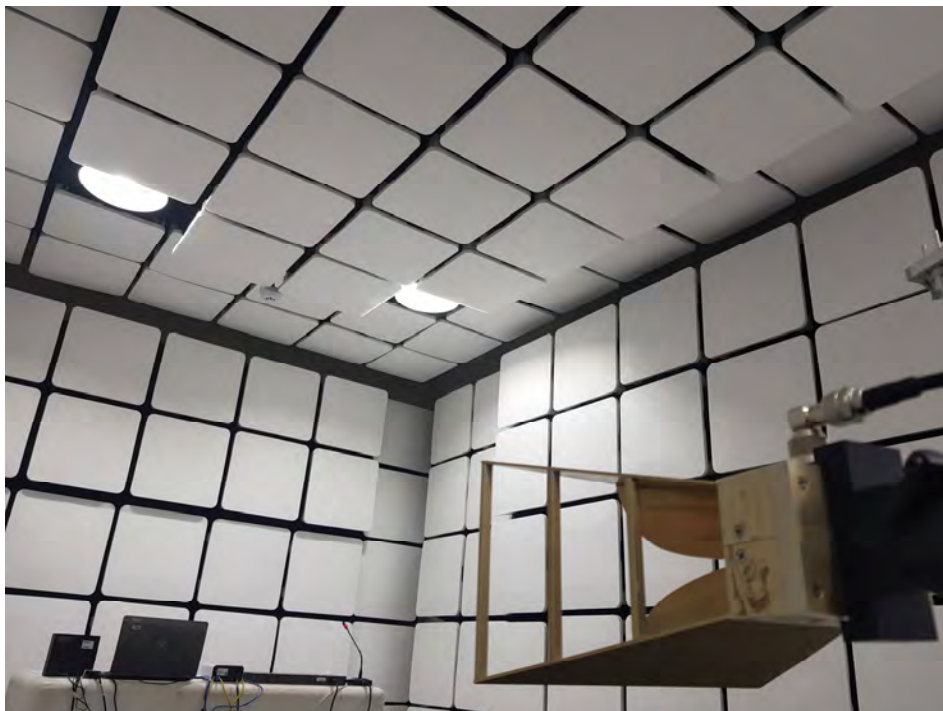

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)

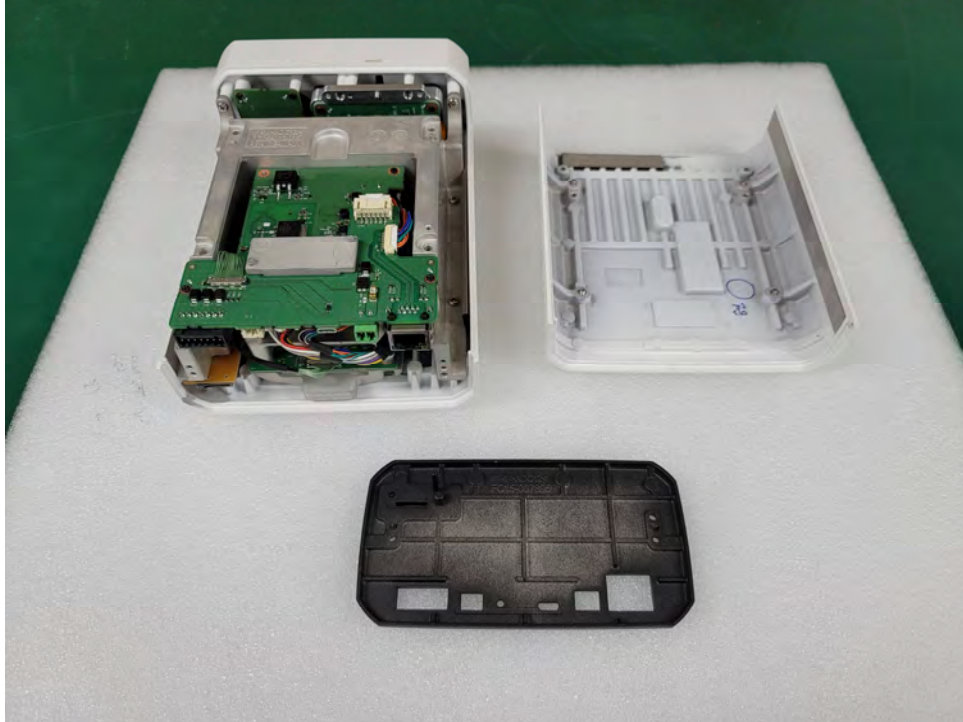


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Interface Board

(Top)

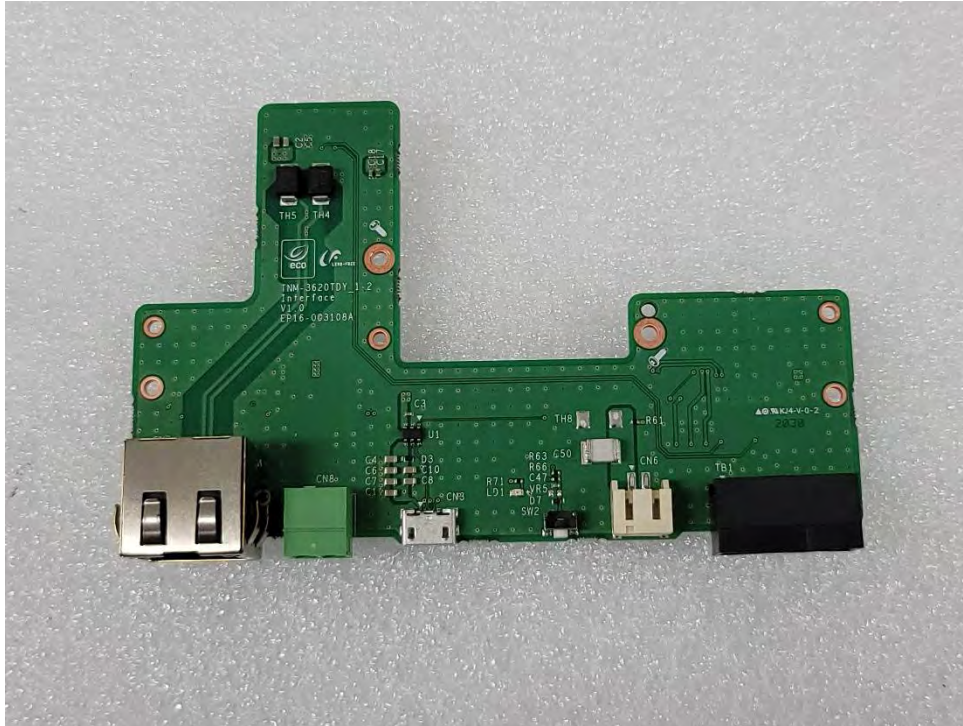

(Bottom)

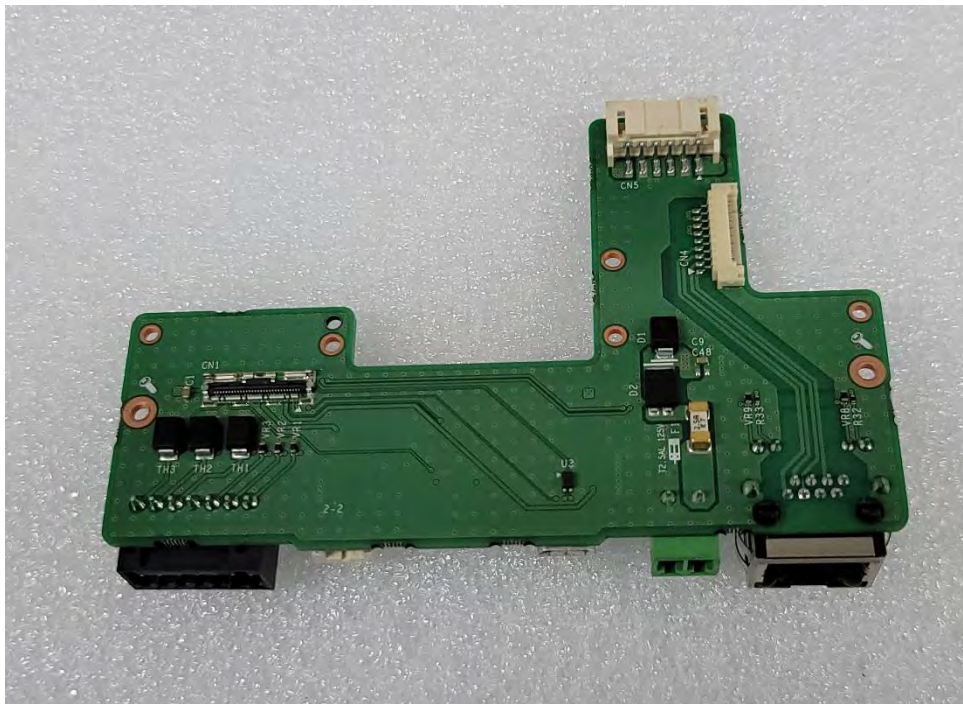


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – NETWORK Board

(Top)



(Bottom)

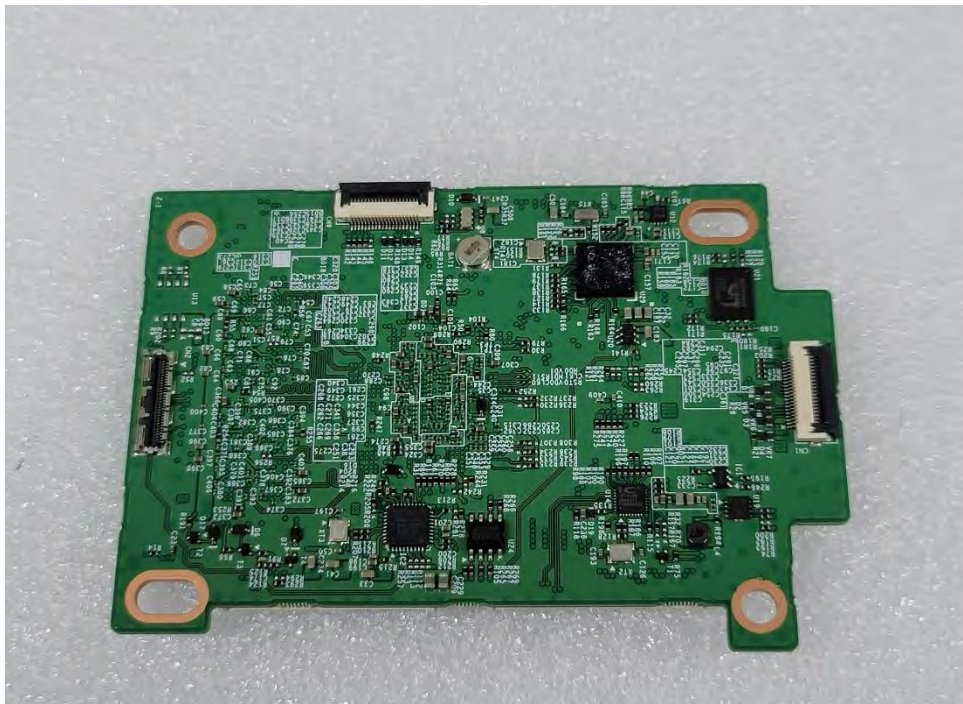

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – NUC Board

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Power Board

(Top)

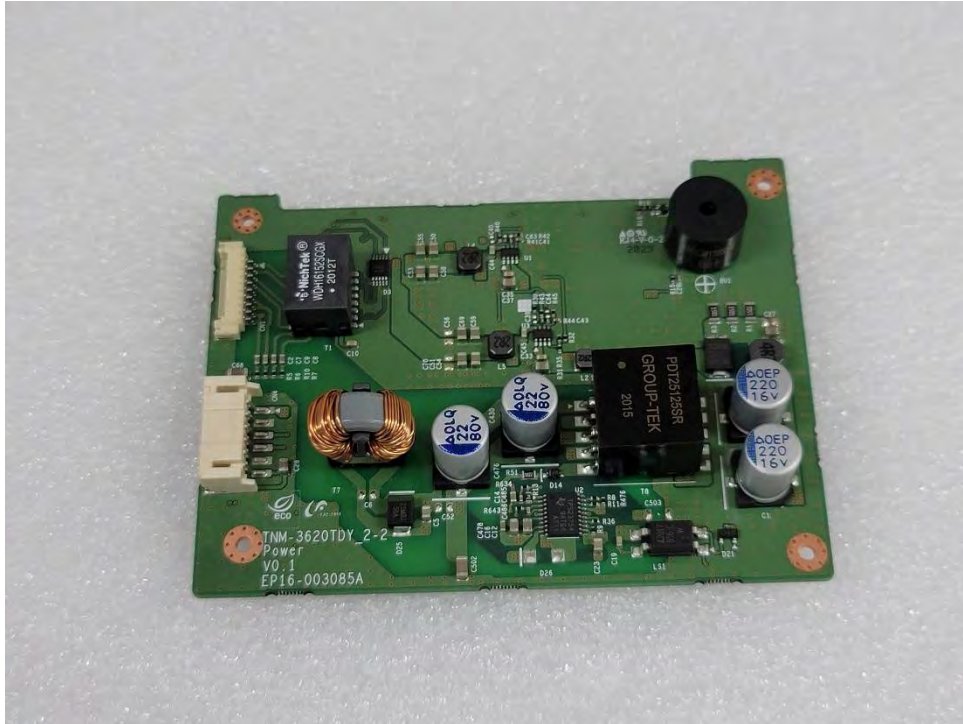

(Bottom)

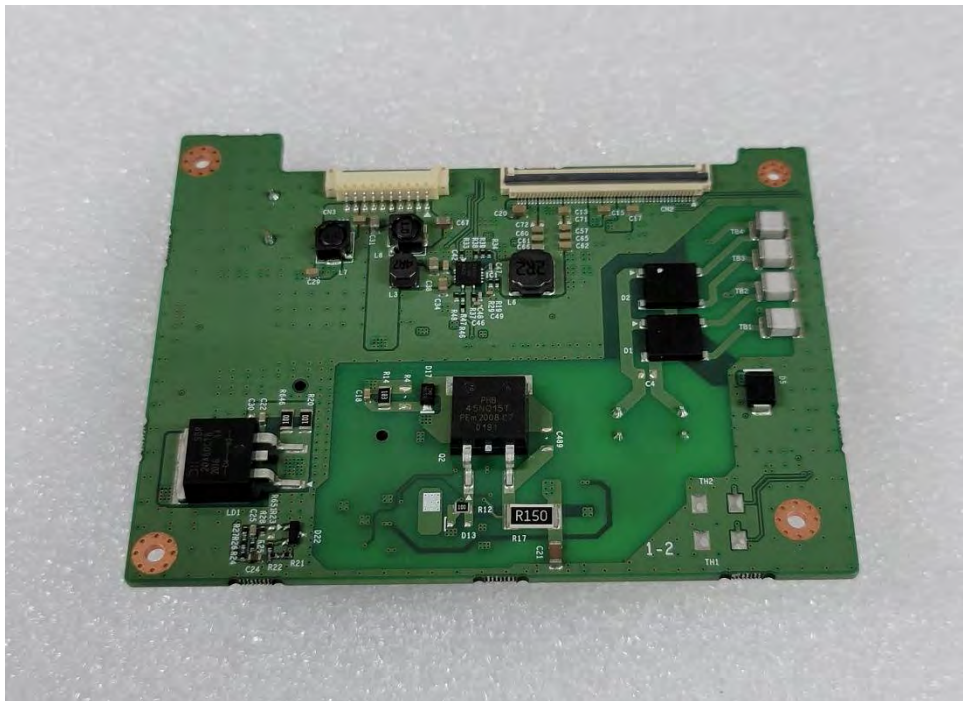

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – SD Board

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – SENSOR Board Lens

(Top)

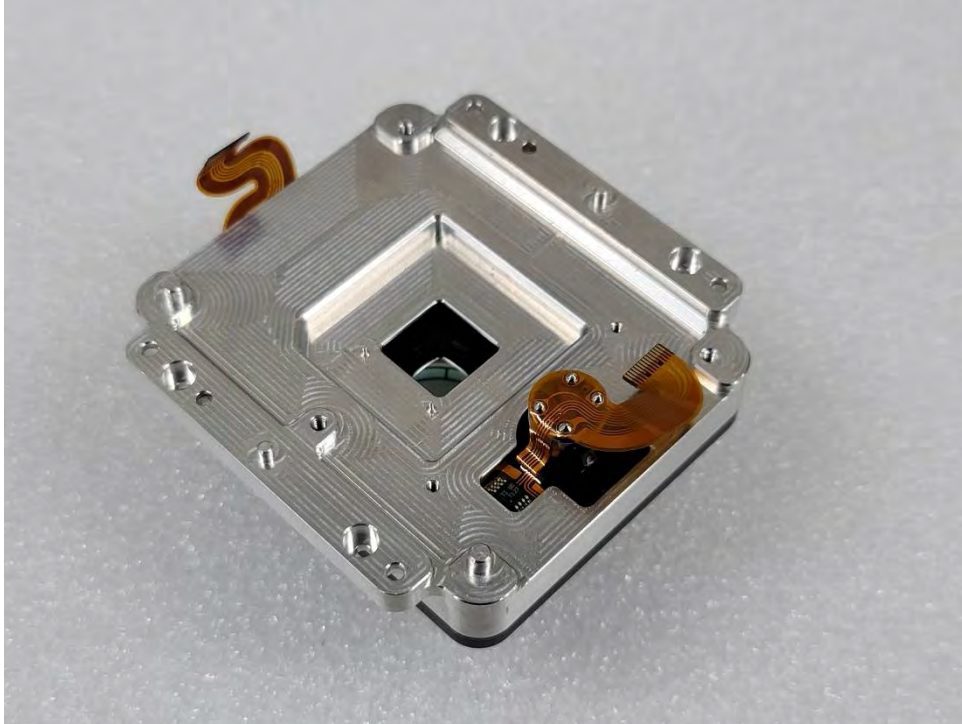

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – SENSOR Board

(Top)



EUT Internal View – CMOS_SENSOR Lens

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – CMOS_SENSOR Board

(Top)

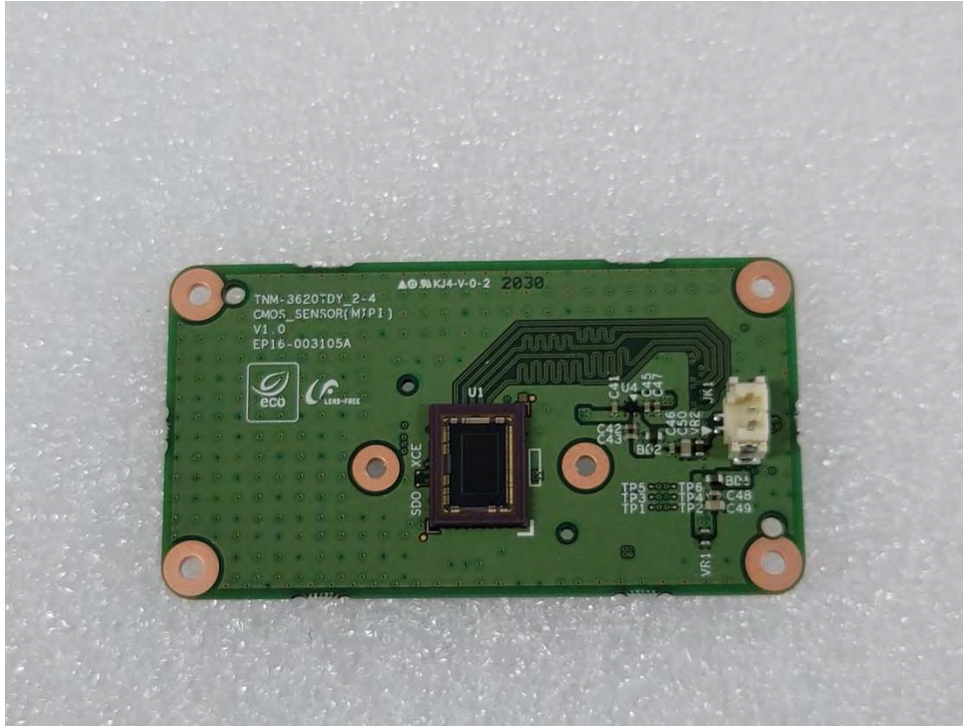

(Bottom)

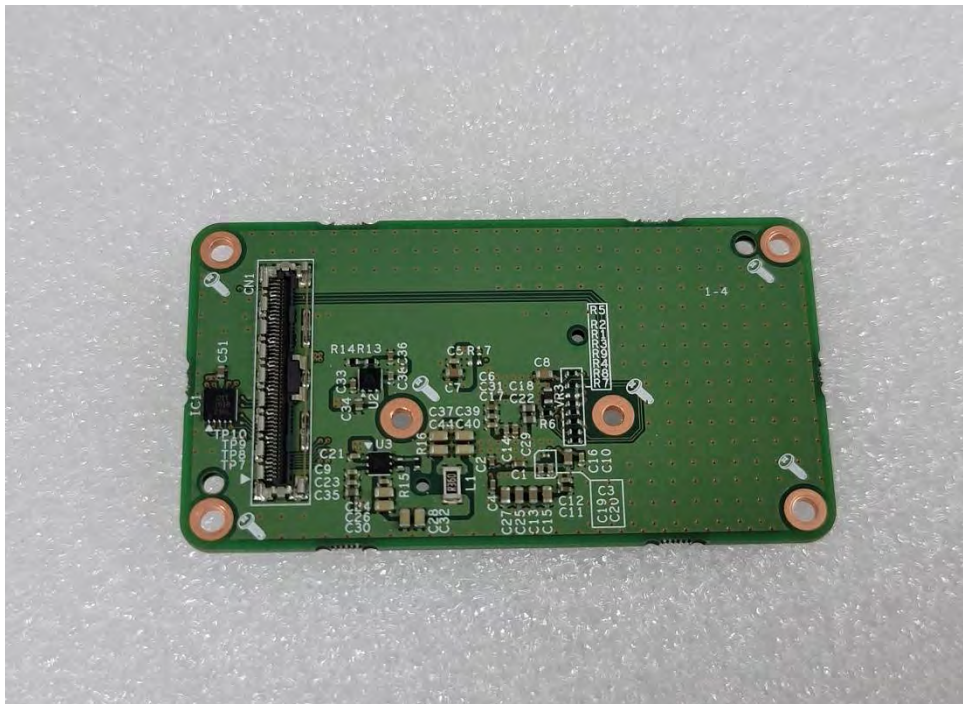

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr