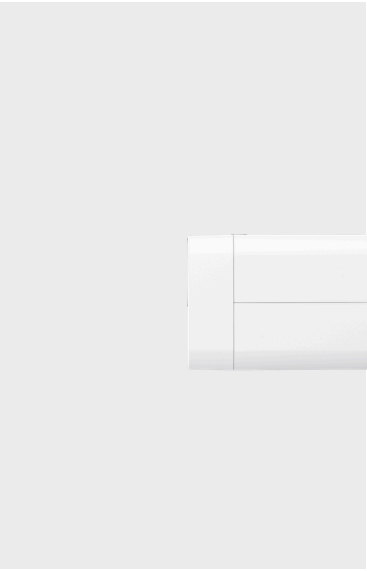


Network

TNM-3620TDY

Камера для определения температуры

Key Features

• Два спектра: QVGA, термодатчик и датчик видимого диапазона 2 Мп
• Встроенный объектив 4,7 мм с постоянным фокусом (тепловизионный), 4 мм с постоянным фокусом (видимого диапазона)
• Два режима измерения температуры
- Режим измерения расчетной температуры тела
30- 45°C (86 - 113°F) / ±0,5°C (±0,3°C с черным телом)
- Обычный режим радиометрического измерения
: -20 - 130°C (-4 - 266°F) / ±5°C(≤100°C), ±20%(>100°C)
• Слот для карт памяти micro SD/SDHC/SDXC (макс. 256 Гб)
• Технология PoE+(IEEE802.3at), 12 В пост. тока

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


TNM-3620TDY

Камера для определения температуры



CAD

Unit: mm [inch]

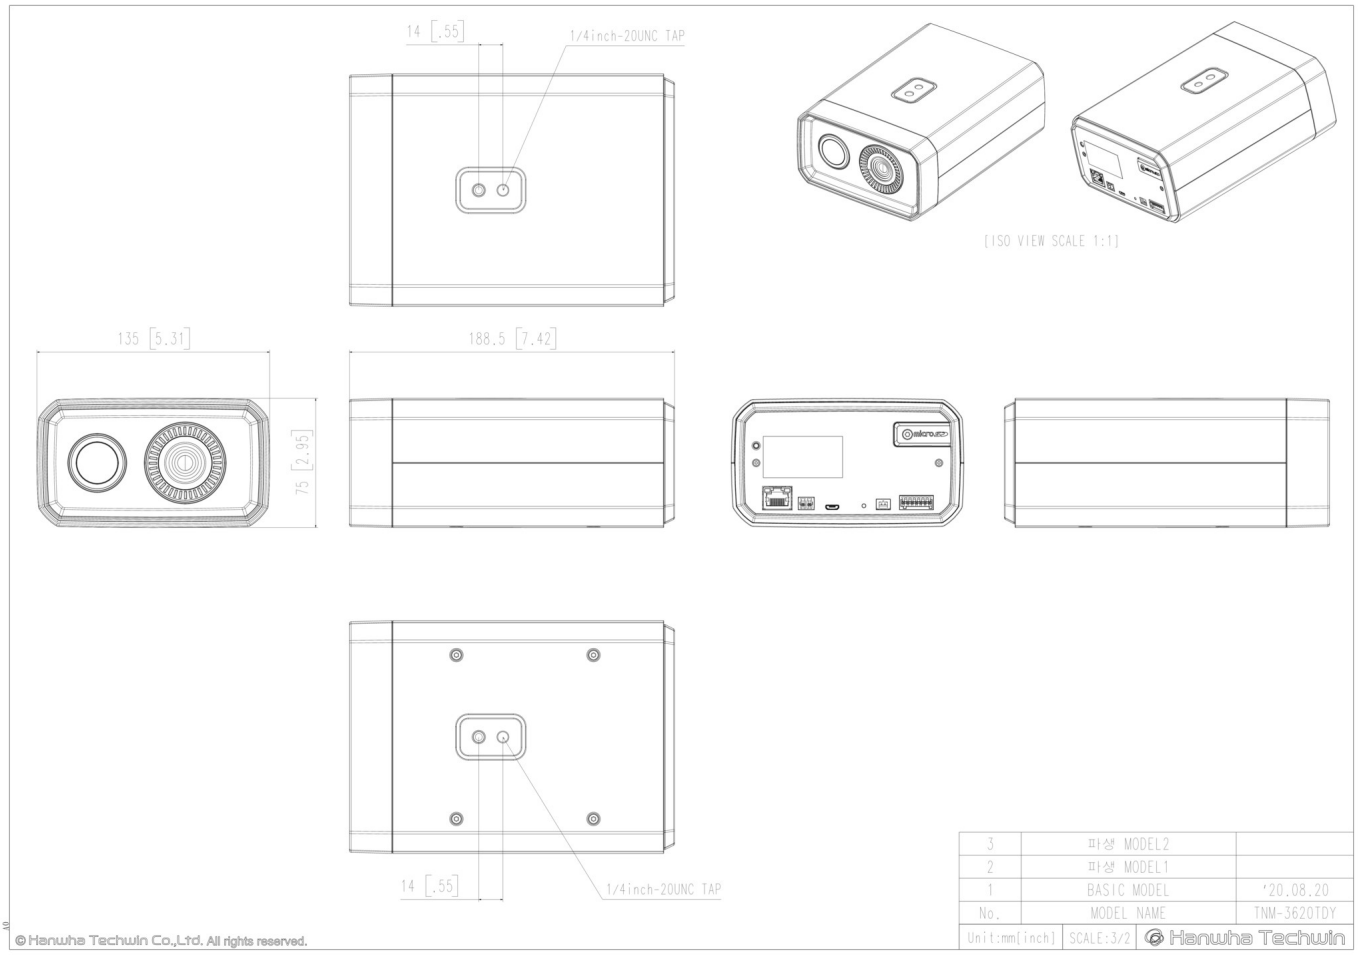

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.