

Network Thermal

# TNO-C3042T

QVGA AI Thermal Bullet

## Key Features

- Wisenet T network thermal compact bullet camera
- 384 x 288 (uncooled); < 20mK (NETD)
- Max 768 x 576 @ 8fps resolution support
- 13mm fixed focal lens (HFoV: 28.5°)
- Triple codec: H.265 / H.264 / MJPEG
- WiseStream II and WiseStream III support (based on AI engine)
- AI-based analytics events:
  - Object detection (Person / Vehicle)
  - Virtual line (Crossing / Direction)
  - Virtual area (Loitering / Intrusion / Enter / Exit)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

# TNO-C3042T

QVGA AI Thermal Bullet



## Specifications

### Video

| | | |
|---|---|---|
| **Imaging Device** | Type | Uncooled micro bolometer (384x288) |
| **Resolution** | | 768x576, 384x288 |
| **Max. Framerate** | H.265/H.264 | 8fps |
| | MJPEG | 8fps |
| **Spectral Range** | | 8~14㎛ |
| **NETD** | | ≤20mK@25°C, F1.0 |
| **Pixel Size** | | 17㎛ |
| **Video Out** | | USB: Micro USB Type B. Preview and installation ONLY. Requires WiFi dongle. |

### Lens

| | | |
|---|---|---|
| **Focal Length (mm)** | | 13 |
| **Max Aperture Ratio (F number)** | Wide | 1.0 |
| **Angular Field of View** | Horizontal | 28.5° |
| | Vertical | 21.4° |
| | Diagonal | 35.5° |
| **iFoV** | | 1.308 mRad |
| **Min. Object Distance** | | 5m(16.4ft) |
| **Focus Control** | | Fixed |
| **Lens Type** | | Athermalized |

### Pan / Tilt / Rotate

| | | |
|---|---|---|
| **Pan / Tilt / Rotate Range** | Pan | 0°~350° |
| | Tilt | 0°~90° |
| | Rotate | 0°~350° |

### Operational

| | | |
|---|---|---|
| **Motion Detection** | Quantity | 8ea |
| | Shape | 8point Polygonal zones |

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

## Operational

| | | |
|---|---|---|
| **Privacy Masking** | Quantity | 6ea |
| | Shape | Rectangular zones |
| | Color / Option | Gray, Black, White |
| **Video Rotation** | | Flip, Mirror, Hallway view(90°/270°) |
| **Serial Interface** | | RS-485 |
| **Alarm Interface** | In/Out | 2 configurable I/O ports |
| | Others | Support extra alarm I/O via optional I/O box |
| **Alarm Triggers** | | Analytics, Network disconnect, Alarm input, Time schedule, MQTT subscription |
| **Alarm Events When Alarm Trigger Occurred** | | File upload(image): e-mail/FTP/SFTP,<br>File upload(video clip): FTP/SFTP,<br>Notification: e-mail,<br>Recording: SD/SDHC/SDXC or NAS recording at event triggers,Alarm output,<br>Handover: PTZ preset,<br>MQTT: publication |
| **Audio In** | | Selectable(mic in/line in) |
| **Audio Out** | | Line out |
| **Color Pallettes** | | Whitehot, Blackhot, Rainbow, Rainbow2, Sepia, Red, Iron, Custom |

## Analytics

| | | |
|---|---|---|
| **Classified Object Type** | | Person, Vehicle |
| **Thumbnail** | | BestShot |
| **Analytics Events** | Based on AI Engine | Object detection, Virtual line(Crossing/Direction), Virtual area(Loitering/Intrusion/Enter/Exit), Motion detection |
| | Normal | Motion detection, Tampering, Audio detection, Sound classification, Shock detection, Virtual area(Appear/Disappear) |

## Radiometry

| | |
|---|---|
| **Hybrid Pallettes** | Support |
| **ROI Condition Monitoring** | None, Increase, Decrease |

## Network

| | | |
|---|---|---|
| **Ethernet** | | Metal shielded RJ-45(10/100/1000BASE-T) |
| **Video Compression** | | H.265: Main,<br>H.264: Main/Baseline/High,MJPEG |
| **Audio Compression** | | G.711 u-law /G.726 selectable,G.726(ADPCM) 8kHz,G.711 8kHz,<br>G.726: 16kbps,24kbps,32kbps,40kbps,<br>AAC-LC: 48kbps at 16kHz |
| **Smart Codec** | | Manual, WiseStream II , WiseStream III |
| **Bitrate Control** | | H.265/H.264: CBR or VBR,<br>MJPEG: VBR |
| **Streaming** | Unicast | Up to 20 users |
| | Multicast | Support |
| | Multiple Streaming | Up to 10 profiles |

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

## Network

| | | |
|---|---|---|
| **Protocol** | | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SFTP, SMTP, ICMP, IGMPv2, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, CDP, SRTP(TCP, UDP Unicast), MQTT, Syslog |
| **Application Programming Interface** | ONVIF | S, G, T, M |
| | Others | SUNAPI(HTTP API), Hanwha Vision Open Platform |

## Security

| | |
|---|---|
| **OS / Firmware Protect** | Encrypted firmware, Secure boot, Signed firmware |
| **User authentication** | Digest authentication, Prevent brute-force attack |
| **Network authentication** | IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2) |
| **Secure Communication** | HTTPS, WSS(WebSocket Secure), SRTP |
| **Access Control** | IP-based access control |
| **Data Protect** | Encryption credentials, Encrypt compress for live recording file export |
| **Audit** | Access / System / Event Log management |
| **Device ID** | Device certificate(Hanwha Vision Root CA) |
| **Secure Storage** | SDcard partition encrypt(AES-256), Secure element |
| **Security Certificate** | Secure element(FIPS 140-3 level3, CC EAL6+) |

## General

| | | |
|---|---|---|
| **Memory** | RAM | 2GB |
| | Flash | 512MB |
| **Edge Storage** | Micro SD/SDHC/SDXC | Max. 1TB x 1slot |

## Environmental & Electrical

| | | |
|---|---|---|
| **Operating Condition** | Temperature | -40°C~+60°C(-40°F~+140°F) |
| | Humidity | 0~95% RH(non-condensing) |
| **Storage Condition** | Temperature | -50°C~+60°C(-58°F~+140°F) |
| | Humidity | 0~95% RH(non-condensing) |
| **Input Voltage** | | PoE(IEEE802.3af, Class3), 12VDC |
| **Power Consumption** | PoE | Max. 10.8W, typical 9W |
| | 12VDC | Max. 9.4W, typical 7.7W |

## Mechanical

| | |
|---|---|
| **Color** | White |
| **Material** | Aluminum |
| **RAL Code** | RAL9003 |
| **Product Dimensions** | ø93.8x233.5mm(ø3.69x9.19") |
| **Product Weight** | 1730g(3.81lb) |
| **Compatible Conduit Hole** | Support conduit compatibility via optional adaptor |

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

## Mechanical

| | |
|---|---|
| **Compatible Gang Box** | Single, Double, 4" Octagon, Square |

## Certifications & Standards

| | |
|---|---|
| **EMC** | FCC 47 CFR 15 Subpart B Class A, CE/UKCA - EN55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, RCM AS-NZS CISPR 32 Class A, KS C 9832 Class A, KS C 9835, IC Regulation ICES-003 Issue 7 Class A |
| **Safety** | UL 62368-1, CAN/CSA C22.2 NO. 62368-1 |
| **Environment** | IEC/EN 63000, IEC 60529 IP66, IEC 60529 IP67, IEC 62262 IK10, NEMA TS 2-2013 (2.2.7, 2.2.8, 2.2.9), NEMA 250 type 4X, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, MIL-STD-810H 501.7, MIL-STD-810H 502.7, MIL-STD-810H 507.6, MIL-STD-810H 509.7, MIL-STD-810H 514.8, MIL-STD-810H 516.8 |

## AI Detection Distance

| | | |
|---|---|---|
| **Person(1.8m/5.9ft)** | Wide | up to 87m(284ft) |
| **Vehicle(1.45m/4.8ft)** | Wide | up to 115m(378ft) |

## DRI (Johnson's Criteria)

| | | |
|---|---|---|
| **Detection** | Person(1.67PPM) | 454m(1,488ft) |
| | Vehicle(0.65PPM) | 1,159m(3,803ft) |
| **Recognition** | Person(6.67PPM) | 113m(372ft) |
| | Vehicle(2.61PPM) | 290m(951ft) |
| **Identification** | Person(13.33PPM) | 57m(186ft) |
| | Vehicle(5.22PPM) | 145m(475ft) |

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


# TNO-C3042T

QVGA AI Thermal Bullet



## CAD

**Unit:** mm [inch]

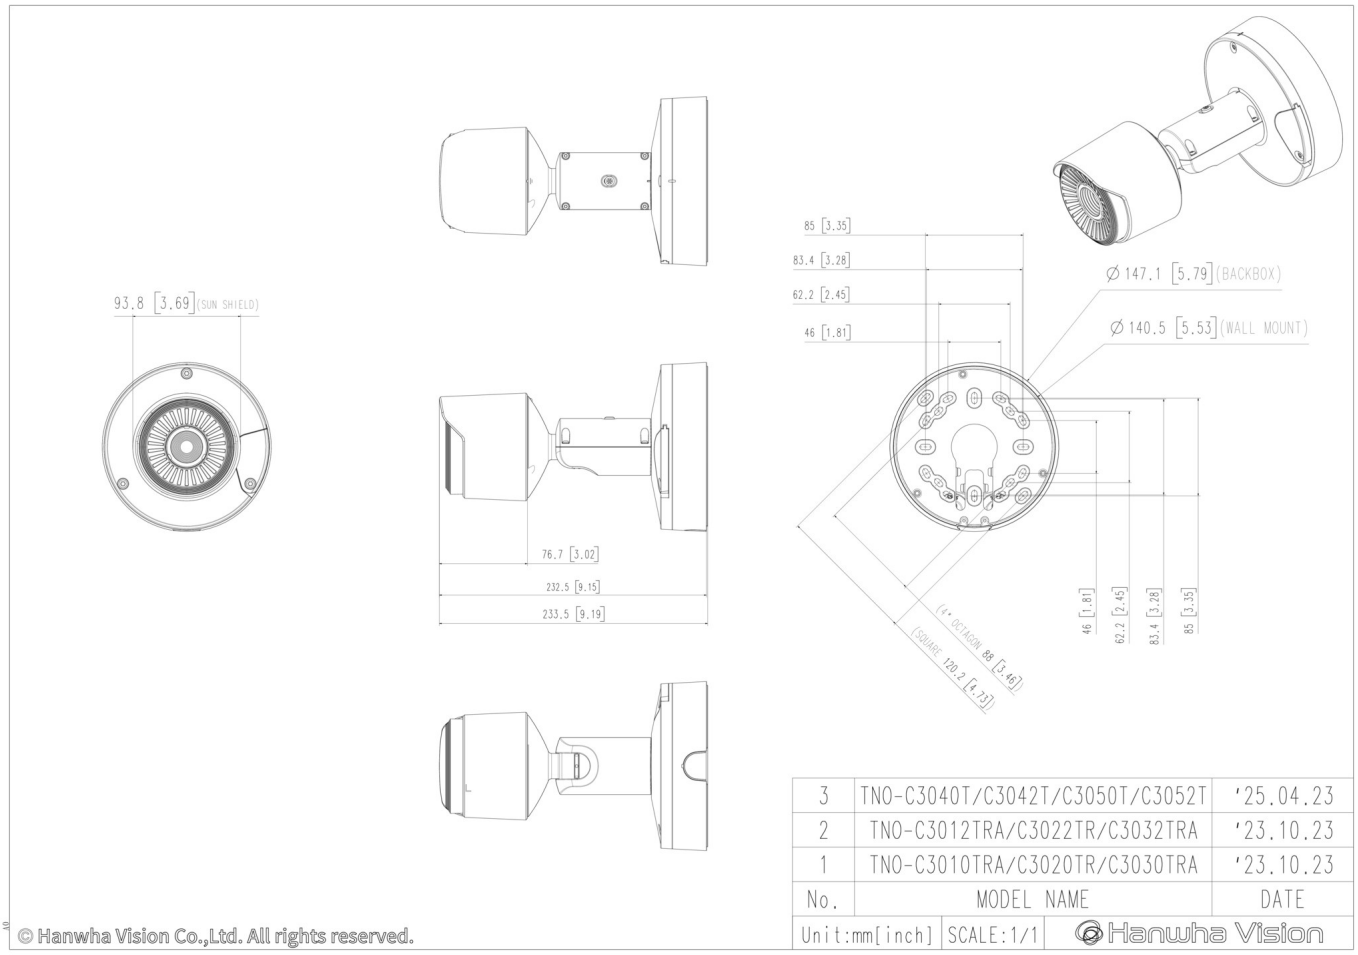


| No. | MODEL NAME | DATE |
|---|---|---|
| 3 | TNO-C3040T/C3042T/C3050T/C3052T | '25.04.23 |
| 2 | TNO-C3012TRA/C3022TR/C3032TRA | '23.10.23 |
| 1 | TNO-C3010TRA/C3020TR/C3030TRA | '23.10.23 |

Unit:mm[inch] | SCALE:1/1 | Hanwha Vision

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

## Compatible Devices



SBP-160HMW1



SBP-140CMB



SBP-180CMB



SBP-180CMS



SBP-150CMP



SBP-115PFA



SBP-300BW1



SBP-300CMI



SBP-300CMP



SBP-300CMTS



SBP-300CMTW



SBP-300CMW1



SBP-050NBW



SBP-060BA



SBP-900CMP



SBP-C15H



SBP-C15NP



SBP-C35H



SBP-C15P



SBP-150CMI



SBP-900CMW



SBP-250WMW




SBP-400WMW



SBP-150PMW



SBD-180PMW



SBP-156KMW



SBP-156LMW1



SBP-150NBW



SBP-300WMW



SBP-300WMW1



SBP-160WMW1



SBP-300PMW2



SBP-300KMW1



SBP-300LMW



SBP-300NBW



© Hanwha Vision CO., LTD. All rights reserved.