



TEST REPORT



Report No. : KES-EM260649

Page 1 / 68

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

1. Client

- Name : Hanwha Vision Co., Ltd.
- Address : 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

- Product item : NETWORK THERMAL CAMERA
- Model name : TNO-C4060T
- Variant model : TNO-C4040T, TNO-C4042T, TNO-C4050T, TNO-C4052T, TNO-C4062T
- Manufacturer etc. : HANWHA VISION VIETNAM COMPANY LIMITED
- Manufacturer address : Lot O-2, Que Vo Industrial Zone Extended Area, Nam Son Ward, Bac Ninh Province, Vietnam
- Manufacturer etc. : D-TECH CO., LTD.
- Manufacturer address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

3. Date of test

: 2026. 03. 02. ~ 2026. 03. 13.

4. Location of Test

- Address : Permanent Testing Lab
- Address : 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Republic of Korea

5. Test method used

: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014,
: EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A2:2021

6. Test result

: PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report cannot be reproduced and copied without permission without the written consent of KES Co., Ltd.

This laboratory is not accredited for the test results marked *.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager by
	Name : JeongMin Won	Name : DongHun Jang

2026. 03. 20.

KES Co., Ltd.

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
2026. 03. 20.	KES-EM260649	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

Use of uncertainty of measurement for decisions on conformity (decision rule):

- ☒ No decision rule is specified by the standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty("simple acceptance" decision rule, previously known as "accuracy method").
- ☐ Other (to be specified, for example when required by the standard or client)



TABLE OF CONTENTS

1	Laboratory Information	4
1.1	Test Location.....	4
1.2	Laboratory Accreditations and Listings	4
2	Test Summary	5
2.1	Class and Voltage.....	5
2.2	Summary of Test Results	5
2.3	Remarks when standards applied	6
2.4	Variant Model Differences	6
2.5	Device Modifications	6
3	General Product Description	7
4	EUT Setup and Operation Mode	11
4.1	EUT Configuration	11
4.2	System Configuration	11
4.3	External I/O Cabling	12
4.4	EUT Operating Mode(s).....	13
4.5	Test operating S/W	13
4.6	Configuration	14
5	General Performance Criteria	15
6	Test Item	17
6.1	Conducted Emissions at Mains Power Ports	17
6.2	Conducted Emissions at Telecommunication Ports	20
6.3	Radiated Emissions(Below 1 GHz)	23
6.4	Radiated Emissions(Above 1 GHz)	26
6.5	Harmonic Current Emissions.....	29
6.6	Voltage Fluctuations and Flicker.....	33
6.7	Electrostatic Discharge.....	35
6.8	Continuous RF electromagnetic field disturbances	39
6.9	Electrical Fast Transients/Bursts	42
6.10	Surge.....	45
6.11	Continuous Induced RF Disturbances	47
6.12	Voltage Dips and Interruptions.....	49
7	Test Setup Photos and EUT Photographs	51
7.1	Test Setup Photos	51
7.2	EUT Photographs	64
7.3	Label	68



1 Laboratory Information

1.1 Test Location

Category	Details
Address	473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Republic of Korea
Telephone Number	031-883-5092
Facsimile Number	031-883-5169

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0008



2 Test Summary

2.1 Class and Voltage

Test Class	Test Voltage
Class A	AC 230 V, 50 Hz

2.2 Summary of Test Results

Regulation
EMC Directive 2014/30/EU, EMC Regulations SI 2016/1091

Test Item	Test Standard		Test Result	Remark
Conducted Emissions at Mains Power Ports	EN 55032:2015+A1:2020		PASS	NOTE 1
Conducted Emissions at Telecommunication Ports			PASS	-
Radiated Emissions(Below 1 GHz)			PASS	-
Radiated Emissions(Above 1 GHz)			PASS	-
Harmonic Current Emissions	EN IEC 61000-3-2:2019		PASS	NOTE 1
Voltage Fluctuations and Flicker	EN 61000-3-3:2013+A2:2021		PASS	NOTE 1
Electrostatic Discharge	EN 50130-4:2011+A1:2014	EN 61000-4-2:2009	PASS	-
Continuous RF electromagnetic field disturbances		EN IEC 61000-4-3:2020	PASS	-
Electrical Fast Transients/Bursts		EN 61000-4-4:2012	PASS	NOTE 1
Surge		EN 61000-4-5 :2014+A1:2017	PASS	NOTE 1
Continuous Induced RF Disturbances		EN IEC 61000-4-6:2023	PASS	NOTE 1
Voltage Dips and Interruptions		EN IEC 61000-4-11:2020	PASS	NOTE 1

* N/A: Not Applicable

(NOTE 1) PoE port is considered a wired network port, so power-related test items are excluded.



2.3 Remarks when standards applied

N/A

2.4 Variant Model Differences

- a. TNO-C4040T : Fixed Lens / b. TNO-C4042T : Fixed Lens, Image frame specification (SW) difference /
- c. TNO-C4050T : Fixed Lens / d. TNO-C4052T : Fixed Lens, Image frame specification (SW) difference /
- e. TNO-C4062T: Image frame specification (SW) difference
- * Common Matters : No electronics in Fixed Lens

2.5 Device Modifications

N/A





3 General Product Description

		TNO-C4060T
Video		
Imaging Device	Size	None
Resolution		1280x960, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264	30fps/25fps(60Hz/50Hz)
	MJPEG	30fps
	Others	None
Spectral Range		8~14 μ m
Pixel Size		17 μ m
Min. Illumination (Lux)	Color(1/30sec, 30IRE)	None
	BW(1/30sec, 30IRE)	None
Video Out		USB: USB Type C. Preview and installation ONLY. Requires WiFi dongle.
Video Transmission Distance		None
Lens		
Focal Length (mm)		35
Zoom Ratio	Optical	None
	Digital	None
Max Aperture Ratio (F number)	Wide	1.0
	Tele	None
Angular Field of View	Horizontal	17.5°
	Vertical	13.2°
	Diagonal	21.7°
iFoV		0.47 mRad
Min. Object Distance		36m(118.1ft)
Focus Control		Fixed
Lens Type		Athermalized
Mount Type		None
Optional Lens		None
Pan / Tilt / Rotate		
Pan / Tilt / Rotate Range	Pan	0°~350°
	Tilt	0°~90°
	Rotate	0°~350°
	Others	None



Operational		
Direction Indicator		None
Day & Night		None
Backlight Compensation		None
Wide Dynamic Range (dB)		None
Digital Noise Reduction		SSNR2
Digital Image Stabilization		None
Defog		None
Motion Detection	Quantity	8ea
	Shape	8point Polygonal zones
Privacy Masking	Quantity	32ea
	Shape	8point Polygonal zones
	Color / Option	Gray, Green, Red, Blue, Black, White, Mosaic, Purple, Yellow
Gain Control		None
White Balance		None
LDC		None
Electronic Shutter	Mode	None
	Speed Range	None
Digital PTZ		None
Video Rotation		Flip, Mirror, Hallway view(90°/270°)
Serial Interface		RS-485
Alarm Interface	In/Out	2 configurable I/O ports
	Others	Support extra alarm I/O via optional I/O box
Alarm Triggers		Analytics, Network disconnect, Alarm input, Time schedule, MQTT subscription, Case tampering
Alarm Events When Alarm Trigger Occurred		File upload(image): e-mail/FTP/SFTP, File upload(video clip): FTP/SFTP, Notification: e-mail, Recording: SD/SDHC/SDXC or NAS recording at event triggers, Alarm output, Handover: PTZ preset, send message by HTTP/HTTPS/TCP, Audio clip playback, MQTT: publication
Audio Streaming		None
Audio In		Selectable(mic in/line in)
Audio Out		Line out
Light Type		None
Light Viewable Length	Warm Light	None
	IR	None
IR Wavelength		None
Water Removal		None
Auto Tracking		None
Coaxial Protocol		None
Color Pallettes		Whitehot, Blackhot, Rainbow, Rainbow2, Sepia, Red, Iron, Custom



Analytics		
Classified Object Type		Person, Vehicle, Vessel
Attributes	Person	None
	Vehicle	None
	Face	None
Thumbnail		BestShot
Analytics Events	Based on AI Engine	Object detection, Virtual line(Crossing/Direction), Virtual area(Loitering/Intrusion/Enter/Exit/Appear/Disappear), Motion detection, Sound classification
	Normal	Tampering, Audio detection, Shock detection, Temperature change detection
Business Intelligence	Based on AI Engine	None
	Normal	None
Network		
Ethernet		Metal shielded RJ-45(10/100/1000BASE-T)
Video Compression		H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression		G.711(PCM): 8kHz(64kbps), G.726(ADPCM): 8kHz(16/24/32/40kbps), AAC-LC: 16kHz(48kbps), OPUS: 16kHz(64kbps)
Smart Codec		WiseStream(Based on AI engine)
Bitrate Control		H.265/H.264: CBR or VBR, MJPEG: VBR
Streaming	Unicast	Up to 20 users
	Multicast	Support
	Multiple Streaming	Up to 5 profiles
Protocol		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SFTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, CDP, SRTP(TCP, UDP Unicast), MQTT, Syslog
SIP support (VoIP, Peer-to-peer, SIP/PBX integration)		None
Application Programming Interface	ONVIF	S, G, T, M
	Others	SUNAPI(HTTP API), Hanwha Vision Open Platform
Direct Cloud Connection		Support
Security		
OS / Firmware Protect		Encrypted firmware, Secure boot, Signed firmware
User authentication		Digest authentication, Prevent brute-force attack
Network authentication		IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)
Secure Communication		HTTPS, WSS(WebSocket Secure), SRTP
Access Control		IP-based access control, MAC-based access control, Auto logout
Data Protect		Encryption credentials, Encrypt compress for live recording file export
Audit		Access / System / Event Log management
Device ID		Device certificate(Hanwha Vision Root CA)
Secure Storage		SDcard partition encrypt(AES-256), Secure element
Supply Chain Security		SBOM
Security Certificate		Secure element(FIPS 140-3 level3, CC EAL6+), Consumer IoT Security Standard (ETSI EN 303 645)



General		
SoC	Type	Wisenet 8
Memory	RAM	4GB
	Flash	8GB eMMC
Edge Storage	Micro SD/SDHC/SDXC	Max. 1TB x 1slot
	SSD	None
Edge Storage(OnCloud)	Micro SD/SDHC/SDXC	Max. 1TB x 1slot *Hanwha Vision branded microSD cards have been certified and recommended for OnCloud edge recording.
Environmental & Electrical		
Operating Condition	Temperature	-40°C~+60°C(-40°F~+140°F)
	Humidity	0~95% RH(non-condensing)
	Others	+74°C(+165°F)(Max) based on NEMA-TS 2(2.2.7)
Storage Condition	Temperature	-50°C~+60°C(-58°F~+140°F)
	Humidity	0~95% RH(non-condensing)
Wind Load		None
EPA(Effective Projected Area)		None
Input Voltage		PoE(IEEE802.3af, Class3), 12VDC
Power Consumption	PoE	Max. 10.8W, typical 9W
	12VDC	Max. 9.4W, typical 7.7W
	24VAC	None
Power Redundance Failover		None
Mechanical		
Color		White
Material		Aluminum, PC(Polycarbonate)
RAL Code		RAL9003
Product Dimensions		ø107.3 x 275mm(ø4.22/10.83")
Product Weight		2000g(4.4 lb)
Compatible Conduit Hole		Support conduit compatibility via optional adaptor
Compatible Gang Box		Single, Double, 4" Octagon, Square



4 EUT Setup and Operation Mode

4.1 EUT Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
NETWORK THERMAL CAMERA	TNO-C4060T	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
Fiber PoE Injector	PT-PSE109GBRO-AH-S	-	Dongguan PROCET Network Technology Co.,Ltd	-
Laptop	NT500R5W	-	Samsung Electronics Vietnam Co., Ltd.	-
Laptop Adapter	A13-040N2A	-	Chicony Power Technology Co., Ltd..	-
Micro SD card	-	-	SanDisk	32 GB
Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
Controller	SPC-1010	-	SamSung Techwin Co.,Ltd.	-
Controller Adapter	FJ-SW1161200500DK	-	SHENZHEN FUJIA APPLIANCE CO., LTD.	-
Earphone	-	-	-	-
Smartphone	SM-N960N	-	LG	-

4.2 System Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
-	-	-	-	-

**4.3 External I/O Cabling**

Mode 1

Start		End		Cable Spec.	
Product Name	I/O Port	Product Name	I/O Port	Length(m)	Shield
EUT	DC IN	Adapter	Line	1.5	U
	RJ-45	Laptop	RJ-45	3.1	U
	Micro SD card slot	Micro SD Card	Micro SD card slot	-	-
	Alarm OUT	Alarm	Alarm IN	3.4	U
	Alarm IN	Button Alarm	Alarm OUT	3.5	U
	RS485	Controller	RS485	3.2	U
	SPEAKER	Earphone	Line	2.0	U
	MIC	Smartphone	3.5 mm	1.4	U
Laptop	DC Jack	Laptop Adapter	Line	1.6	U
Controller	DC Jack	Controller Adapter	Line	1.4	U

Mode 2

Start		End		Cable Spec.	
Product Name	I/O Port	Product Name	I/O Port	Length(m)	Shield
EUT	RJ-45 (PoE)	Fiber PoE Injector	RJ-45 (PoE)	3.1	U
	Micro SD card slot	Micro SD Card	Micro SD card slot	-	-
	Alarm OUT	Alarm	Alarm IN	3.4	U
	Alarm IN	Button Alarm	Alarm OUT	3.5	U
	RS485	Controller	RS485	3.2	U
	SPEAKER	Earphone	Line	2.0	U
	MIC	Smartphone	3.5 mm	1.4	U
Laptop	DC Jack	Laptop Adapter	Line	1.6	U
	RJ-45	Fiber PoE Injector	RJ-45	1.3	U
Fiber PoE Injector	Ground Port	Ground	Ground Port	1.6	-
Controller	DC Jack	Controller Adapter	Line	1.4	U

* Unshielded=U, Shielded=S

**4.4 EUT Operating Mode(s)**


Category	Mode	Operating
Mode 1	DC 12 V	1. After running the ping test on the laptop, verify that the network of the EUT is operating normally, and verify that the images of the EUT are output normally through the Web Viewer.
Mode 2	PoE	2. Verified that the 1 kHz tone sound played on the smartphone is normally output to the earphone through the EUT. 3. Press Button Alarm to verify that the Alarm is operating normally, and operate the controller to verify that the EUT is operating normally. 4. After the test, the micro SD card was checked for normal rusting of the image.

4.5 Test operating S/W


Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd.



4.6 Configuration

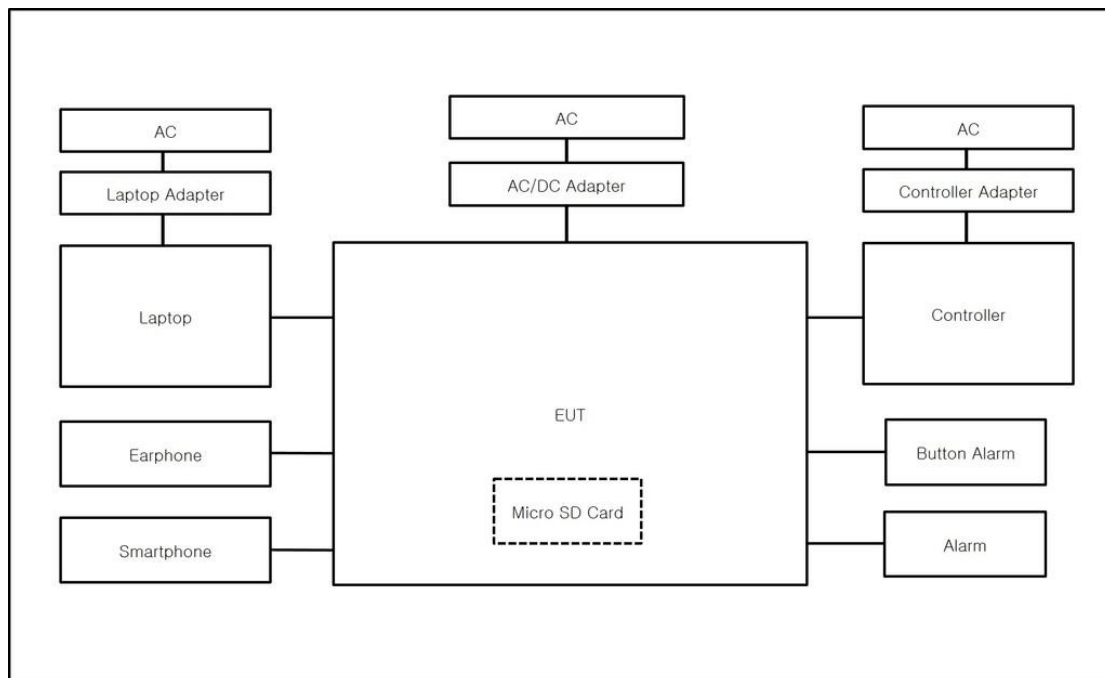

Mode 1

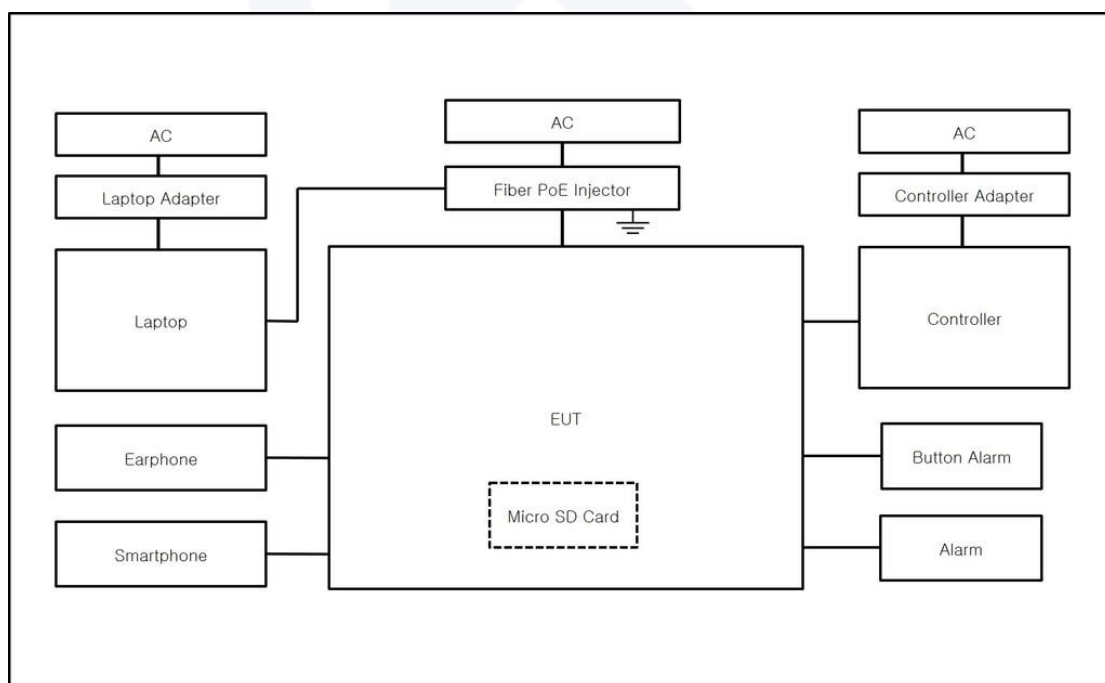

Mode 2



5 General Performance Criteria

Criteria for compliance was based on the following guidelines:

EN 50130-4 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and
- (c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

**Conducted RF immunity**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any

change in outputs, which could be interpreted by associated equipment as a change,

and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,

then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable settings etc.)

(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and

(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual

change in the EUT or any change in outputs, which could be interpreted by associated equipment

as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

◆ Calculation**- Conducted Emissions**

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

- Radiated Emissions(Below 1 GHz)

Result(QP) [$\text{dB}(\mu\text{V}/\text{m})$] = (Reading(QP)[$\text{dB}(\mu\text{V})$] + c.f[$\text{dB}(1/\text{m})$])

Margin(QP)[dB] = Limit[$\text{dB}(\mu\text{V}/\text{m})$] - Result(QP) [$\text{dB}(\mu\text{V}/\text{m})$]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

- Radiated Emissions(Above 1 GHz)

Result(PK/CAV) [$\text{dB}(\mu\text{V}/\text{m})$] = (Reading(PK/CAV)[$\text{dB}(\mu\text{V})$] + c.f[$\text{dB}(1/\text{m})$])

Margin(PK/CAV)[dB] = Limit[$\text{dB}(\mu\text{V}/\text{m})$] - Result(PK/CAV) [$\text{dB}(\mu\text{V}/\text{m})$]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(PK/CAV) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



6 Test Item

6.1 Conducted Emissions at Mains Power Ports

6.1.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #6	-	DYMSTEC	-	-	-	■
EMC32 Measurement Software	EMC32	R&S	9.12.00	-	-	■
EMI TEST RECEIVER	ESR3	Rohde & Schwarz	101783	2025-11-03	2026-11-03	■
LISN	ENV216	Rohde & Schwarz	101786	2026-01-08	2027-01-08	■
ARTIFICIAL MAINS NETWORK	ESH2-Z5	Rohde & Schwarz	100450	2025-11-03	2026-11-03	■
PULSE LIMITER	ESH3-Z2	Rohde & Schwarz	101915	2025-11-03	2026-11-03	■

6.1.2 Test Location : SHIELD ROOM #6

6.1.3 Test Conditions :

Temperature	Relative Humidity
(22.4 ~ 22.5) °C	(36.9 ~ 37.0) % R.H.




6.1.4 Test Result

- Test Date : 2026-03-05
- Test Mode : Mode 1

Test Report

1 / 1

Test Description: Conducted Emission
Job No.: KES-EM260649
Phase: L
Mode: Mode 1
Operator Name: KES

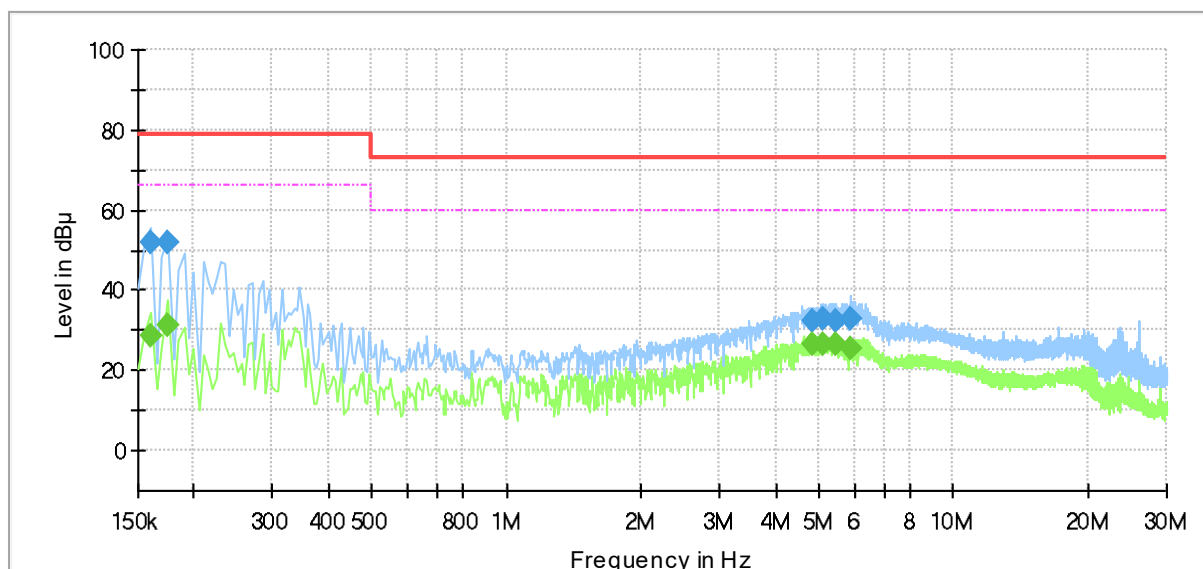

Final_Result

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Limit (dB μV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	28.73	66.00	37.27	1000.0	9.000	L1	19.4
0.160000	51.84	---	79.00	27.16	1000.0	9.000	L1	19.4
0.175000	---	31.26	66.00	34.74	1000.0	9.000	L1	19.4
0.175000	52.00	---	79.00	27.00	1000.0	9.000	L1	19.4
4.845000	---	26.35	60.00	33.65	1000.0	9.000	L1	19.8
4.845000	32.14	---	73.00	40.86	1000.0	9.000	L1	19.8
5.120000	---	26.73	60.00	33.27	1000.0	9.000	L1	19.8
5.120000	32.80	---	73.00	40.20	1000.0	9.000	L1	19.8
5.440000	---	26.36	60.00	33.64	1000.0	9.000	L1	19.8
5.440000	32.54	---	73.00	40.46	1000.0	9.000	L1	19.8
5.900000	---	25.34	60.00	34.66	1000.0	9.000	L1	19.8
5.900000	32.80	---	73.00	40.20	1000.0	9.000	L1	19.8



Report No. : KES-EM260649

Page 19 / 68


○ Test Date : 2026-03-05

● Test Mode : Mode 1

Test Report

1 / 1

Test Description: Conducted Emission
Job No.: KES-EM260649
Phase: N
Mode: Mode 1
Operator Name: KES

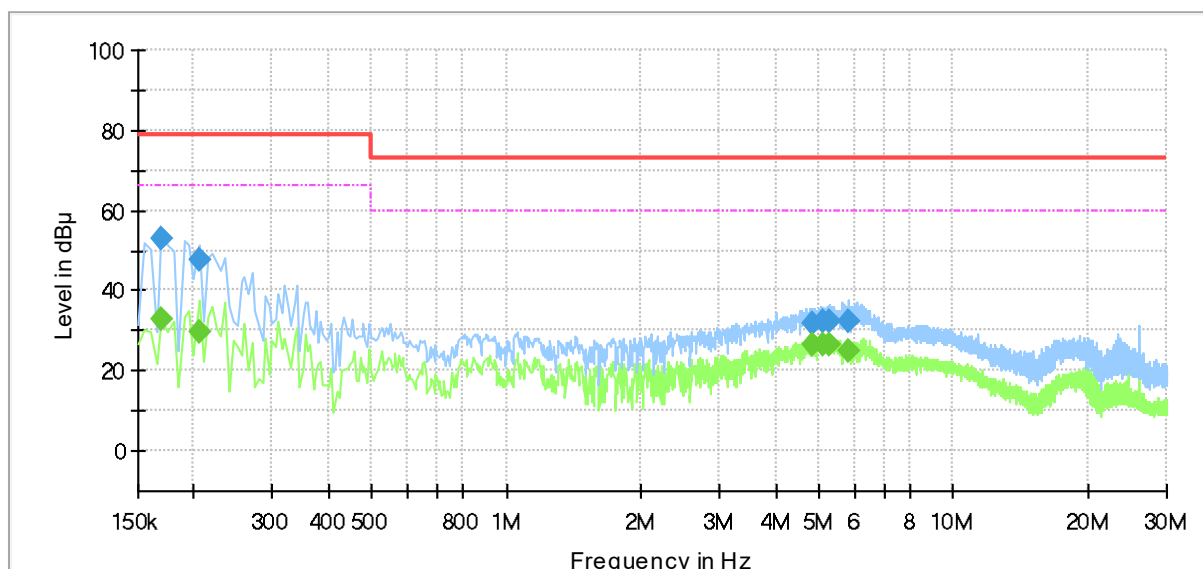

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Corr. (dB)
0.170000	---	32.73	66.00	33.27	1000.0	9.000	N	19.4
0.170000	52.94	---	79.00	26.06	1000.0	9.000	N	19.4
0.205000	---	29.61	66.00	36.39	1000.0	9.000	N	19.4
0.205000	47.75	---	79.00	31.25	1000.0	9.000	N	19.4
4.825000	---	26.24	60.00	33.76	1000.0	9.000	N	19.8
4.825000	31.90	---	73.00	41.10	1000.0	9.000	N	19.8
5.125000	---	26.53	60.00	33.47	1000.0	9.000	N	19.8
5.125000	32.29	---	73.00	40.71	1000.0	9.000	N	19.8
5.310000	---	26.50	60.00	33.50	1000.0	9.000	N	19.8
5.310000	32.43	---	73.00	40.57	1000.0	9.000	N	19.8
5.845000	---	24.97	60.00	35.03	1000.0	9.000	N	19.9
5.845000	32.10	---	73.00	40.90	1000.0	9.000	N	19.9

6.1.5 Remark

Complies with the test requirements.



6.2 Conducted Emissions at Telecommunication Ports

6.2.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #6	-	DYMSTEC	-	-	-	■
EMC32 Measurement Software	EMC32	R&S	9.12.00	-	-	■
EMI TEST RECEIVER	ESR3	Rohde & Schwarz	101783	2025-11-03	2026-11-03	■
LISN	ENV216	Rohde & Schwarz	101786	2026-01-08	2027-01-08	■
ARTIFICIAL MAINS NETWORK	ESH2-Z5	Rohde & Schwarz	100450	2025-11-03	2026-11-03	■
PULSE LIMITER	ESH3-Z2	Rohde & Schwarz	101915	2025-11-03	2026-11-03	■
8-WIRE ISN CAT6	ENY81-CAT6	Rohde & Schwarz	101666	2026-02-24	2027-02-24	■

6.2.2 Test Location : SHIELD ROOM #6

6.2.3 Test Conditions :

Temperature	Relative Humidity
(22.4 ~ 22.5) °C	(36.9 ~ 37.0) % R.H.




6.2.4 Test Result

- Test Date : 2026-03-05
- Test Mode : Mode 1

Test Report

1 / 1

Test Description: Telecommunication Emission
Job No.: KES-EM260649
Mode : Mode 1
Speed : 1 000 Mbps
Operator Name: KES

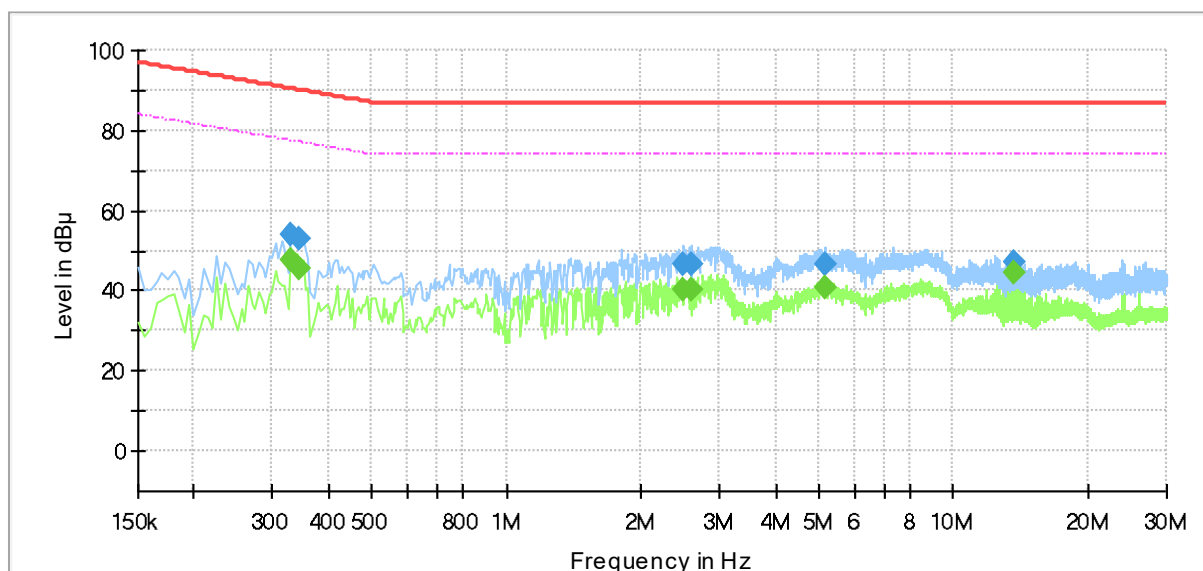

Final_Result

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Limit (dB μV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.330000	---	47.48	77.45	29.97	1000.0	9.000	Single Line	19.4
0.330000	53.92	---	90.45	36.53	1000.0	9.000	Single Line	19.4
0.345000	---	45.69	77.08	31.39	1000.0	9.000	Single Line	19.4
0.345000	53.19	---	90.08	36.89	1000.0	9.000	Single Line	19.4
2.495000	---	40.15	74.00	33.85	1000.0	9.000	Single Line	19.3
2.495000	46.65	---	87.00	40.35	1000.0	9.000	Single Line	19.3
2.585000	---	39.98	74.00	34.02	1000.0	9.000	Single Line	19.3
2.585000	46.59	---	87.00	40.41	1000.0	9.000	Single Line	19.3
5.170000	---	40.64	74.00	33.36	1000.0	9.000	Single Line	19.4
5.170000	46.56	---	87.00	40.44	1000.0	9.000	Single Line	19.4
13.620000	---	44.67	74.00	29.33	1000.0	9.000	Single Line	19.6
13.620000	47.08	---	87.00	39.92	1000.0	9.000	Single Line	19.6



Report No. : KES-EM260649


Page 22 / 68

- Test Date : 2026-03-05
- Test Mode : Mode 2

Test Report

1 / 1

Test Description: Telecommunication Emission
Job No.: KES-EM260649
Mode : Mode 2
Speed : 1 000 Mbps
Operator Name: KES

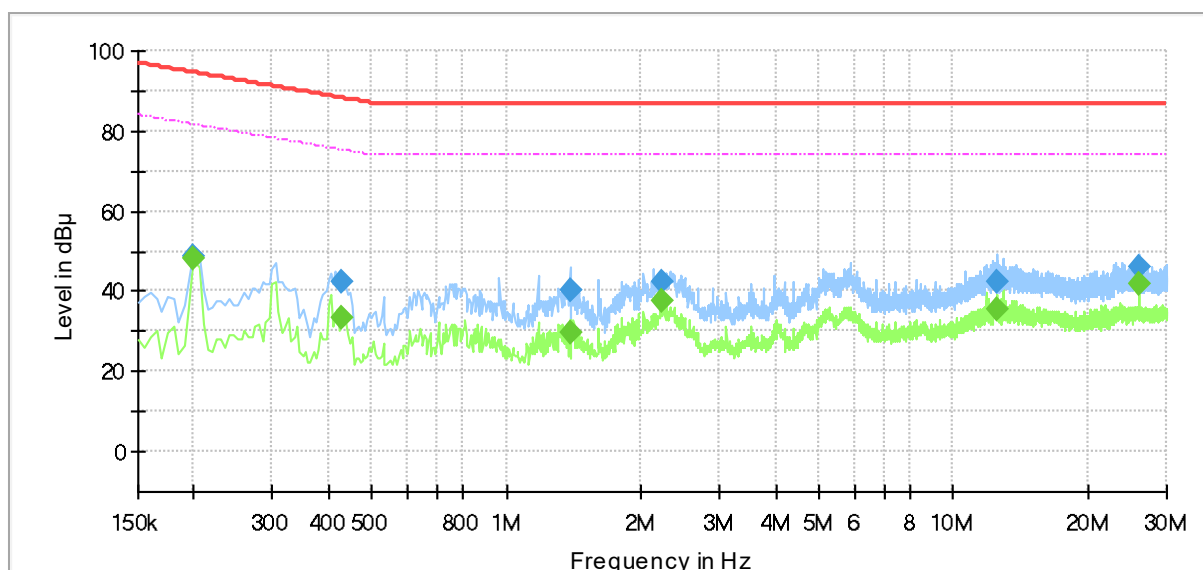

Final_Result

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Limit (dB μV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.200000	---	48.09	81.61	33.52	1000.0	9.000	Single Line	19.6
0.200000	48.81	---	94.61	45.80	1000.0	9.000	Single Line	19.6
0.430000	---	33.53	75.25	41.72	1000.0	9.000	Single Line	19.4
0.430000	42.30	---	88.25	45.95	1000.0	9.000	Single Line	19.4
1.390000	---	29.88	74.00	44.12	1000.0	9.000	Single Line	19.3
1.390000	40.38	---	87.00	46.62	1000.0	9.000	Single Line	19.3
2.220000	---	37.71	74.00	36.29	1000.0	9.000	Single Line	19.3
2.220000	42.38	---	87.00	44.62	1000.0	9.000	Single Line	19.3
12.475000	---	35.24	74.00	38.76	1000.0	9.000	Single Line	19.6
12.475000	42.50	---	87.00	44.50	1000.0	9.000	Single Line	19.6
26.000000	---	41.90	74.00	32.10	1000.0	9.000	Single Line	20.0
26.000000	46.20	---	87.00	40.80	1000.0	9.000	Single Line	20.0

6.2.5 Remark

Complies with the test requirements.



6.3 Radiated Emissions(Below 1 GHz)

6.3.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #4(10 m)	-	DYMSTEC	-	-	-	■
EP5/RE Software	EP5/RE	TOYO	6.0.0	-	-	■
EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100551	2026-02-12	2027-02-12	■
AMPLIFIER	SCU 01	Rohde & Schwarz	100603	2025-11-03	2026-11-03	■
BILOG ANTENNA	VULB 9168	SCHWARZBEC K	9168-461	2024-05-09	2026-05-09	■
ATTENUATOR	6806.17.A	HUBER+SUHNE R	-	2026-02-12	2027-02-12	■

6.3.2 Test Location : SEMI ANECHOIC CHAMBER #4(10 m) Measurement Distance : □ 3 m, ■ 10 m


6.3.3 Test Conditions :

Temperature	Relative Humidity
(22.1 ~ 22.2) °C	(35.2 ~ 35.3) % R.H.



6.3.4 Test Result

- Test Date : 2026-03-04
- Test Mode : Mode 1

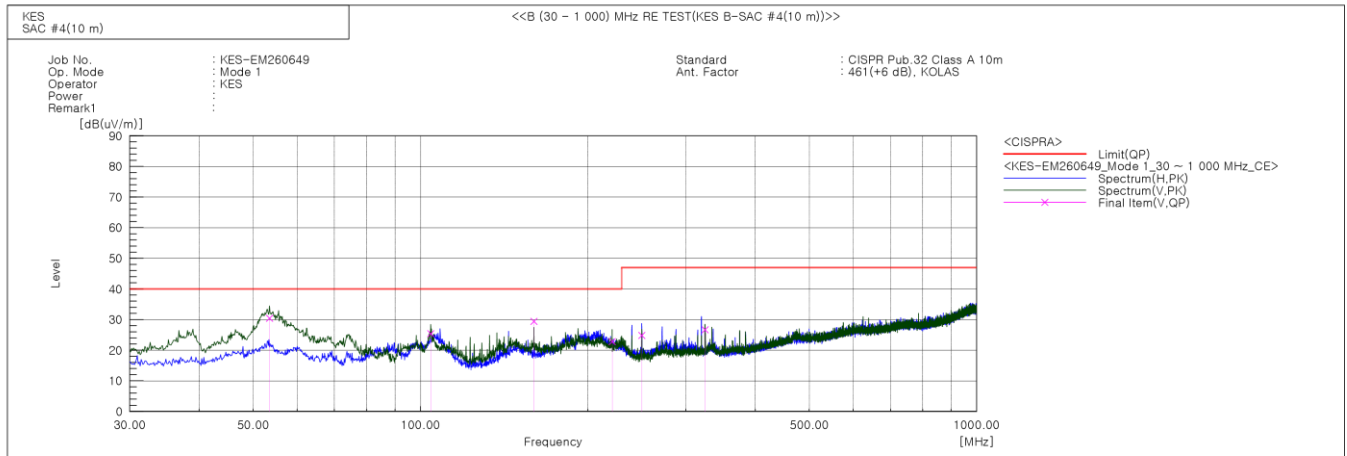

Final Result

No.	Frequency [MHz]	(P)	Reading [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	53.523	V	50.9	-20.5	30.4	40.0	9.6	135.0	144.0	
2	104.326	V	49.4	-24.0	25.4	40.0	14.6	118.0	91.0	
3	159.980	V	48.8	-19.4	29.4	40.0	10.6	159.0	113.0	
4	221.090	V	44.1	-21.3	22.8	40.0	17.2	127.0	42.0	
5	249.948	V	44.3	-19.5	24.8	47.0	22.2	105.0	306.0	
6	324.759	V	42.8	-16.1	26.7	47.0	20.3	143.0	347.0	

※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.




Report No. : KES-EM260649

Page 25 / 68

○ Test Date : 2026-03-04

● Test Mode : Mode 2

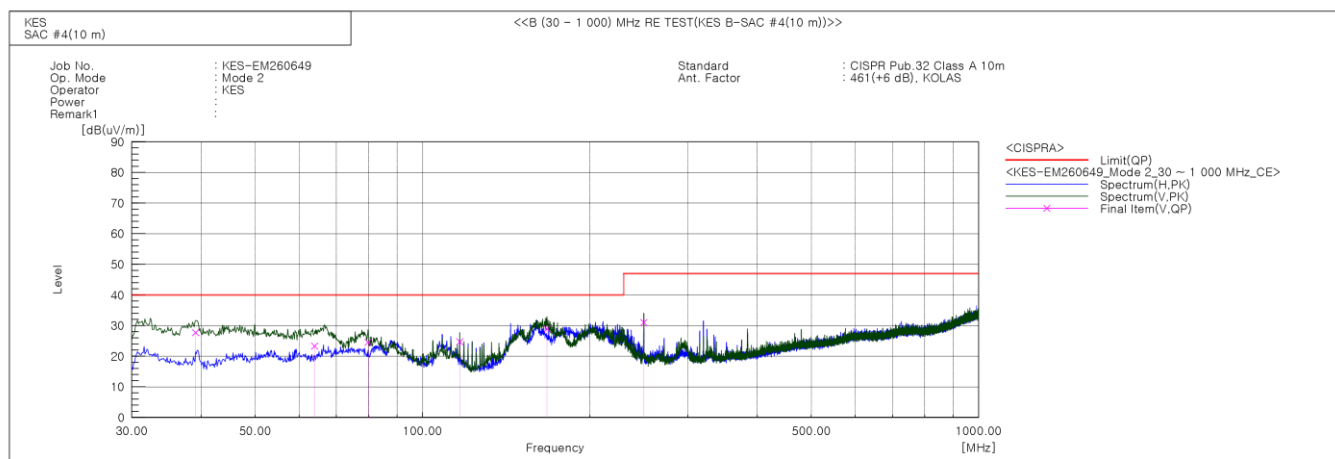

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	39.094	V	49.1	-21.4	27.7	40.0	12.3	100.0	347.0	
2	63.950	V	44.7	-21.4	23.3	40.0	16.7	124.0	39.0	
3	79.834	V	49.8	-25.2	24.6	40.0	15.4	131.0	257.0	
4	116.694	V	47.3	-22.6	24.7	40.0	15.3	136.0	284.0	
5	167.376	V	48.7	-19.8	28.9	40.0	11.1	162.0	137.0	
6	249.948	V	50.5	-19.5	31.0	47.0	16.0	113.0	83.0	

※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.

6.3.5 Remark

Complies with the test requirements.



6.4 Radiated Emissions(Above 1 GHz)

6.4.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #5	-	SY Corporation	-	-	-	■
ES10/RE Software	ES10/RE	TOYO	2022.01.000	-	-	■
EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	2026-02-12	2027-02-12	■
PREAMPLIFIER	8449B	HP	3008A00538	2025-04-30	2026-04-30	■
HORN ANTENNA	BBHA 9120D	SCHWARZBEC K	9120D-1802	2025-11-05	2026-11-05	■
ATTENUATOR	8491B	HP	23094	2026-02-12	2027-02-12	■

6.4.2 Test Location : SEMI ANECHOIC CHAMBER #5


6.4.3 Test Conditions :

Temperature	Relative Humidity
(21.5 ~ 21.6) °C	(36.7 ~ 36.8) % R.H.



6.4.4 Test Result

- Test Date : 2026-03-02
- Test Mode : Mode 1

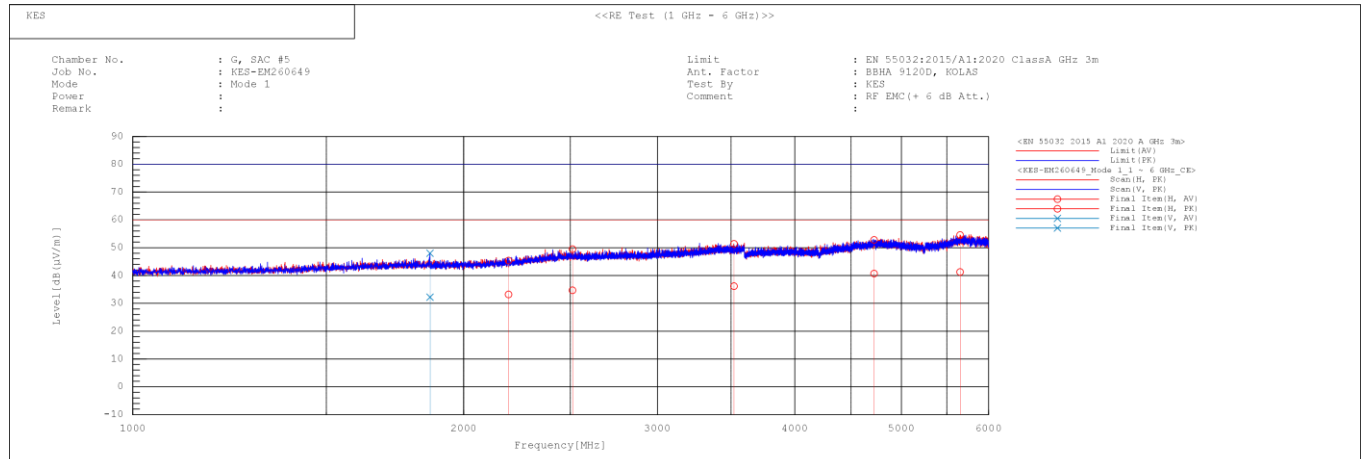

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1863.825	V	29.3	45.1	2.9	32.2	48.0	60.0	80.0	27.8	32.0	100.0	95.0	
2	2196.386	H	29.0	41.2	4.2	33.2	45.4	60.0	80.0	26.8	34.6	100.0	359.3	
3	2511.489	H	29.1	43.9	5.6	34.7	49.5	60.0	80.0	25.3	30.5	100.0	170.0	
4	3521.922	H	28.6	43.8	7.6	36.2	51.4	60.0	80.0	23.8	28.6	100.0	170.0	
5	4722.592	H	28.7	40.8	12.0	40.7	52.8	60.0	80.0	19.3	27.2	100.0	116.9	
6	5652.270	H	27.5	40.8	13.8	41.3	54.6	60.0	80.0	18.7	25.4	100.0	102.2	

※ The data is the result of measured by the detector in PK and CISPR Average on the Peak graph.

※ The Average of the test data is the cispr average result.




Report No. : KES-EM260649

Page 28 / 68

○ Test Date : 2026-03-02

● Test Mode : Mode 2

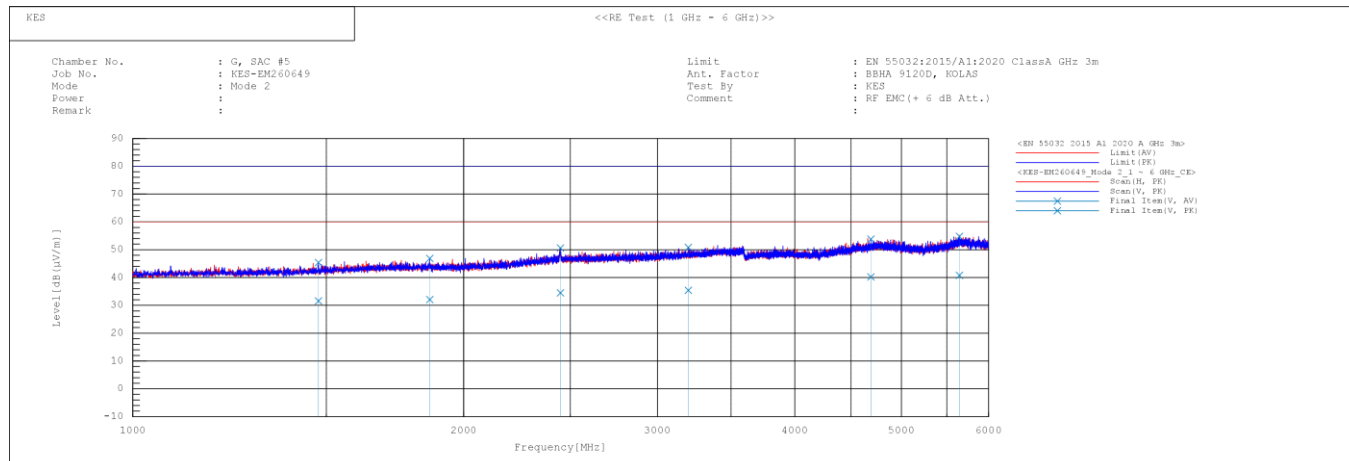

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f. [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1475.495	V	30.4	44.2	1.2	31.6	45.4	60.0	80.0	28.4	34.6	100.0	358.5	
2	1862.651	V	29.2	44.0	2.9	32.1	46.9	60.0	80.0	27.9	33.1	100.0	168.5	
3	2448.816	V	29.0	45.1	5.5	34.5	50.6	60.0	80.0	25.5	29.4	100.0	246.6	
4	3201.142	V	28.2	43.6	7.2	35.4	50.8	60.0	80.0	24.6	29.2	100.0	259.5	
5	4690.278	V	28.3	41.9	11.9	40.2	53.8	60.0	80.0	19.8	26.2	100.0	226.8	
6	5645.636	V	27.1	41.1	13.7	40.8	54.8	60.0	80.0	19.2	25.2	100.0	17.6	

※ The data is the result of measured by the detector in PK and CISPR Average on the Peak graph.

※ The Average of the test data is the cispr average result.

6.4.5 Remark

Complies with the test requirements.



6.5 Harmonic Current Emissions

6.5.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #7	-	DYMSTEC	-	-	-	■
net.control Software	net.control	EM TEST	2.1.4	-	-	■
DIGITAL POWER ANALYZER (Harmonic)	DPA 500N	EM TEST	V1024106759	2025-03-31	2026-03-31	■
POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-	-	■

6.5.2 Test Location : SHIELD ROOM #7

6.5.3 Test Conditions :

Temperature	Relative Humidity
(22.4 ~ 22.5) °C	(35.7 ~ 35.8) % R.H.

6.5.4 Classification of Equipment for Harmonic Current Emissions

- Limits for Class A equipment
- Limits for Class B equipment
- Limits for Class C equipment(Rated Power > 25 W)
- Limits for Class C equipment(Rated Power ≥ 5 W and ≤ 25 W)
- Limits for Class D equipment

**6.5.5 Test Result**

- Test Date : 2026-03-13
- Test Mode : Mode 1

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.038			
2	0.003	0.187	1.620	n/a
3	0.033	0.946	3.450	PASS
4	0.003	0.394	0.645	n/a
5	0.032	1.875	1.710	PASS
6	0.003	0.626	0.450	n/a
7	0.031	2.725	1.155	PASS
8	0.002	0.694	0.345	n/a
9	0.029	4.915	0.600	PASS
10	0.002	0.845	0.276	n/a
11	0.028	5.673	0.495	PASS
12	0.002	0.956	0.230	n/a
13	0.027	8.432	0.315	PASS
14	0.002	1.166	0.197	n/a
15	0.025	10.993	0.225	PASS
16	0.002	1.239	0.173	n/a
17	0.023	11.499	0.199	PASS
18	0.002	1.328	0.153	n/a
19	0.021	11.826	0.178	PASS
20	0.002	1.447	0.138	n/a
21	0.019	11.770	0.161	PASS
22	0.002	1.548	0.125	n/a
23	0.017	11.582	0.147	PASS
24	0.002	1.731	0.115	n/a
25	0.015	11.107	0.135	PASS
26	0.002	1.720	0.106	n/a
27	0.013	10.712	0.125	PASS
28	0.002	1.933	0.099	n/a
29	0.011	9.735	0.116	PASS
30	0.002	1.991	0.092	n/a
31	0.010	8.869	0.109	PASS
32	0.002	2.003	0.086	n/a
33	0.008	8.158	0.102	PASS
34	0.002	2.082	0.081	n/a
35	0.007	6.910	0.096	PASS
36	0.002	2.109	0.077	n/a
37	0.006	6.230	0.091	PASS
38	0.002	2.306	0.073	n/a
39	0.005	5.394	0.087	n/a
40	0.001	2.158	0.069	n/a

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.



Test Data - Harmonics (continued)

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.037			
2	0.002	0.184	1.080	n/a
3	0.031	1.356	2.300	PASS
4	0.002	0.483	0.430	n/a
5	0.031	2.759	1.140	PASS
6	0.002	0.646	0.300	n/a
7	0.031	3.996	0.770	PASS
8	0.002	0.810	0.230	n/a
9	0.029	7.236	0.400	PASS
10	0.002	1.008	0.184	n/a
11	0.028	8.382	0.330	PASS
12	0.002	1.168	0.153	n/a
13	0.026	12.475	0.210	PASS
14	0.002	1.407	0.131	n/a
15	0.024	16.168	0.150	PASS
16	0.002	1.469	0.115	n/a
17	0.023	17.046	0.132	PASS
18	0.002	1.599	0.102	n/a
19	0.021	17.522	0.118	PASS
20	0.002	1.766	0.092	n/a
21	0.019	11.648	0.161	PASS
22	0.002	1.914	0.084	n/a
23	0.017	11.418	0.147	PASS
24	0.002	2.101	0.077	n/a
25	0.015	10.963	0.135	PASS
26	0.002	2.141	0.071	n/a
27	0.013	10.503	0.125	PASS
28	0.002	2.373	0.066	n/a
29	0.011	9.554	0.116	PASS
30	0.001	2.390	0.061	n/a
31	0.009	8.650	0.109	PASS
32	0.001	2.453	0.058	n/a
33	0.008	7.931	0.102	PASS
34	0.001	2.591	0.054	n/a
35	0.007	6.758	0.096	PASS
36	0.001	2.599	0.051	n/a
37	0.006	6.040	0.091	PASS
38	0.001	2.781	0.048	n/a
39	0.004	5.175	0.087	n/a
40	0.001	2.674	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



6.5.6 Remark

Complies with the test requirements.





6.6 Voltage Fluctuations and Flicker

6.6.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #7	-	DYMSTEC	-	-	-	■
net.control Software	net.control	EM TEST	2.1.4	-	-	■
DIGITAL POWER ANALYZER (Flicker)	DPA 500N	EM TEST	V1024106759	2025-04-01	2026-04-01	■
POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-	-	■

6.6.2 Test Location : SHIELD ROOM #7

6.6.3 Test Conditions :

Temperature	Relative Humidity
(22.5 ~ 22.7) °C	(35.4 ~ 35.7) % R.H.



6.6.4 Test Result

- Test Date : 2026-03-13
- Test Mode : Mode 1

Flicker Measurements					
	P_{it}	Max P_{st}	Max D_c	Max D_{max}	Max T_{max}
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

6.6.5 Remark

Complies with the test requirements.



6.7 Electrostatic Discharge

6.7.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #6	-	DYMSTEC	-	-	-	■
ESD SIMULATOR	ESS-2000	NoiseKen	ESS01Z0454	2026-01-13	2027-01-13	■
HCP	-	KES	-	-	-	■
VCP	-	Noise Ken	-	-	-	■

6.7.2 Test Location : SHIELD ROOM #6

6.7.3 Test Conditions :

Temperature	Relative Humidity
Temperature(15 ~ 35) °C	(22.8 ~ 22.9) °C
Relative Humidity(30 ~ 60) % R.H.	(37.0 ~ 37.1) % R.H.
Atmospheric Pressure(86 ~ 106) kPa	(100.9 ~ 100.9) kPa

6.7.4 Test Specifications :

Discharge Factor	: 1 s
Discharge Impedance	: 330 Ω / 150 pF
Kind of Discharge	: Direct Discharge - Contact Discharge, Air Discharge Indirect Discharge - HCP, VCP
Polarity	: Positive and Negative
Number of Discharge	: 10 at all locations for Contact Discharge, 10 at all locations for Air Discharge
Performance Criteria	: Complied
Discharge Voltage	:


Type	Direct Discharge		Indirect Discharge	
	Contact Discharge	Air Discharge	Horizontal Coupling Plane	Vertical Coupling Plane
Test Voltage	-	± 2 kV	-	-
	± 6 kV	± 4 kV	± 6 kV	± 6 kV
	-	± 8 kV	-	-




6.7.5 Location of Discharge




<Location of Discharge-1_Mode 1, Mode 2>

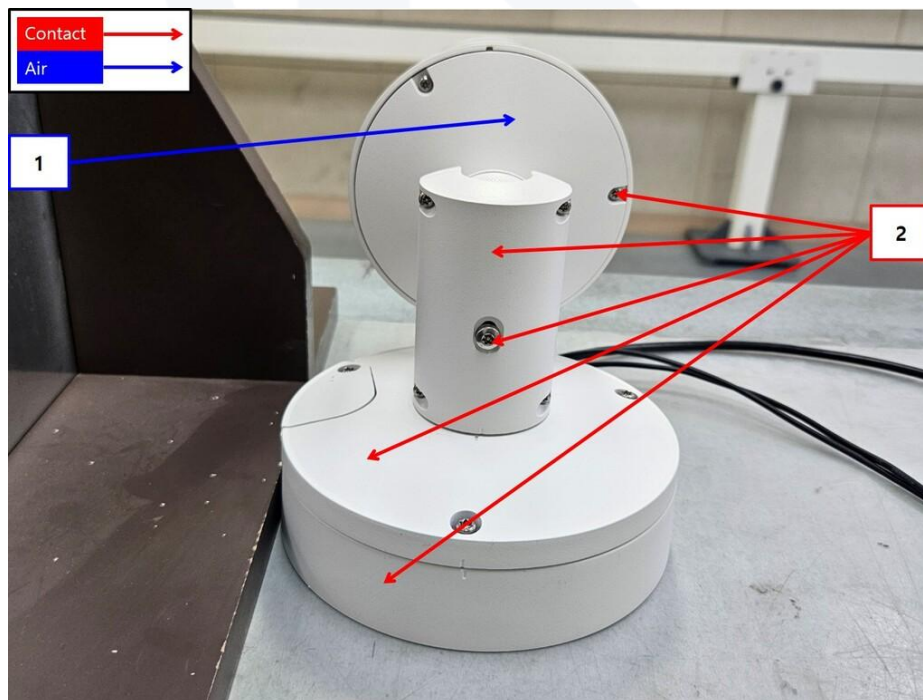

<Location of Discharge-2_Mode 1, Mode 2>

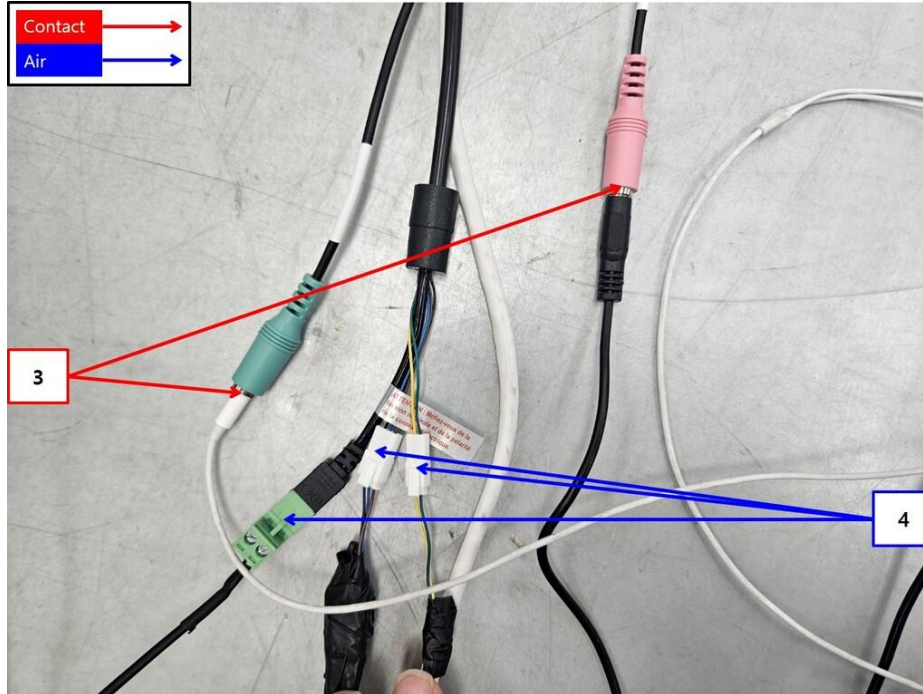

<Location of Discharge_Mode 1>

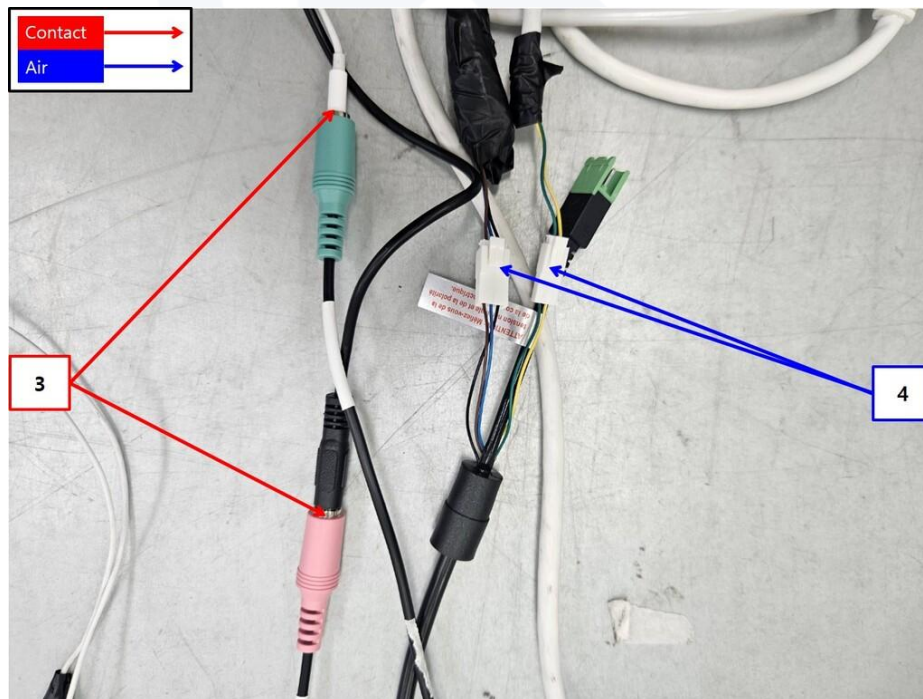

<Location of Discharge_Mode 2>



6.7.6 Test Result

○ Test Date : 2026-03-13

● Test Mode : Mode 1

○ Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

○ Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1, Lens	Air Discharge	Complied	-
2	Enclosure 2, Screw	Contact Discharge	Complied	-
3	Port 1	Contact Discharge	Complied	-
4	Port 2	Air Discharge	Complied	-

○ Test Date : 2026-03-13

● Test Mode : Mode 2

○ Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

○ Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1, Lens	Air Discharge	Complied	-
2	Enclosure 2, Screw	Contact Discharge	Complied	-
3	Port 1	Contact Discharge	Complied	-
4	Port 2	Air Discharge	Complied	-

6.7.7 Remark

No loss of performance of function.



6.8 Continuous RF electromagnetic field disturbances

6.8.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #3	-	DYMSTEC	-	-	-	■
EMC32 Measurement Software	EMC32	R&S	10.10.02	-	-	■
SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	2025-07-28	2026-07-28	■
HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-	-	■
POWER METER	E4419B	Agilent	GB40203000	2026-02-12	2027-02-12	■
AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	2026-02-12	2027-02-12	■
AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	2026-02-12	2027-02-12	■
STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	SCHWARZBEC K	9128ES-121	-	-	■
DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H. SYSTEM,INC	781	2026-03-06	2027-03-06	■

6.8.2 Test Location : SEMI ANECHOIC CHAMBER #3

6.8.3 Test Conditions :

Temperature	Relative Humidity
(22.6 ~ 23.2) °C	(35.0 ~ 35.5) % R.H.



6.8.4 Test Specifications :

Antenna Polarization	:	Horizontal & Vertical unless indicated otherwise
Antenna Distance	:	3 m
Field Strength	:	10 V/m (rms)
Frequency Range	:	80 MHz ~ 2.7 GHz
Modulation	:	AM 80 %, 1 kHz, Sine wave PM 1 Hz (0.5 s ON : 0.5 s OFF)
Dwell Time	:	3 s
Frequency Step	:	1 %
Application method	:	4
Performance Criteria	:	Complied

**6.8.5 Test Result**

- Test Date : 2026-03-12
- Test Mode : Mode 1
- Enclosure Port

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Rear	Complied	Complied
Right	Complied	Complied
Left	Complied	Complied

- Test Date : 2026-03-12
- Test Mode : Mode 2
- Enclosure Port

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Rear	Complied	Complied
Right	Complied	Complied
Left	Complied	Complied

6.8.6 Remark

No loss of performance of function.



6.9 Electrical Fast Transients/Bursts

6.9.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #7	-	DYMSTEC	-	-	-	■
iec.control Software	iec.control	EM TEST	5.4.8	-	-	■
ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	2025-11-05	2026-11-05	■
MOTOR VARIAC	MV 2616	EM TEST	P1552169719	2025-11-05	2026-11-05	■
CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	2025-11-05	2026-11-05	■

6.9.2 Test Location : SHIELD ROOM #7

6.9.3 Test Conditions :

Temperature	Relative Humidity
(21.6 ~ 21.7) °C	(34.8 ~ 34.9) % R.H.

6.9.4 Test Specifications :

Pulse Amplitude & Polarity	: Input a.c power ports ± 2.0 kV Other supply and Signal ports ± 1 kV
Repetition Rate	: 100 kHz
Impulse Rise Time	: 5 ns ± 30 %
Impulse Period	: 50 ns ± 30 %
Burst Duration	: 15 ms ± 20 %
Burst Period	: 300 ms ± 20 %
Duration of Test Voltage	: 1 min
Application Method	: a.c / d.c power ports (Coupling / Decoupling Network) Other than a.c / d.c power poerts (Capacitive Coupling Clamp)
Performance Criteria	: Complied



6.9.5 Test Result

○ Test Date : 2026-03-10

● Test Mode : Mode 1

○ Input a.c power ports

Mode of Application	Observations	
	(+) Burst	(-) Burst
L-N	Complied	Complied

○ Input d.c power ports

Mode of Application	Observations	
	(+) Burst	(-) Burst
N/A	-	-

○ Signal ports and telecommunication ports

Mode of Application	Observations	
	(+) Burst	(-) Burst
RJ-45	Complied	Complied
Alarm IN, Alarm OUT, RS-485	Complied	Complied



○ Test Date : 2026-03-10

● Test Mode : Mode 2

○ Input a.c power ports

Mode of Application	Observations	
	(+) Burst	(-) Burst
N/A	-	-

○ Input d.c power ports

Mode of Application	Observations	
	(+) Burst	(-) Burst
N/A	-	-

○ Signal ports and telecommunication ports

Mode of Application	Observations	
	(+) Burst	(-) Burst
RJ-45	Complied	Complied
Alarm IN, Alarm OUT, RS-485	Complied	Complied

6.9.6 Remark

No loss of performance of function.



6.10 Surge

6.10.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #7	-	DYMSTEC	-	-	-	■
iec.control Software	iec.control	EM TEST	5.4.8	-	-	■
ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	2025-11-05	2026-11-05	■
MOTOR VARIAC	MV 2616	EM TEST	P1552169719	2025-11-05	2026-11-05	■

6.10.2 Test Location : SHIELD ROOM #7

6.10.3 Test Conditions :

Temperature	Relative Humidity
(21.6 ~ 21.7) °C	(34.8 ~ 34.9) % R.H.

6.10.4 Test Specifications :

Surge	: Input a.c power ports	Line to Line ±0.5 kV, ±1.0 kV Line to Ground ±0.5 kV, ±1.0 kV, ±2.0 kV
	Other supply / Signal lines	Line to Ground ±0.5 kV, ±1.0 kV
Input a.c / Other supply / Signal lines		
Open-Circuit Voltage Waveform	: 1.2/50 μs	
Short-Circuit Current Waveform	: 8/20 μs	
Number of Applications	: Apply 5 surges for each polarity	
Phase Angle	: 0° ~ 270° (input a.c. power port)	
Polarity	: Positive and Negative	
Repetition Rate	: 1 surge per 30 s	
Performance Criteria	: Complied	

**6.10.5 Test Result**

○ Test Date : 2026-03-10

● Test Mode : Mode 1

○ Input a.c power ports

Mode of Application	Observations	
	(+) Surge	(-) Surge
L-N	Complied	Complied

○ Signal ports and telecommunication ports

Mode of Application	Coupling Method	Observations	
		(+) Surge	(-) Surge
RJ-45	CDN	Complied	Complied
RJ-45	LINE	Complied	Complied

○ Test Date : 2026-03-10

● Test Mode : Mode 2

○ Input a.c power ports

Mode of Application	Observations	
	(+) Surge	(-) Surge
N/A	-	-

○ Signal ports and telecommunication ports

Mode of Application	Coupling Method	Observations	
		(+) Surge	(-) Surge
RJ-45	CDN	Complied	Complied
RJ-45	LINE	Complied	Complied

6.10.6 Remark

No loss of performance of function.



6.11 Continuous Induced RF Disturbances

6.11.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #7	-	DYMSTEC	-	-	-	■
icd.control Software	icd.control	EM TEST	8.0.0	-	-	■
TEST SYSTEM FOR CONDUCTED AND RADIATED	NSG4070	TESEQ	65585	2025-11-03	2026-11-03	■
ATTENUATOR	ATT 6/80	EM TEST	P1614178148	2025-11-03	2026-11-03	■
CDN	CDN M016	TESEQ	43694	2025-11-03	2026-11-03	■
CDN	CDN M016	TESEQ	43697	2025-11-03	2026-11-03	■
CDN	CDN T8 RJ45	SCHWARZBEC K	00103	2025-07-07	2026-07-07	■
EM CLAMP	KEMZ 801A	TESEQ	44099	2025-11-05	2026-11-05	■

6.11.2 Test Location : SHIELD ROOM #7

6.11.3 Test Conditions :

Temperature	Relative Humidity
(22.9 ~ 23.1)°C	(35.4 ~ 35.6) % R.H.

6.11.4 Test Specifications

Frequency range and Voltage Level	: 0.15 MHz ~ 100 MHz : 10 V(r.m.s)
Modulation	: AM 80 %, 1 kHz, Sine wave PM 1 Hz (0.5 s ON : 0.5 s OFF)
Dwell Time	: 3 s
Frequency Step	: 1 %
Performance Criteria	: Complied

**6.11.5 Test Result**

○ Test Date : 2026-03-09

● Test Mode : Mode 1

○ Input a.c power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L-N	CDN	Complied

○ Input d.c power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
N/A	-	-

○ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
Alarm IN, Alarm OUT, RS485	Clamp	Complied

○ Test Date : 2026-03-09

● Test Mode : Mode 2

○ Input a.c power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
N/A	CDN	-

○ Input d.c power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
N/A	-	-

○ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
Alarm IN, Alarm OUT, RS485	Clamp	Complied

6.11.6 Remark

No loss of performance of function.



6.12 Voltage Dips and Interruptions

6.12.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #7	-	DYMSTEC	-	-	-	■
iec.control Software	iec.control	EM TEST	5.4.8	-	-	■
ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	2025-11-05	2026-11-05	■
MOTOR VARIAC	MV 2616	EM TEST	P1552169719	2025-11-05	2026-11-05	■

6.12.2 Test Location : SHIELD ROOM #7

6.12.3 Test Conditions :

Temperature	Relative Humidity
(21.6 ~ 21.7) °C	(34.8 ~ 34.9) % R.H.

6.12.4 Test Specifications

Instantaneous peak overshoot/undershoot of the actual voltage	: Less than 5 %
Voltage Rise Time, Voltage Fall Time	: Between 1 μs and 5 μs
Test Voltage Frequency Deviation for Voltage Dips	: with in ± 2 %
EUT Voltage	: AC 230 V, 50 Hz
Number of Applications	: 3 cycles
Test Interval	: 10 s
Performance Criteria	: Complied

Voltage Dips and Interruptions	Duration [in period]
20 % Voltage reduction	250 T
30 % Voltage reduction	25 T
60 % Voltage reduction	10 T
100 % Voltage reduction	250 T

Voltage Variations	Supply Voltage
Supply Voltage max (Umax)	Unom a + 10 %
Supply Voltage min (Umin)	Unom a - 15 %



6.12.5 Test Result

- Test Date: 2026-03-10
- Test Mode: Mode 1

- Voltage Dips and Short Interruptions

Depth	Duration [in period]	Observations
20 % Voltage reduction	250 T	Complied
30 % Voltage reduction	25 T	Complied
60 % Voltage reduction	10 T	Complied
100 % Voltage reduction	250 T	Degradation

- Voltage variations

Voltage Variations	Supply Voltage	Observations
Supply voltage max ($U_{\max} = U_{\text{nom}} + 10\%$)	253 V	Complied
Supply voltage min ($U_{\min} = U_{\text{nom}} - 15\%$)	195.5 V	Complied

U_{nom} = Nominal mains voltage, $U_{\max} = (\text{Maximum } U_{\text{nom}}) + 10\%$, $U_{\min} = (\text{Minimum } U_{\text{nom}}) - 15\%$.

6.12.6 Remark

Degradation : During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered without operator's intervention



7 Test Setup Photos and EUT Photographs

7.1 Test Setup Photos



<Conducted Emissions at Mains Power Ports - Front> Mode 1



<Conducted Emissions at Mains Power Ports - Rear> Mode 1




<Conducted Emissions at Telecommunication Ports - Front>Mode 1




<Conducted Emissions at Telecommunication Ports - Rear> Mode 1



<Conducted Emissions at Telecommunication Ports - Front>Mode 2

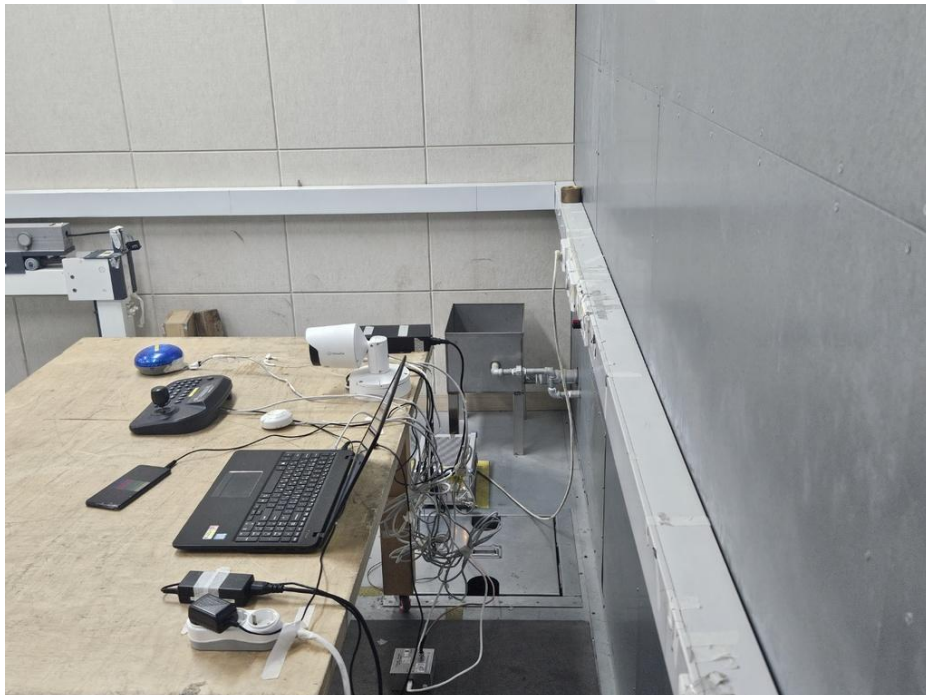


<Conducted Emissions at Telecommunication Ports - Rear> Mode 2

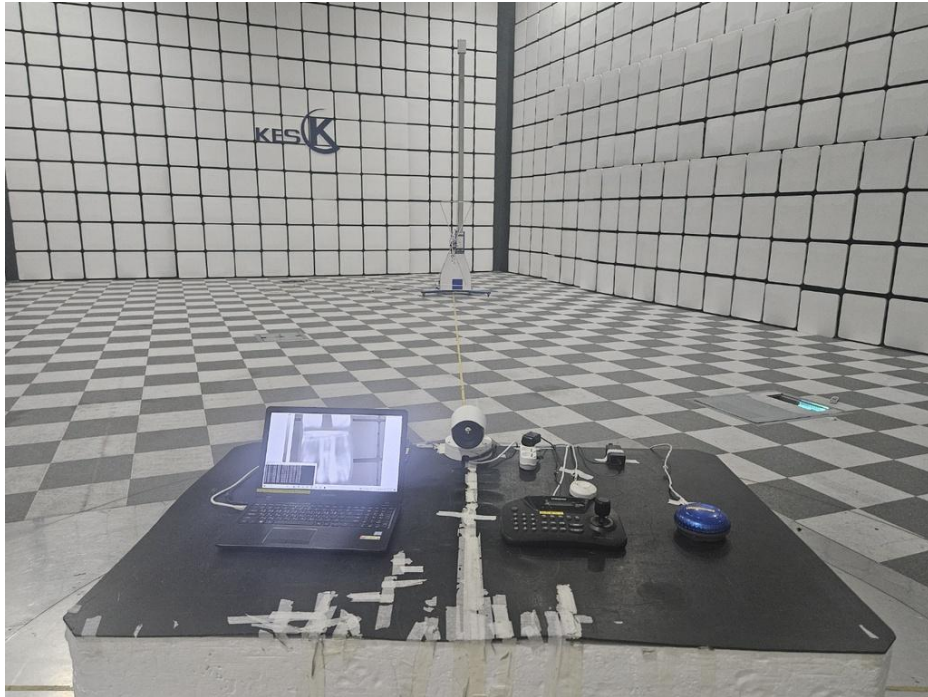


<Radiated Emissions(Below 1 GHz) - Front> Mode 1




<Radiated Emissions(Below 1 GHz) - Rear> Mode 1

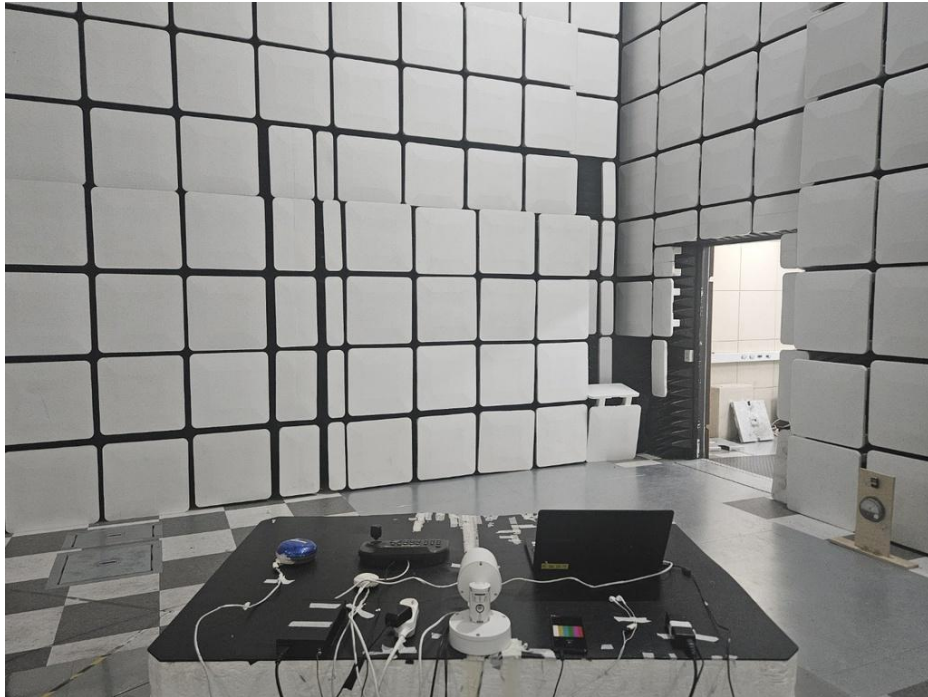


<Radiated Emissions(Below 1 GHz) - Front> Mode 2

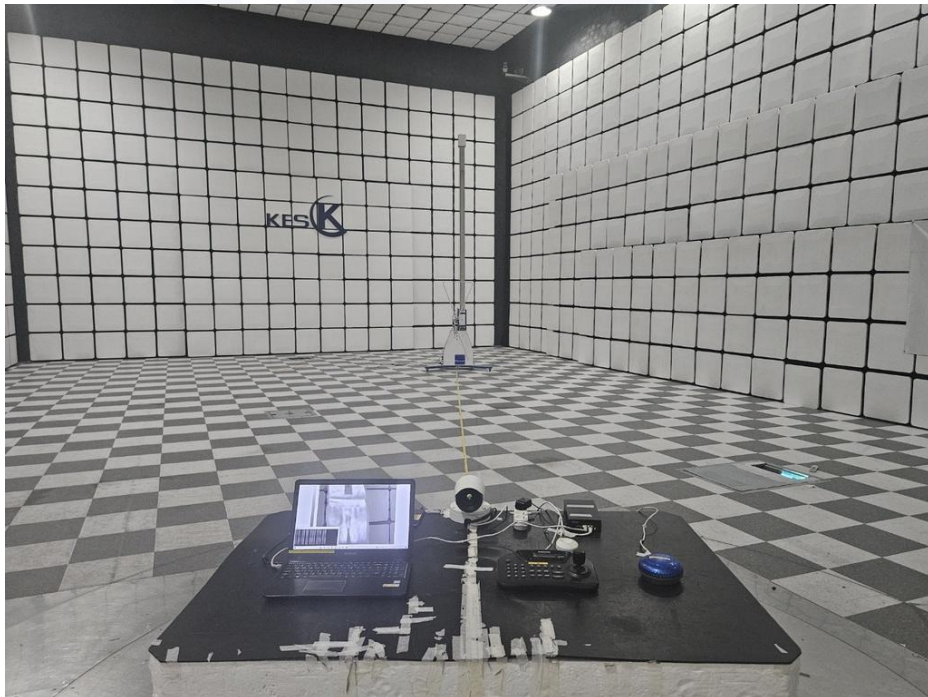


<Radiated Emissions(Below 1 GHz) - Rear> Mode 2

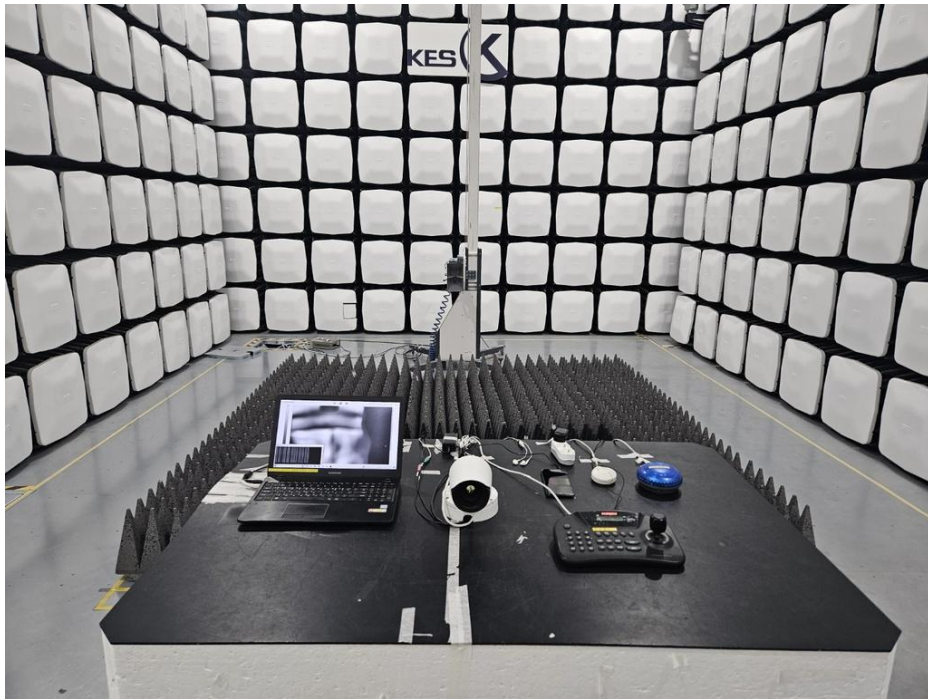


<Radiated Emissions(Above 1 GHz) - Front> Mode 1

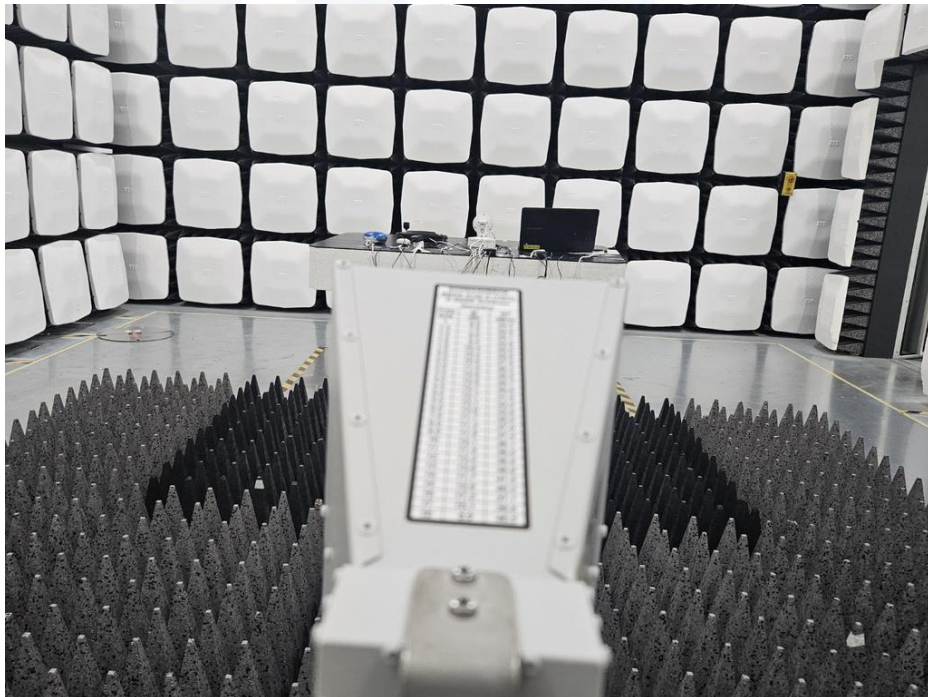


<Radiated Emissions(Above 1 GHz) - Rear> Mode 1

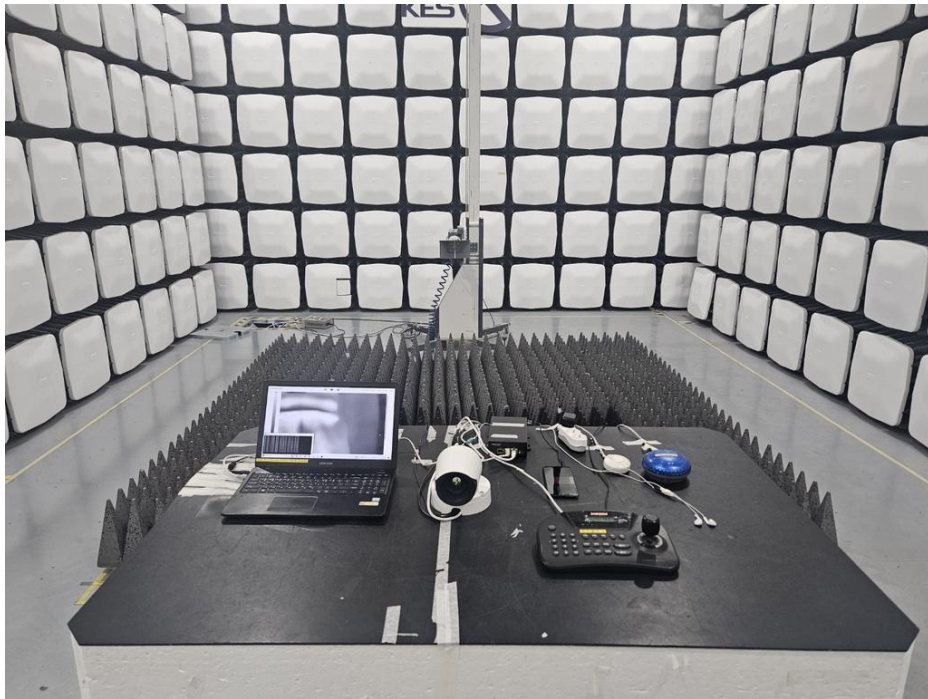


<Radiated Emissions(Above 1 GHz) - Front> Mode 2

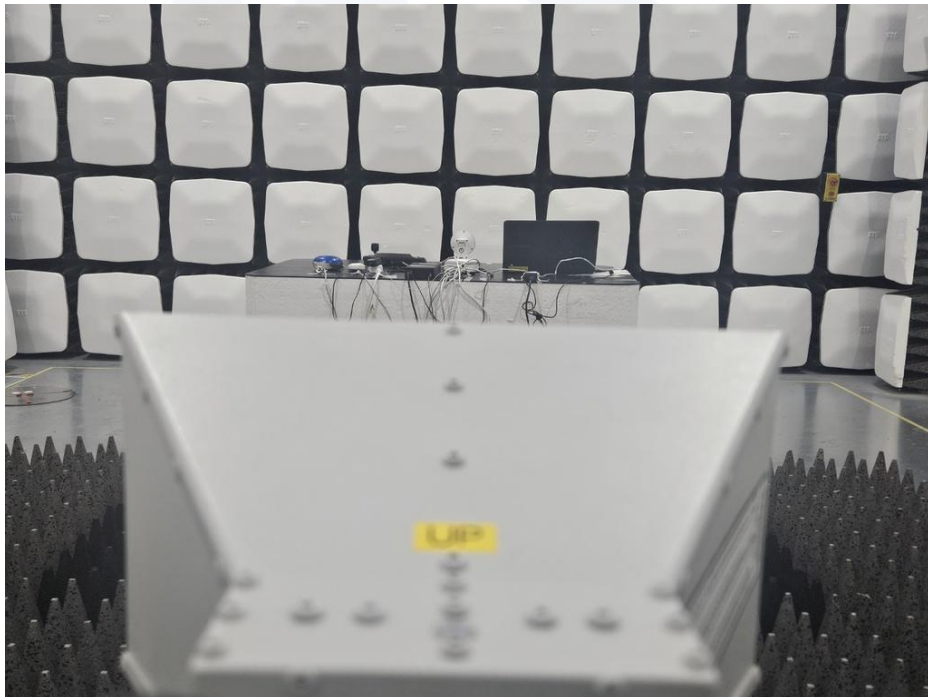

<Radiated Emissions(Above 1 GHz) - Rear> Mode 2

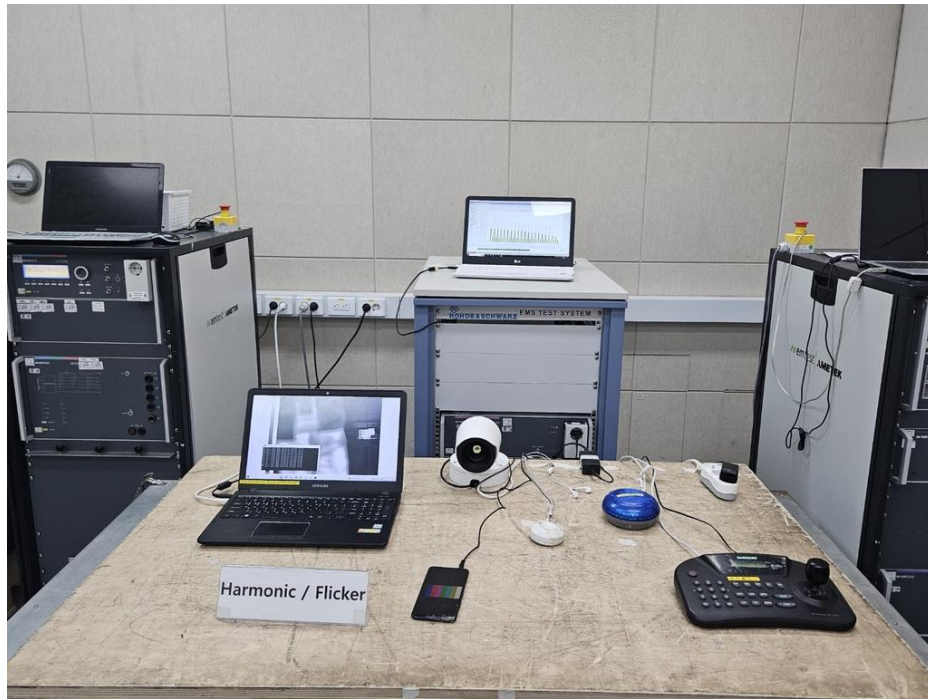

<Harmonic Current Emissions and Voltage Fluctuations and Flicker> Mode 1

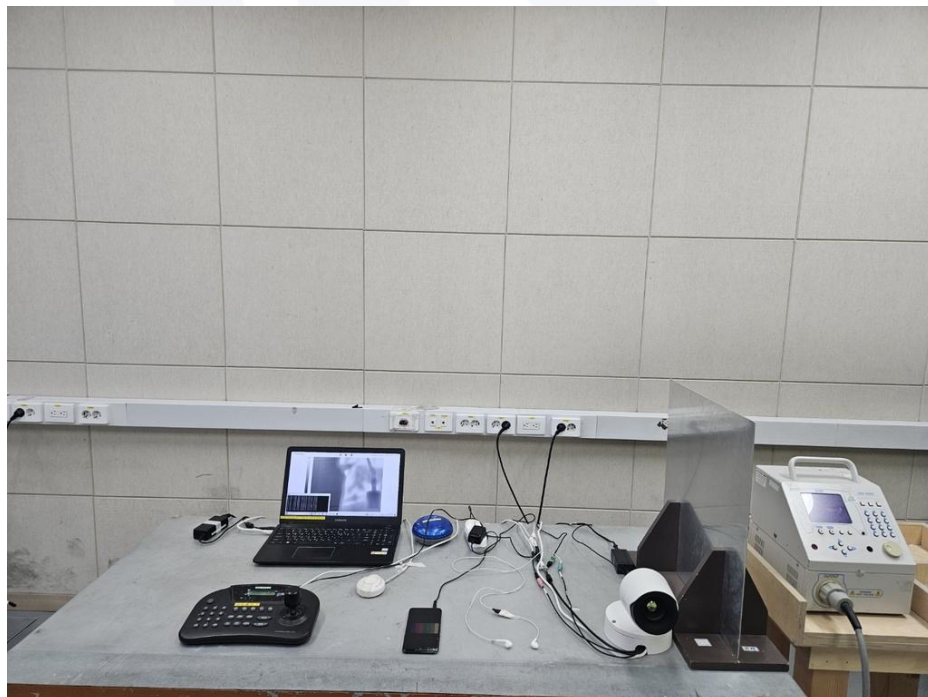


<Electrostatic Discharge> Mode 1



<Electrostatic Discharge> Mode 2



<Continuous RF electromagnetic field disturbances> Mode 1

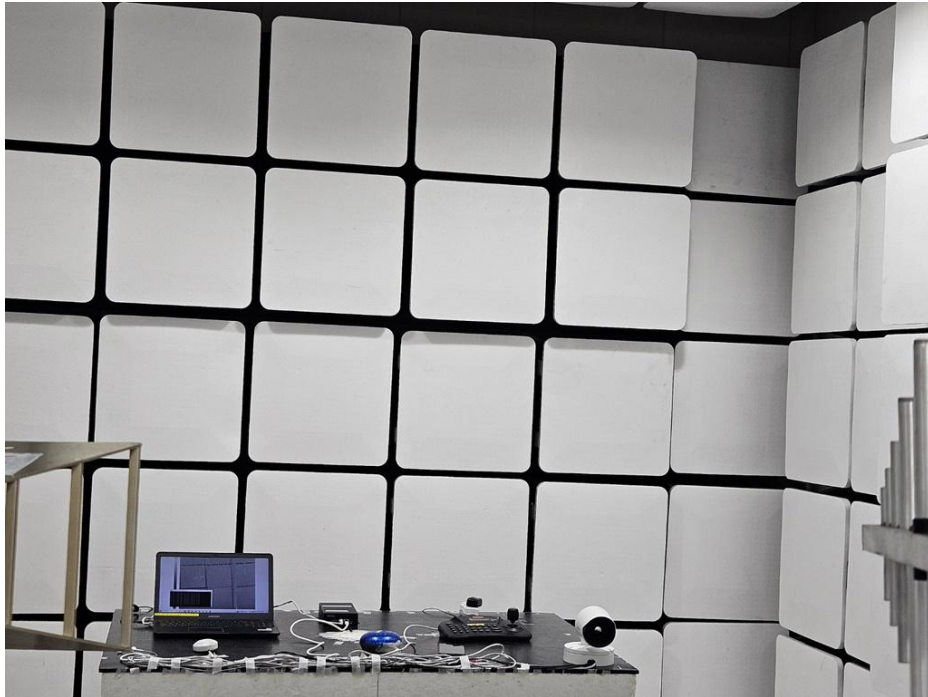

<Continuous RF electromagnetic field disturbances> Mode 2




<Electrical Fast Transients/Bursts> Mode 1




<Electrical Fast Transients/Bursts> Mode 2



<Surge> Mode 1

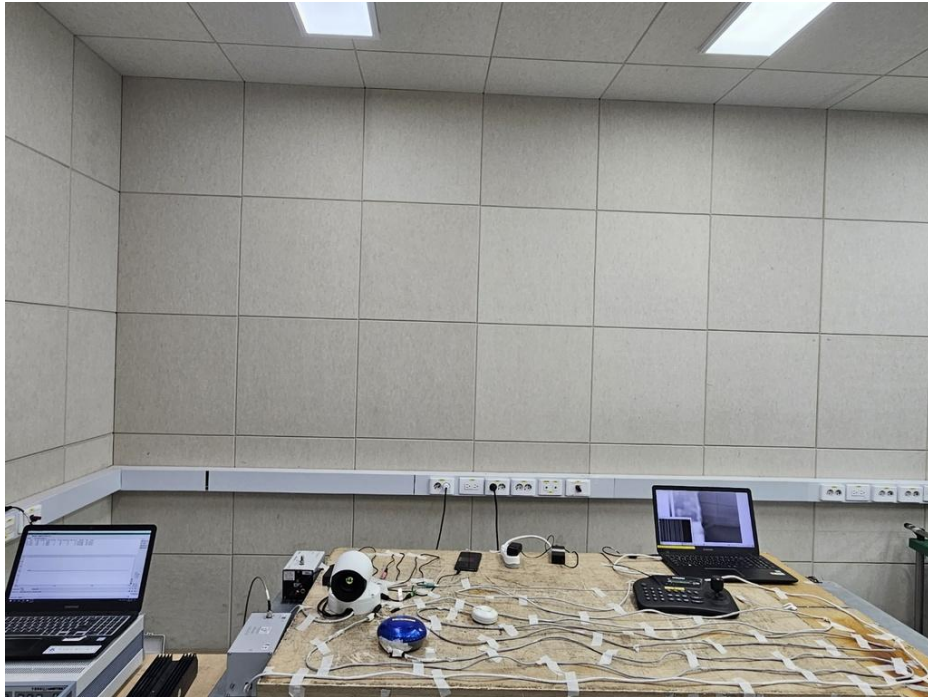

<Continuous Induced RF Disturbances> Mode 1

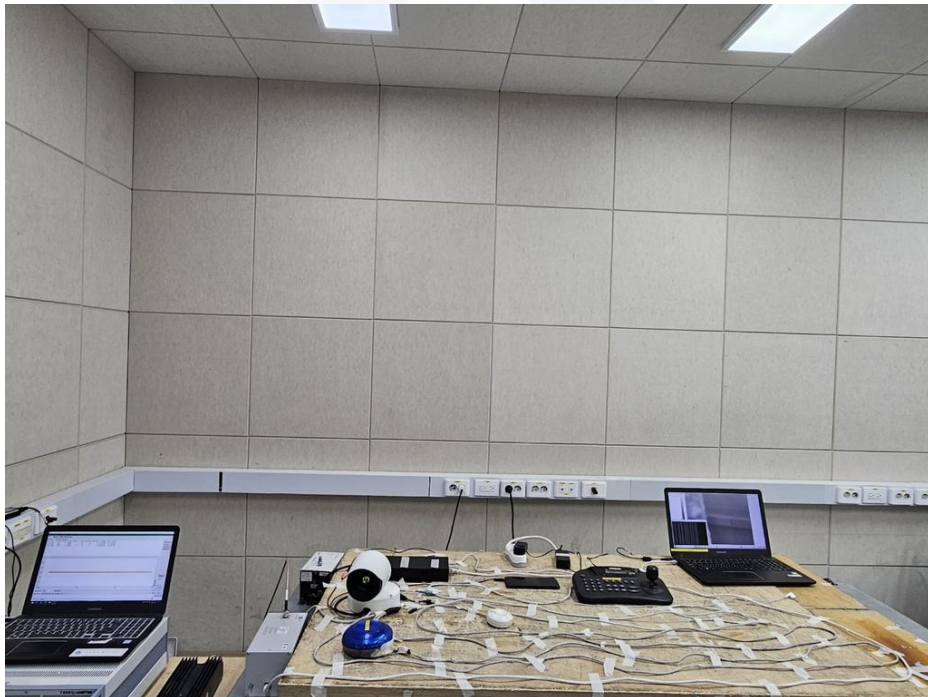

<Continuous Induced RF Disturbances> Mode 2



<Voltage Dips and Interruptions> Mode 1




7.2 EUT Photographs



<EUT External Photographs - Top>



<EUT External Photographs - Bottom>

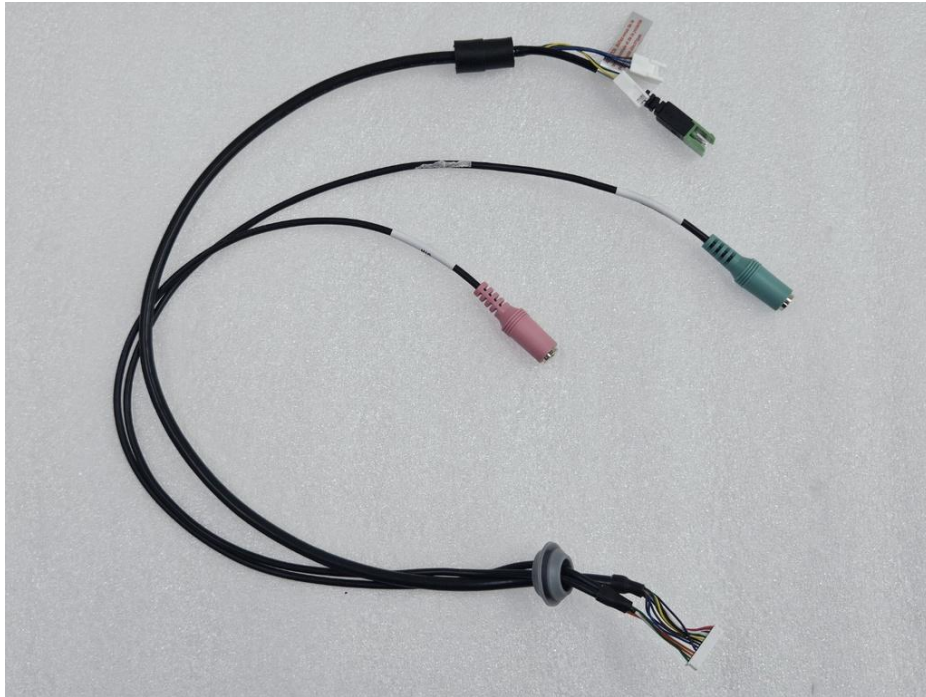

<Components>



<Port-1>



<Port-2>



<Port-3>



<EUT Internal Photographs>



7.3 Label



Name : Hanwha Vision Co., Ltd.
Product item : NETWORK THERMAL CAMERA
Model name : TNO-C4060T

The End.

