



TEST REPORT



Report No. : KES-EM251640

Page 1 / 64

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

1. Client

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

Product name : BARCODE READER

Model/Type No. : TNS-7000M

Variant Model : -

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended Area, Nam Son Ward, Bac Ninh City, Bac Ninh Province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea (Suwon Industrial Complex)

3. Date of Receipt : May. 07, 2025

4. Test date : May. 18, 2025 ~ May. 21, 2025

5. Date of Issue : Jun. 05, 2025

6. Test Results : In Compliance

Tested by

Reviewed by

Eun Gu, Jeon
EMC Test Engineer

Dong Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

KES-QP16-F01(00-23-01-01)

KES Co., Ltd.

The authenticity of this test report can be found on the verification page of our website (www.kes.co.kr).

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
Jun. 05, 2025	KES-EM251640	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency.....	8
1.2	Variant Model Differences.....	8
1.3	Device Modifications.....	8
1.4	Equipment Under Test.....	8
1.5	System Configuration.....	8
1.6	Support Equipments.....	8
1.7	External I/O Cabling.....	9
1.8	EUT Operating Mode(s).....	9
1.9	Configuration.....	10
1.10	Remarks when standards applied.....	11
1.11	Calibration Details of Equipment Used for Measurement.....	11
1.12	Test Facility.....	11
1.13	Laboratory Accreditations and Listings.....	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions at Mains Power Ports.....	13
2.2	Conducted Emissions at Telecommunication Ports.....	14
2.3	Radiated Electric Field Emissions(Below 1 GHz).....	15
2.4	Radiated Electric Field Emissions(Above 1 GHz).....	16
2.5	Harmonic Current Emissions.....	17
2.6	Voltage Fluctuations and Flicker.....	18
3.0	Criteria for compliance.....	19
3.1	Electrostatic Discharge.....	20
3.2	Radiated Electric Field Immunity.....	23
3.3	Electrical Fast Transients/Bursts.....	26
3.4	Surge.....	28
3.5	Conducted Disturbance.....	31
3.6	Power Frequency Magnetic Field Immunity.....	33
3.7	Voltage Dips and Short Interruptions.....	34
	APPENDIX A – TEST DATA.....	37
	Conducted Emissions at Mains Power Ports.....	37
	Conducted Emissions at Telecommunication Ports.....	39
	Radiated Electric Field Emissions(Below 1 GHz).....	40
	Radiated Electric Field Emissions(Above 1 GHz).....	41
	Harmonic Current Emissions and Voltage Fluctuations and Flicker.....	42
	APPENDIX B – Test Setup Photos and Configuration.....	45
	Conducted Emissions at Mains Power Ports.....	45
	Conducted Telecommunication Emissions.....	46
	Radiated Electric Field Emissions(Below 1 GHz).....	47
	Radiated Electric Field Emissions(Above 1 GHz).....	48
	Harmonic Current Emissions and Voltage Fluctuations and Flicker.....	49
	Electrostatic Discharge.....	50
	Radiated Electric Field Immunity.....	50
	Electrical Fast Transients/Bursts.....	51
	Surge Transients.....	51
	Conducted Disturbance.....	52
	Power Frequency Magnetic Field Immunity.....	52
	Voltage Dips and Short Interruptions.....	53
	APPENDIX C – EUT Photographs.....	54
	EUT External Photographs.....	54
	EUT Internal Photographs.....	55
	Label and Location.....	56



1.0 General Product Description

Main Specifications of EUT are:

Division		Specificity
Internal highest operating frequency		1.2 GHz
Power	Rated Power	8 Pin (DC 24 V)
	Test Power	AC 230 V, 50 Hz
Ports	I/O Port	8 Pin 1 EA, 12 Pin 1 EA, Micro SD Slot 1 EA
	Unused Port	EXTERNAL LIGHT(4 Pin) 1 EA
Components		Main Body 1 EA, Cable 1 EA
Ethernet Speed		100 Mbps



Video	
Imaging Device	Global Shutter Mono 1/3" CMOS
Resolution	Max 2048x1536
Max. Framerate	Max 50fps
NETD	None
Pixel Size	2.25μm(H)×2.25μm(V)
Min. Illumination	None
Video Out	None
Video Transmission Distance	None
Lens	
Optional Lens	6mm/8mm/12mm/16mm/25mm
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	None
Backlight Compensation	None
WDR/HDR/LSC	HDR / LSC
Digital Noise Reduction	None
Electronic Shutter Speed	150us~33.3ms (sensor mode별 다름) LED 조명은 150us~3.5ms (shutter별 다름)
Digital PTZ	None
Video Rotation	Flip, Mirror
Analytics	Barcode recognition - Barcode type: 1D Code, Code128 / CODE39 / CODE93 / Codabar / ITF(Interleaved 2 of 5) / UPC / EAN 2D Code, QRcode / DataMatrix / Maxicode Stack Code, PDF417
Business Intelligence	None
Serial Interface	None
Alarm I/O	[WiseBCR App] Input 2EA, Output 2EA
Alarm Triggers	[WiseBCR App] Alarm input
Alarm Events	[WiseBCR App] Trigger On/Off, Read/NoRead
Light Type	Provides power and signal to Hanwha Vision LED Light LED Accessories (M12 Pin Connections), White/Red/Blue option



Light Viewable Length	None
IR Viewable Length	None
IR Illuminator (Optional)	None
IR Radiation angle	None
IR LED	None
IR Wavelength	None
IR Operation	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
Network	
Ethernet	M12 8pin connector (10/100/1000/BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Audio Compression	None
Smart Codec	None
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Quality Level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(6 users) / Multicast Multiple streaming(Up to 3 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, SRTP (TCP, UDP Unicast)
SIP support (VoIP, Peer-to-peer, SIP/PBX integration)	None
Security	None
Application Programming Interface	SUNAPI(HTTP API) Wisenet Open Platform ONVIF Profile M



Security	
OS / Firmware Protect	Secure boot, Signed firmware, Firmware encryption
User authentication	Digest Authentication, Privent brute-force attack
Network authentication	802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2)
Secure Communication	HTTPS, SRTP, WSS(Websocket secure)
Access Control	IP address filtering
Data Protect	Authentication information encryption, ZIP compression encryption
Audit	User Access/System/Event log
Device ID	Device Certificate(Root CA3, pre-installed)
Secure Storage	none
Security Certificate	Secure by default
General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Support
Edge Storage	SD/SDHC/SDXC
Memory	4GB RAM, 512MB Flash
NVIDIA Carrier Board	None
Environmental & Electrical	
Operating Temperature / Humidity	-40°C~+55°C / 0~95% RH * Start up should be done at above -30°C
Storage Temperature / Humidity	-40°C ~ +60°C(-40°F ~ +140°F) / Less than 95% RH
Wind Load	None
EPA(Effective Projected Area)	None
Certification	IP67, IP66, IK10(Exclude Lens cover)
Input Voltage	24VDC, M12 12pin connector
Power Consumption	Max 12.9W, Typical 6.7W * Max: LED On Typical: LED Off
Mechanical	
Color / Material	Black&White / Aluminum
RAL Code	RAL-9003
Product Dimensions / Weight	W74.4 x H77.4 x D59.4, 420g
Reset	HW Reset
Laser Aimer	None
Indicator LED	Support
Status LED	Support
Certifications & Standards	
EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3 KS C 9832 Class A, KS C 9835
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1
Environment	EN 60068-2-6 (variation resistance) EN 60068-2-27 (shock resistance) IEC/EN 60529 IP67 with cables and appropriate lens cover attached IEC/EN 60529 IP66 with cables and appropriate lens cover attached IEC/EN 62262 IK10 (Exclude Lens cover)
Video	None
Compatible Models	
Other Compatible Models	Pivot Mounting Bracket Clear filter cover



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V, 50 Hz(AC/DC Adapter Input Power)

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Barcode Reader	TNS-7000M	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 System Configuration

Description	Model Number	Serial Number	Manufacturer	Remarks
-	-	-	-	-

1.6 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC/DC Adapter	WTS-2405N(120W)	-	Sun Electronics Co., Ltd.	-
Laptop	P95G001	9JM8HT2	DELL INC.	-
Laptop AC/DC Adapter	HA65NM130	-	Chicony Power Technology(Suzhou)Co., Ltd.	-
Micro SD Card	-	-	Sandisk	8 GB



1.7 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
BARCODE READER (EUT)	8 Pin	AC/DC Adapter	Line	2.8	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
	12 Pin	Laptop	RJ-45	5.0	S
Laptop	DC Jack	Laptop Adapter	Line	1.5	U

* Unshielded=U, Shielded=S


1.8 EUT Operating Mode(s)

Test mode	Normal operating	Test Voltages
Operating	- After connecting the EUT and the laptop by wire, check the camera operation status using the web viewer on the laptop and operate the barcode recognition function continuously to check the operation status. - Tested to confirm normal operation and communication through Ping Test.	AC 230 V, 50 Hz

EUT Test operating S/W - Vendor Support Program		
Name	Version	Manufacture Company
Web Viewer	-	HANWHA VISION VIETNAM COMPANY LIMITED



1.9 Configuration

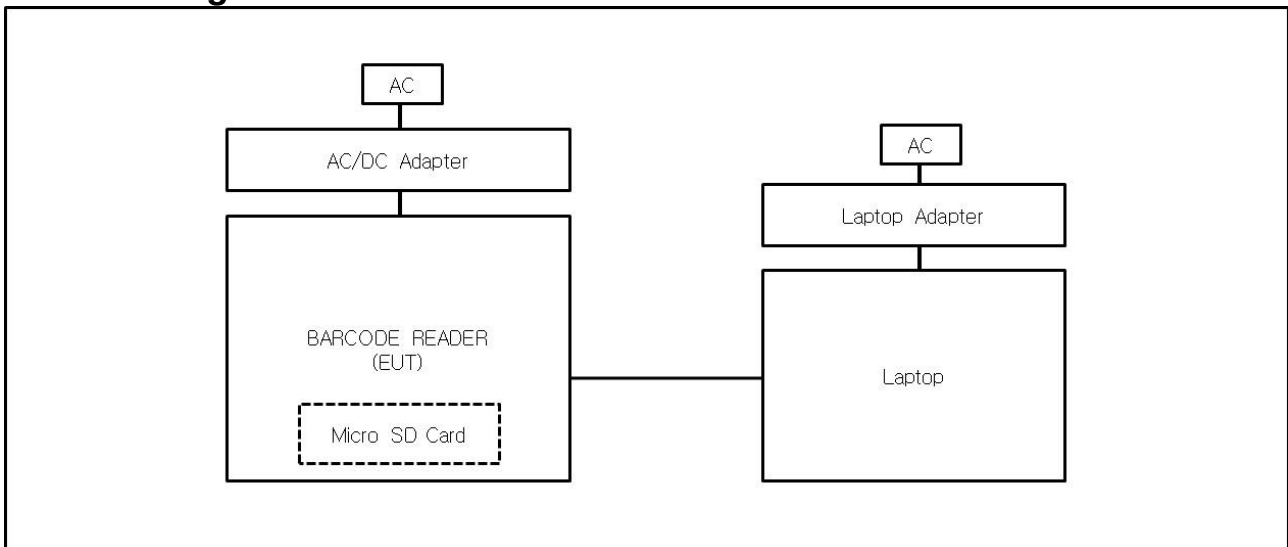

**1.10 Remarks when standards applied**

The EXTERNAL LIGHT(4 Pin) port of the EUT was unused or a management port, so the test was not applied.

1.11 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.12 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.13 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0008



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A1:2020

☒ Class A

☐ Class B

☒ EN 55035:2017/A11:2020

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013





2.1 Conducted Emissions at Mains Power Ports

Test Date

May. 18, 2025

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 06, 2025
☒	LISN	ENV216	R & S	101786	01, 09, 2026
☒	ARTIFICIAL MAINS NETWORK	ESH2-Z5	R & S	100450	11, 06, 2025
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 06, 2025

Test Conditions

Temperature: (23.1 ± 0,1) °C

Relative Humidity: (46.4 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

May. 18, 2025

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test SW	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 06, 2025
☒	LISN	ENV216	R & S	101786	01, 09, 2026
☒	ARTIFICIAL MAINS NETWORK	ESH2-Z5	R & S	100450	11, 06, 2025
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 06, 2025
☒	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	02, 27, 2026

Test Conditions

Temperature: (23.1 ± 0,1) °C

Relative Humidity: (46.4 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

May. 18, 2025

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESW8	R & S	101319	03, 24, 2026
☒	AMPLIFIER	SCU 01	R & S	100603	11, 06, 2025
☒	BILOG ANTENNA	VULB 9168	SCHWARZBECK	9168-461	05, 09, 2026
☒	ATTENUATOR	6806.17.A	HUBER+SUHNER	-	02, 13, 2026

Test Conditions

Temperature: (23,0 ± 0,1) °C

Relative Humidity: (47,2 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Measurement distance

10 m

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

May. 21, 2025

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test SW	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	02, 13, 2026
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 04, 2025
☒	PREAMPLIFIER	8449B	HP	3008A00899	03, 05, 2026
☒	ATTENUATOR	8491B	HP	23094	02, 13, 2026

Test Conditions

Temperature: (23,0 ± 0,1) °C

Relative Humidity: (47,3 ± 0,1) % R.H

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.The Average of the test data is the cispr average result.



2.5 Harmonic Current Emissions

Test Date

May. 21, 2025

Test Location

SHIELD ROOM #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	03, 31, 2026
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (23,2 ± 0,1) °C

Relative Humidity: (46,4 ± 0,1) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

May. 21, 2025

Test Location

SHIELD ROOM #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	03, 31, 2026
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (23,2 ± 0,2) °C

Relative Humidity: (46,4 ± 0,1) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



3.0 Criteria for compliance

General performance criteria

General performance criteria are defined in 8.2, 8.3 and 8.4. These criteria shall be used during the testing of primary functions where no relevant annex is applicable.

When assessing the impact of a disturbance on a function, the assessment should take into consideration the function's performance prior to the application of the disturbance and only identify as failures those changes in performance that are a result of the disturbance.

Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed

below a performance level specified by the manufacturer when the equipment is used as intended.

The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed,

below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2

Test Date

May. 18, 2025

Test Location

EMS-ESD: SHIELD ROOM #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	01, 21, 2026
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (23,2 ± 0,1) °C
Relative Humidity: (46,3 ± 0,1) % R.H.
Atmospheric Pressure: (100,1 ± 0,1) kPa

Test Specifications

Discharge Factor: ≥ 1 s
Discharge Impedance: 330 ohm / 150 pF
Kind of Discharge: Air, Contact (direct and indirect)
Polarity: Positive and Negative
Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge



Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☒ 4 kV	☒ 4 kV	☒ 4 kV	☒ 4 kV
	☐ 6 kV	☐ 6 kV	☐ 6 kV	☐ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ B



Location of Discharge:

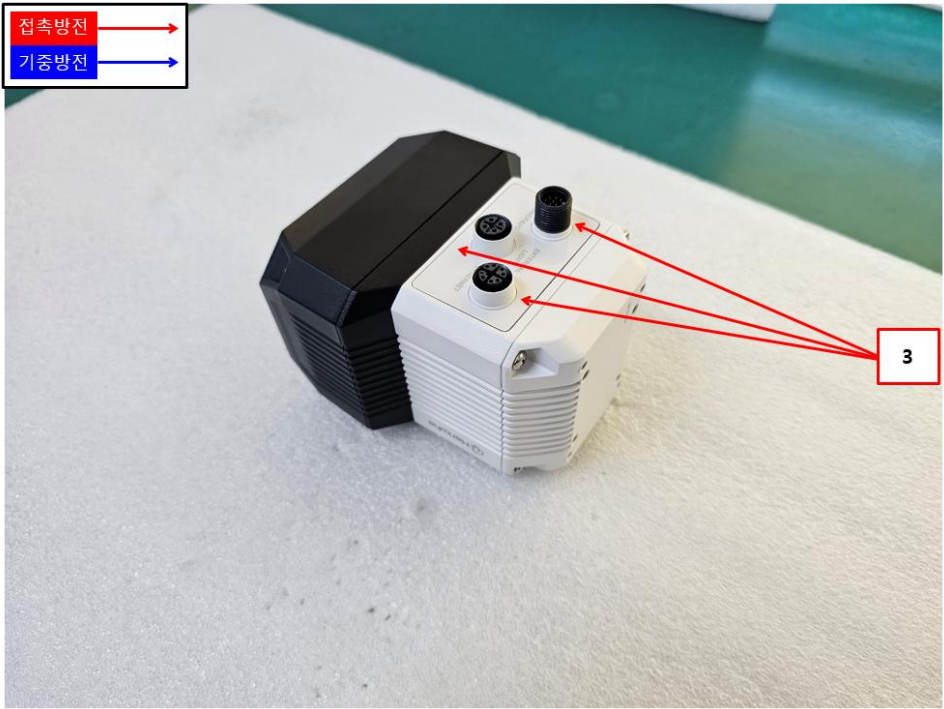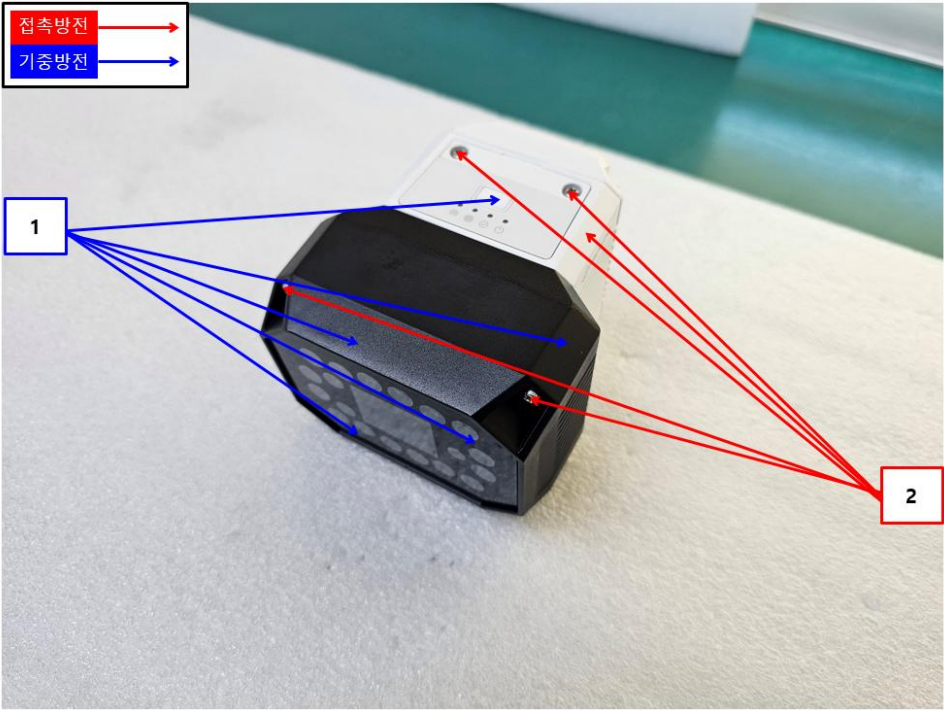

**Test Data**

No.	Test Point	Discharge Method	Performance		Remarks
			Criteria	Results	
1	HCP Contact	Contact Discharge	B	A	-
2	VCP Contact	Contact Discharge	B	A	-

Direct Discharge

No.	Test Point	Discharge Method	Performance		Remarks
			Criteria	Results	
1	Button, Enclosure 1	Air Discharge	B	A	-
2	Enclosure 2, Screw	Contact Discharge	B	A	-
3	Port	Contact Discharge	B	A	-

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

Any degradations of performance was not observed during in the test.



3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3

Test Date

May. 20, 2025

Test LocationEMS-RS: ☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	07, 29, 2025
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	02, 13, 2026
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	02, 13, 2026
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	02, 13, 2026
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 05, 2026

Test Conditions

Temperature: (23,4 ± 0,1) °C
Relative Humidity: (47,3 ± 0,2) % R.H.
Atmospheric Pressure: (99,9 ± 0,1) kPa



Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☒ 3 V/m
☐ 10 V/m

Frequency Range: ☒ 80 MHz to 1 GHz (swept test)
☒ 1.8 GHz , 2.6 GHz , 3.5 GHz , 5 GHz ($\pm 1\%$)(spot test)

Modulation: ☒ AM, 80 %, 1 kHz sine wave

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☒ 3 s (spot test)

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ A

**Test Data**

Side Exposed	Performance Criteria	Results	
		Horizontal	Vertical
Front	A	A	A
Right	A	A	A
Back	A	A	A
Left	A	A	A

[Audio output function]

☐ Electrical Measurements / ☐ Acoustic Measurements

Measured parts	Test method	Level (dB)		Performance criteria	Observations	
		Criteria	Measured		Horizontal	Vertical
-	-	-	-	A	-	-

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4

Test Date

May. 19, 2025

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 06, 2025
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 07, 2025
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 06, 2025

Test Conditions

Temperature: (23,2 ± 0,1) °C
Relative Humidity: (46.2 ± 0,1) % R.H.
Atmospheric Pressure: (100,1 ± 0,1) kPa

Test Specifications

Pulse Amplitude & Polarity: ☒ ± 1.0 kV ☐ ± 2.0 kV
(Power Lines) ☐ ± 4.0 kV

Pulse Amplitude & Polarity: ☒ ± 0.5 kV ☐ ± 1.0 kV
(Signal Lines) ☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☒ 5 klz ☐ 100 klz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ B

**Test Data**☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
L	B	A	A
N	B	A	A
PE	B	A	A
L – N	B	A	A
L – PE	B	A	A
N – PE	B	A	A
L – N – PE	B	A	A

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
-	B	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
12 Pin	B	A	A

Note: “Blank” = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.4 Surge

Reference Standard

EN 61000-4-5

Test Date

May. 20, 2025

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 07, 2025
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 07, 2025

Test Conditions

Temperature: (23,2 ± 0,1) °C
Relative Humidity: (46,2 ± 0,1) % R.H.
Atmospheric Pressure: (100,1 ± 0,1) kPa



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :
Common Mode
☒ (0,5 / 1,0 / 2,0) kV
Differential Mode
☒ (0,5 / 1,0) kV

Number of Surges: ☒ 5 surges per angle

Angle: ☒ 90°, 270° (input a.c. power port)

Polarity: ☒ Positive & Negative

Repetition Rate: ☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ B

Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude: Common Mode
☐ (1,0) kV

Number of Surges: ☐ 5 Surges

Polarity: ☐ Positive & Negative

Repetition Rate: ☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ B

**Test Data**☒ Line to Line – Differential Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
L – N	B	A	A

☒ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
L – PE	B	A	A
N – PE	B	A	A

Signal Lines☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

Note: “Blank” = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6

Test Date

May. 20, 2025

Test Location

EMS-CS: SHIELD ROOM #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	8.0.0	-
☒	TEST SYSTEM FOR CONDUCTED AND RADIATED	NSG4070	TESEQ	65585	11, 18, 2025
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 06, 2025
☒	CDN	CDN M016	TESEQ	43694	11, 07, 2025
☒	CDN	CDN M016	TESEQ	43697	11, 07, 2025
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 08, 2025

Test Conditions

Temperature: (23,5 ± 0,1) °C
Relative Humidity: (46,7 ± 0,1) % R.H.
Atmospheric Pressure: (100,2 ± 0,1) kPa

Test Specifications

Frequency range: ☒ 150 kHz to 80 MHz

Voltage Level: ☒ 3 Vrms (150 kHz to 10 MHz)
☒ 3 Vrms to 1 Vrms (10 MHz to 30 MHz)
☒ 1 Vrms (30 MHz to 80 MHz)

Modulation: ☒ AM, 80 %, 1 kHz sine wave

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

Required Performance Criteria: ☒ A

**Test Data**☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
L – N – PE	CDN	A	A

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
-	-	A	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
12 Pin	Clamp	A	A

[Audio output function]

☐ Electrical Measurements / ☐ Acoustic Measurements

Measured parts	Test method	Level (dB)		Performance criteria	Results
		Criteria	Measured		
-	-	-	-	A	-

* The SOUND ACOUSTIC TESTER mark characteristics indicate low if less than 50 dB.

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.6 Power Frequency Magnetic Field Immunity

Reference Standard

EN 61000-4-8

Test Date

N/A

Test Location

EMS-Magnetic: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☐	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 08, 2025
☐	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 08, 2025
☐	MAGNETIC FIELD COIL	MS 100N	EM TEST	P1536163691	11, 08, 2025
☐	CURRENT TRANSFORMER	MC 2630	EM TEST	P1629182219	11, 08, 2025

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Atmospheric Pressure:

kPa

Test Specifications

Field Strength:

☐ 1 A/m
☐ 30 A/m☐ 3 A/m

Frequency:

☐ 50 Hz☐ 60 Hz

Required Performance Criteria:

☐ A

**Test Data**☐ Immersion method

Coil orientation	Performance Criteria	Results
X - axis	-	-
Y - axis	-	-
Z - axis	-	-

Note: "blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☐ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria☒ NOT APPLICABLE**Remarks**Not affected by magnetic fields.



3.7 Voltage Dips and Short Interruptions

Reference Standard

EN IEC 61000-4-11

Test Date

May. 19, 2025

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 07, 2025
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 07, 2025

Test Conditions

Temperature: (23,2 ± 0,1) °C
Relative Humidity: (46,2 ± 0,1) % R.H.
Atmospheric Pressure: (100,1 ± 0,1) kPa

**Test Data**

NO	Depth	Duration	Performance		Remarks
			Criteria	Results	
1	95 %	0.5	B	A	-
2	30 %	25	C	A	-
3	95 %	250	C	C	-

Results:

- A – No response observed from EUT
B – Unit shuts down then automatically restarts when full voltage is restored.
C – Unit shuts down then manually restarts when full voltage is restored or Loss of function.

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

During the interruption (95 %, 250 cycle), EUT was turned off but after the test, it was recovered by operator's intervention.




APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Conducted Emission
Job No.: KES-EM251640
Phase: L
Mode:
Operator Name: KES

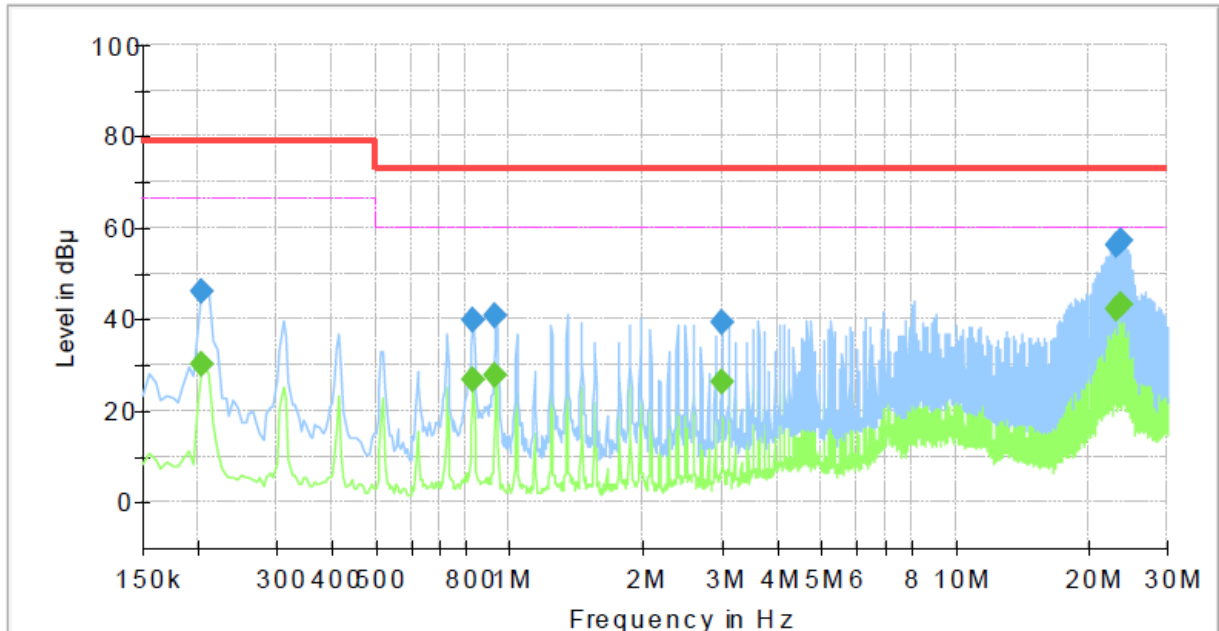

Final_Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.205000	---	30.05	66.00	35.95	1000.0	9.000	L1	19.5
0.205000	45.96	---	79.00	33.04	1000.0	9.000	L1	19.5
0.830000	---	26.44	60.00	33.56	1000.0	9.000	L1	19.6
0.830000	39.46	---	73.00	33.54	1000.0	9.000	L1	19.6
0.930000	---	27.59	60.00	32.41	1000.0	9.000	L1	19.6
0.930000	40.75	---	73.00	32.25	1000.0	9.000	L1	19.6
3.000000	---	26.34	60.00	33.66	1000.0	9.000	L1	19.7
3.000000	39.40	---	73.00	33.60	1000.0	9.000	L1	19.7
23.175000	---	42.02	60.00	17.98	1000.0	9.000	L1	20.5
23.175000	56.25	---	73.00	16.75	1000.0	9.000	L1	20.5
23.485000	---	43.07	60.00	16.93	1000.0	9.000	L1	20.5
23.485000	57.29	---	73.00	15.71	1000.0	9.000	L1	20.5



[NEUTRAL]

Common Information

Test Description: Conducted Emission
Job No.: KES-EM251640
Phase: N
Mode:
Operator Name: KES

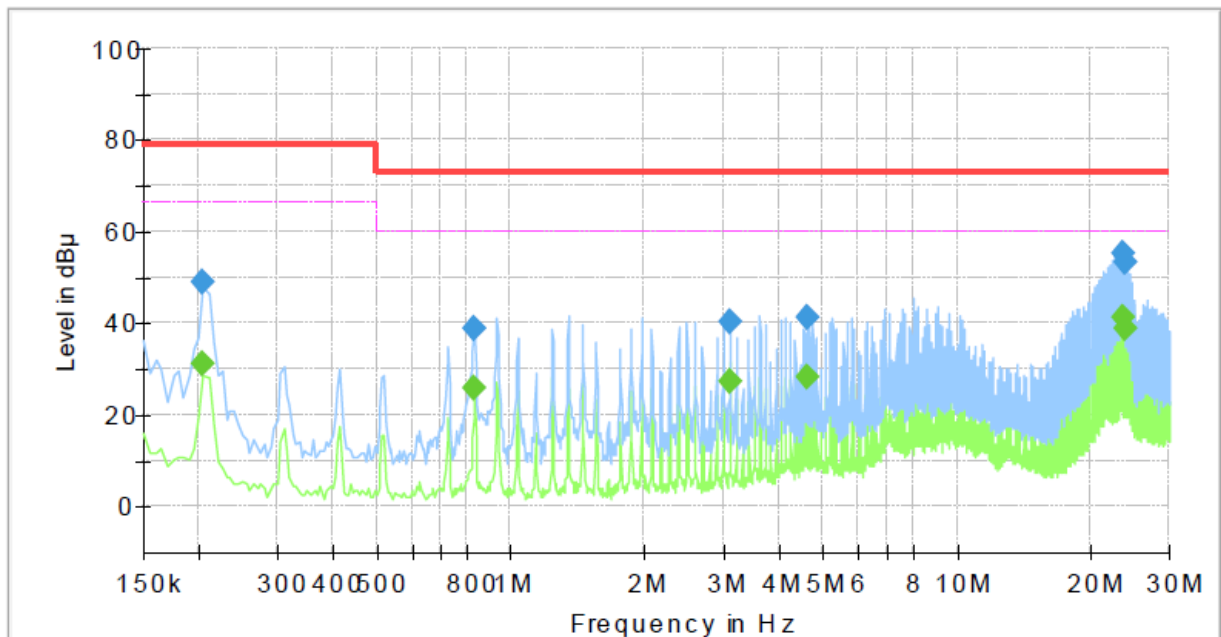

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.205000	---	31.20	66.00	34.80	1000.0	9.000	N	19.5
0.205000	48.80	---	79.00	30.20	1000.0	9.000	N	19.5
0.830000	---	25.55	60.00	34.45	1000.0	9.000	N	19.6
0.830000	38.52	---	73.00	34.48	1000.0	9.000	N	19.6
3.105000	---	27.16	60.00	32.84	1000.0	9.000	N	19.7
3.105000	40.20	---	73.00	32.80	1000.0	9.000	N	19.7
4.655000	---	28.18	60.00	31.82	1000.0	9.000	N	19.8
4.655000	41.07	---	73.00	31.93	1000.0	9.000	N	19.8
23.485000	---	41.26	60.00	18.74	1000.0	9.000	N	20.5
23.485000	55.30	---	73.00	17.70	1000.0	9.000	N	20.5
24.005000	---	38.89	60.00	21.11	1000.0	9.000	N	20.5
24.005000	53.21	---	73.00	19.79	1000.0	9.000	N	20.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

**Conducted Emissions at Telecommunication Ports**

[1000 Mbps]

Common Information

Test Description: Telecommunication Emission
Job No.: KES-EM251640
Mode :
Speed : 100 Mbps
Operator Name: KES

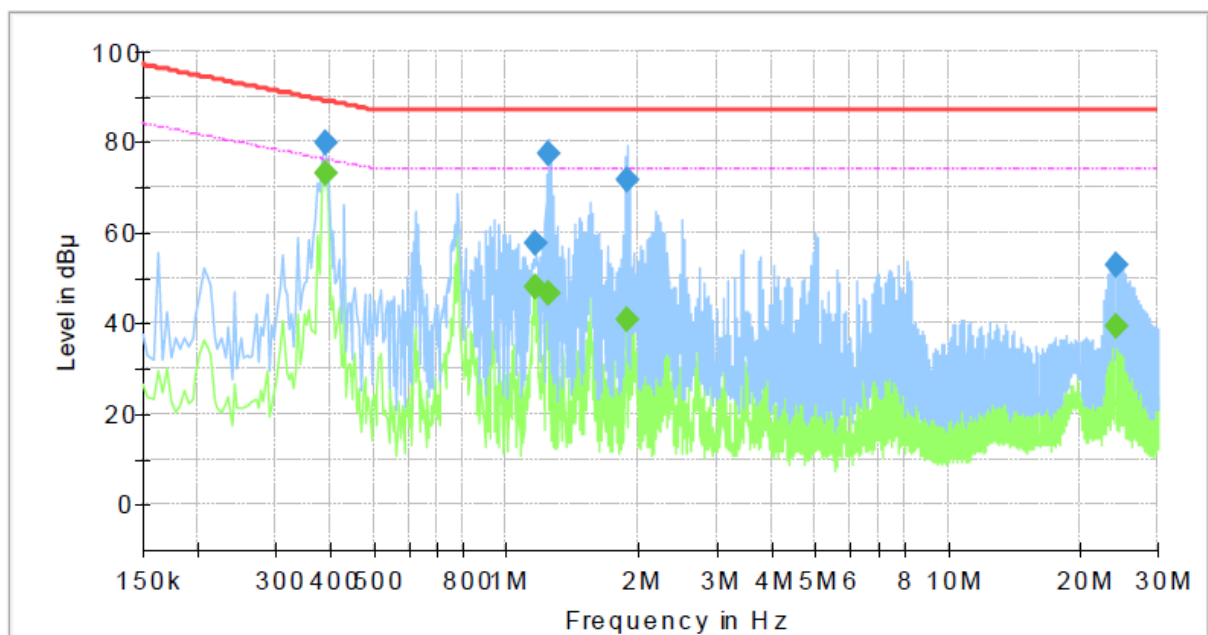**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.390000	79.67	---	89.06	9.39	1000.0	9.000	Single Line	19.4
0.390000	---	73.16	76.06	2.90	1000.0	9.000	Single Line	19.4
1.166000	57.63	---	87.00	29.37	1000.0	9.000	Single Line	19.4
1.166000	---	48.01	74.00	25.99	1000.0	9.000	Single Line	19.4
1.254000	77.49	---	87.00	9.51	1000.0	9.000	Single Line	19.4
1.254000	---	46.22	74.00	27.78	1000.0	9.000	Single Line	19.4
1.886000	---	40.54	74.00	33.46	1000.0	9.000	Single Line	19.4
1.886000	71.69	---	87.00	15.31	1000.0	9.000	Single Line	19.4
24.106000	---	39.10	74.00	34.90	1000.0	9.000	Single Line	20.4
24.106000	52.68	---	87.00	34.32	1000.0	9.000	Single Line	20.4


◆ Calculation

$$\text{QuasiPeak [dB}\mu\text{V]} / \text{CAverage [dB}\mu\text{V]} = \text{Reading Value [dB}\mu\text{V]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

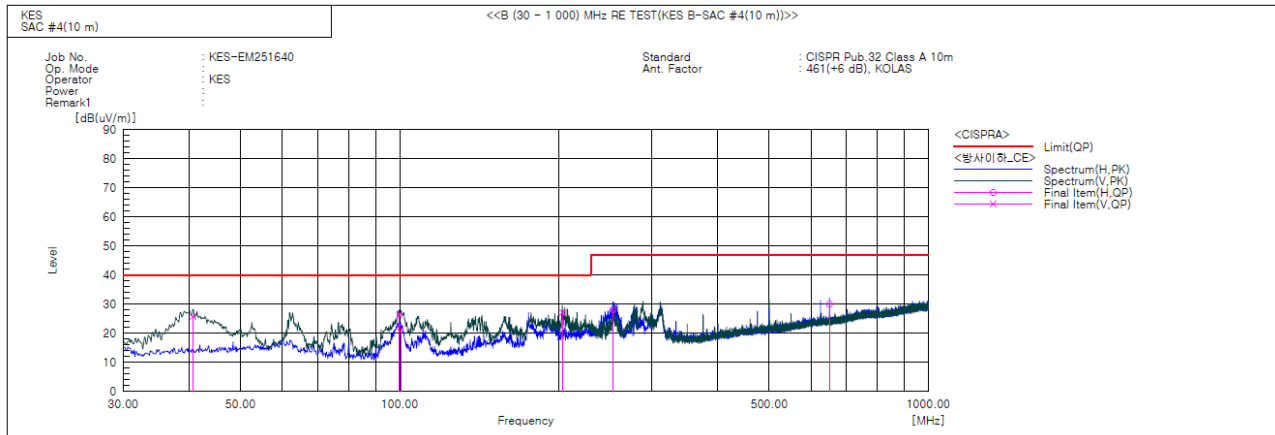**Radiated Electric Field Emissions(Below 1 GHz)****Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	40.670	V	47.6	-21.8	25.8	40.0	14.2	166.0	320.0	
2	99.840	V	51.2	-24.9	26.3	40.0	13.7	100.0	49.0	
3	100.446	H	46.6	-24.8	21.8	40.0	18.2	316.0	174.0	
4	203.145	V	48.9	-21.8	27.1	40.0	12.9	105.0	351.0	
5	253.104	H	47.4	-19.3	28.1	47.0	18.9	315.0	190.0	
6	650.073	H	36.2	-6.2	30.0	47.0	17.0	355.0	339.0	


◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

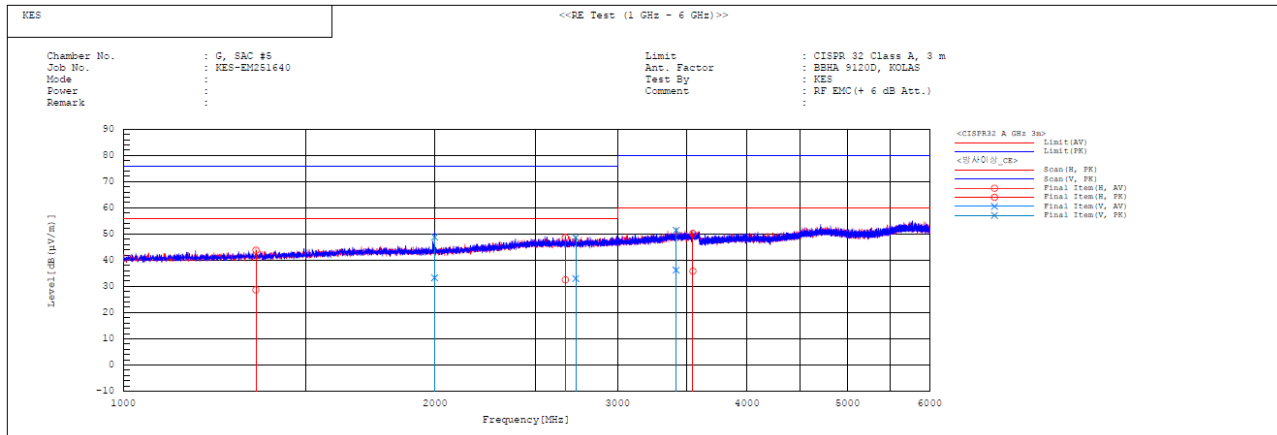**Radiated Electric Field Emissions(Above 1 GHz)****Final Result**

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1343.806	H	28.5	43.6	0.2	43.8	56.0	76.0	27.3	32.2	100.0	204.9	
2	1998.041	V	30.4	45.9	2.9	48.8	56.0	76.0	22.7	27.2	100.0	209.7	
3	2671.741	H	27.0	43.1	5.5	48.6	56.0	76.0	23.5	27.4	100.0	5.4	
4	2733.239	V	27.3	42.9	5.7	48.6	56.0	76.0	23.0	27.4	100.0	53.8	
5	3417.023	V	29.0	44.2	7.2	51.4	60.0	80.0	23.8	28.6	100.0	126.1	
6	3546.841	H	28.4	42.8	7.4	50.2	60.0	80.0	24.2	29.8	100.0	218.0	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(PK/CAV) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

**Harmonic Current Emissions and Voltage Fluctuations and Flicker****Average harmonic current results**

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.048			
2	0.002	0.153	1.080	n/a
3	0.041	1.782	2.300	PASS
4	0.002	0.487	0.430	n/a
5	0.039	3.408	1.140	PASS
6	0.002	0.784	0.300	n/a
7	0.036	4.737	0.770	PASS
8	0.002	0.788	0.230	n/a
9	0.034	8.446	0.400	PASS
10	0.002	0.936	0.184	n/a
11	0.030	9.166	0.330	PASS
12	0.002	0.982	0.153	n/a
13	0.026	12.421	0.210	PASS
14	0.001	1.074	0.131	n/a
15	0.022	14.449	0.150	PASS
16	0.001	1.118	0.115	n/a
17	0.017	13.214	0.132	PASS
18	0.001	1.050	0.102	n/a
19	0.014	11.491	0.118	PASS
20	0.001	0.994	0.092	n/a
21	0.010	6.061	0.161	PASS
22	0.001	0.999	0.084	n/a
23	0.006	4.419	0.147	PASS
24	0.001	1.040	0.077	n/a
25	0.004	2.657	0.135	n/a
26	0.001	1.018	0.071	n/a
27	0.001	1.098	0.125	n/a
28	0.001	1.112	0.066	n/a
29	0.001	1.040	0.116	n/a
30	0.001	1.146	0.061	n/a
31	0.002	2.106	0.109	n/a
32	0.001	1.217	0.058	n/a
33	0.003	3.012	0.102	n/a
34	0.001	1.278	0.054	n/a
35	0.003	3.379	0.096	n/a
36	0.001	1.280	0.051	n/a
37	0.003	3.626	0.091	n/a
38	0.001	1.321	0.048	n/a
39	0.003	3.304	0.087	n/a
40	0.001	1.435	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.049			
2	0.002	0.130	1.620	n/a
3	0.041	1.193	3.450	PASS
4	0.003	0.398	0.645	n/a
5	0.039	2.306	1.710	PASS
6	0.003	0.692	0.450	n/a
7	0.037	3.194	1.155	PASS
8	0.002	0.625	0.345	n/a
9	0.034	5.699	0.600	PASS
10	0.002	0.895	0.276	n/a
11	0.031	6.209	0.495	PASS
12	0.002	0.765	0.230	n/a
13	0.026	8.384	0.315	PASS
14	0.002	0.816	0.197	n/a
15	0.022	9.714	0.225	PASS
16	0.001	0.843	0.173	n/a
17	0.018	8.971	0.199	PASS
18	0.001	0.781	0.153	n/a
19	0.014	7.825	0.178	PASS
20	0.001	0.761	0.138	n/a
21	0.010	6.329	0.161	PASS
22	0.001	0.730	0.125	n/a
23	0.007	4.628	0.147	PASS
24	0.001	0.794	0.115	n/a
25	0.004	2.843	0.135	n/a
26	0.001	0.802	0.106	n/a
27	0.002	1.269	0.125	n/a
28	0.001	0.928	0.099	n/a
29	0.001	1.238	0.116	n/a
30	0.001	0.892	0.092	n/a
31	0.003	2.340	0.109	n/a
32	0.001	0.961	0.086	n/a
33	0.003	3.254	0.102	n/a
34	0.001	1.001	0.081	n/a
35	0.003	3.573	0.096	n/a
36	0.001	1.014	0.077	n/a
37	0.004	3.860	0.091	n/a
38	0.001	1.024	0.073	n/a
39	0.003	3.571	0.087	n/a
40	0.001	1.164	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Voltage Fluctuations

Flicker Measurements					
	P_{lt}	Max P_{st}	Max D_c	Max D_{max}	Max T_{max}
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS





APPENDIX B – Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports






Conducted Telecommunication Emissions






Radiated Electric Field Emissions(Below 1 GHz)

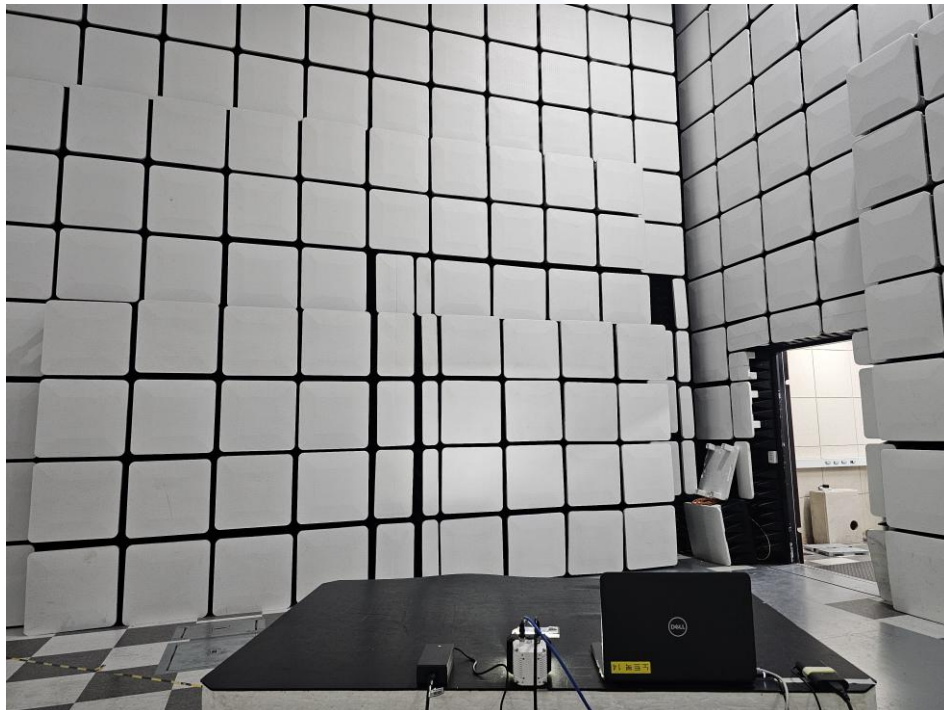



Radiated Electric Field Emissions(Above 1 GHz)

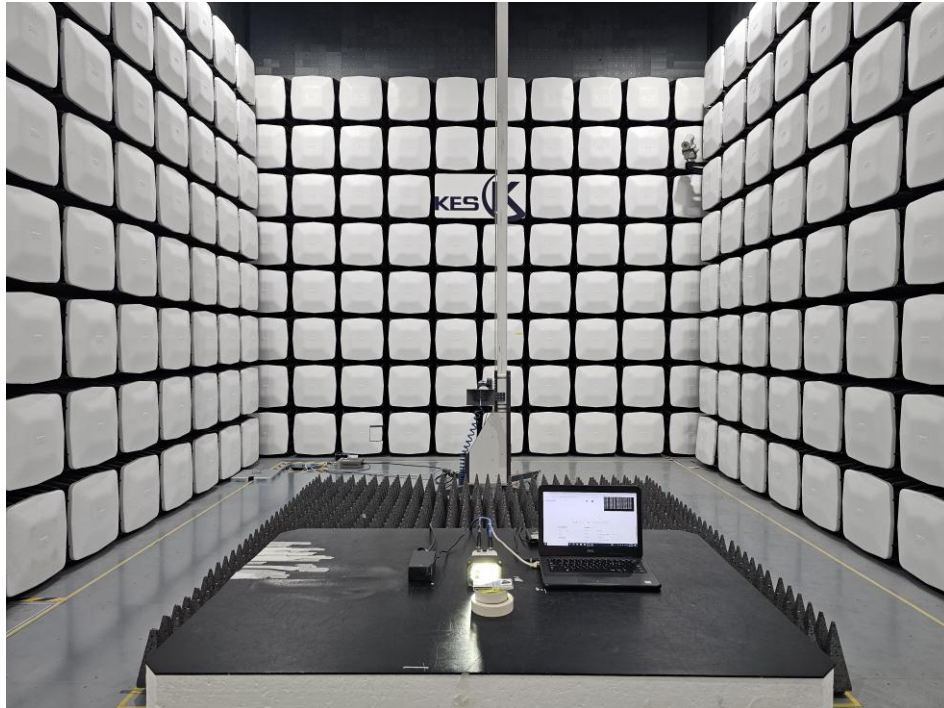




Harmonic Current Emissions and Voltage Fluctuations and Flicker






Electrostatic Discharge

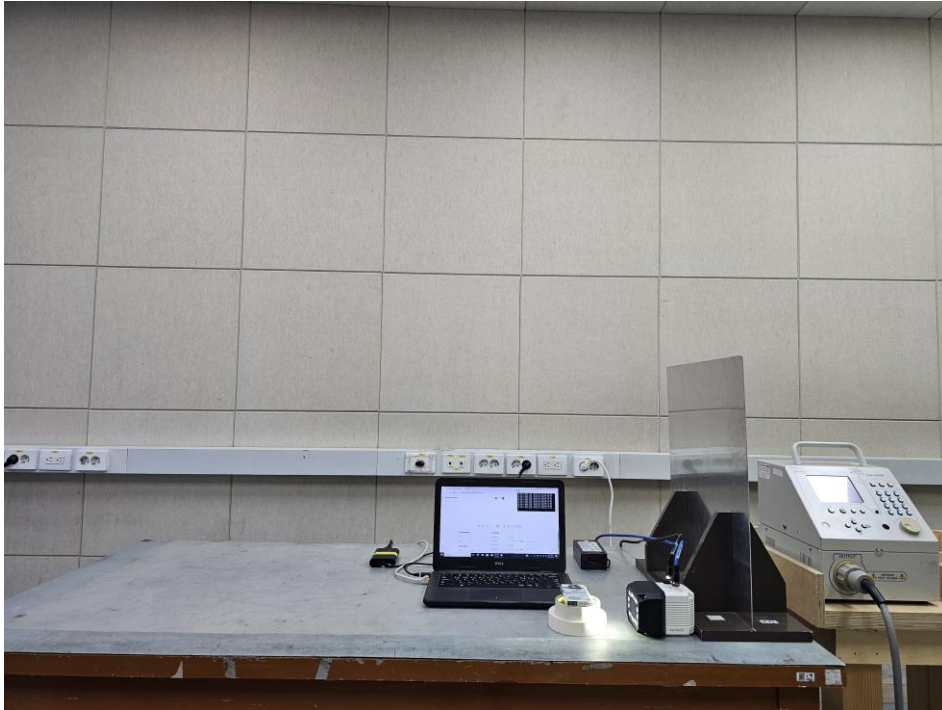

Radiated Electric Field Immunity

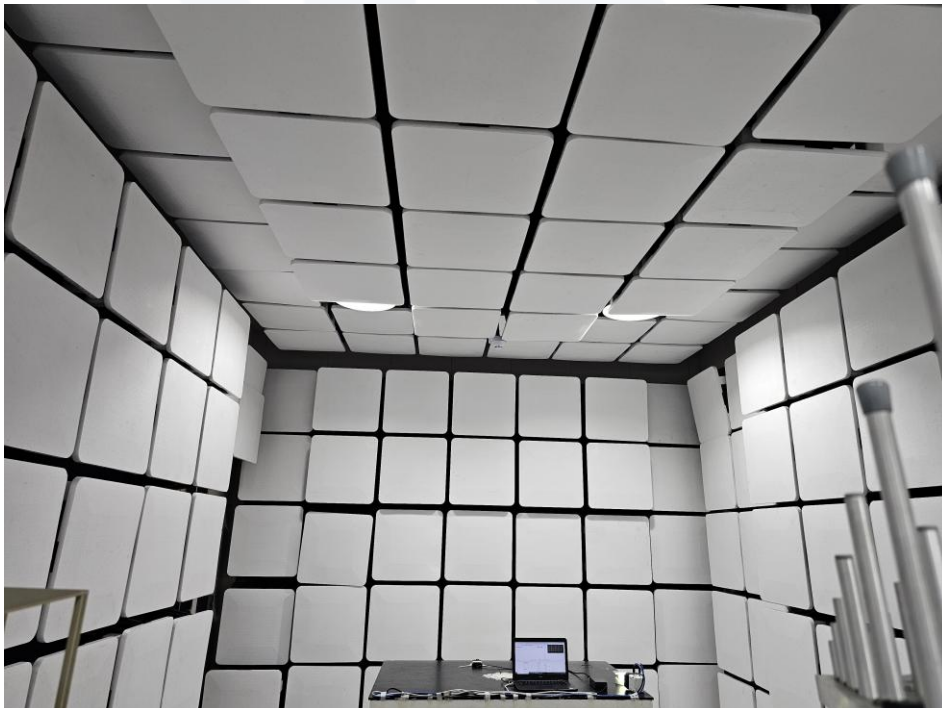



Electrical Fast Transients/Bursts




Surge Transients





Conducted Disturbance

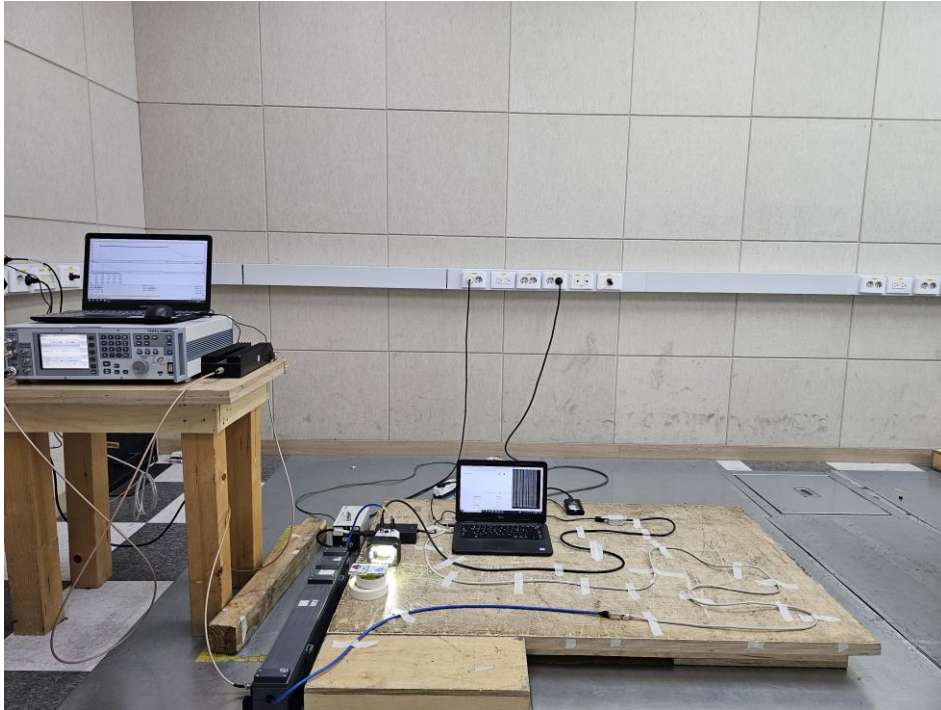

Power Frequency Magnetic Field Immunity

N/A



Voltage Dips and Short Interruptions





APPENDIX C – EUT Photographs

EUT External Photographs

(Top)



(Bottom)





EUT Internal Photographs


(Internal View)





EUT Internal View – Board 1

(Top)

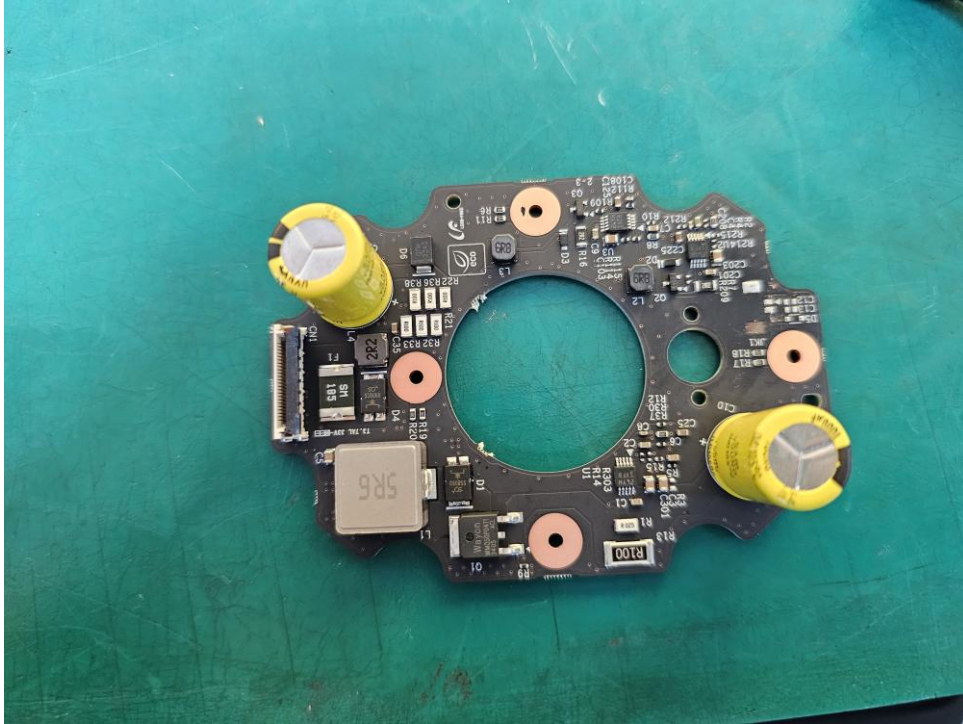

(Bottom)





EUT Internal View – Board 2

(Top)



(Bottom)






EUT Internal View – Board 3

(Top)




(Bottom)

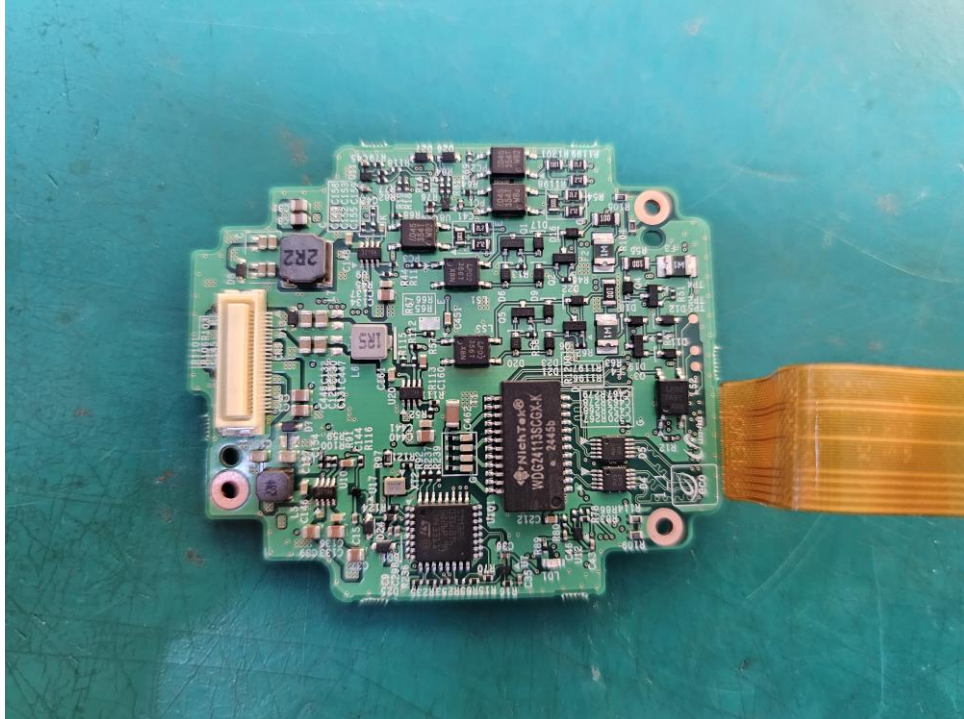




EUT Internal View – Board 4

(Top)

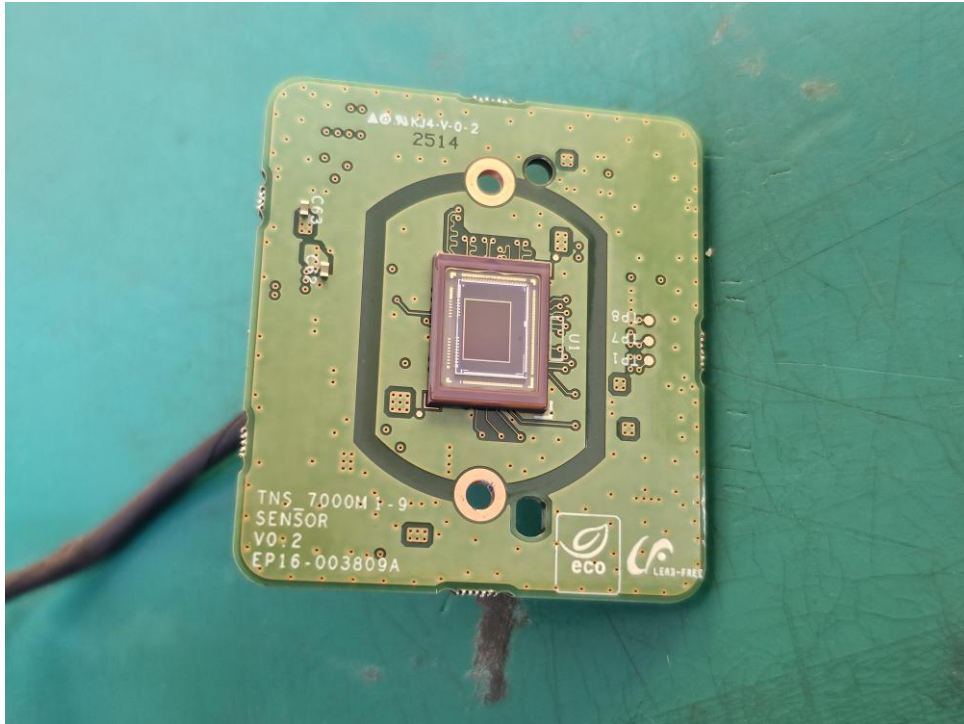


(Bottom)

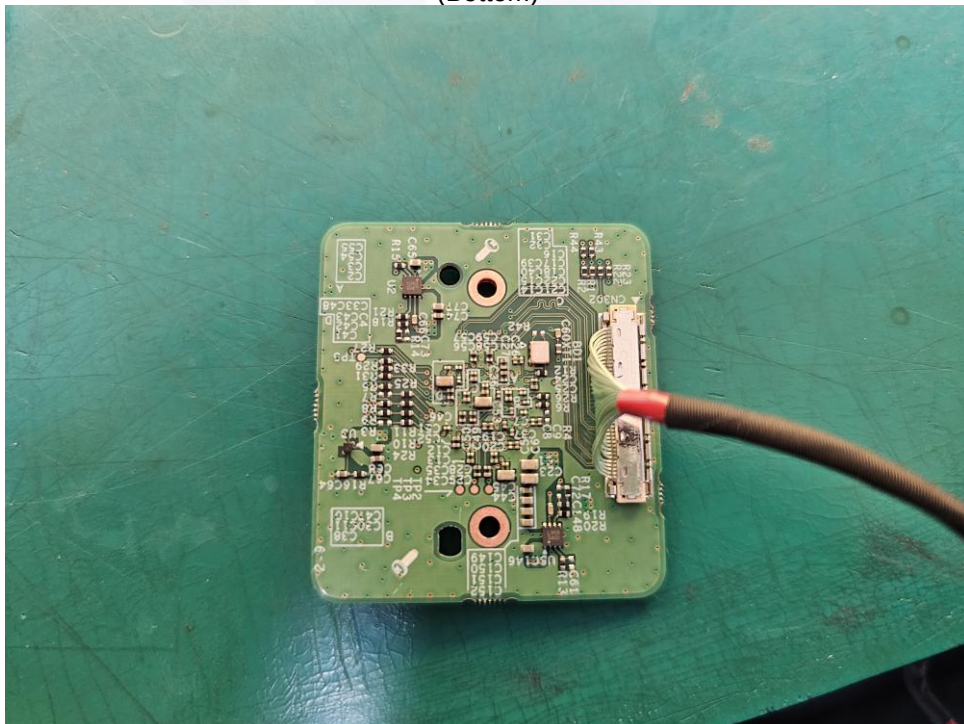




EUT Internal View – Board 5

(Top)

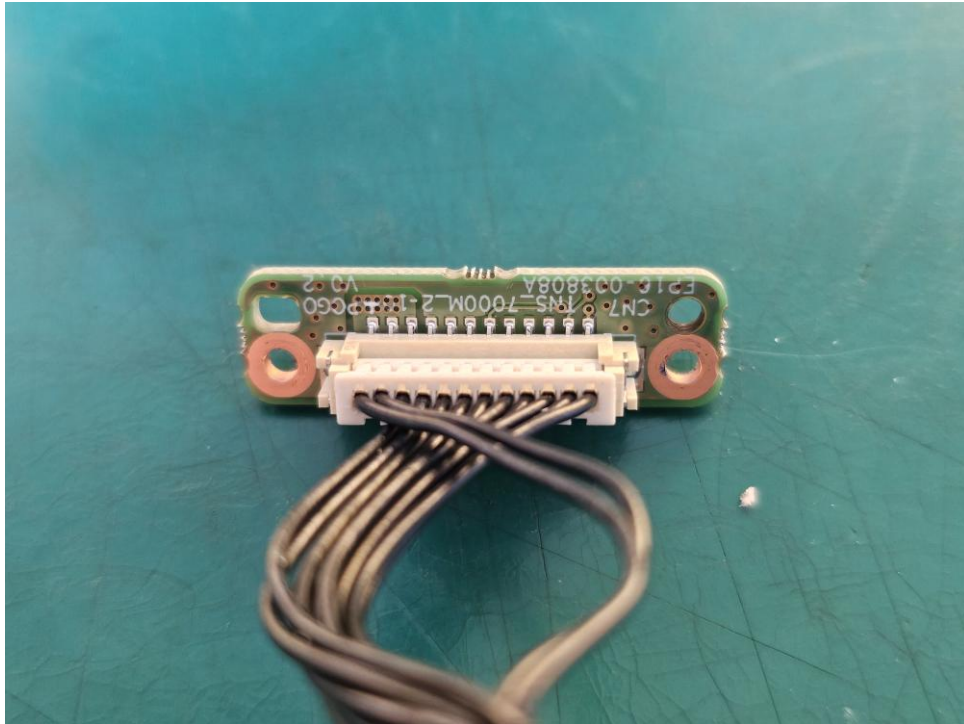


(Bottom)

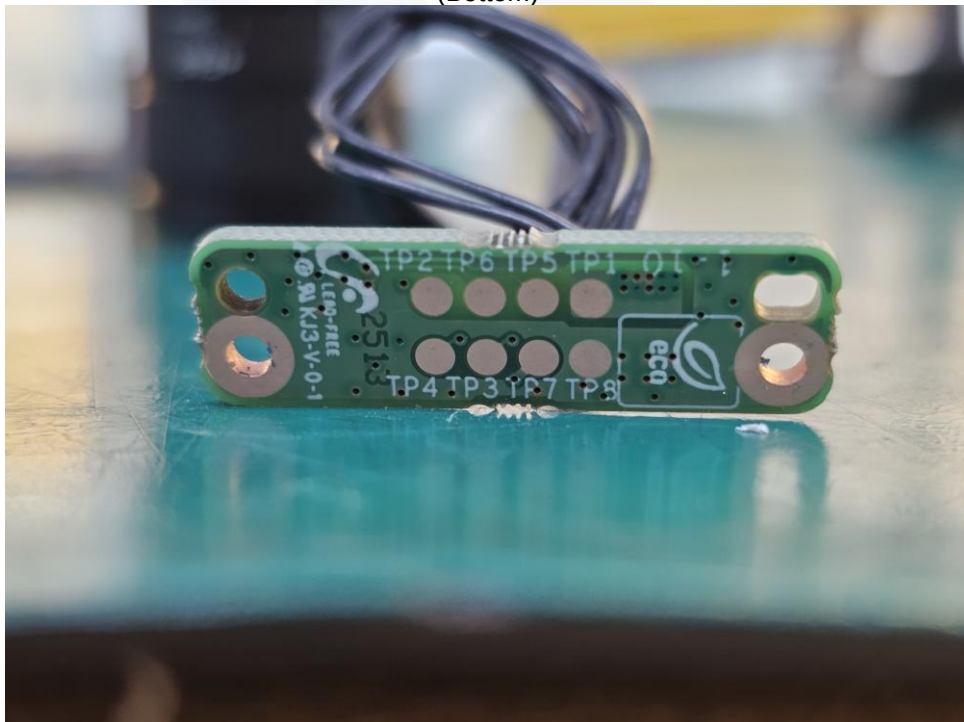




EUT Internal View – Board 6

(Top)

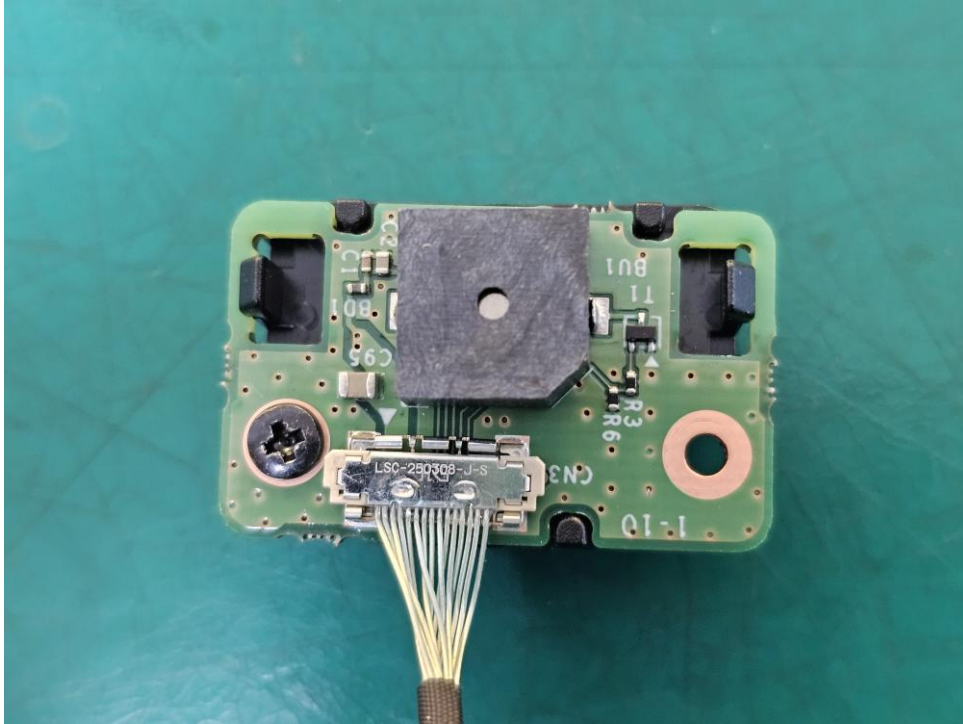


(Bottom)

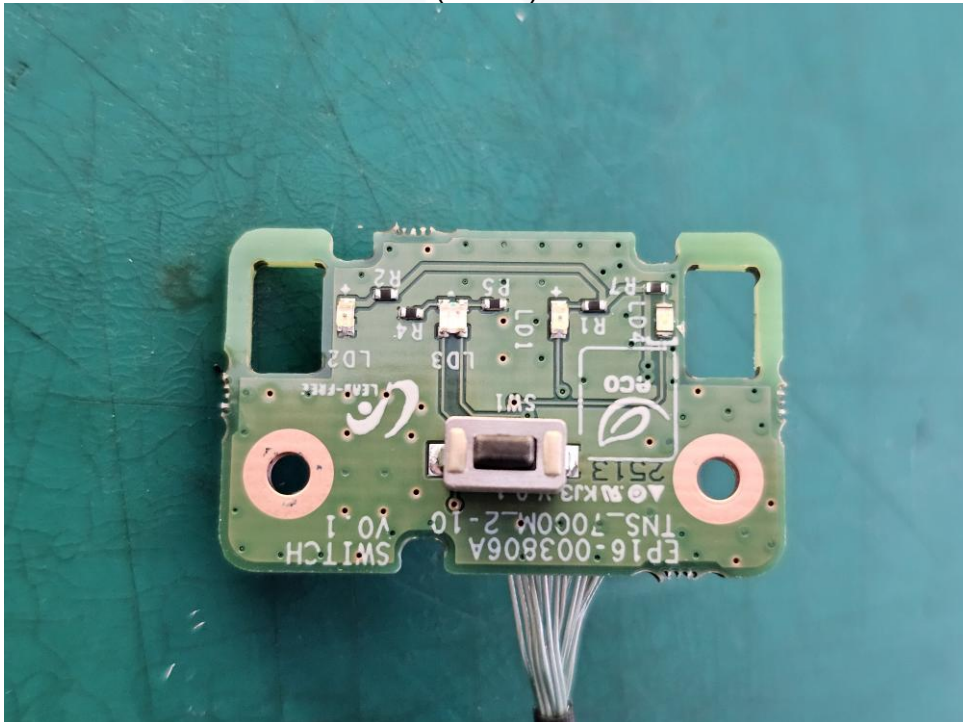



EUT Internal View – Board 7

(Top)

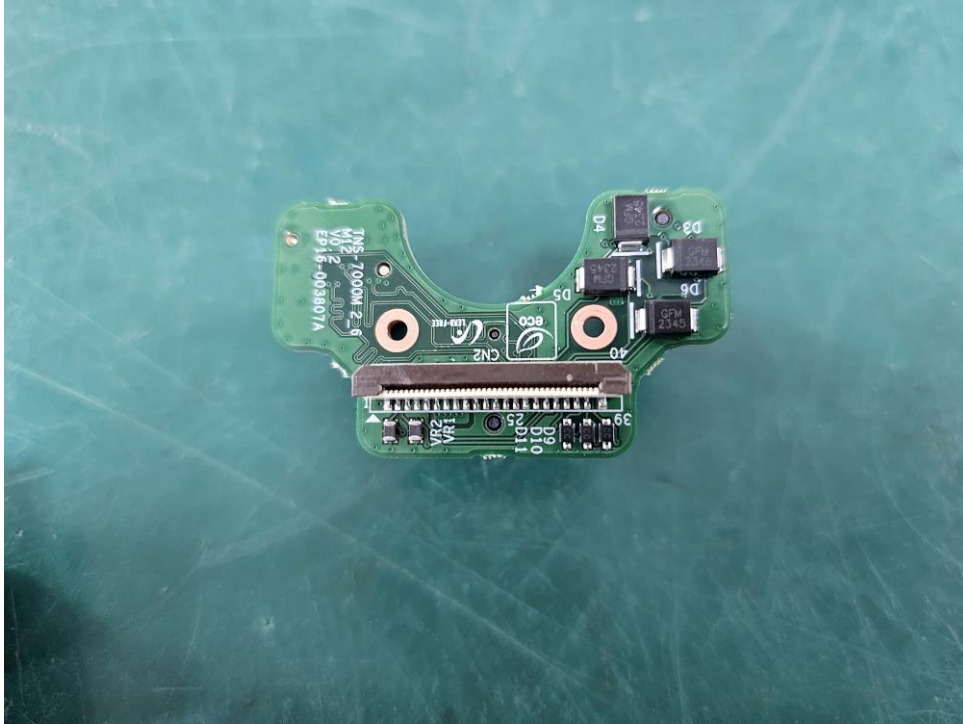

(Bottom)






EUT Internal View – Lens

(Top)




(Bottom)

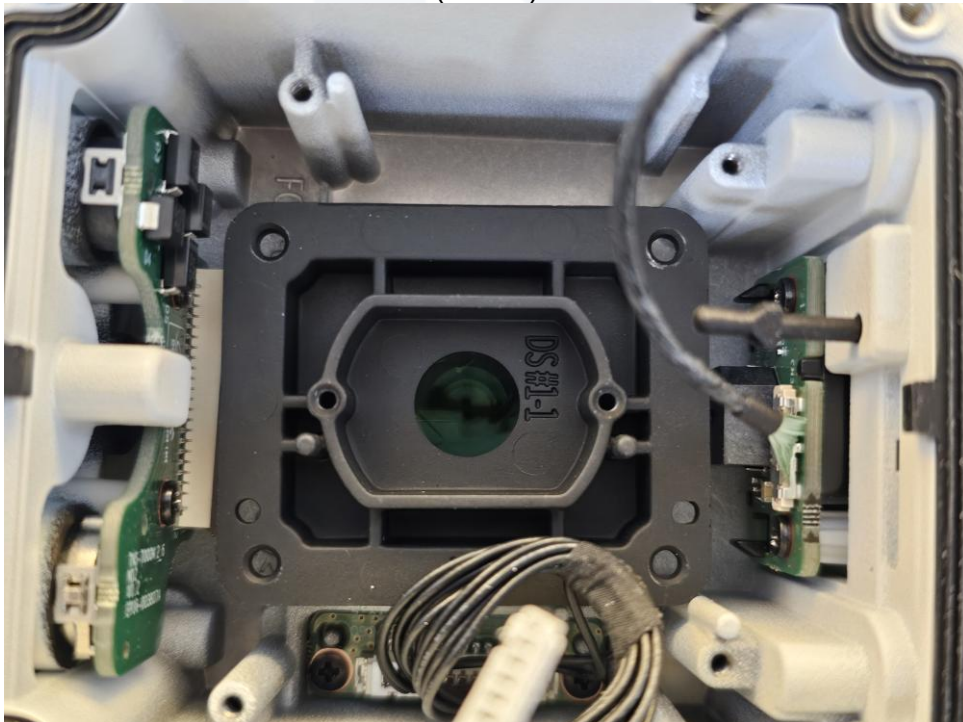



Label and Location

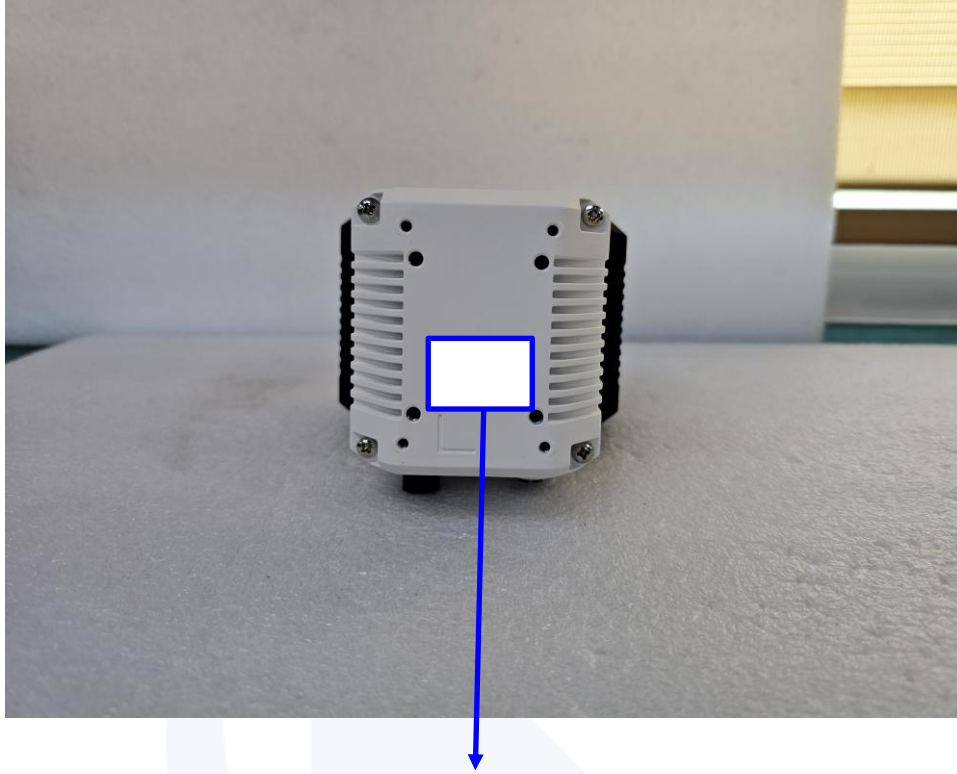

BARCODE READER

Model No : TNS-7000M

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in VIETNAM



The End.