

WRN-810S

NVR Wisenet WAVE PoE+ 1U

Key Features

- Supporte le client Wave, l'application mobile et la synchronisation Cloud Sync
- Prise en charge des métadonnées IA
- Débit d'enregistrement de 80 Mbit/s
- Peut embarquer jusqu'à 12 To de stockage interne
- Sorties de moniteur HDMI/VGA pour la configuration et la surveillance de base
- 8 ports PoE/PoE+, pour un budget total de 100 W, 2 ports Gigabit en liaison montante
- Prise en charge du contrôle de ports PoE et des E/S d'alarme
- Compatible avec le protocole de caméras ONVIF
- Montage sur rack 1U
- Un maximum de 30 serveurs est recommandé pour un système fusionné
- Comprend une souris USB et des supports de montage sur racks

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

WRN-810S

NVR Wisenet WAVE PoE+ 1U



Specifications

System	
Recording Bandwidth	Up to 80Mbps
OS Drive Bays	eMMC 32GB
Data Drive Bays	SATA 2ea
Data Storage	Up to 12TB
Network Interface	PoE RJ-45(Lan, 10/100) 8EA, RJ-45 2EA(WAN, 1Gbps)
Processor	Dual core
Operating System	Ubuntu LInux 18.04 LTS
IPMI	Not Supported
Video Outputs	1xHDMI, 1xVGA
USB Ports	3EA (Front x1, Rear x2)
Other Ports	Audio output, Alarm In(4)/Out(2)
Mechanical	
Color / Material	Black / Metal & Plastic
Dimensions (HxWxD)	14.57"(370mm) x 2.0"(50.7mm) x 12.60"(320mm)
Weight	6.13 lbs (2.78kg)
Electrical	
Power Input	100 ~ 240V AC
Power Consumption	37W
PoE Budget	100W
Environmental	
Operating Temperature	32°F to 104°F(0°C-40°C)
Operating Humidity	20% to 85% (non-condensing)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


WRN-810S



NVR Wisenet WAVE PoE+ 1U

CAD

Unit: mm [inch]

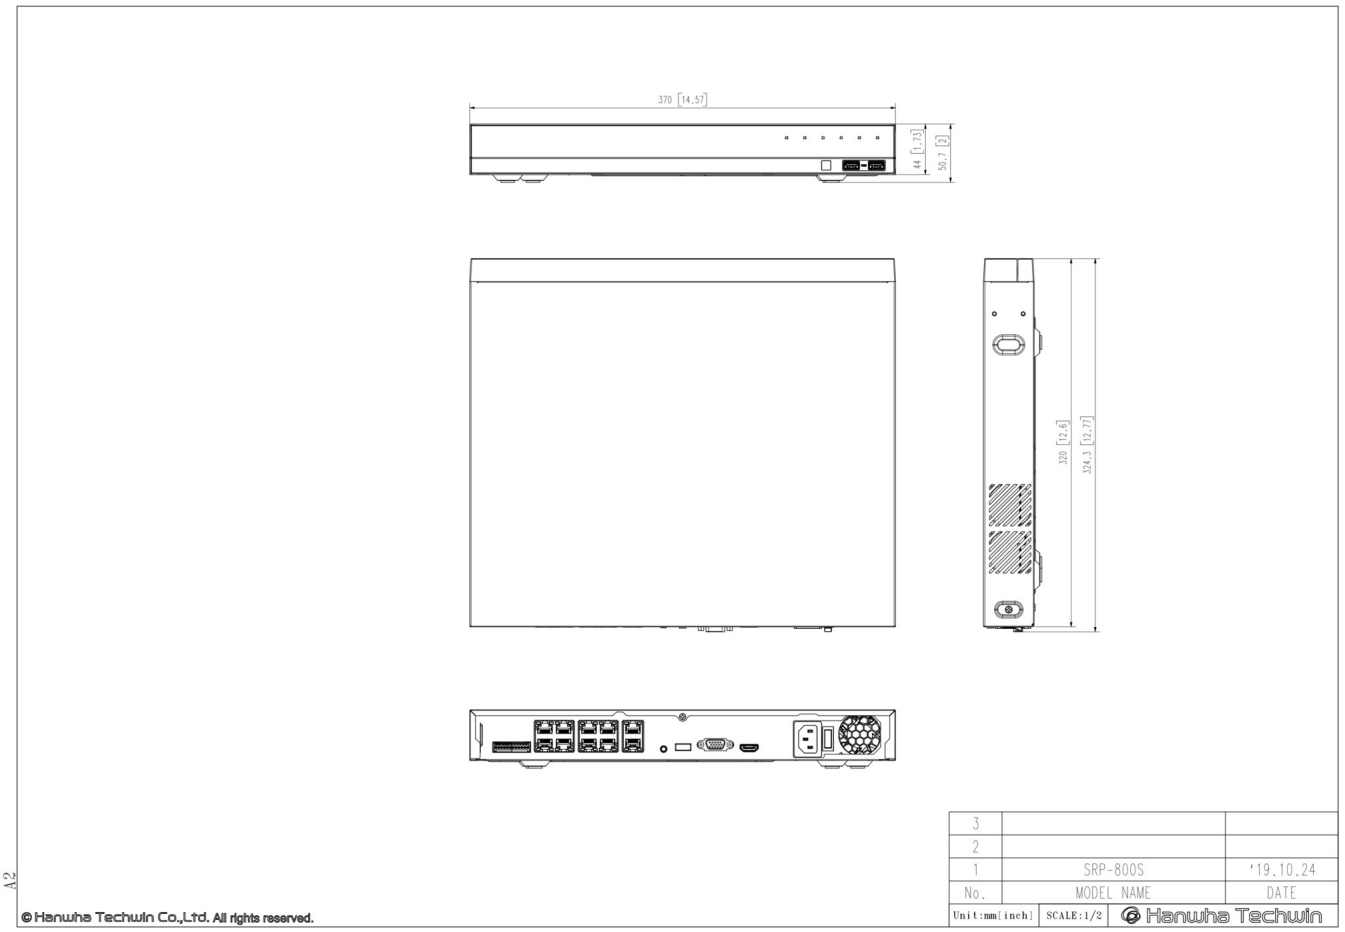

© Hanwha Vision CO., LTD. All rights reserved.