

## EMC TEST REPORT

Test Report No. : KES-EM-22T0794  
Date of Issue : Sep. 22, 2022  
Product name : NETWORK CAMERA  
Model/Type No. : XNB-6002  
Variant Model : -  
Applicant : Hanwha Techwin Co., Ltd.  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Equipment authorization : **Supplier's Declaration of Conformity**  
Date of Receipt : Sep. 06, 2022  
Test date : Sep. 09, 2022 ~ Sep. 10, 2022  
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by



Min Seong, Kim  
EMC Test Engineer

Reviewed by



Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-22T0794

Page (2) of (41)

---

**REPORT REVISION HISTORY**

| Date          | Test Report No. | Revision History |
|---------------|-----------------|------------------|
| Sep. 22, 2022 | KES-EM-22T0794  | Issued           |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |
|               |                 |                  |

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

---

## TABLE OF CONTENTS

|                                                      |                                                             |    |
|------------------------------------------------------|-------------------------------------------------------------|----|
| 1.0                                                  | General Product Description.....                            | 4  |
| 1.1                                                  | Test Voltage & Frequency .....                              | 7  |
| 1.2                                                  | Variant Model Differences .....                             | 7  |
| 1.3                                                  | Device Modifications .....                                  | 7  |
| 1.4                                                  | Equipment Under Test.....                                   | 7  |
| 1.5                                                  | Support Equipments .....                                    | 8  |
| 1.6                                                  | External I/O Cabling .....                                  | 9  |
| 1.7                                                  | EUT Operating Mode(s) .....                                 | 10 |
| 1.8                                                  | Configuration.....                                          | 11 |
| 1.9                                                  | Remarks when standards applied .....                        | 12 |
| 1.10                                                 | Calibration Details of Equipment Used for Measurement ..... | 12 |
| 1.11                                                 | Test Facility .....                                         | 12 |
| 1.12                                                 | Laboratory Accreditations and Listings .....                | 13 |
| 2.0                                                  | Test Regulations.....                                       | 14 |
| 2.1                                                  | Conducted Emissions at Mains Power Ports .....              | 15 |
| 2.2                                                  | Radiated Electric Field Emissions(Below 1 GHz) .....        | 17 |
| 2.3                                                  | Radiated Electric Field Emissions(Above 1 GHz) .....        | 19 |
| APPENDIX A – TEST DATA.....                          |                                                             | 21 |
| Conducted Emissions at Mains Power Ports.....        |                                                             | 21 |
| Radiated Electric Field Emissions(Below 1 GHz) ..... |                                                             | 25 |
| Radiated Electric Field Emissions(Above 1 GHz) ..... |                                                             | 29 |
| Test Setup Photos and Configuration .....            |                                                             | 31 |
| Conducted Emissions at Mains Power Ports.....        |                                                             | 31 |
| Radiated Electric Field Emissions(Below 1 GHz) ..... |                                                             | 33 |
| Radiated Electric Field Emissions(Above 1 GHz) ..... |                                                             | 35 |
| EUT External Photographs .....                       |                                                             | 37 |
| EUT Internal Photographs .....                       |                                                             | 38 |

## 1.0 General Product Description

### Main Specifications of EUT are:

|                             |                                                                                                                             |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>Video</b>                |                                                                                                                             |
| Imaging Device              | None                                                                                                                        |
| Resolution                  | 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240           |
| Max. Framerate              | H.265/H.264: 2MP Max. 60fps/50fps(60Hz/50Hz)<br>MJPEG: Max. 30fps/25fps(60Hz/50Hz)                                          |
| NETD                        | None                                                                                                                        |
| Pixel Size                  | None                                                                                                                        |
| Min. Illumination           | None                                                                                                                        |
| Video Out                   | CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation<br>USB: Micro USB Type B, 1280x720 for installation |
| Video Transmission Distance | None                                                                                                                        |
| <b>Lens</b>                 |                                                                                                                             |
| Focal Length (Zoom Ratio)   | None                                                                                                                        |
| Max. Aperture Ratio         | None                                                                                                                        |
| Angular Field of View       | None                                                                                                                        |
| Min. Object Distance        | None                                                                                                                        |
| Focus Control               | None                                                                                                                        |
| Lens Type                   | None                                                                                                                        |
| Mount Type                  | None                                                                                                                        |
| Optional Lens               | SLA-T1080FA, SLA-T2480A, SLA-T2480VA, SLA-T4680A, SLA-T4680VA                                                               |
| <b>Pan / Tilt / Rotate</b>  |                                                                                                                             |
| Pan / Tilt / Rotate Range   | None                                                                                                                        |
| Pan Range                   | None                                                                                                                        |
| Pan Speed                   | None                                                                                                                        |
| Tilt Range                  | None                                                                                                                        |
| Tilt Speed                  | None                                                                                                                        |
| Rotate Range                | None                                                                                                                        |
| Sequence                    | None                                                                                                                        |
| Preset Accuracy             | None                                                                                                                        |

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-22T0794

Page (5) of (41)

| Operational                 |                                                                                                                                                                                                                                                                   |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Camera Title                | Displayed up to 85 characters                                                                                                                                                                                                                                     |
| Direction Indicator         | None                                                                                                                                                                                                                                                              |
| Day & Night                 | Auto(Electrical)                                                                                                                                                                                                                                                  |
| Backlight Compensation      | BLC, HLC, WDR, SDR                                                                                                                                                                                                                                                |
| Wide Dynamic Range          | extremeWDR (120dB)                                                                                                                                                                                                                                                |
| Digital Noise Reduction     | SSNRV, WiseNR                                                                                                                                                                                                                                                     |
| Digital Image Stabilization | Support                                                                                                                                                                                                                                                           |
| Defog                       | Support                                                                                                                                                                                                                                                           |
| Motion Detection            | 8ea, 8point Polygonal zones                                                                                                                                                                                                                                       |
| Privacy Masking             | 32ea, 4point Quadrangle zones<br>- Color : Gray, Green, Red, Blue, Black, White<br>- Mosaic                                                                                                                                                                       |
| Gain Control                | Off / Max Gain / Manual                                                                                                                                                                                                                                           |
| White Balance               | ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor                                                                                                                                                                                                                |
| LDC                         | Support(Not support for fisheye lens)                                                                                                                                                                                                                             |
| Electronic Shutter Speed    | Minimum / Maximum / Prefer / Anti flicker (2~1/12,000sec)                                                                                                                                                                                                         |
| Digital PTZ                 | None                                                                                                                                                                                                                                                              |
| Video Rotation              | Flip, Mirror, Hallway view(90°/270°)                                                                                                                                                                                                                              |
| Analytics                   | Analytic events<br>- Defocus detection, Motion detection, Tampering, Fog detection, Audio detection, Sound classification, Face detection, Virtual area(Loitering/Intrusion/Enter/Exit/Appear/Disappear), Virtual line(Crossing/Direction)                        |
| Business Intelligence       | People counting, Queue management, Heatmap                                                                                                                                                                                                                        |
| Serial Interface            | None                                                                                                                                                                                                                                                              |
| Alarm I/O                   | Input 1ea / Output 1ea                                                                                                                                                                                                                                            |
| Alarm Triggers              | Analytics, Network disconnect, Alarm input, App event, Time schedule                                                                                                                                                                                              |
| Alarm Events                | When alarm trigger occurred<br>- File upload(image) : e-mail/FTP<br>- Notification : e-mail<br>- Recording : SD/SDHC/SDXC or NAS recording at event triggers<br>- Alarm output<br>- Handover(PTZ preset, Send message by HTTP/HTTPS/TCP)<br>- Audio clip playback |
| Audio Streaming             | None                                                                                                                                                                                                                                                              |
| Audio In                    | Selectable(mic in/line in)<br>Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm                                                                                                                                                                                |
| Audio Out                   | Line out, Max.output level: 1Vrms                                                                                                                                                                                                                                 |
| IR Viewable Length          | None                                                                                                                                                                                                                                                              |
| IR Illuminator (Optional)   | None                                                                                                                                                                                                                                                              |
| IR Radiation angle          | None                                                                                                                                                                                                                                                              |
| IR LED                      | None                                                                                                                                                                                                                                                              |
| IR Wavelength               | None                                                                                                                                                                                                                                                              |
| IR Operation                | None                                                                                                                                                                                                                                                              |
| Water Removal               | None                                                                                                                                                                                                                                                              |
| Auto Tracking               | None                                                                                                                                                                                                                                                              |
| Coaxial Protocol            | None                                                                                                                                                                                                                                                              |
| Color Palettes              | None                                                                                                                                                                                                                                                              |
| Radiometry                  |                                                                                                                                                                                                                                                                   |
| Temperature Detect Range    | None                                                                                                                                                                                                                                                              |
| Temperature Accuracy        | None                                                                                                                                                                                                                                                              |
| Temperature Detection       | None                                                                                                                                                                                                                                                              |
| Additional                  | None                                                                                                                                                                                                                                                              |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-22T0794

Page (6) of (41)

| Network                                               |                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ethernet                                              | RJ-45(10/100BASE-T)                                                                                                                                                                                                                                                                                                                                                                                  |
| Video Compression                                     | H.265/H.264: Main/Baseline/High, MJPEG                                                                                                                                                                                                                                                                                                                                                               |
| Audio Compression                                     | G.711 u-law /G.726 Selectable<br>G.726(ADPCM) 8KHz, G.711 8KHz<br>G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps<br>AAC-LC: 48Kbps at 16KHz                                                                                                                                                                                                                                                                   |
| Smart Codec                                           | Manual(Sea area), WiseStreamII                                                                                                                                                                                                                                                                                                                                                                       |
| Video Quality Adjustment                              | H.264/H.265: Target bitrate level control<br>MJPEG: Target bitrate level control                                                                                                                                                                                                                                                                                                                     |
| Bitrate Control                                       | H.264/H.265: CBR or VBR<br>MJPEG: VBR                                                                                                                                                                                                                                                                                                                                                                |
| Streaming                                             | Unicast(20 users) / Multicast<br>Multiple streaming(Up to 10 profiles)                                                                                                                                                                                                                                                                                                                               |
| Protocol                                              | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS,<br>SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS,<br>DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)                                                                                                                                                                            |
| SIP support (VoIP, Peer-to-peer, SIP/PBX integration) | None                                                                                                                                                                                                                                                                                                                                                                                                 |
| Security                                              | HTTPS(SSL) Login Authentication<br>Digest Login Authentication<br>IP Address Filtering<br>User access log<br>802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2)<br>Device Certificate(Hanwha Techwin Root CA, pre-installed)<br>Secure by default certificate<br>HTPM (Hanwha Trusted platform module)<br>Secure OS/Boot/Storage, Verify firmware forgery<br>TPM 2.0 with FIPS 140-2 level2 |
| Application Programming Interface                     | ONVIF Profile S/G/T<br>SUNAPI(HTTP API)<br>Wisenet open platform                                                                                                                                                                                                                                                                                                                                     |
| General                                               |                                                                                                                                                                                                                                                                                                                                                                                                      |
| Webpage Language                                      | English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian,<br>Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian                                                                                                                                                                                                                                                        |
| Web Viewer                                            | None                                                                                                                                                                                                                                                                                                                                                                                                 |
| Edge Storage                                          | Micro SD/SDHC/SDXC 1slot Max. <b>1TB(TBD)</b>                                                                                                                                                                                                                                                                                                                                                        |
| Memory                                                | 2GB RAM, 512MB Flash                                                                                                                                                                                                                                                                                                                                                                                 |
| Environmental & Electrical                            |                                                                                                                                                                                                                                                                                                                                                                                                      |
| Operating Temperature / Humidity                      | -10°C ~ +55°C(+14°F ~ +131°F)/ 0~90% RH(non-condensing)                                                                                                                                                                                                                                                                                                                                              |
| Storage Temperature / Humidity                        | -30°C ~ +60°C(-22°F ~ +140°F)/ 0~90% RH                                                                                                                                                                                                                                                                                                                                                              |
| Certification                                         | None                                                                                                                                                                                                                                                                                                                                                                                                 |
| Input Voltage                                         | PoE(IEEE802.3af, Class3), , 12VDC                                                                                                                                                                                                                                                                                                                                                                    |
| Power Consumption                                     | PoE: Max 10.5W, typical 7.4W<br>12VDC: Max 8.6W, typical 5.8W<br>Power redundancy failover                                                                                                                                                                                                                                                                                                           |
| Mechanical                                            |                                                                                                                                                                                                                                                                                                                                                                                                      |
| Color / Material                                      | Black / Plastic, Metal                                                                                                                                                                                                                                                                                                                                                                               |
| RAL Code                                              | RAL9005                                                                                                                                                                                                                                                                                                                                                                                              |
| Product Dimensions / Weight                           | 131.1(W)x33(H)x86(D)mm(5.16x1.30x3.39") / 420g                                                                                                                                                                                                                                                                                                                                                       |
| Compatible Conduit hole / Gangbox                     | None                                                                                                                                                                                                                                                                                                                                                                                                 |
| Hanging Mount (Dome)                                  | None                                                                                                                                                                                                                                                                                                                                                                                                 |
| Skin Cover                                            | None                                                                                                                                                                                                                                                                                                                                                                                                 |
| Skin Cover (Dome)                                     | None                                                                                                                                                                                                                                                                                                                                                                                                 |
| Weather Cap (Dome)                                    | None                                                                                                                                                                                                                                                                                                                                                                                                 |
| Power Module                                          | None                                                                                                                                                                                                                                                                                                                                                                                                 |
| Backbox                                               | None                                                                                                                                                                                                                                                                                                                                                                                                 |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

- ☒ AC 120 V, 60 Hz (DC Adapter Input Power)
- ☒ AC 120 V, 60 Hz (PoE Adapter Input Power)

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

| Description    | Model Number | Serial Number | Manufacturer                                   | Remarks |
|----------------|--------------|---------------|------------------------------------------------|---------|
| NETWORK CAMERA | XNB-6002     | -             | HANWHA TECHWIN<br>SECURITY VIETNAM<br>CO.,LTD. | EUT     |

## 1.5 Support Equipments

| Description      | Model Number  | Serial Number | Manufacturer                                       | Remarks |
|------------------|---------------|---------------|----------------------------------------------------|---------|
| LENS MODULE      | SLA-T2480A    | -             | HANWHA TECHWIN<br>SECURITY VIETNAM<br>CO.,LTD.     | -       |
| AC/DC Adapter    | 2ACB022F      | -             | ChAnnel Well<br>Technology<br>(Guangzhou) Co.,Ltd. | -       |
| PoE Adapter      | POE 36U-1AT-R | -             | PHIHONG                                            | -       |
| Notebook         | LG15N54       | 410NZGK015231 | LG                                                 | -       |
| Notebook Adapter | ADP-90WH B    | 84ZW19F1663   | DELTA<br>ELECTRONICS(JIANGSU<br>) LTD.             | -       |
| Micro SD Card    | -             | -             | SanDisk                                            | 32 GB   |
| Headset          | K550          | -             | Britz®                                             | -       |
| Alarm            | PRO-SL        | -             | SENSOR PRO                                         | -       |
| Button Alarm     | -             | -             | -                                                  | -       |
| Smart Phone      | SM-N950N      | R39JB0C3FB    | SAMSUNG                                            | -       |

## 1.6 External I/O Cabling

### ■ DC Mode

| Start                |                   | END              |                    | Cable Spec. |        |
|----------------------|-------------------|------------------|--------------------|-------------|--------|
| Description          | I/O Port          | Description      | I/O Port           | Length      | Shield |
| NETWORK CAMERA (EUT) | DC (2 Pin)        | AC/DC Adapter    | Line-Out (2 Pin)   | 1.0         | U      |
|                      | CAM               | LENS MODULE      | Line-Out           | 8.0         | S      |
|                      | RJ-45             | Notebook         | RJ-45              | 3.0         | U      |
|                      | SLOT              | Micro SD Card    | SLOT               | -           | -      |
|                      | MIC (3.5 mm)      | Headset          | Line-Out (3.5 mm)  | 2.0         | U      |
|                      | Speaker (3.5 mm)  |                  |                    |             |        |
|                      | Alarm Out (2 Pin) | Alarm            | Line-Out (2 Pin)   | 3.0         | U      |
|                      | Alarm In (2 Pin)  | Button Alarm     | Line-Out (2 Pin)   | 3.0         | U      |
| Notebook             | DC Jack           | Notebook Adapter | Line-Out (DC Jack) | 1.0         | U      |
|                      | 3.5 mm            | Smart Phone      | 3.5 mm             | 1.0         | U      |

\* Unshielded=U, Shielded=S

■ PoE Mode

| Start                |                  | END              |                    | Cable Spec. |        |
|----------------------|------------------|------------------|--------------------|-------------|--------|
| Description          | I/O Port         | Description      | I/O Port           | Length      | Shield |
| NETWORK CAMERA (EUT) | RJ-45 (PoE)      | PoE Adapter      | RJ-45 (PoE)        | 3.0         | U      |
|                      | CAM              | LENS MODULE      | Line-Out           | 8.0         | S      |
|                      | SLOT             | Micro SD Card    | SLOT               | -           | -      |
|                      | MIC (3.5 mm)     | Headset          | Line-Out (3.5 mm)  | 2.0         | U      |
|                      | Speaker (3.5 mm) |                  |                    |             |        |
|                      | 2 Pin            | Alarm            | Line-Out (2 Pin)   | 3.0         | U      |
|                      | 2 Pin            | Button Alarm     | Line-Out (2 Pin)   | 3.0         | U      |
| Notebook             | RJ-45            | PoE Adapter      | RJ-45 (DATA)       | 1.0         | U      |
|                      | DC Jack          | Notebook Adapter | Line-Out (DC Jack) | 1.0         | U      |
|                      | 3.5 mm           | Smart Phone      | 3.5 mm             | 1.0         | U      |

\* Unshielded=U, Shielded=S

## 1.7 EUT Operating Mode(s)


| Test Mode | operating                                                                                                                                                                                                                                                           |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation | <p>- By connecting to the Web Viewer, checking the video output of EUT and performing a ping test, it was confirmed that the network function is operating normally.</p> <p>- After the test, the Micro SD Card was checked to see if it was recorded normally.</p> |

| EUT Test operating S/W |         |                     |
|------------------------|---------|---------------------|
| Name                   | Version | Manufacture Company |
| Web Viewer             | -       | -                   |


## 1.8 Configuration

■ AC Main  
 □ DC Main

### ■ DC Mode

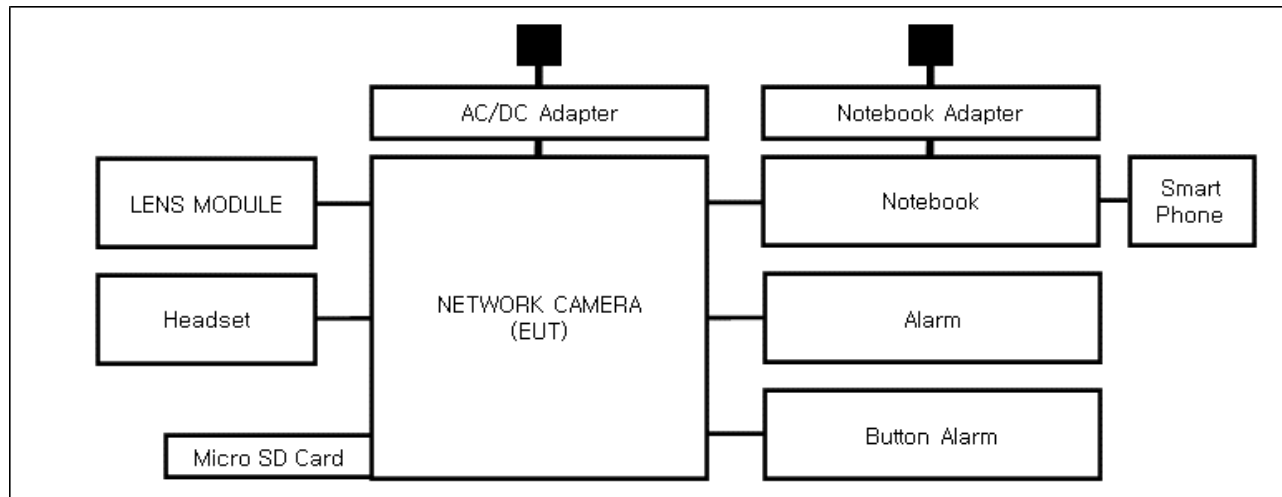

### ■ PoE Mode

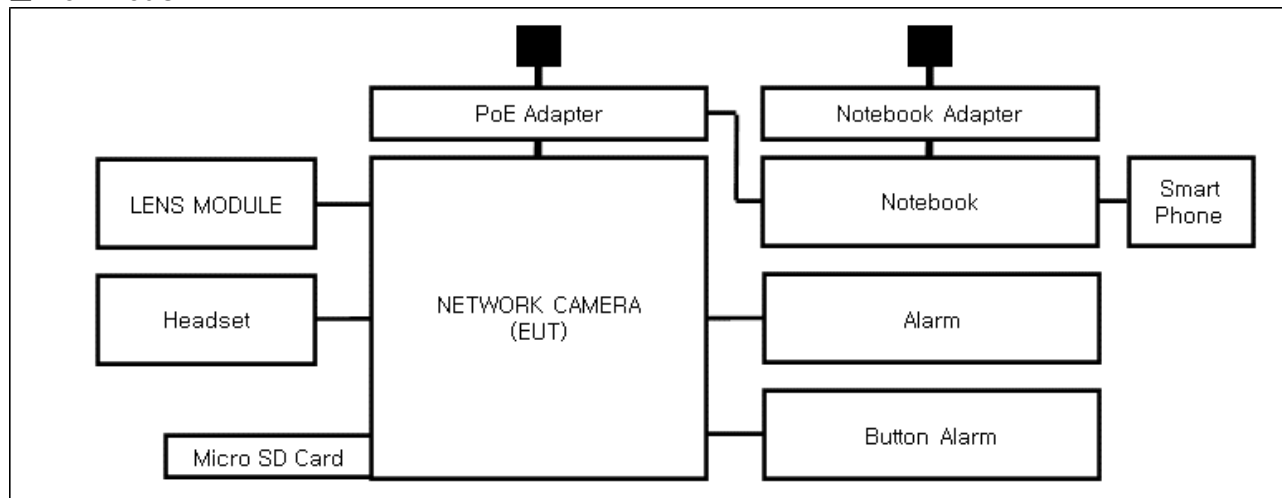

---

## **1.9 Remarks when standards applied**

- VIDEO port and USB port were excluded from testing because it is the management port.
- PoE port is considered to be wired network port, so power-related test items are excluded.

## **1.10 Calibration Details of Equipment Used for Measurement**

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## **1.11 Test Facility**

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

## 1.12 Laboratory Accreditations and Listings

| Country       | Agency         | Scope of Accreditation                                                                                                                                                                         | Logo                                                                                                                           |
|---------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| KOREA         | <b>RRA</b>     | EMI (3 m & 10 m Semi-Anechoic Chamber ,<br>10 m Open Area and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                 | <br>KR0100                                  |
| International | <b>KOLAS</b>   | EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                                   | <br>KT489                                   |
| USA           | <b>FCC</b>     | 3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.                                                                               | <br>KR0100                                  |
| Canada        | <b>ISED</b>    | 3 m & 10 m Semi-Anechoic Chamber and Conducted test site                                                                                                                                       | <br>23298                                  |
| JAPAN         | <b>VCCI</b>    | Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz | <br>R-20056, C-20036,<br>T-20040, G-20057 |
| Europe        | <b>TÜV SÜD</b> | EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                    | <br>CARAT 001633 0004                     |

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B

☒ **IC Regulation ICES-003 Issue 7**

☐ CAN/CSA-CISPR 32:17

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B

## 2.1 Conducted Emissions at Mains Power Ports

### Test Date

Sep. 09, 2022


### Test Location

Electro wave Shieldroom #6

### Test Equipment

| Used                                | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101783        | 12, 28, 2022 |
| <input checked="" type="checkbox"/> | LISN              | ENV216       | R & S        | 101787        | 12, 27, 2022 |
| <input checked="" type="checkbox"/> | LISN              | ESH2-Z5      | R & S        | 100450        | 12, 27, 2022 |
| <input checked="" type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 12, 27, 2022 |

### Diagram of test setup

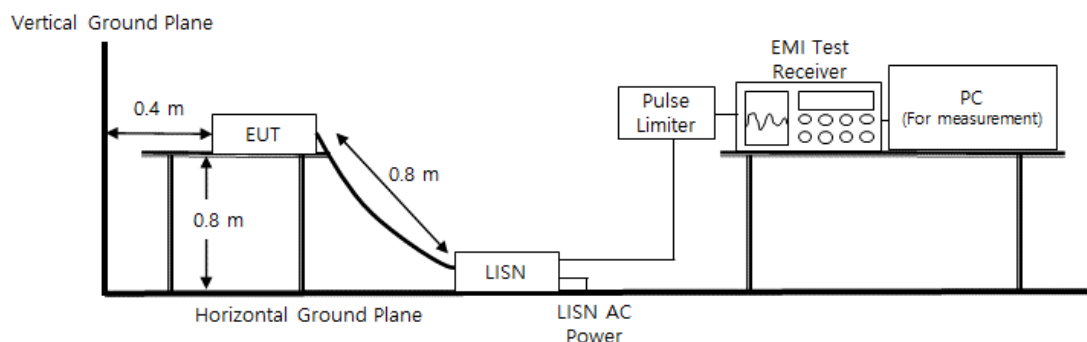



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0794  
Page (16) of (41)

### Test Conditions

Temperature:  $(23,8 \pm 0,1) ^\circ\text{C}$   
Relative Humidity:  $(45,6 \pm 0,3) \% \text{ R.H.}$

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## 2.2 Radiated Electric Field Emissions(Below 1 GHz)


**Test Date**  
Sep. 09, 2022

**Test Location**  
☐ OPEN AREA TEST SITE #2      ☒ SEMI ANECHOIC CHAMBER #4(10m)

### Test Equipment

| Used                                | Description              | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W             | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER        | ESU26        | R & S            | 100551        | 03, 31, 2023 |
| <input checked="" type="checkbox"/> | AMPLIFIER                | SCU 01       | R & S            | 100603        | 11, 24, 2022 |
| <input checked="" type="checkbox"/> | TRILOG-BROADBAND ANTENNA | VULB9163     | Schwarzbeck      | 715           | 12, 08, 2022 |
| <input checked="" type="checkbox"/> | ATTENUATOR               | 8491A        | HP               | 32173         | 03, 08, 2023 |

### Diagram of test setup

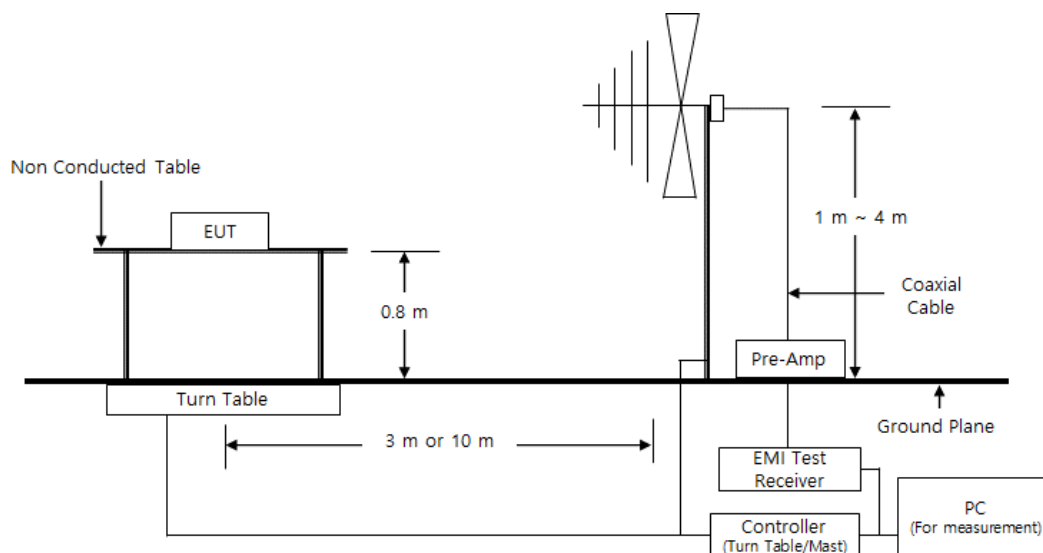

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0794  
Page (18) of (41)

### Test Conditions

Temperature: (23,1 ± 0,2) °C  
Relative Humidity: (46,9 ± 0,4) % R.H.

### Frequency Range of Measurement

30 MHz to 1 GHz

### Instrument Settings

IF Band Width: 120 kHz

### Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## 2.3 Radiated Electric Field Emissions(Above 1 GHz)


**Test Date**  
 Sep. 10, 2022

**Test Location**  
 SEMI ANECHOIC CHAMBER #4(10 m)

### Test Equipment

| Used                                | Description       | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESU26        | R & S            | 100551        | 03, 31, 2023 |
| <input checked="" type="checkbox"/> | PREAMPLIFIER      | 8449B        | AGILENT          | 3008A01742    | 12, 27, 2022 |
| <input checked="" type="checkbox"/> | HORN ANTENNA      | BBHA 9120D   | SCHWARZBECK      | 9120D-1802    | 12, 16, 2022 |

### Diagram of test setup

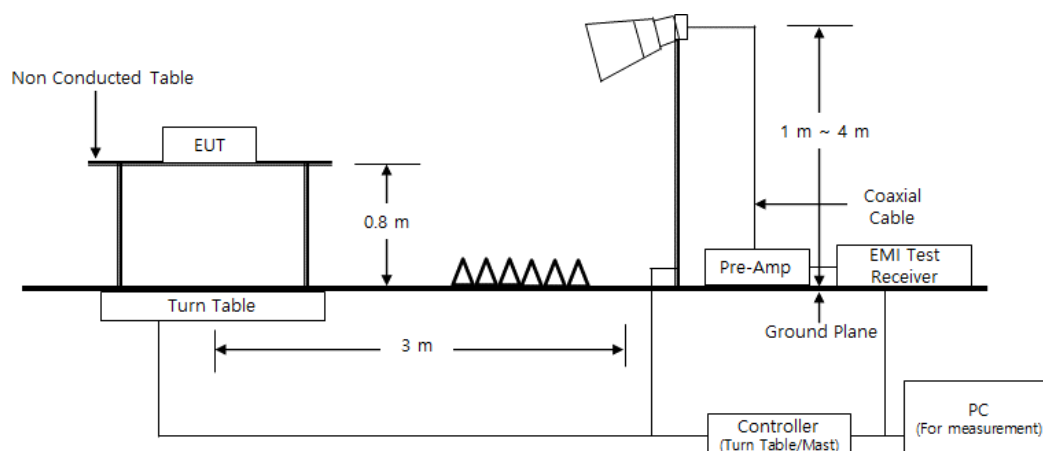

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-22T0794  
Page (20) of (41)

### Test Conditions

Temperature: (23,5 ± 0,1) °C  
Relative Humidity: (46,4 ± 0,2) % R.H.

### Frequency Range of Measurement

1 GHz to 5 GHz

### Instrument Settings

IF Band Width: 1 MHz

### Test Results

The requirements are:

- ☒ PASS
- ☐ NOT PASS
- ☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## APPENDIX A – TEST DATA


### Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

### Common Information

|                   |                    |
|-------------------|--------------------|
| Test Description: | Conducted Emission |
| Model No.:        | XNB-6002           |
| Phase:            | L1                 |
| Mode:             | DC                 |
| Operator Name:    | KES                |

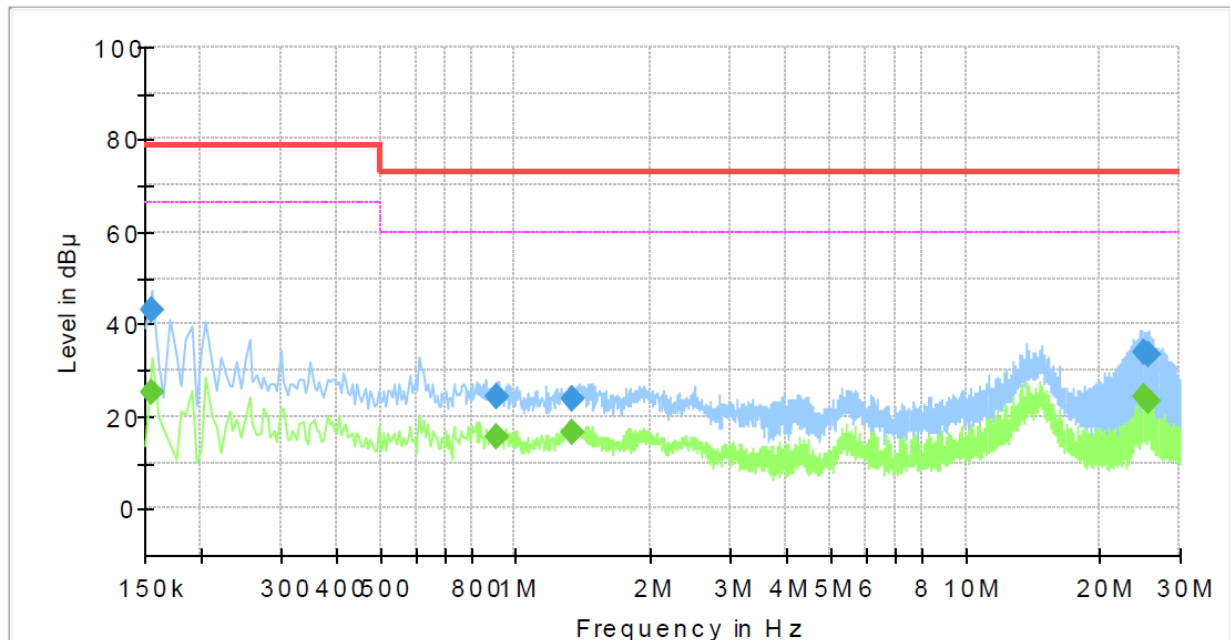


### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.155000        | ---              | 25.09           | 66.00        | 40.91       | 1000.0          | 9.000           | L1   | 19.4       |
| 0.155000        | 42.85            | ---             | 79.00        | 36.15       | 1000.0          | 9.000           | L1   | 19.4       |
| 0.905000        | ---              | 15.56           | 60.00        | 44.44       | 1000.0          | 9.000           | L1   | 20.1       |
| 0.905000        | 24.33            | ---             | 73.00        | 48.67       | 1000.0          | 9.000           | L1   | 20.1       |
| 1.340000        | ---              | 16.45           | 60.00        | 43.55       | 1000.0          | 9.000           | L1   | 20.1       |
| 1.340000        | 23.82            | ---             | 73.00        | 49.18       | 1000.0          | 9.000           | L1   | 20.1       |
| 25.025000       | ---              | 24.41           | 60.00        | 35.59       | 1000.0          | 9.000           | L1   | 20.1       |
| 25.025000       | 34.05            | ---             | 73.00        | 38.95       | 1000.0          | 9.000           | L1   | 20.1       |
| 25.630000       | ---              | 23.33           | 60.00        | 36.67       | 1000.0          | 9.000           | L1   | 20.2       |
| 25.630000       | 33.19            | ---             | 73.00        | 39.81       | 1000.0          | 9.000           | L1   | 20.2       |

## NEUTRAL LINE

### Common Information

|                   |                    |
|-------------------|--------------------|
| Test Description: | Conducted Emission |
| Model No.:        | XNB-6002           |
| Phase:            | N                  |
| Mode:             | DC                 |
| Operator Name:    | KES                |

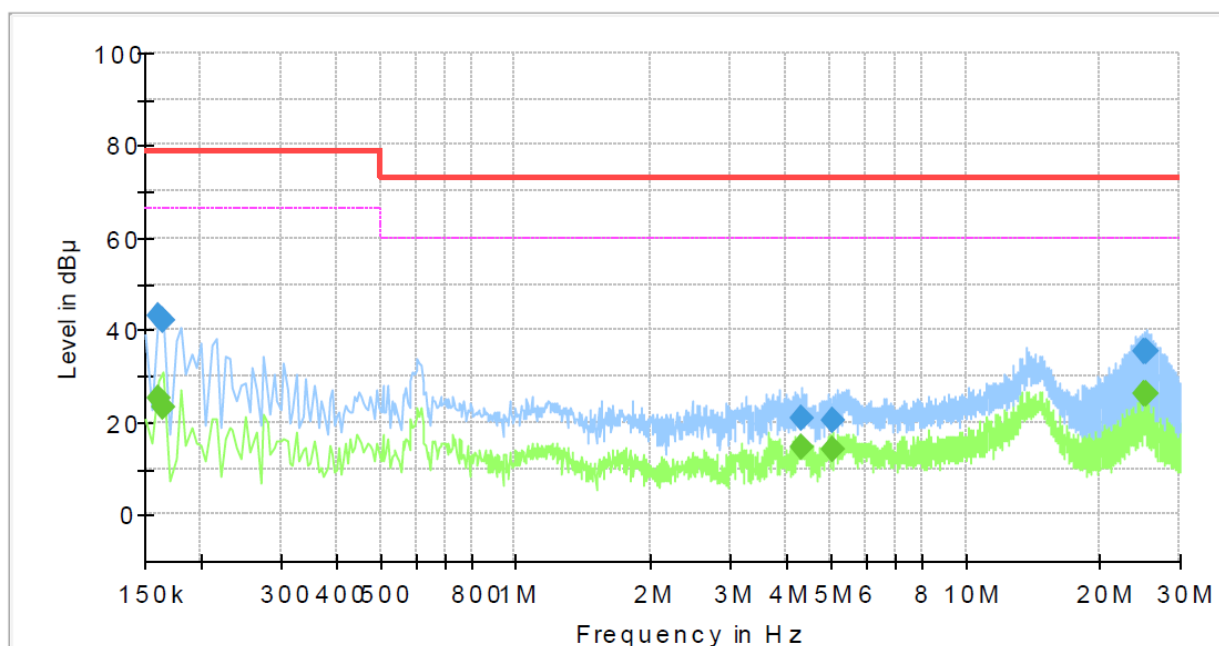

### Final Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.160000        | ---              | 25.20           | 66.00        | 40.80       | 1000.0          | 9.000           | N    | 19.4       |
| 0.160000        | 43.06            | ---             | 79.00        | 35.94       | 1000.0          | 9.000           | N    | 19.4       |
| 0.165000        | ---              | 23.52           | 66.00        | 42.48       | 1000.0          | 9.000           | N    | 19.4       |
| 0.165000        | 42.31            | ---             | 79.00        | 36.69       | 1000.0          | 9.000           | N    | 19.4       |
| 4.305000        | ---              | 14.41           | 60.00        | 45.59       | 1000.0          | 9.000           | N    | 19.8       |
| 4.305000        | 20.64            | ---             | 73.00        | 52.36       | 1000.0          | 9.000           | N    | 19.8       |
| 5.050000        | ---              | 14.05           | 60.00        | 45.95       | 1000.0          | 9.000           | N    | 19.6       |
| 5.050000        | 20.61            | ---             | 73.00        | 52.39       | 1000.0          | 9.000           | N    | 19.6       |
| 24.995000       | ---              | 26.11           | 60.00        | 33.89       | 1000.0          | 9.000           | N    | 20.2       |
| 24.995000       | 35.35            | ---             | 73.00        | 37.65       | 1000.0          | 9.000           | N    | 20.2       |
| 25.155000       | ---              | 25.99           | 60.00        | 34.01       | 1000.0          | 9.000           | N    | 20.2       |
| 25.155000       | 35.29            | ---             | 73.00        | 37.71       | 1000.0          | 9.000           | N    | 20.2       |

**PoE Mode**
**HOT LINE**
**Common Information**

Test Description:

Model No.:

Phase:

Mode:

Operator Name:


Conducted Emission

XNB-6002

L1

PoE

KES

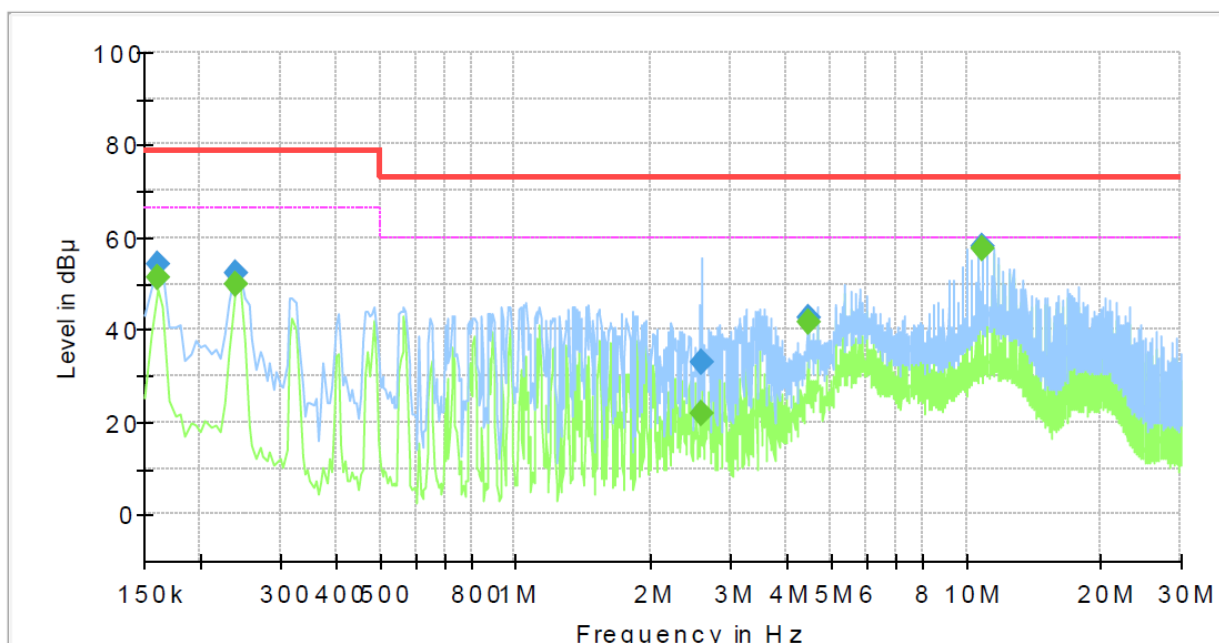
**Final Result**

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.160000        | ---              | 51.07           | 66.00        | 14.93       | 1000.0          | 9.000           | L1   | 19.4       |
| 0.160000        | 54.27            | ---             | 79.00        | 24.73       | 1000.0          | 9.000           | L1   | 19.4       |
| 0.240000        | ---              | 49.99           | 66.00        | 16.01       | 1000.0          | 9.000           | L1   | 19.5       |
| 0.240000        | 52.02            | ---             | 79.00        | 26.98       | 1000.0          | 9.000           | L1   | 19.5       |
| 2.585000        | ---              | 21.70           | 60.00        | 38.30       | 1000.0          | 9.000           | L1   | 20.2       |
| 2.585000        | 32.86            | ---             | 73.00        | 40.14       | 1000.0          | 9.000           | L1   | 20.2       |
| 4.455000        | ---              | 41.41           | 60.00        | 18.59       | 1000.0          | 9.000           | L1   | 19.8       |
| 4.455000        | 42.65            | ---             | 73.00        | 30.35       | 1000.0          | 9.000           | L1   | 19.8       |
| 10.910000       | ---              | 57.38           | 60.00        | 2.62        | 1000.0          | 9.000           | L1   | 19.9       |
| 10.910000       | 58.02            | ---             | 73.00        | 14.98       | 1000.0          | 9.000           | L1   | 19.9       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

## NEUTRAL LINE

### Common Information

|                   |                    |
|-------------------|--------------------|
| Test Description: | Conducted Emission |
| Model No.:        | XNB-6002           |
| Phase:            | N                  |
| Mode:             | PoE                |
| Operator Name:    | KES                |

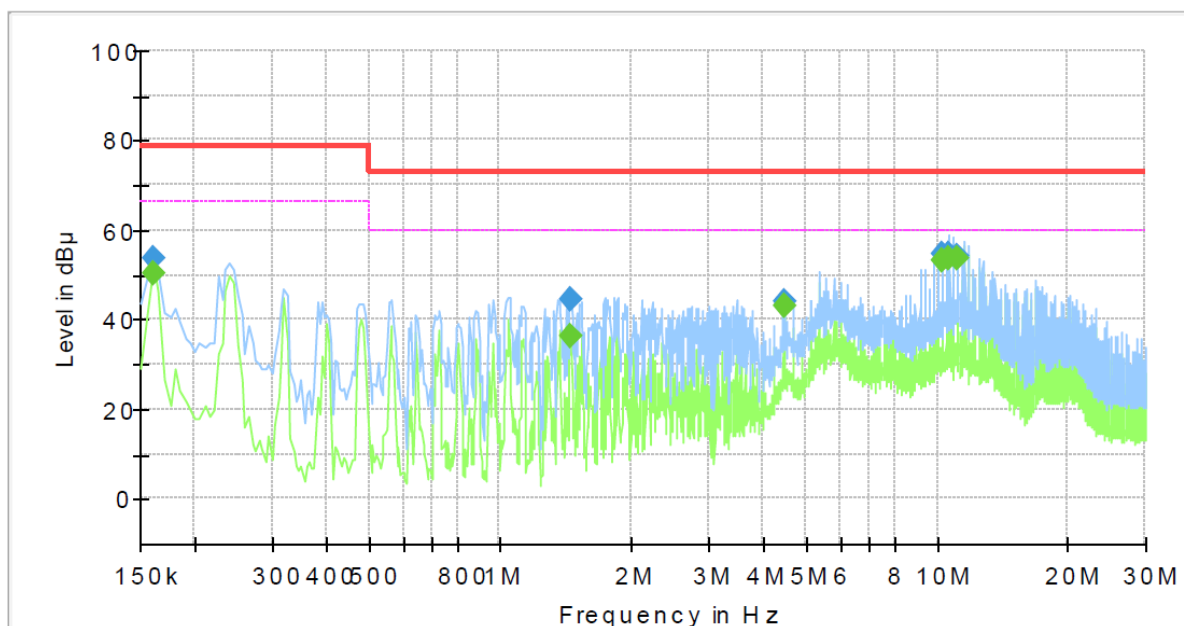

### Final\_Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.160000        | ---              | 50.46           | 66.00        | 15.54       | 1000.0          | 9.000           | N    | 19.4       |
| 0.160000        | 53.73            | ---             | 79.00        | 25.27       | 1000.0          | 9.000           | N    | 19.4       |
| 1.450000        | ---              | 36.23           | 60.00        | 23.77       | 1000.0          | 9.000           | N    | 20.2       |
| 1.450000        | 44.38            | ---             | 73.00        | 28.62       | 1000.0          | 9.000           | N    | 20.2       |
| 4.455000        | ---              | 42.92           | 60.00        | 17.08       | 1000.0          | 9.000           | N    | 19.8       |
| 4.455000        | 43.89            | ---             | 73.00        | 29.11       | 1000.0          | 9.000           | N    | 19.8       |
| 10.245000       | ---              | 53.35           | 60.00        | 6.65        | 1000.0          | 9.000           | N    | 19.9       |
| 10.245000       | 54.55            | ---             | 73.00        | 18.45       | 1000.0          | 9.000           | N    | 19.9       |
| 10.690000       | ---              | 53.92           | 60.00        | 6.08        | 1000.0          | 9.000           | N    | 19.9       |
| 10.690000       | 54.63            | ---             | 73.00        | 18.37       | 1000.0          | 9.000           | N    | 19.9       |
| 11.135000       | ---              | 53.83           | 60.00        | 6.17        | 1000.0          | 9.000           | N    | 20.0       |
| 11.135000       | 54.36            | ---             | 73.00        | 18.64       | 1000.0          | 9.000           | N    | 20.0       |

#### ◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact shchoi@kes.co.kr



## Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

### ■ DC Mode

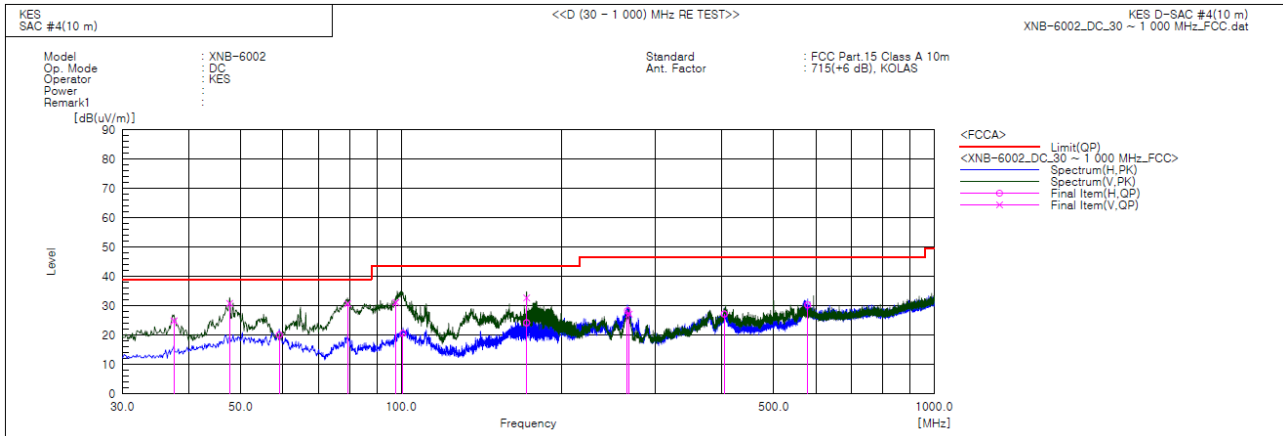


### Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB(uV)] | c.f<br>[dB(1/m)] | Result<br>QP<br>[dB(uV/m)] | Limit<br>QP<br>[dB(uV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark |
|-----|--------------------|-----|---------------------------|------------------|----------------------------|---------------------------|----------------------|----------------|----------------|--------|
| 1   | 37.518             | V   | 48.7                      | -23.8            | 24.9                       | 39.0                      | 14.1                 | 100.0          | 227.0          |        |
| 2   | 47.703             | V   | 51.8                      | -21.0            | 30.8                       | 39.0                      | 8.2                  | 100.0          | 272.0          |        |
| 3   | 59.100             | H   | 41.8                      | -21.7            | 20.1                       | 39.0                      | 18.9                 | 387.0          | 355.0          |        |
| 4   | 79.349             | V   | 58.2                      | -27.5            | 30.7                       | 39.0                      | 8.3                  | 126.0          | 90.0           |        |
| 5   | 97.779             | V   | 53.8                      | -22.6            | 31.2                       | 43.5                      | 12.3                 | 100.0          | 178.0          |        |
| 6   | 100.810            | H   | 42.9                      | -22.3            | 20.6                       | 43.5                      | 22.9                 | 367.0          | 180.0          |        |
| 7   | 171.984            | V   | 56.6                      | -23.9            | 32.7                       | 43.5                      | 10.8                 | 142.0          | 105.0          |        |
| 8   | 171.984            | H   | 48.1                      | -23.9            | 24.2                       | 43.5                      | 19.3                 | 400.0          | 27.0           |        |
| 9   | 265.831            | H   | 46.9                      | -18.6            | 28.3                       | 46.5                      | 18.2                 | 365.0          | 98.0           |        |
| 10  | 267.893            | V   | 45.8                      | -18.6            | 27.2                       | 46.5                      | 19.3                 | 100.0          | 347.0          |        |
| 11  | 403.814            | H   | 41.0                      | -13.8            | 27.2                       | 46.5                      | 19.3                 | 400.0          | 250.0          |        |
| 12  | 578.899            | H   | 39.0                      | -8.7             | 30.3                       | 46.5                      | 16.2                 | 343.0          | 139.0          |        |



## PoE Mode

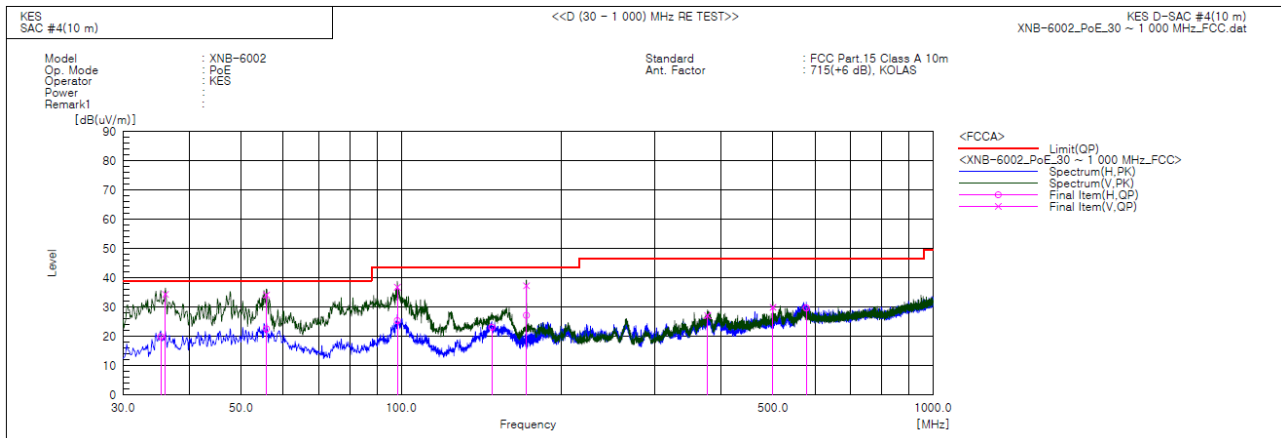


## Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB(uV)] | c.f<br>[dB(1/m)] | Result<br>QP<br>[dB(uV/m)] | Limit<br>QP<br>[dB(uV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark |
|-----|--------------------|-----|---------------------------|------------------|----------------------------|---------------------------|----------------------|----------------|----------------|--------|
| 1   | 35.335             | H   | 44.5                      | -24.6            | 19.9                       | 39.0                      | 19.1                 | 377.0          | 39.0           |        |
| 2   | 36.063             | V   | 58.8                      | -24.4            | 34.4                       | 39.0                      | 4.6                  | 100.0          | 112.0          |        |
| 3   | 55.821             | V   | 55.4                      | -21.3            | 34.1                       | 39.0                      | 4.9                  | 154.0          | 303.0          |        |
| 4   | 55.826             | H   | 43.9                      | -21.3            | 22.6                       | 39.0                      | 16.4                 | 324.0          | 173.0          |        |
| 5   | 98.382             | V   | 59.3                      | -22.5            | 36.8                       | 43.5                      | 6.7                  | 100.0          | 51.0           |        |
| 6   | 98.389             | H   | 47.9                      | -22.5            | 25.4                       | 43.5                      | 18.1                 | 400.0          | 20.0           |        |
| 7   | 148.098            | H   | 48.2                      | -25.1            | 23.1                       | 43.5                      | 20.4                 | 387.0          | 42.0           |        |
| 8   | 171.984            | V   | 61.2                      | -23.9            | 37.3                       | 43.5                      | 6.2                  | 112.0          | 219.0          |        |
| 9   | 171.984            | H   | 51.1                      | -23.9            | 27.2                       | 43.5                      | 16.3                 | 345.0          | 50.0           |        |
| 10  | 376.775            | V   | 41.5                      | -14.4            | 27.1                       | 46.5                      | 19.4                 | 100.0          | 22.0           |        |
| 11  | 500.086            | V   | 41.0                      | -11.1            | 29.9                       | 46.5                      | 16.6                 | 100.0          | 81.0           |        |
| 12  | 577.565            | H   | 38.5                      | -8.8             | 29.7                       | 46.5                      | 16.8                 | 354.0          | 121.0          |        |



- IC Regulation ICES-003 Issue 7


■ DC Mode

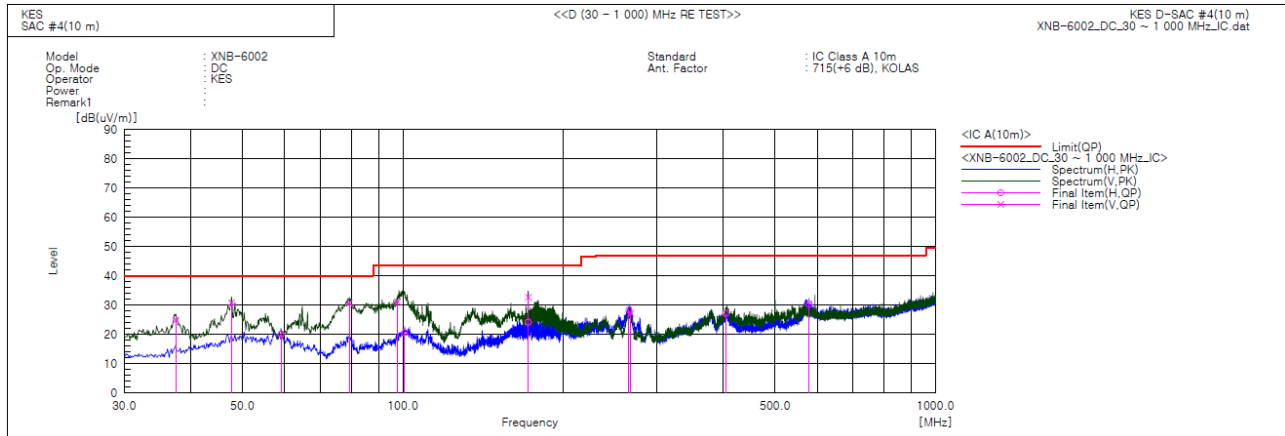

Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB(uV)] | c.f<br>[dB(1/m)] | Result<br>QP<br>[dB(uV/m)] | Limit<br>QP<br>[dB(uV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark |
|-----|--------------------|-----|---------------------------|------------------|----------------------------|---------------------------|----------------------|----------------|----------------|--------|
| 1   | 37.518             | V   | 48.7                      | -23.8            | 24.9                       | 40.0                      | 15.1                 | 100.0          | 227.0          |        |
| 2   | 47.703             | V   | 51.8                      | -21.0            | 30.8                       | 40.0                      | 9.2                  | 100.0          | 272.0          |        |
| 3   | 59.100             | H   | 41.8                      | -21.7            | 20.1                       | 40.0                      | 19.9                 | 387.0          | 355.0          |        |
| 4   | 79.349             | V   | 58.2                      | -27.5            | 30.7                       | 40.0                      | 9.3                  | 126.0          | 90.0           |        |
| 5   | 97.779             | V   | 53.8                      | -22.6            | 31.2                       | 43.5                      | 12.3                 | 100.0          | 178.0          |        |
| 6   | 100.810            | H   | 42.9                      | -22.3            | 20.6                       | 43.5                      | 22.9                 | 367.0          | 180.0          |        |
| 7   | 171.984            | V   | 56.6                      | -23.9            | 32.7                       | 43.5                      | 10.8                 | 142.0          | 105.0          |        |
| 8   | 171.984            | H   | 48.1                      | -23.9            | 24.2                       | 43.5                      | 19.3                 | 400.0          | 27.0           |        |
| 9   | 265.831            | H   | 46.9                      | -18.6            | 28.3                       | 47.0                      | 18.7                 | 365.0          | 98.0           |        |
| 10  | 267.893            | V   | 45.8                      | -18.6            | 27.2                       | 47.0                      | 19.8                 | 100.0          | 347.0          |        |
| 11  | 403.814            | H   | 41.0                      | -13.8            | 27.2                       | 47.0                      | 19.8                 | 400.0          | 250.0          |        |
| 12  | 578.899            | H   | 39.0                      | -8.7             | 30.3                       | 47.0                      | 16.7                 | 343.0          | 139.0          |        |

## PoE Mode

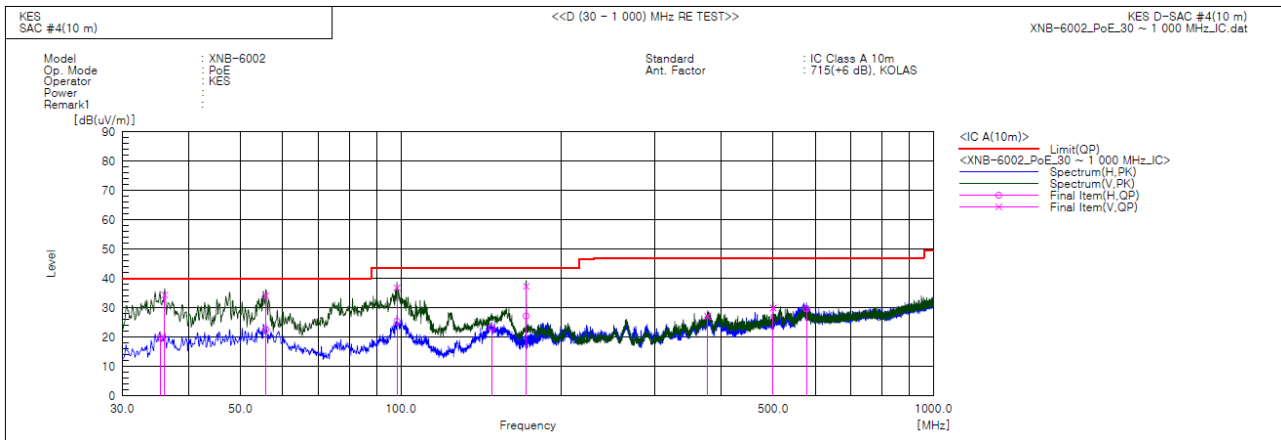

## Final Result

| No. | Frequency<br>[MHz] | (P) | Reading<br>QP<br>[dB(uV)] | c.f<br>[dB(1/m)] | Result<br>QP<br>[dB(uV/m)] | Limit<br>QP<br>[dB(uV/m)] | Margin<br>QP<br>[dB] | Height<br>[cm] | Angle<br>[deg] | Remark |
|-----|--------------------|-----|---------------------------|------------------|----------------------------|---------------------------|----------------------|----------------|----------------|--------|
| 1   | 35.335             | H   | 44.5                      | -24.6            | 19.9                       | 40.0                      | 20.1                 | 377.0          | 39.0           |        |
| 2   | 36.063             | V   | 58.8                      | -24.4            | 34.4                       | 40.0                      | 5.6                  | 100.0          | 112.0          |        |
| 3   | 55.821             | V   | 55.4                      | -21.3            | 34.1                       | 40.0                      | 5.9                  | 154.0          | 303.0          |        |
| 4   | 55.826             | H   | 43.9                      | -21.3            | 22.6                       | 40.0                      | 17.4                 | 324.0          | 173.0          |        |
| 5   | 98.382             | V   | 59.3                      | -22.5            | 36.8                       | 43.5                      | 6.7                  | 100.0          | 51.0           |        |
| 6   | 98.389             | H   | 47.9                      | -22.5            | 25.4                       | 43.5                      | 18.1                 | 400.0          | 20.0           |        |
| 7   | 148.098            | H   | 48.2                      | -25.1            | 23.1                       | 43.5                      | 20.4                 | 387.0          | 42.0           |        |
| 8   | 171.984            | V   | 61.2                      | -23.9            | 37.3                       | 43.5                      | 6.2                  | 112.0          | 219.0          |        |
| 9   | 171.984            | H   | 51.1                      | -23.9            | 27.2                       | 43.5                      | 16.3                 | 345.0          | 50.0           |        |
| 10  | 376.775            | V   | 41.5                      | -14.4            | 27.1                       | 47.0                      | 19.9                 | 100.0          | 22.0           |        |
| 11  | 500.086            | V   | 41.0                      | -11.1            | 29.9                       | 47.0                      | 17.1                 | 100.0          | 81.0           |        |
| 12  | 577.565            | H   | 38.5                      | -8.8             | 29.7                       | 47.0                      | 17.3                 | 354.0          | 121.0          |        |

## Calculation - SAC #4(10 m)

Result(QP) [dB( $\mu$ V/m)] = (Reading(QP)[dB( $\mu$ V)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB( $\mu$ V/m)] - Result(QP) [dB( $\mu$ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Report No.:

KES-EM-22T0794

Page (29) of (41)

## Radiated Electric Field Emissions(Above 1 GHz)

### DC Mode

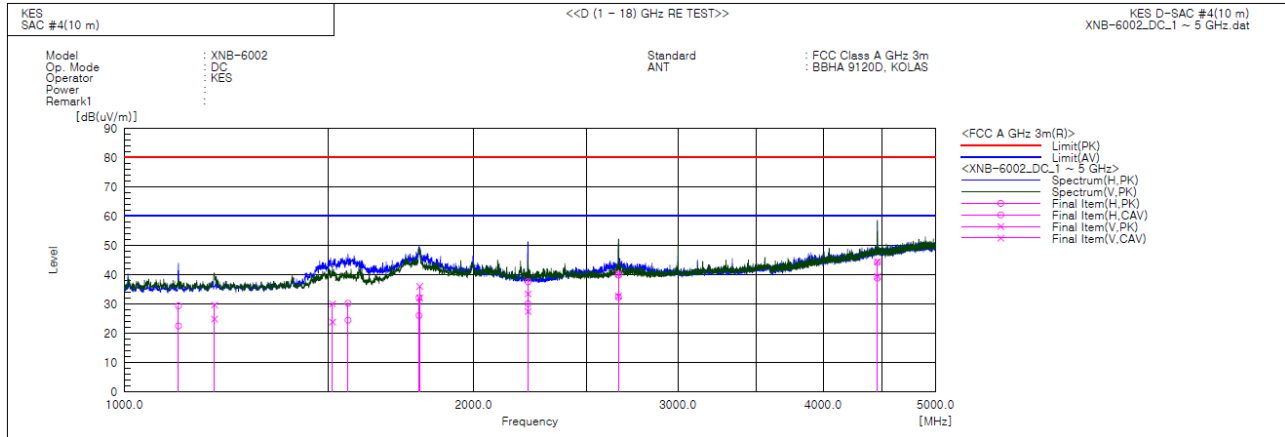

### Final Result


| No. | Frequency [MHz] | (P) | Reading PK [dB(uV)] | Reading CAV [dB(uV)] | c. f [dB(1/m)] | Result PK [dB(uV/m)] | Result CAV [dB(uV/m)] | Limit PK [dB(uV/m)] | Limit AV [dB(uV/m)] | Margin PK [dB] | Margin CAV [dB] | Height [cm] | Angle [deg] | Remark |
|-----|-----------------|-----|---------------------|----------------------|----------------|----------------------|-----------------------|---------------------|---------------------|----------------|-----------------|-------------|-------------|--------|
| 1   | 1113.640        | H   | 35.0                | 28.1                 | -5.6           | 29.4                 | 22.5                  | 80.0                | 60.0                | 50.6           | 37.5            | 369.0       | 86.0        |        |
| 2   | 1195.965        | V   | 34.8                | 30.0                 | -5.1           | 29.7                 | 24.9                  | 80.0                | 60.0                | 50.3           | 35.1            | 113.0       | 273.0       |        |
| 3   | 1511.850        | V   | 33.9                | 27.7                 | -3.8           | 30.1                 | 23.9                  | 80.0                | 60.0                | 49.9           | 36.1            | 100.0       | 296.0       |        |
| 4   | 1559.025        | H   | 33.8                | 28.0                 | -3.5           | 30.3                 | 24.5                  | 80.0                | 60.0                | 49.7           | 35.5            | 353.0       | 319.0       |        |
| 5   | 1795.027        | H   | 32.8                | 26.7                 | -0.6           | 32.2                 | 26.1                  | 80.0                | 60.0                | 47.8           | 33.9            | 320.0       | 152.0       |        |
| 6   | 1797.113        | V   | 36.7                | 32.7                 | -0.6           | 36.1                 | 32.1                  | 80.0                | 60.0                | 43.9           | 27.9            | 100.0       | 213.0       |        |
| 7   | 2227.525        | H   | 38.0                | 30.5                 | -0.4           | 37.6                 | 30.1                  | 80.0                | 60.0                | 42.4           | 29.9            | 400.0       | 323.0       |        |
| 8   | 2227.661        | V   | 33.9                | 27.9                 | -0.4           | 33.5                 | 27.5                  | 80.0                | 60.0                | 46.5           | 32.5            | 105.0       | 273.0       |        |
| 9   | 2665.917        | H   | 38.2                | 30.7                 | 1.7            | 39.9                 | 32.4                  | 80.0                | 60.0                | 40.1           | 27.6            | 355.0       | 115.0       |        |
| 10  | 2666.162        | V   | 38.5                | 31.0                 | 1.7            | 40.2                 | 32.7                  | 80.0                | 60.0                | 39.8           | 27.3            | 100.0       | 95.0        |        |
| 11  | 4455.025        | H   | 30.8                | 25.4                 | 13.4           | 44.2                 | 38.8                  | 80.0                | 60.0                | 35.8           | 21.2            | 389.0       | 134.0       |        |
| 12  | 4455.102        | V   | 31.1                | 26.0                 | 13.4           | 44.5                 | 39.4                  | 80.0                | 60.0                | 35.5           | 20.6            | 100.0       | 258.0       |        |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

## PoE Mode

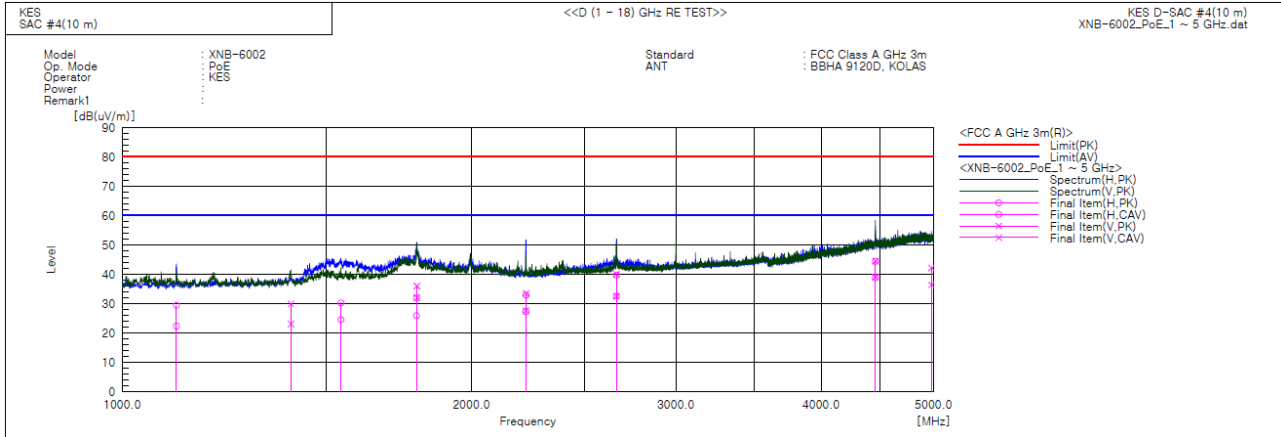

## Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB(1/m)] | Result PK [dB(uV/m)] | Result CAV [dB(uV/m)] | Limit PK [dB(uV/m)] | Limit AV [dB(uV/m)] | Margin PK [dB] | Margin CAV [dB] | Height [cm] | Angle [deg] | Remark |
|-----|-----------------|-----|---------------------|----------------------|---------------|----------------------|-----------------------|---------------------|---------------------|----------------|-----------------|-------------|-------------|--------|
| 1   | 1113.625        | H   | 35.1                | 28.0                 | -5.6          | 29.5                 | 22.4                  | 80.0                | 60.0                | 50.5           | 37.6            | 376.0       | 356.0       |        |
| 2   | 1397.475        | V   | 34.2                | 27.3                 | -4.2          | 30.0                 | 23.1                  | 80.0                | 60.0                | 50.0           | 36.9            | 134.0       | 215.0       |        |
| 3   | 1543.250        | H   | 33.9                | 28.2                 | -3.6          | 30.3                 | 24.6                  | 80.0                | 60.0                | 49.7           | 35.4            | 349.0       | 324.0       |        |
| 4   | 1793.125        | H   | 32.7                | 26.6                 | -0.6          | 32.1                 | 26.0                  | 80.0                | 60.0                | 47.9           | 34.0            | 314.0       | 160.0       |        |
| 5   | 1794.000        | V   | 36.6                | 32.7                 | -0.6          | 36.0                 | 32.1                  | 80.0                | 60.0                | 44.0           | 27.9            | 100.0       | 141.0       |        |
| 6   | 2227.594        | H   | 33.4                | 27.8                 | -0.4          | 33.0                 | 27.4                  | 80.0                | 60.0                | 47.0           | 32.6            | 400.0       | 260.0       |        |
| 7   | 2227.663        | V   | 33.9                | 28.0                 | -0.4          | 33.5                 | 27.6                  | 80.0                | 60.0                | 46.5           | 32.4            | 109.0       | 248.0       |        |
| 8   | 2666.168        | V   | 38.4                | 30.9                 | 1.7           | 40.1                 | 32.6                  | 80.0                | 60.0                | 39.9           | 27.4            | 100.0       | 41.0        |        |
| 9   | 2666.174        | H   | 38.1                | 30.8                 | 1.7           | 39.8                 | 32.5                  | 80.0                | 60.0                | 40.2           | 27.5            | 349.0       | 126.0       |        |
| 10  | 4454.920        | V   | 31.1                | 25.7                 | 13.4          | 44.5                 | 39.1                  | 80.0                | 60.0                | 35.5           | 20.9            | 113.0       | 271.0       |        |
| 11  | 4455.512        | H   | 31.0                | 25.5                 | 13.4          | 44.4                 | 38.9                  | 80.0                | 60.0                | 35.6           | 21.1            | 391.0       | 301.0       |        |
| 12  | 4979.165        | V   | 26.5                | 20.8                 | 15.7          | 42.2                 | 36.5                  | 80.0                | 60.0                | 37.8           | 23.5            | 100.0       | 252.0       |        |

## Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]



Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value


## Test Setup Photos and Configuration

### Conducted Emissions at Mains Power Ports

#### ■ DC Mode

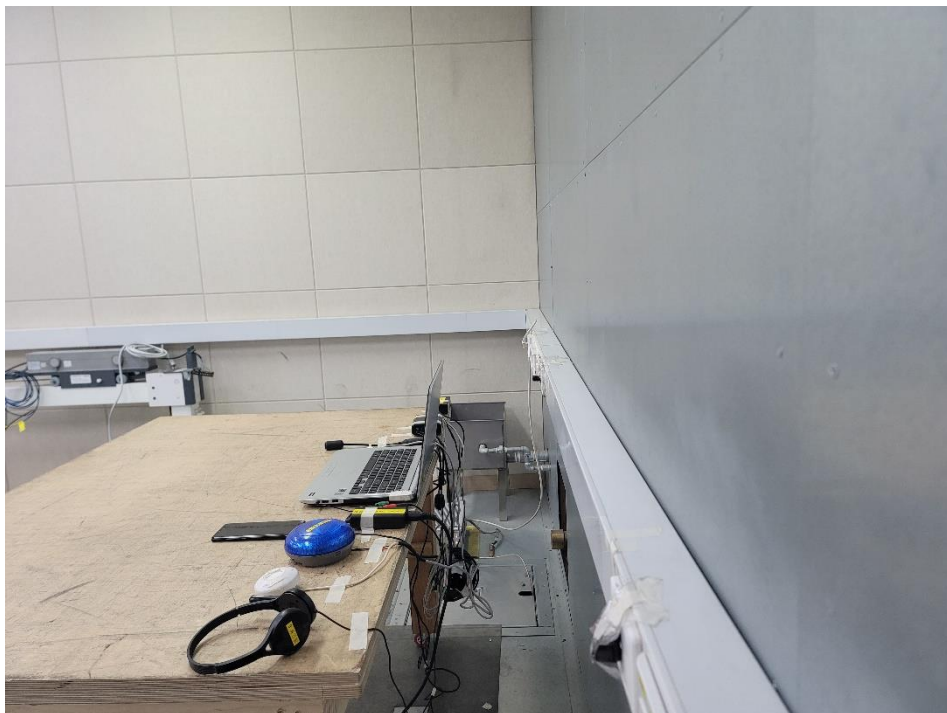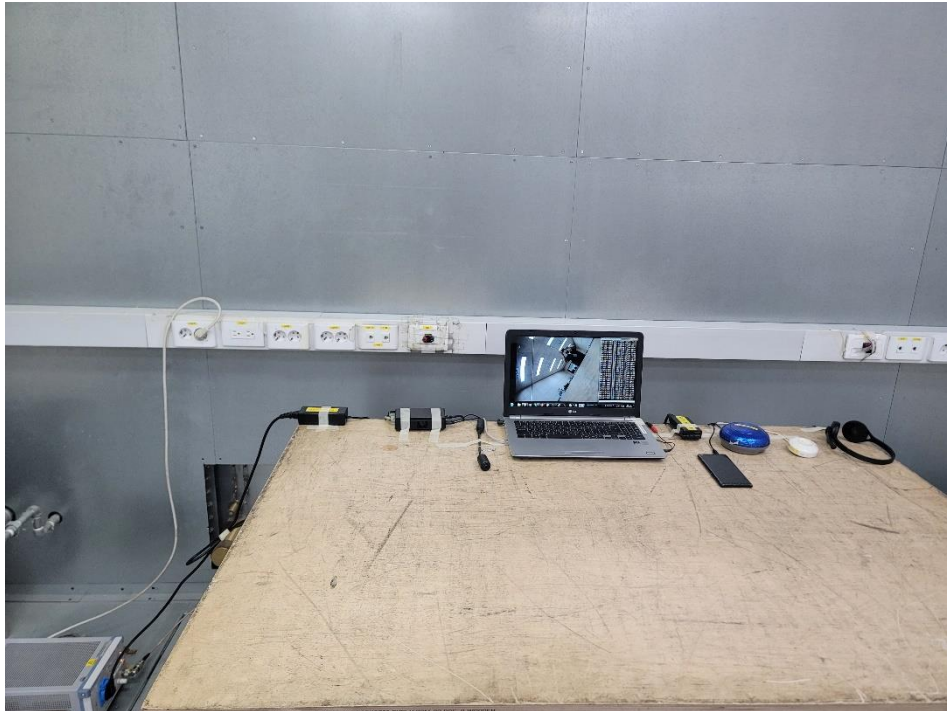



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

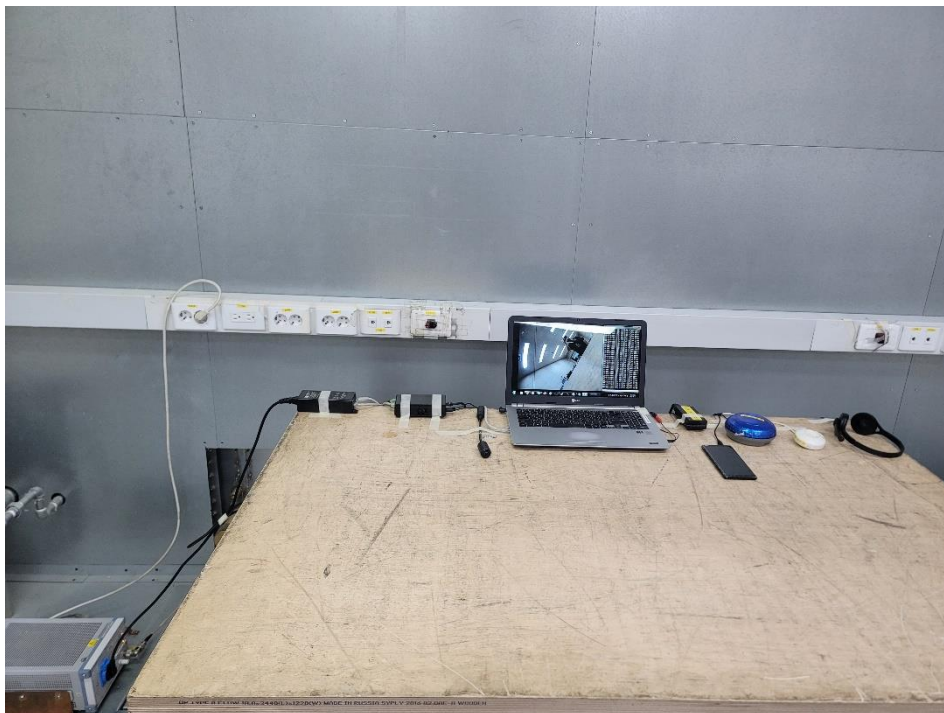**■ PoE Mode**

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Radiated Electric Field Emissions(Below 1 GHz)

### ■ DC Mode

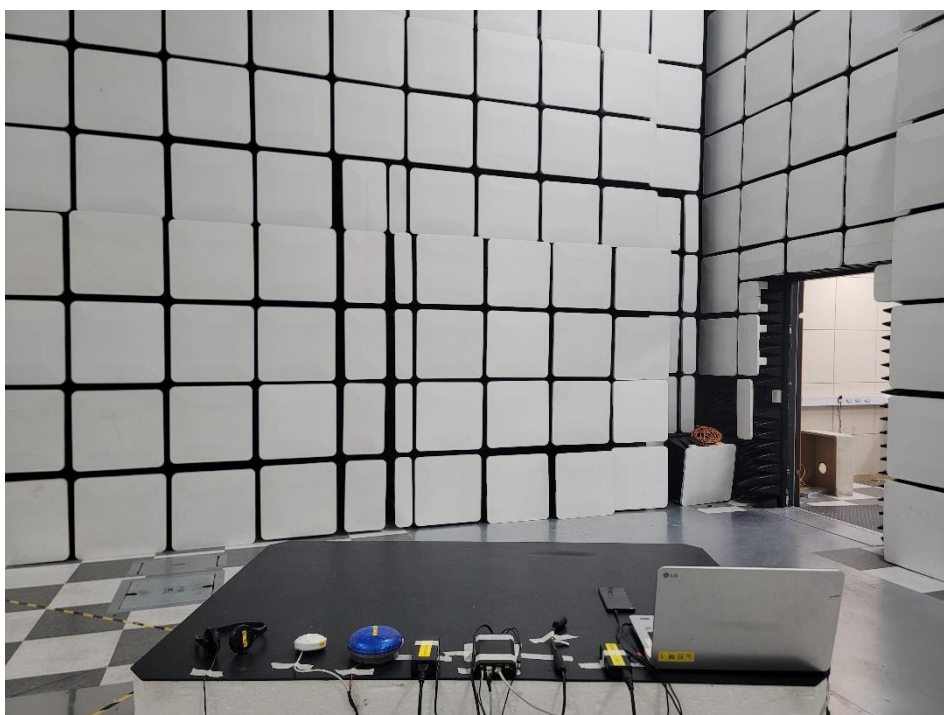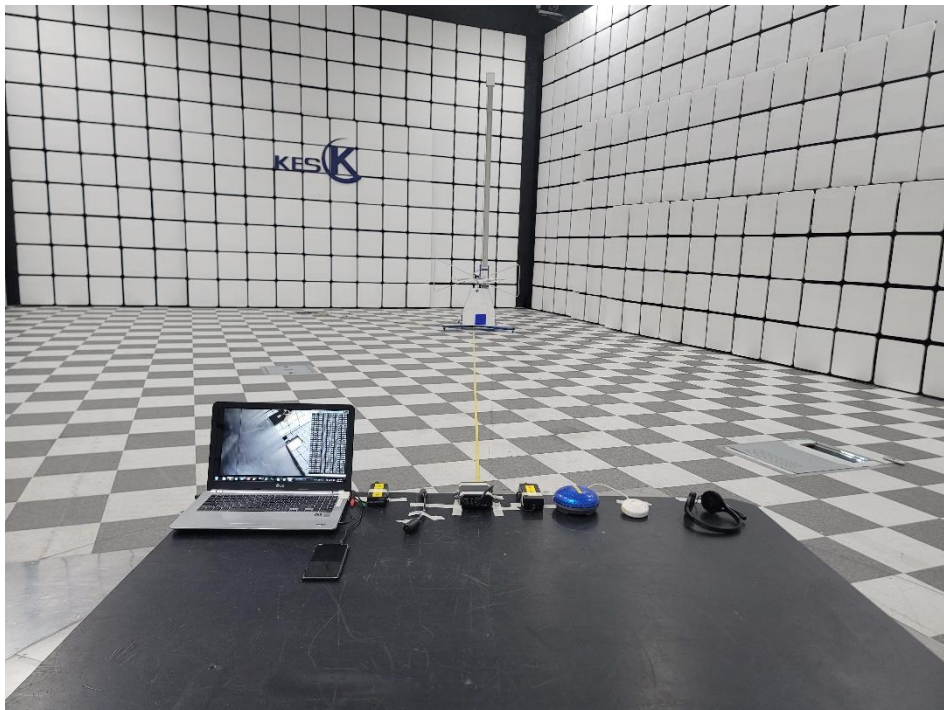

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



### ■ PoE Mode

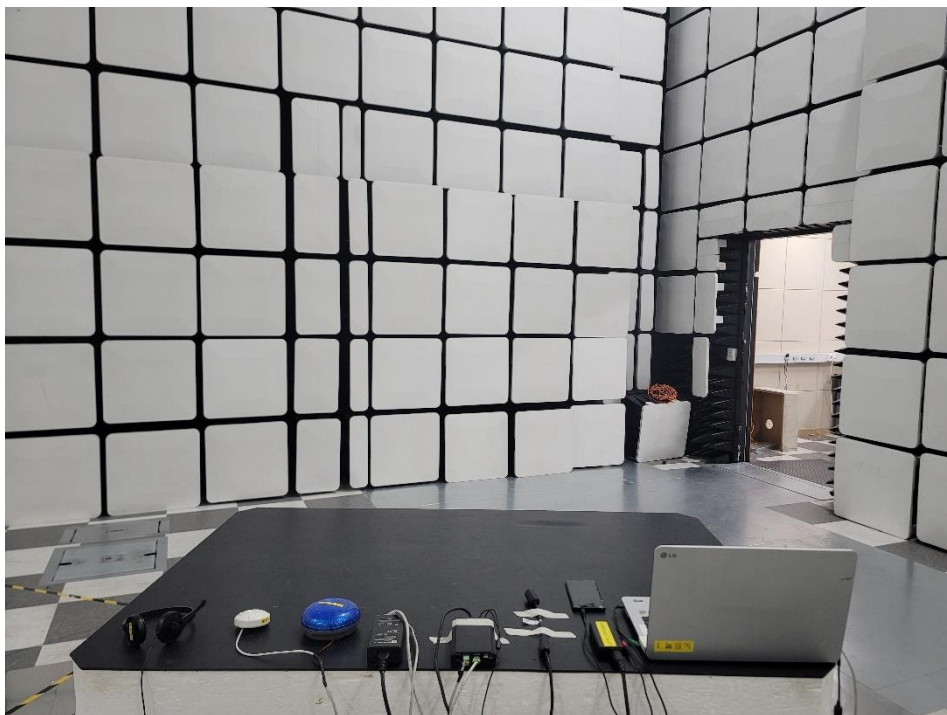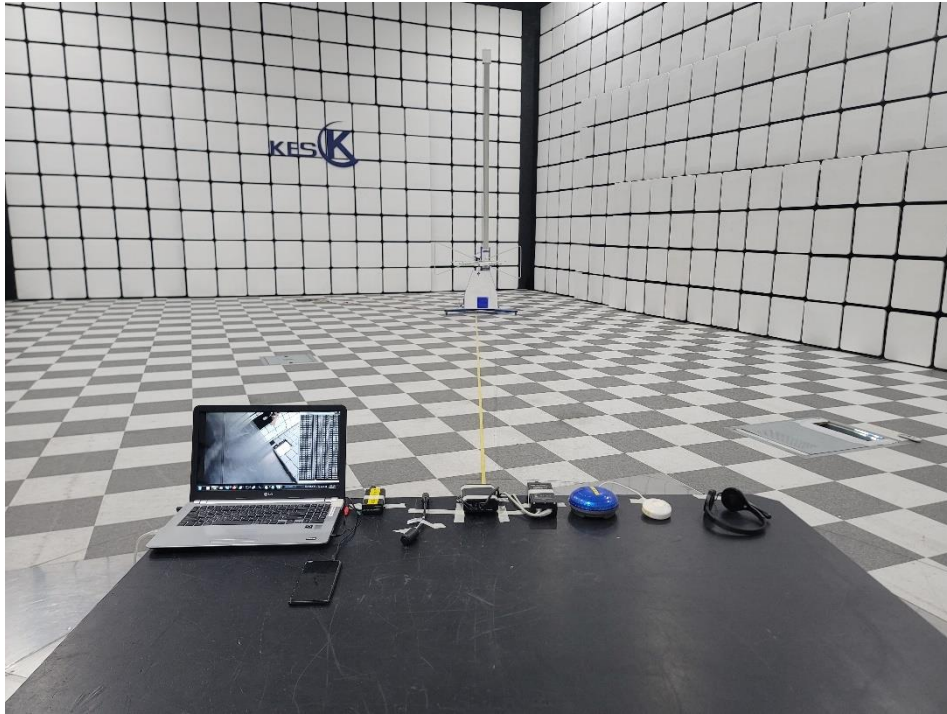

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Radiated Electric Field Emissions(Above 1 GHz)

### ■ DC Mode

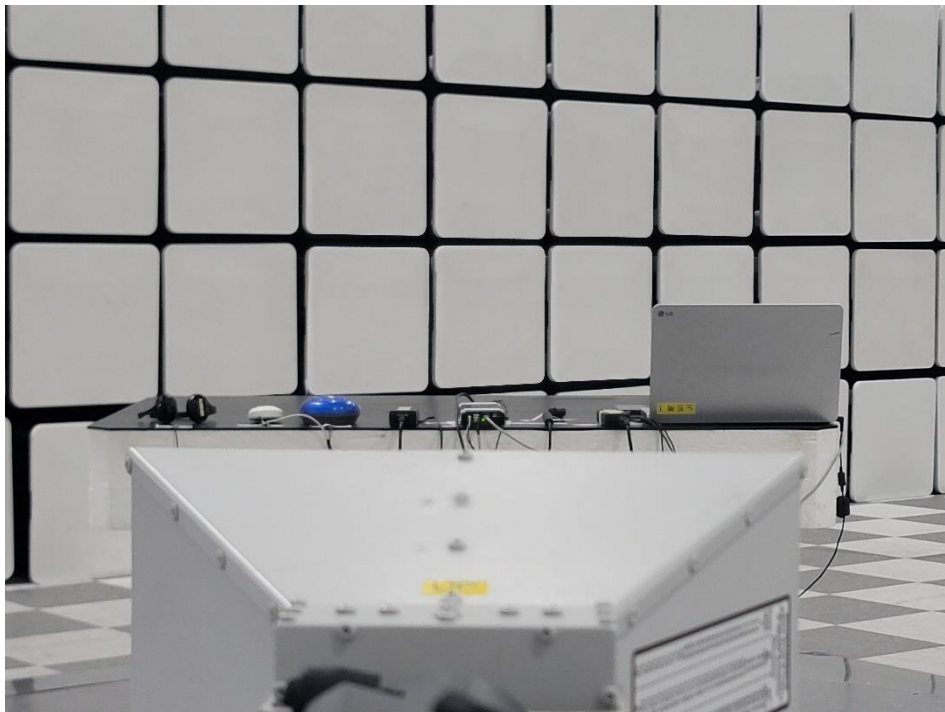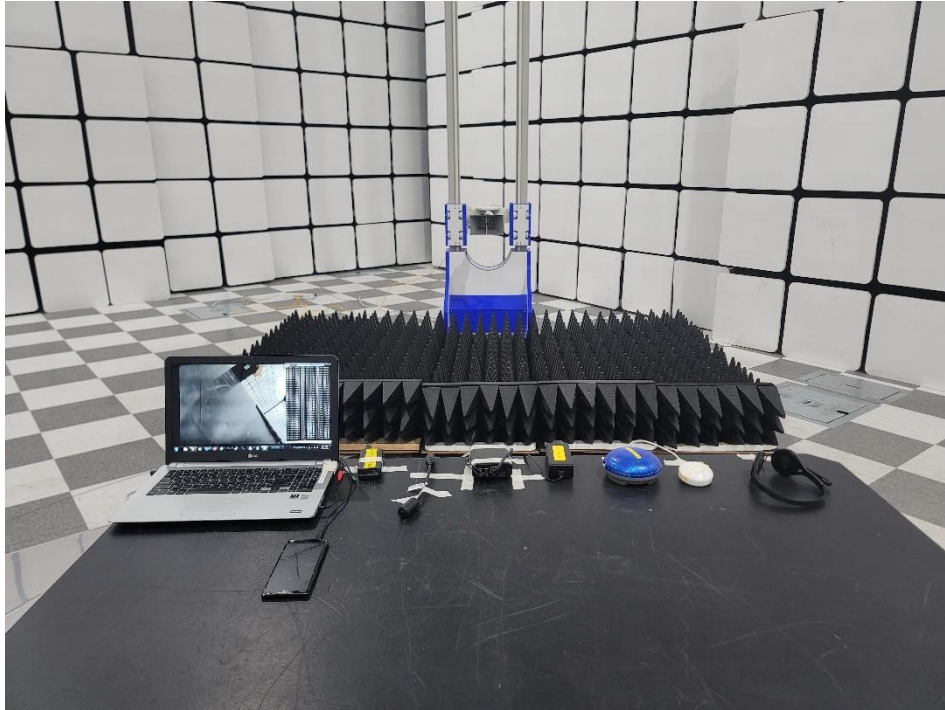

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

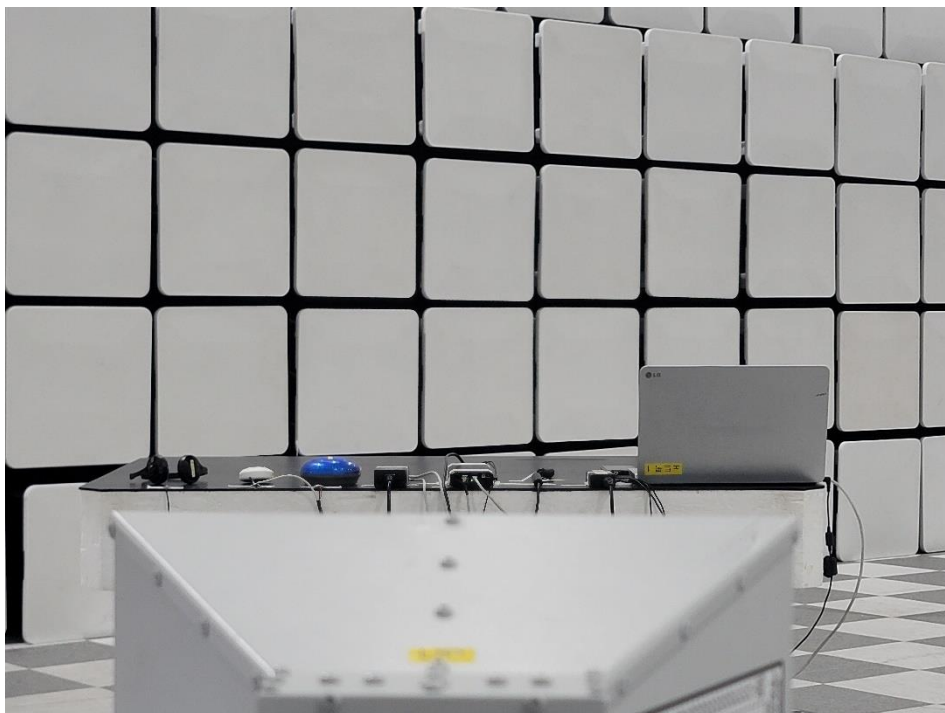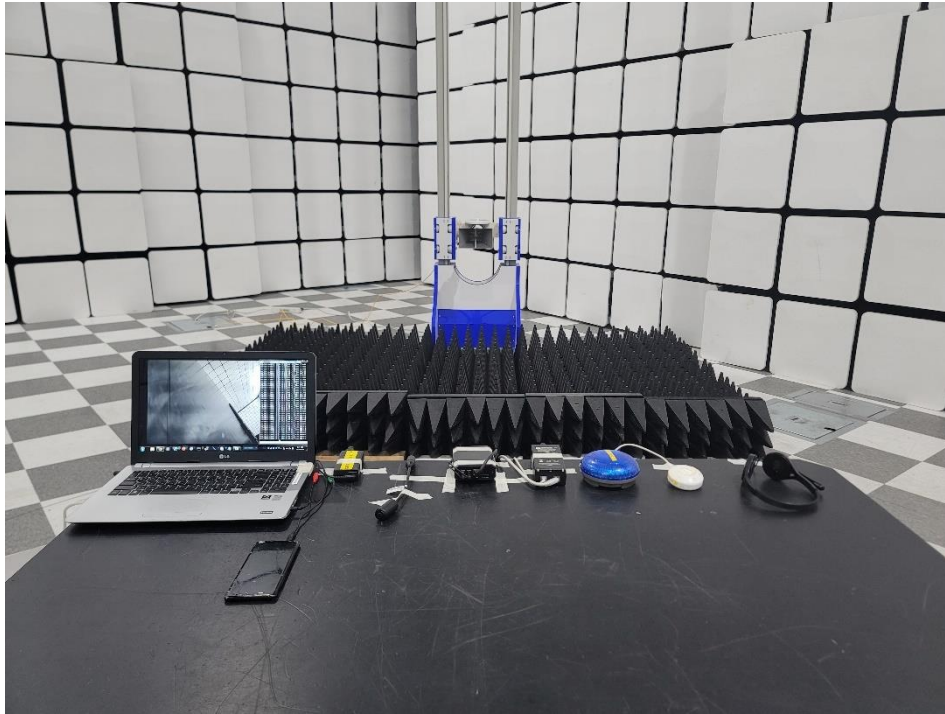

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal Photographs


(Internal View)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

## EUT Internal View – Network Board

(Top)

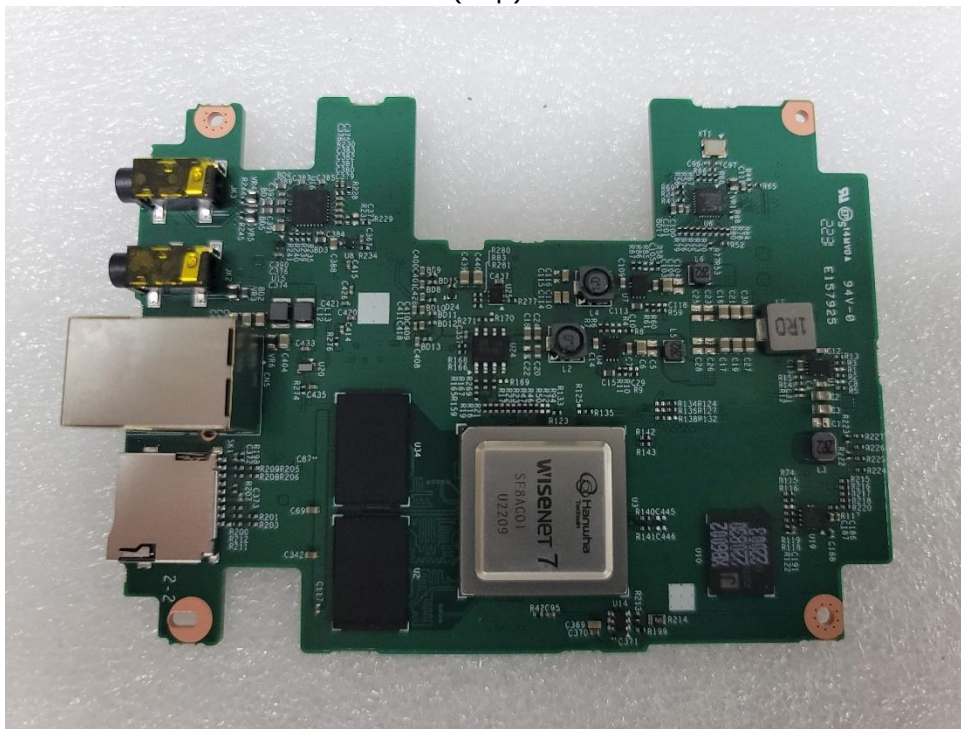


(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Power Board

(Top)

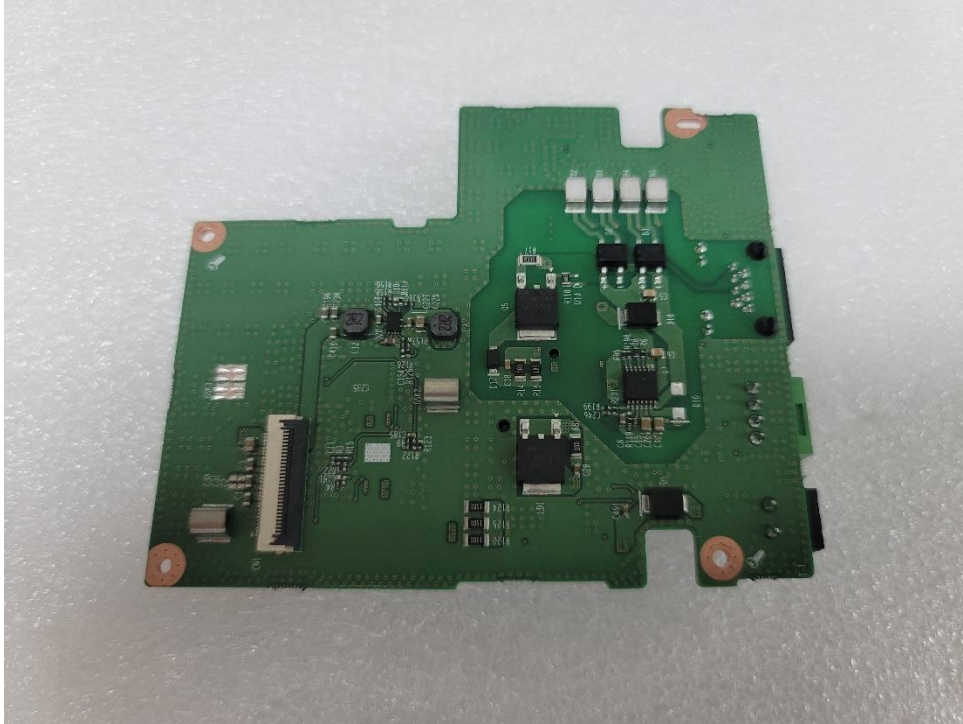

(Bottom)

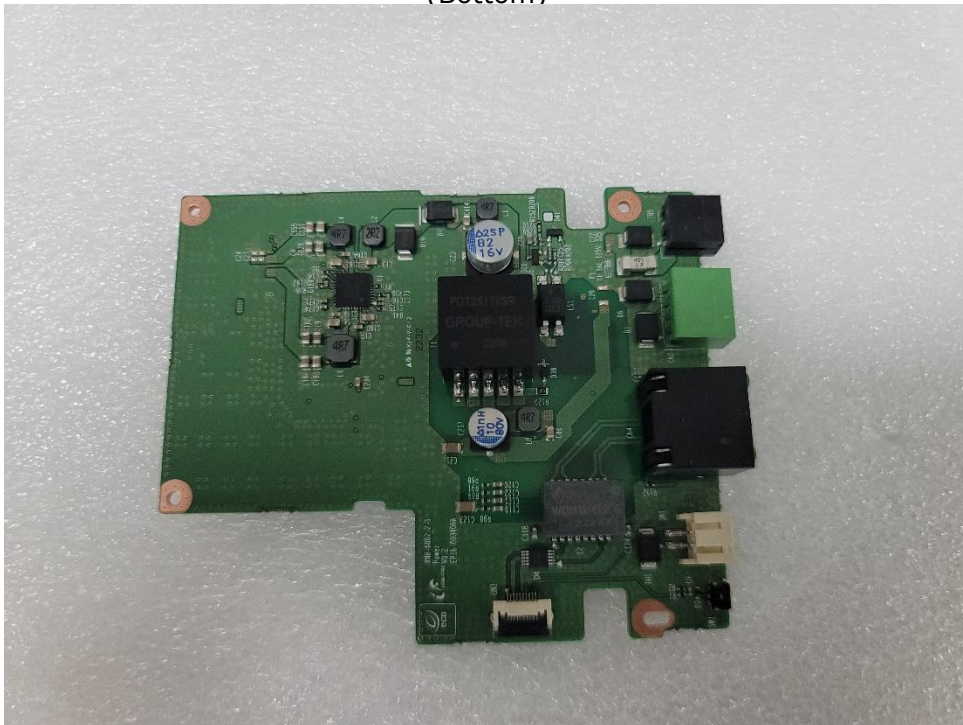

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

---

## Label Photographs

### FCC Label



Hanwha Techwin Co., Ltd.

XNB-6002

### IC Label

### CAN ICES-003(A) / NMB-003(A)

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:  
(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.