



TEST REPORT



Report No. : KES-EM241340

Page 1 / 80

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, KOREA

Tel : +82-31-425-6200, Fax : +82-31-425-6200

1. Client

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

Product name : NETWORK CAMERA

Model/Type No. : XNB-8003

Variant Model : -

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended Area, Nam Son Ward, Bac Ninh City, Bac Ninh Province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea (Suwon Industrial Complex)

3. Date of Receipt : Apr. 24, 2024

4. Test date : Apr. 28, 2024 ~ May. 02, 2024

5. Date of Issue : May. 08, 2024

6. Test Results : In Compliance

Tested by

김세현
[김세현]2024/05/08

Reviewed by

이종일
[이종일]2024/05/08

Se Heon, Kim
EMC Test Engineer

Dong Il, Lee
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

KES-QP16-F01(00-23-01-01)

KES Co., Ltd.

The authenticity of this test report can be found on the verification page of our website (www.kes.co.kr).

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
May. 08, 2024	KES-EM241340	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0 General Product Description	4
1.1 Test Voltage & Frequency	7
1.2 Variant Model Differences	7
1.3 Device Modifications	7
1.4 Equipment Under Test	7
1.5 System Configuration	7
1.6 Support Equipments	8
1.7 External I/O Cabling.....	9
1.8 EUT Operating Mode(s).....	11
1.9 Configuration	12
1.10 Remarks When Standards Applied.....	13
1.11 Calibration Details of Equipment Used for Measurement	13
1.12 Test Facility	13
1.13 Laboratory Accreditations and Listings	13
2.0 Test Regulations	14
2.1 Conducted Emissions at Mains Power Ports.....	15
2.2 Conducted Emissions at Telecommunication Ports.....	16
2.3 Impulse Noise (click).....	17
2.4 Radiated Electric Field Emissions(Below 1 GHz).....	18
2.5 Radiated Electric Field Emissions(Above 1 GHz)	19
2.6 Harmonic Current Emissions	20
2.7 Voltage Fluctuations and Flicker.....	21
3.0 Criteria for Compliance	22
3.1 Electrostatic Discharge	23
3.2 Radio-frequency Electromagnetic Field.....	27
3.3 Fast Transients	30
3.4 Surges.....	33
3.5 Conducted Disturbance	37
3.6 Power Frequency Magnetic Field Immunity	40
APPENDIX A – TEST DATA	43
Conducted Emissions at Mains Power Ports	43
Conducted Emissions at Telecommunication Ports	45
Impulse Noise (click)	47
Radiated Electric Field Emissions(Below 1 GHz)	48
Radiated Electric Field Emissions(Above 1 GHz).....	50
Harmonic Current Emissions and Voltage Fluctuations and Flicker	52
Test Setup Photos and Configuration.....	55
Conducted Emissions at Mains Power Ports	55
Conducted Emissions at Telecommunication Ports	56
Impulse Noise (click)	58
Radiated Electric Field Emissions(Below 1 GHz)	59
Radiated Electric Field Emissions(Above 1 GHz).....	61
Harmonic Current Emissions and Voltage Fluctuations and Flicker	63
Electrostatic Discharge	64
Radio-frequency Electromagnetic Field	65
Fast Transients.....	66
Surges	68
Conducted Disturbance.....	69
Power Frequency Magnetic Field Immunity	70
EUT Photographs	74
EUT Internal Layout Photographs	75



1.0 General Product Description

Main Specifications of EUT are:

	XNB-8003
Video	
Imaging Device	1/1.8" progressive CMOS
Resolution	3328x1872, 3072x1728, 2592x1944, 2688x1520, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 15fps/12fps(60Hz/50Hz)
NETD	None
Pixel Size	None
Min. Illumination	(TBD) Color: 0.04Lux(F1.3, 1/30sec, 30IRE) B/W : 0.004Lux(F1.3, 1/30sec, 30IRE), 0Lux(IR LED on)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB: Micro USB Type B, 1280x720 for installation
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	None
Max. Aperture Ratio	None
Angular Field of View	None
Min. Object Distance	None
Focus Control	Simple focus
Lens Type	DC auto iris, P-iris, Manual, I-CS
Mount Type	C mount, CS mount
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	None
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SSDR
Wide Dynamic Range	extremeWDR (120dB)
Digital Noise Reduction	WiseNR II (Based on AI engine), SSNR V
Digital Image Stabilization	Support (built-in gyro sensor)
Defog	Support
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	32ea, Quadrangle zones - Color : Gray, Green, Red, Blue, Black, White - Mosaic



Gain Control	Support
White Balance	ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor
LDC	Support (Fill/stretch mode)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec) Auto prefer shutter control(Based on AI engine)
Digital PTZ	Support
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	- Analytics events based on AI engine(NPU) : Object detection (Person/Face/Vehicle(car/truck/bus/bicycle/motorcycle)/Licence plate), IVA (Virtual line/Area, Enter/Exit, Loitering, direction, intrusion) - Analytics events : Defocus detection, Motion detection, Tampering, Fog detection, Audio detection, Sound classification, Shock detection, Appear/Disappear
Business Intelligence	Based on AI engine(NPU) : People counting, Queue management, Heatmap
Serial Interface	RS-485(Samsung-T, Pelco-D/P, Panasonic, Bosch, AD, GE, Vicon, Honeywell)
Alarm I/O	2 configurable I/O ports
Alarm Triggers	Analytics, Network disconnect, Alarm input, App event, Time schedule
Alarm Events	When alarm trigger occurred - File upload(image) : e-mail/FTP - Notification : e-mail - Recording : SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover(PTZ preset, Send message by HTTP/HTTPS/TCP) - Audio clip playback - PTZ preset
Audio In	Selectable(mic in/line in/Built-in MIC) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
IR Viewable Length	None
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	Manual(Sea area), WiseStreamII, WiseStreamIII(Based on AI engine)
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles, 3 virtual channel support)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)



Security	TPM 2.0 (FIPS 140-2 level 2) HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2) Device Certificate(Hanwha Techwin Root CA, pre-installed) Secure by default certificate(TBD) Secure OS/Boot/Storage, Verify firmware forgery
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 2slot Max. 1TB (512GB * 2)
Memory	4GB RAM, 512MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	-10 °C ~ 55°C(-14°F ~ +131°F) less than 95%RH(non-condensing)
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH
Certification	None
Input Voltage	PoE(IEEE802.3af, Class3), 12VDC(TBD)
Power Consumption	TBD Power redundancy failover(TBD)
Mechanical	
Color / Material	Black / Aluminum
RAL Code	None
Product Dimensions / Weight	81(W)x67(H)x165(D)mm(3.19x2.64x6.48"), 0.88kg(1.94 lb) (TBD)
Compatible Conduit hole / Gangbox	None
Hanging Mount (Dome)	None
Skin Cover (Dome)	None
Weather Cap (Dome)	None
Power Module	None
Backbox	None
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	None
Observe (63PPM/ 19PPF)	None
Recognize (125PPM/ 38PPF)	None
Identify (250PPM/ 76PPF)	None



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

- ☒ AC 230 V, 50 Hz (AC/DC Adapter Input Power)
- ☒ AC 230 V, 50 Hz (PoE Adapter Input Power)

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNB-8003	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 System Configuration

Description	Model Number	Serial Number	Manufacturer	Remarks
-	-	-	-	-



1.6 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	LG15U56	605NZ8J002174	LG Electronics	-
Notebook Adapter	ADS-65AI-19-3	EAY65689605	SHENZHEN HONOR ELECTRONIC CO.,LTD.	-
Lens	-	-	-	-
AC/DC Adapter	KPL-048F-VI	-	Channel Well Technology Co.,Ltd.	-
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Headset	K550	-	Britz®	-
Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
Controller	SPC-1010	C50E67WG10100F	HANWHA VISION VIETNAM COMPANY LIMITED	-
Controller Adapter	AP-12005A	-	APOWER	-
Micro SD Card	-	-	SanDisk	-
Smartphone	-	-	Samsung Electronics	-



1.7 External I/O Cabling

■ AC/DC Adapter

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	DC IN	AC/DC Adapter	DC OUT	1.5	U
	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	3.5	U
	5 Pin	Lens	5 Pin	0.2	U
	Audio OUT	Headset	Audio IN	1.8	U
	Audio IN		Audio OUT	1.8	U
	Alarm OUT	Alarm	Alarm IN	3.5	U
	Alarm IN	Button Alarm	Alarm OUT	3.5	U
	RS-485	Controller	RS-485	3.5	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
	Ground	Ground	Ground	2.0	-
Notebook	3.5 mm	Smartphone	3.5 mm	1.0	U
	DC Jack	Notebook Adapter	DC Jack	1.5	U
Controller	DC Jack	Controller Adapter	DC Jack	1.2	U

* Unshielded=U, Shielded=S



■ PoE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.5	U
	5 Pin	Lens	5 Pin	0.2	U
	Audio OUT	Headset	Audio IN	1.8	U
	Audio IN		Audio OUT	1.8	U
	Alarm OUT	Alarm	Alarm IN	3.5	U
	Alarm IN	Button Alarm	Alarm OUT	3.5	U
	RS-485	Controller	RS-485	3.5	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
	Ground	Ground	Ground	2.0	-
PoE Adapter	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	1.0	U
Notebook	3.5 mm	Smartphone	3.5 mm	1.0	U
	DC Jack	Notebook Adapter	DC Jack	1.5	U
Controller	DC Jack	Controller Adapter	DC Jack	1.2	U

* Unshielded=U, Shielded=S



1.8 EUT Operating Mode(s)

■ DC, AC, PoE


Test mode	Normal operating
Operating	1. Check the camera video output on the Notebook. 2. Check if the network status is operating normally during PING TEST. 3. Check the output of the 1 kHz tone output from the smartphone and the microphone input from the headset. 4. Press the alarm button to check the normal operation of the button alarm. 5. After testing, I checked the files stored on Micro SD card.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd




1.9 Configuration

■ AC/DC Adapter

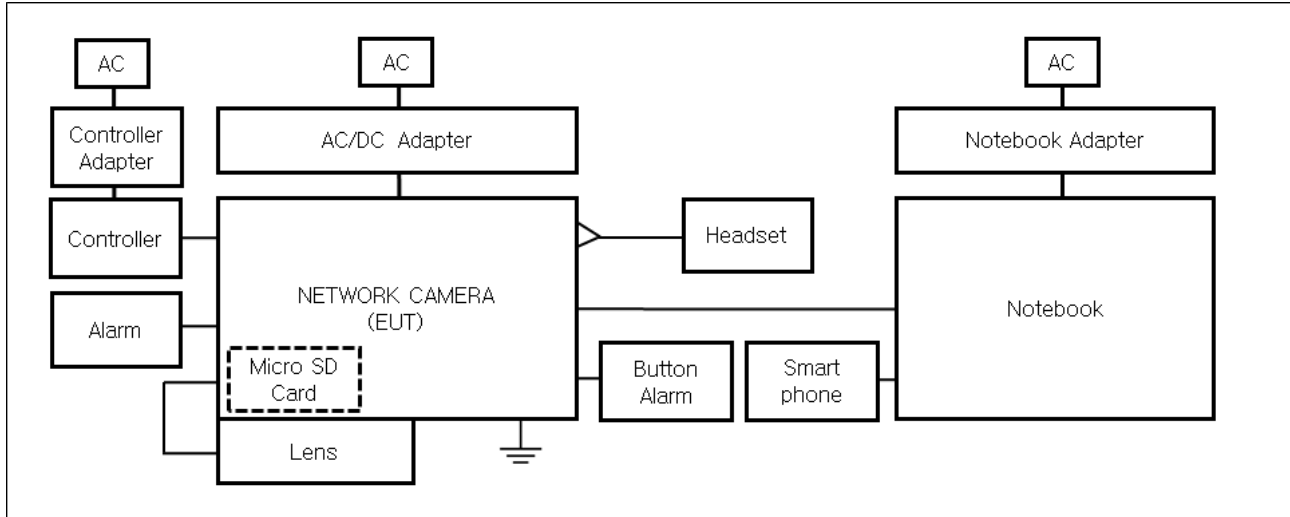

■ PoE

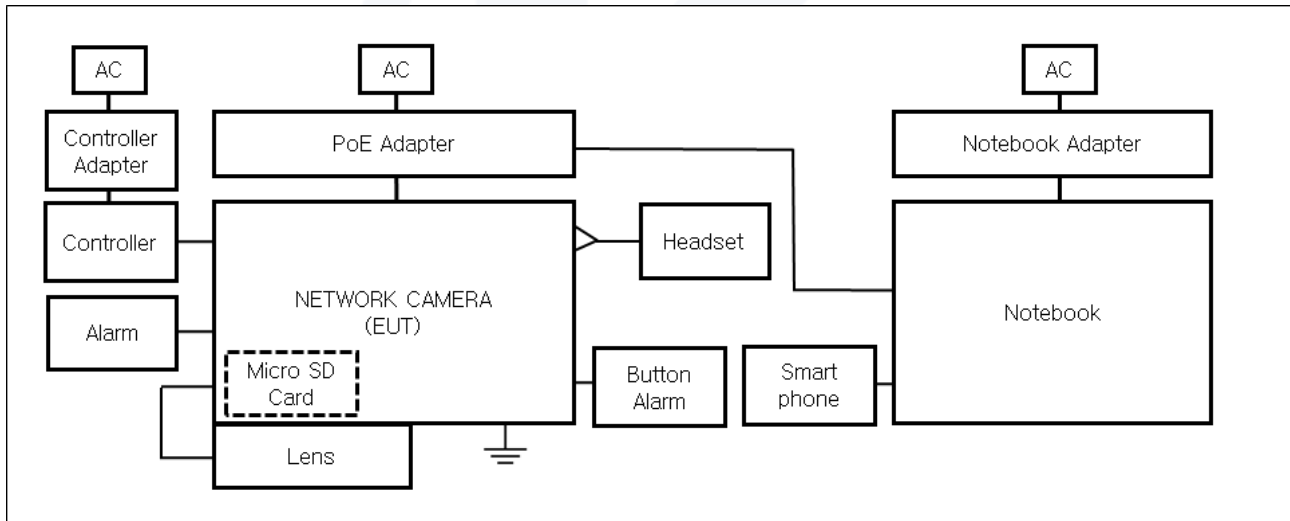

**1.10 Remarks When Standards Applied**

- In PoE mode, the LAN port is regarded as a wired communication network port and power-related ports are not tested.

- USB, VIDEO ports are for administrator use and is excluded from testing.

1.11 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.12 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.13 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 50121-4:2016/A1:2019

☒ EN IEC 61000-3-2:2019

☒ EN 61000-3-3:2013/A2:2021

☒ **EMC – Regulations 2016**

☒ EN 50121-4:2016/A1:2019

☒ EN IEC 61000-3-2:2019

☒ EN 61000-3-3:2013/A2:2021



2.1 Conducted Emissions at Mains Power Ports

Test Date

Apr. 30, 2024

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test SW	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	Nov 08, 2024
☒	LISN	ENV216	R & S	101787	Nov 08, 2024
☒	LISN	ESH2-Z5	R & S	100450	Nov 08, 2024
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	Nov 08, 2024

Test Conditions

Temperature: (22,9 ± 0,0) °C

Relative Humidity: (46,1 ± 0,0) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

Apr. 30, 2024

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	Nov 08, 2024
☒	LISN	ENV216	R & S	101787	Nov 08, 2024
☒	LISN	ESH2-Z5	R & S	100450	Nov 08, 2024
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	Nov 08, 2024
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	Nov 09, 2024
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101666	Mar 05, 2025

Test Conditions

Temperature: (22,9 ± 0,1) °C
Relative Humidity: (46,1 ± 0,0) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Impulse Noise (click)

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	CLICK METER SOFTWARE CMS FOR DDA55	AFJ	4.19	-
☐	CLICK ANALYZER	DDA55+	AFJ INSTRUMENTS	14042211198	Feb 13, 2025
☐	LISN	ENV216	R & S	101786	Feb 10, 2025
☐	LISN	ENV216	R & S	101137	Feb 10, 2025

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

RemarksImpulse Noise(click) does not occurrence.



2.4 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Apr 29, 2024

Test Location☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	Feb 13, 2025
☒	AMPLIFIER	SCU 01	R & S	100603	Nov 08, 2024
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	Nov 17, 2024
☒	ATTENUATOR	8491A	HP	32173	Feb 13, 2025

Test Conditions

Temperature: (23,2 ± 0,1) °C
Relative Humidity: (46,2 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.5 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Apr 30, 2024

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	Feb 13, 2025
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	Nov 03, 2024
☒	PREAMPLIFIER	8449B	HP	3008A00899	Mar 05, 2025
☒	ATTENUATOR	8491B	HP	23094	Feb 13, 2025

Test Conditions

Temperature: (22,8 ± 0,2) °C

Relative Humidity: (44,7 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- The Average of the test data is the cispr average result.



2.6 Harmonic Current Emissions

Test Date

Apr 30, 2024

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test SW	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	Mar 28, 2025
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (22,7 ± 0,0) °C
Relative Humidity: (46,4 ± 0,0) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.7 Voltage Fluctuations and Flicker

Test Date

Apr 30, 2024

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test SW	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	Mar 28, 2025
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (22,7 ± 0,3) °C
Relative Humidity: (46,4 ± 0,4) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



3.0 Criteria for Compliance

Criteria for compliance was based on the following guidelines:

General performance criteria

The general principles (performance criteria) for the evaluation of the immunity test results are the following.

Performance criteria A

The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criteria B

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criteria C

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Apr 28, 2024

Test Location

EMS-ESD: Electro wave Shieldroom#7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	Jan 30, 2025
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (22,8 ± 0,0) °C
Relative Humidity: (46,3 ± 0,1) % R.H.
Atmospheric Pressure: (100,2 ± 0,0) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: ■ 10 at all locations for Air discharge
■ 10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV


Notes: HCP: Horizontal Coupling Plane

VCP: Vertical Coupling Plane


Required Performance Criteria: ☒ B




Location of Discharge:



■ AC/DC Adapter, PoE

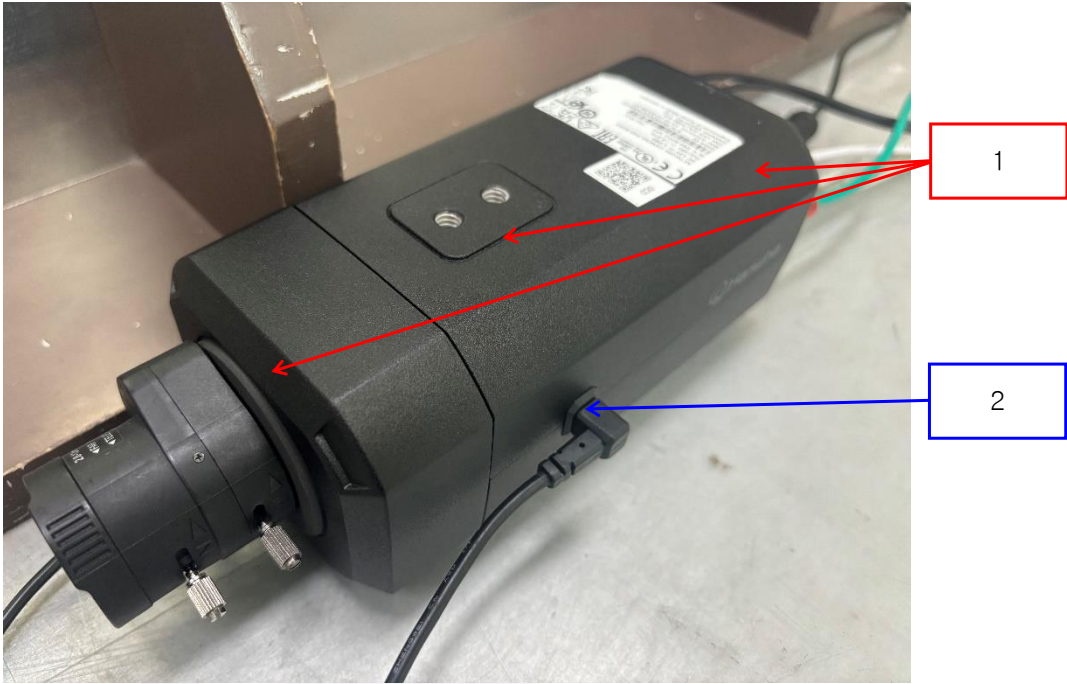


■ AC/DC Adapter

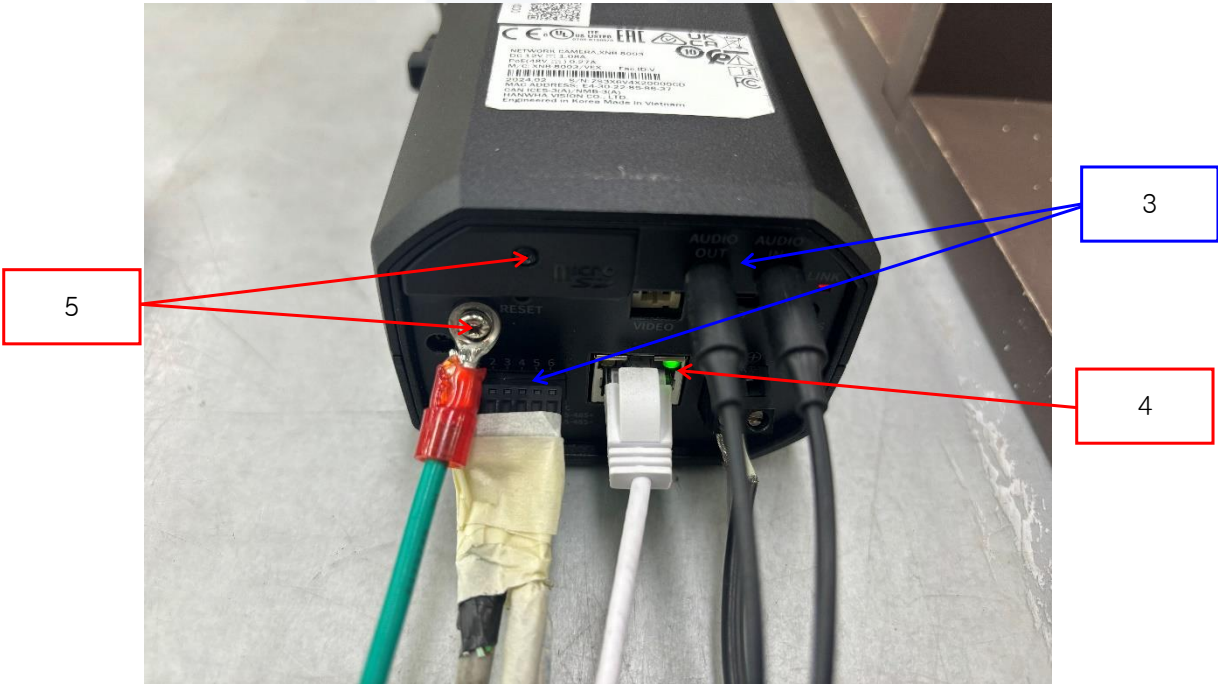

Page 25 / 80

■ PoE

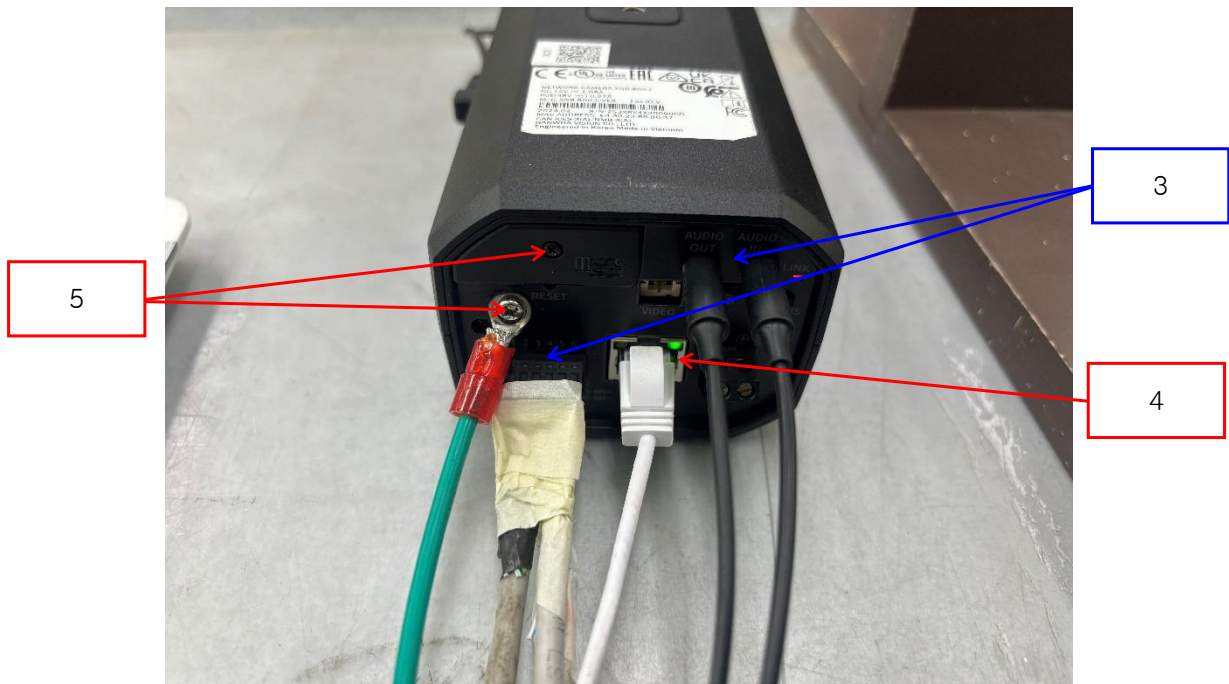

**Test Data**

■ AC/DC Adapter
Indirect Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	HCP Contact	Contact Discharge	B	A
2	VCP Contact	Contact Discharge	B	A

Direct Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	Enclosure	Contact Discharge	B	A
2	Port 1	Air Discharge	B	A
3	Port 2	Air Discharge	B	A
4	Port 3	Contact Discharge	B	A
5	Screw	Contact Discharge	B	A

■ PoE

Indirect Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	HCP Contact	Contact Discharge	B	A
2	VCP Contact	Contact Discharge	B	A

Direct Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	Enclosure	Contact Discharge	B	A
2	Port 1	Air Discharge	B	A
3	Port 2	Air Discharge	B	A
4	Port 3	Contact Discharge	B	A
5	Screw	Contact Discharge	B	A

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

Any degradations of performance was not observed during in the test.



3.2 Radio-frequency Electromagnetic Field

Reference Standard

EN IEC 61000-4-3:2020

Test Date

May 01, 2024

Test LocationEMS-RS: ☒ SEMI ANECHOIC CHAMBER #3 ☐ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	9.12.00	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	Jul 31, 2024
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	Feb 13, 2025
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	Feb 13, 2025
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	Feb 13, 2025
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	Mar 05, 2025

Test Conditions

Temperature: (22,8 ± 1,3) °C
Relative Humidity: (45,8 ± 1,0) % R.H.
Atmospheric Pressure: (100,4 ± 0,0) kPa



Test Specifications

Antenna Polarization: Horizontal & Vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Frequency Range: ☒ 80 MHz to 800 MHz [10V/m]
[Field Strength] ☒ 800 MHz to 1 GHz [20 V/m]
☒ 1,4 GHz to 2,0 GHz [10 V/m]
☒ 2,0 GHz to 2,7 GHz [5 V/m]
☒ 5,1 GHz to 6,0 GHz [3 V/m]

Modulation: ☒ 80 % AM, 1 kHz sine wave

Frequency Step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ A

**Test Data**

■ AC/DC Adapter

Side Exposed	Performance Criteria	Results	
		Horizontal	Vertical
Front	A	A	A
Right	A	A	A
Back	A	A	A
Left	A	A	A

■ PoE

Side Exposed	Performance Criteria	Results	
		Horizontal	Vertical
Front	A	A	A
Right	A	A	A
Back	A	A	A
Left	A	A	A

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

Any degradations of performance was not observed during in the test.



3.3 Fast Transients

Reference Standard

EN 61000-4-4:2012

Test Date

Apr 28, 2024

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	Nov 09, 2024
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	Nov 09, 2024
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	Nov 10, 2024

Test Conditions

Temperature: (22,8 ± 0,5) °C
Relative Humidity: (46,3 ± 0,4) % R.H.
Atmospheric Pressure: (100,2 ± 0,0) kPa

Test Specifications

Pulse Amplitude & Polarity: ☒ ± 2.0 kV ☐ ± 4.0 kV
(Power Lines)

Pulse Amplitude & Polarity: ☒ ± 2.0 kV ☐ ± 4.0 kV
(Signal Lines)

Pulse Amplitude & Polarity: ☒ ± 1.0 kV
(Earth Lines)

Burst Period: ☒ 300 ms

Repetition Rate: ☒ 5 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ A

**Test Data**

■ AC/DC Adapter

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
L	A	A	A
N	A	A	A
PE	A	A	A
L – N	A	A	A
L – PE	A	A	A
N – PE	A	A	A
L – N – PE	A	A	A

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
RJ-45(LAN)	A	A	A
Alarm OUT	A	A	A
Alarm IN	A	A	A
RS-485	A	A	A

☒ Earth ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
Ground	A	A	A

**■ PoE**☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
-	A	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
RJ-45(PoE)	A	A	A
Alarm OUT	A	A	A
Alarm IN	A	A	A
RS-485	A	A	A

☒ Earth ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
Ground	A	A	A

Note: “Blank” = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.4 Surges

Reference Standard

EN 61000-4-5:2014+A1:2017

Test Date

Apr 28, 2024

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test SW	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	Nov 09, 2024
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	Nov 09, 2024
☒	CDN	CNV 508N1	EM TEST	P1610176296	Nov 10, 2024

Test Conditions

Temperature: (22,8 ± 0,7) °C
Relative Humidity: (46,3 ± 0,8) % R.H.
Atmospheric Pressure: (100,2 ± 0,0) kPa

**Test Specifications****AC Power Lines**

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode☒ (2,0) kVDifferential Mode☒ (1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input AC power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria:

☒ B**DC Power Lines**

Source Impedance:

42 ohm

Surge Amplitude:

Common Mode☐ (2,0) kVDifferential Mode☐ (1,0) kV

Number of Surges:

☐ 5 Surges

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria:

☐ B**Signal Lines**

Source Impedance:

42 ohm

Surge Amplitude:

Common Mode☐ (2,0) kVDifferential Mode☒ (1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria:

☒ B

**Test Data**☒ AC/DC Adapter☒ Line to Line – Differential Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
L – N	B	A	A
L – PE	B	A	A
N – PE	B	A	A

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

Signal Lines☒ Line to Line – Differential Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(LAN)	CDN	Complied	Complied
	LINE	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

☒ PoE☐ Line to Line – Differential Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

Signal Lines☒ Line to Line – Differential Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(PoE)	CDN	Complied	Complied
	LINE	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

May 02, 2024

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.12	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	Nov 08, 2024
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	Nov 08, 2024
☒	CDN	CDN M016	TESEQ	43694	Nov 08, 2024
☒	CDN	CDN M016	TESEQ	43697	Nov 08, 2024
☒	CDN	CDN T800	TESEQ	42800	Nov 08, 2024
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	Nov 09, 2024

Test Conditions

Temperature: (22,8 ± 1,3) °C
Relative Humidity: (45,6 ± 1,5) % R.H.
Atmospheric Pressure: (100,5 ± 0,0) kPa

Test Specifications

Frequency Range: ☒ 150 kHz to 80 MHz
Voltage Level: ☒ 10 Vrms
Modulation: ☒ 80 % AM, 1 kHz sine wave
Frequency Step: ☒ 1 % step
Dwell Time: ☐ 1 s ☒ 3 s
Required Performance Criteria: ☒ A

**Test Data**

■ AC/DC Adapter

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
L – N – PE	CDN	A	A

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
RJ-45(LAN)	CDN	A	A
Alarm OUT	Clamp	A	A
Alarm IN	Clamp	A	A
RS-485	Clamp	A	A

☒ Earth ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
Ground	Clamp	A	A

**■ PoE**☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
-	CDN	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
RJ-45(PoE)	CDN	A	A
Alarm OUT	Clamp	A	A
Alarm IN	Clamp	A	A
RS-485	Clamp	A	A

☒ Earth ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
Ground	Clamp	A	A

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.6 Power Frequency Magnetic Field Immunity

Reference Standard

EN 61000-4-8:2010

Test Date

Apr 28, 2024

Test Location

EMS-Magnetic: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test SW	iec.control	EM TEST	5.4.8	-
☒	EMS Test SW	NET.CONTROL	EM TEST	1.2.11	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	Nov 09, 2024
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	Nov 09, 2024
☒	MAGNETIC FIELD COIL	MS 100N	EM TEST	P1536163691	Nov 10, 2024
☒	CURRENT TRANSFORMER	MC 26100 (100 A 교정)	EM TEST	P1550168963	Feb 14, 2025
☒	MULTIFUNCTION AC/DC POWER SOURCE	NETWAVE 7-400	EM TEST	P1614178393	Nov 08, 2024
☒	MAGNETICFIELD COIL	INA 703	Teseq AG	3006	Feb 14, 2025

Test Conditions

Temperature: (22,8 ± 0,2) °C
Relative Humidity: (46,3 ± 0,3) % R.H.
Atmospheric Pressure: (100,2 ± 0,0) kPa



Test Specifications

Field Strength(Power Source): ☒ 100 A/m (ac)

☒ 300 A/m (dc)

Frequency (ac): ☒ 16.7 Hz ☒ 50 Hz ☐ 60 Hz

Frequency (dc): ☒ 0 Hz

Required Performance Criteria: ☒ A



**Test Data**☒ AC/DC Adapter☒ Immersion method

Coil orientation	Performance	
	Criteria	Results
X - axis	A	A
Y - axis	A	A
Z - axis	A	A

☒ PoE☒ Immersion method

Coil orientation	Performance	
	Criteria	Results
X - axis	A	A
Y - axis	A	A
Z - axis	A	A

Note: "blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ AC/DC Adapter

[HOT]

Common Information

Test Description: Conducted Emission
Model No.: XNB-8003
Phase: L
Mode: AC/DC Adapter
Operator Name: KES

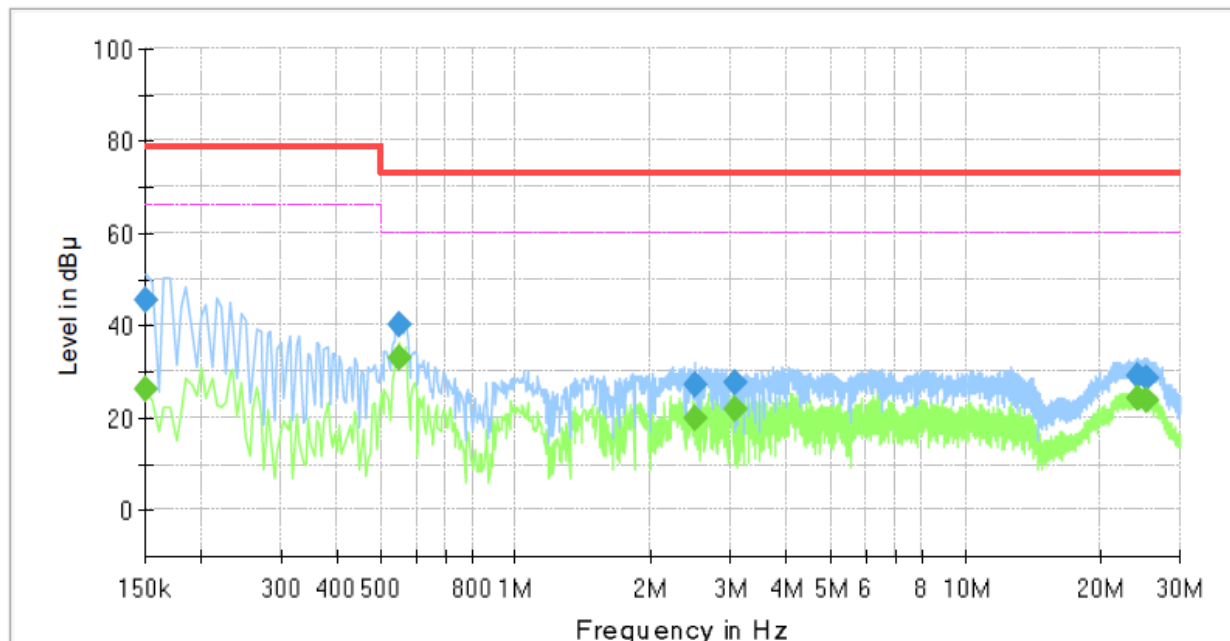

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	26.09	66.00	39.91	1000.0	9.000	L1	19.4
0.150000	45.63	---	79.00	33.37	1000.0	9.000	L1	19.4
0.550000	---	32.85	60.00	27.15	1000.0	9.000	L1	19.4
0.550000	40.36	---	73.00	32.64	1000.0	9.000	L1	19.4
2.495000	---	19.82	60.00	40.18	1000.0	9.000	L1	19.5
2.495000	27.02	---	73.00	45.98	1000.0	9.000	L1	19.5
3.080000	---	21.84	60.00	38.16	1000.0	9.000	L1	19.6
3.080000	27.67	---	73.00	45.33	1000.0	9.000	L1	19.6
24.050000	---	24.09	60.00	35.91	1000.0	9.000	L1	20.3
24.050000	28.93	---	73.00	44.07	1000.0	9.000	L1	20.3
25.160000	---	23.90	60.00	36.10	1000.0	9.000	L1	20.3
25.160000	28.58	---	73.00	44.42	1000.0	9.000	L1	20.3



[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XNB-8003
Phase: N
Mode: AC/DC Adapter
Operator Name: KES

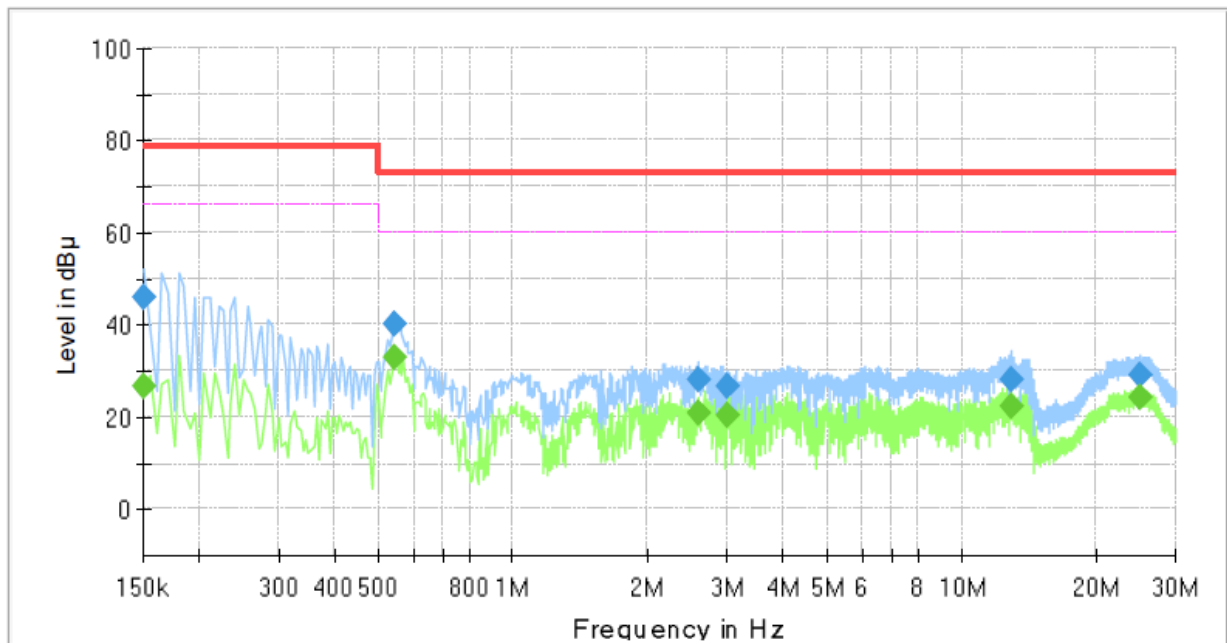

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	26.43	66.00	39.57	1000.0	9.000	N	19.3
0.150000	46.12	---	79.00	32.88	1000.0	9.000	N	19.3
0.545000	---	33.01	60.00	26.99	1000.0	9.000	N	19.4
0.545000	39.95	---	73.00	33.05	1000.0	9.000	N	19.4
2.595000	---	20.91	60.00	39.09	1000.0	9.000	N	19.6
2.595000	28.17	---	73.00	44.83	1000.0	9.000	N	19.6
3.015000	---	20.42	60.00	39.58	1000.0	9.000	N	19.6
3.015000	26.47	---	73.00	46.53	1000.0	9.000	N	19.6
12.850000	---	22.17	60.00	37.83	1000.0	9.000	N	20.0
12.850000	28.31	---	73.00	44.69	1000.0	9.000	N	20.0
24.980000	---	24.46	60.00	35.54	1000.0	9.000	N	20.4
24.980000	29.18	---	73.00	43.82	1000.0	9.000	N	20.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


**Conducted Emissions at Telecommunication Ports**

■ AC/DC Adapter

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8003
Mode : AC/DC Adapter
Speed : 1 000 Mbps
Operator Name: KES

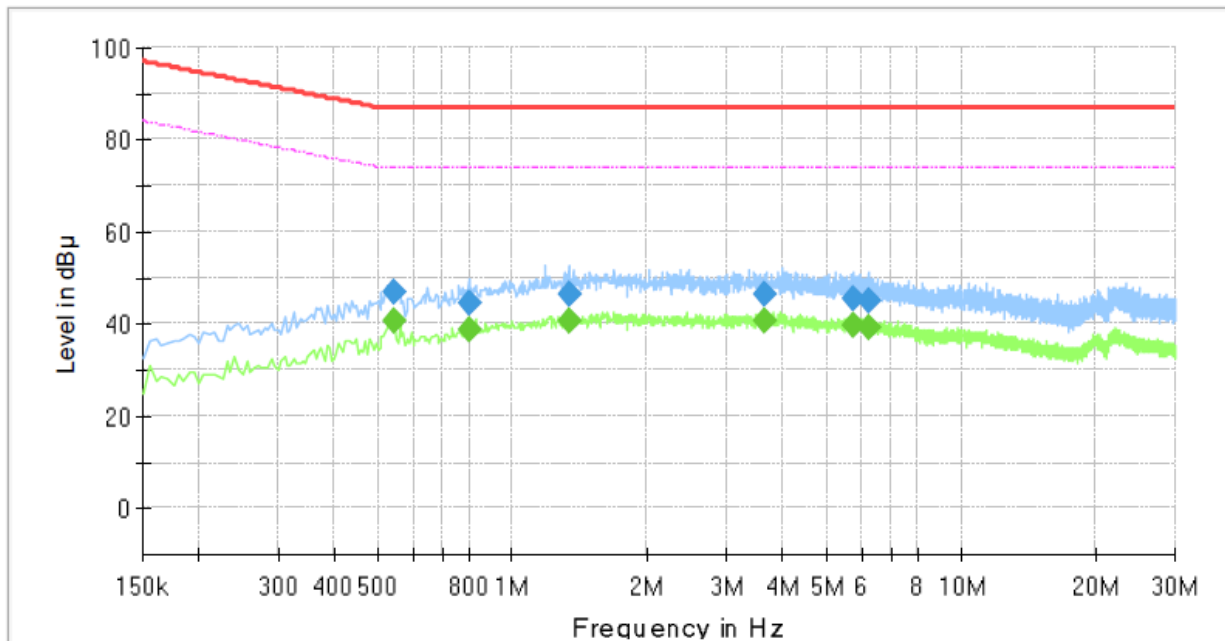**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.545000	---	40.60	74.00	33.40	1000.0	9.000	Single Line	19.2
0.545000	46.96	---	87.00	40.04	1000.0	9.000	Single Line	19.2
0.800000	---	38.56	74.00	35.44	1000.0	9.000	Single Line	19.2
0.800000	44.46	---	87.00	42.54	1000.0	9.000	Single Line	19.2
1.330000	---	40.65	74.00	33.35	1000.0	9.000	Single Line	19.2
1.330000	46.40	---	87.00	40.60	1000.0	9.000	Single Line	19.2
3.640000	---	40.89	74.00	33.11	1000.0	9.000	Single Line	19.2
3.640000	46.61	---	87.00	40.39	1000.0	9.000	Single Line	19.2
5.725000	---	39.69	74.00	34.31	1000.0	9.000	Single Line	19.4
5.725000	45.35	---	87.00	41.65	1000.0	9.000	Single Line	19.4
6.195000	---	39.26	74.00	34.74	1000.0	9.000	Single Line	19.4
6.195000	44.96	---	87.00	42.04	1000.0	9.000	Single Line	19.4




■ PoE

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8003
Mode : PoE
Speed : 1 000 Mbps
Operator Name: KES

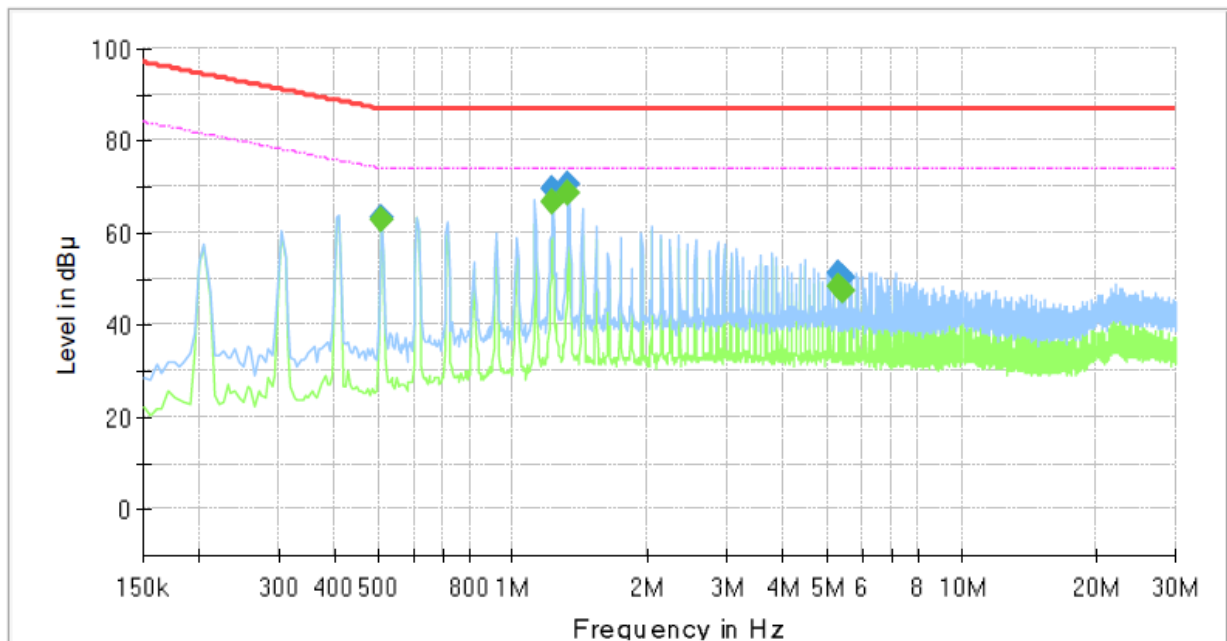

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.510000	---	62.71	74.00	11.29	1000.0	9.000	Single Line	19.2
0.510000	63.13	---	87.00	23.87	1000.0	9.000	Single Line	19.2
1.225000	---	66.62	74.00	7.38	1000.0	9.000	Single Line	19.2
1.225000	69.56	---	87.00	17.44	1000.0	9.000	Single Line	19.2
1.325000	---	68.72	74.00	5.28	1000.0	9.000	Single Line	19.2
1.325000	70.55	---	87.00	16.45	1000.0	9.000	Single Line	19.2
5.300000	---	48.41	74.00	25.59	1000.0	9.000	Single Line	19.3
5.300000	51.48	---	87.00	35.52	1000.0	9.000	Single Line	19.3
5.400000	---	47.38	74.00	26.62	1000.0	9.000	Single Line	19.3
5.400000	50.30	---	87.00	36.70	1000.0	9.000	Single Line	19.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))




Report No. : KES-EM241340

Page 47 / 80

Impulse Noise (click)


N/A

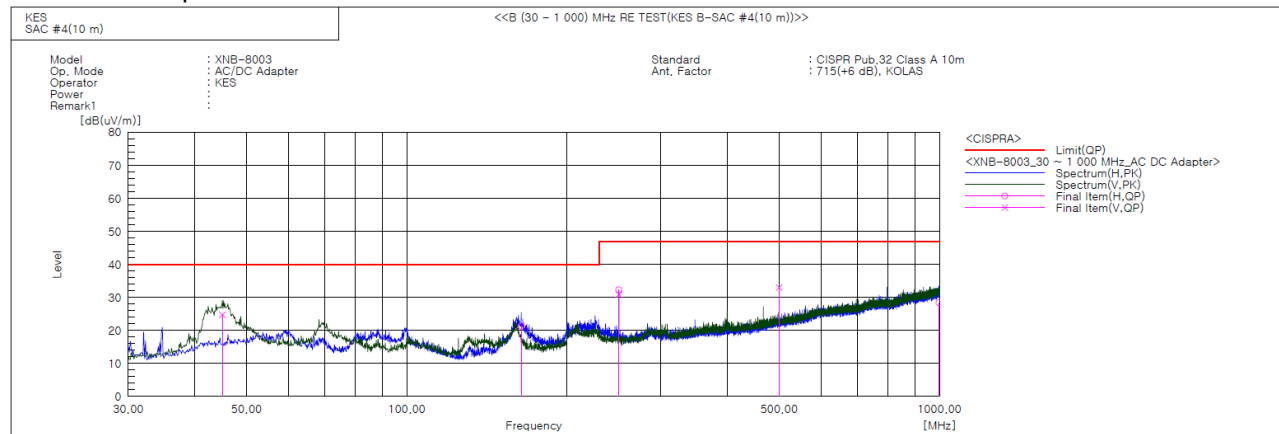**Radiated Electric Field Emissions(Below 1 GHz)****AC/DC Adapter****Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	45.035	V	46.2	-21.5	24.7	40.0	15.3	107.0	100.0	
2	163.981	H	45.8	-24.6	21.2	40.0	18.8	397.0	199.0	
3	249.948	H	51.1	-18.8	32.3	47.0	14.7	392.0	177.0	
4	249.948	V	49.7	-18.8	30.9	47.0	16.1	103.0	11.0	
5	499.965	V	44.1	-11.1	33.0	47.0	14.0	155.0	115.0	
6	997.575	H	30.2	-1.8	28.4	47.0	18.6	374.0	289.0	



■ PoE

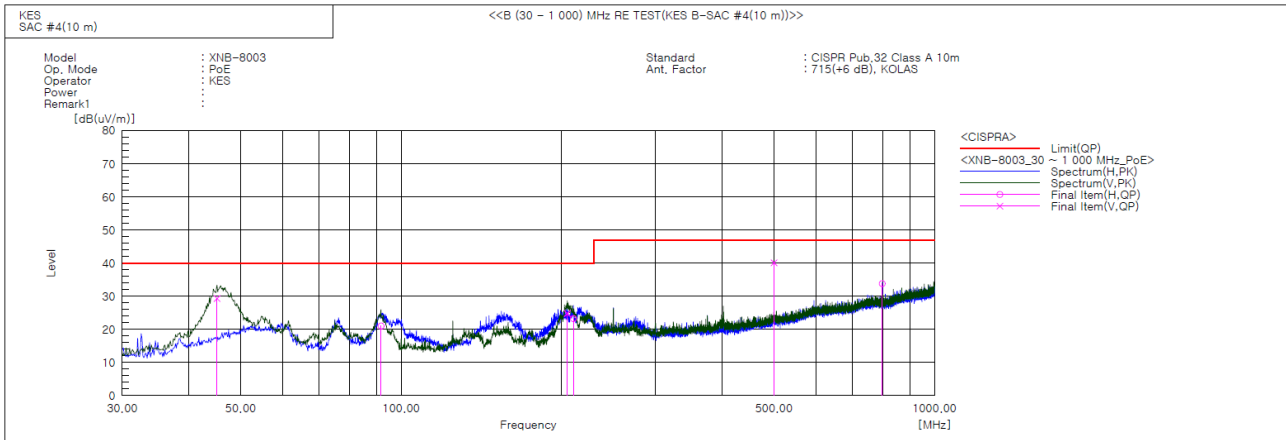

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	45.156	V	50.8	-21.5	29.3	40.0	10.7	157.0	114.0	
2	91.716	H	44.6	-23.6	21.0	40.0	19.0	364.0	149.0	
3	204.843	V	45.2	-20.4	24.8	40.0	15.2	109.0	203.0	
4	210.299	H	43.2	-20.0	23.2	40.0	16.8	385.0	183.0	
5	499.965	V	51.2	-11.1	40.1	47.0	6.9	111.0	185.0	
6	797.998	H	39.4	-5.6	33.8	47.0	13.2	377.0	20.0	


◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value


Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

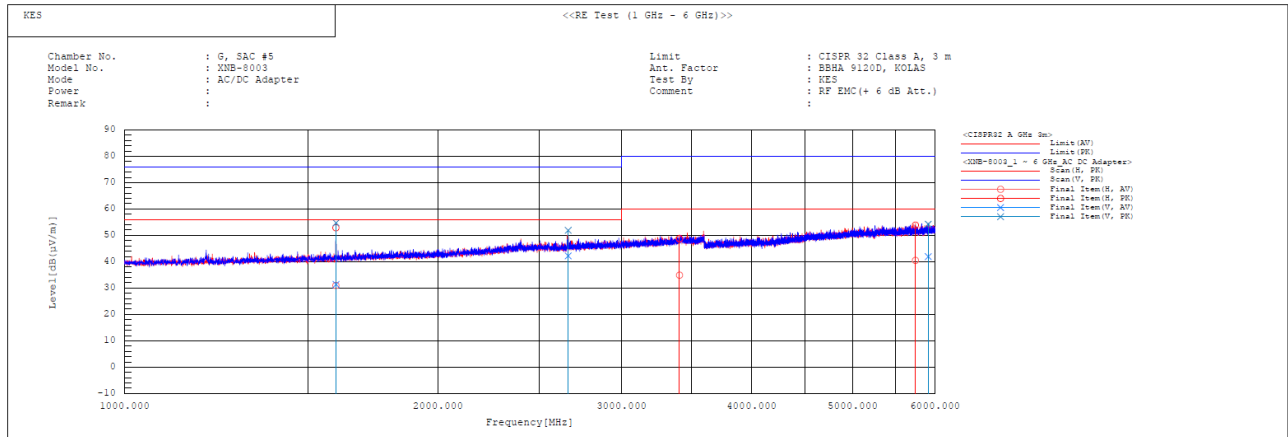**Radiated Electric Field Emissions(Above 1 GHz)****■ AC/DC Adapter****Final Result**

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1595.000	H	29.5	51.4	1.5	31.0	52.9	56.0	76.0	25.0	23.1	100.0	28.9	
2	1595.500	V	29.9	53.2	1.5	31.4	54.7	56.0	76.0	24.6	21.3	100.0	359.9	
3	2666.000	V	36.6	46.3	5.6	42.2	51.9	56.0	76.0	13.8	24.1	100.0	359.9	
4	3408.500	H	27.7	41.5	7.2	34.9	48.7	60.0	80.0	25.1	31.3	100.0	355.8	
5	5742.500	H	26.5	39.9	14.0	40.5	53.9	60.0	80.0	19.5	26.1	100.0	114.6	
6	5907.500	V	27.7	40.0	14.2	41.9	54.2	60.0	80.0	18.1	25.8	100.0	250.3	



PoE

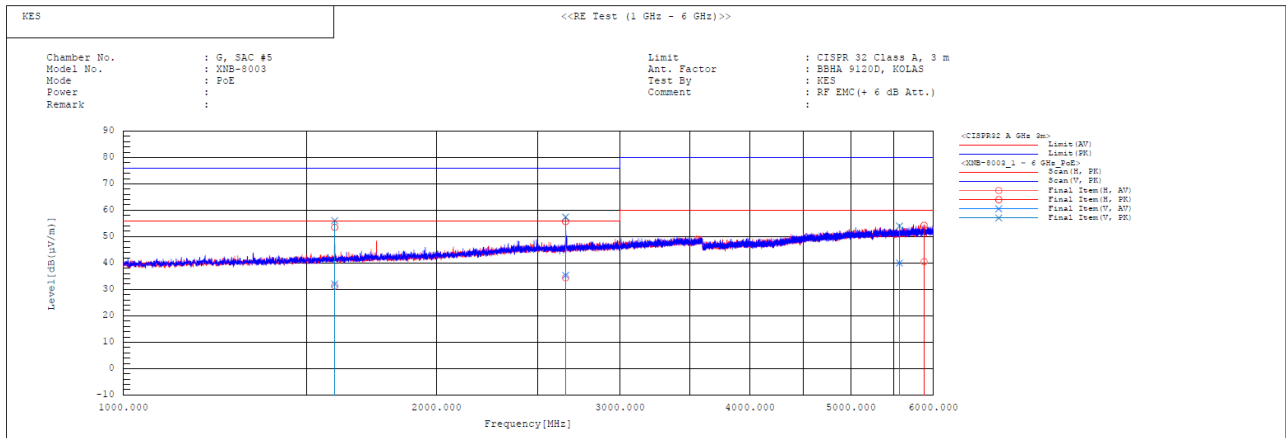

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1596.000	V	30.6	54.6	1.5	32.1	56.1	56.0	76.0	23.9	19.9	100.0	240.4	
2	1596.000	H	29.9	52.0	1.5	31.4	53.5	56.0	76.0	24.6	22.5	100.0	359.5	
3	2659.500	H	28.8	50.1	5.6	34.4	55.7	56.0	76.0	21.6	20.3	100.0	48.6	
4	2659.500	V	29.7	51.8	5.6	35.3	57.4	56.0	76.0	20.7	18.6	100.0	349.7	
5	5566.000	V	26.4	40.4	13.6	40.0	54.0	60.0	80.0	20.0	26.0	100.0	0.1	
6	5876.500	H	26.3	40.1	14.2	40.5	54.3	60.0	80.0	19.5	25.7	100.0	13.6	

◆ Calculation

Over Limit [dB] = (Read Level[dB μ V] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB]) – Limit Line[dB μ V]

Over Limit : Marjin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

**Harmonic Current Emissions and Voltage Fluctuations and Flicker**

■ AC/DC Adapter

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.053			
2	0.004	0.391	1.080	n/a
3	0.046	2.014	2.300	PASS
4	0.004	0.911	0.430	n/a
5	0.045	3.964	1.140	PASS
6	0.005	1.761	0.300	PASS
7	0.044	5.757	0.770	PASS
8	0.004	1.803	0.230	n/a
9	0.044	10.964	0.400	PASS
10	0.004	2.061	0.184	n/a
11	0.043	12.916	0.330	PASS
12	0.004	2.572	0.153	n/a
13	0.041	19.442	0.210	PASS
14	0.004	3.009	0.131	n/a
15	0.039	25.879	0.150	PASS
16	0.004	3.305	0.115	n/a
17	0.037	27.876	0.132	PASS
18	0.004	3.639	0.102	n/a
19	0.035	29.510	0.118	PASS
20	0.003	3.731	0.092	n/a
21	0.033	20.237	0.161	PASS
22	0.003	4.141	0.084	n/a
23	0.030	20.757	0.147	PASS
24	0.003	4.184	0.077	n/a
25	0.028	20.808	0.135	PASS
26	0.003	4.168	0.071	n/a
27	0.026	20.559	0.125	PASS
28	0.003	4.471	0.066	n/a
29	0.023	20.113	0.116	PASS
30	0.003	4.242	0.061	n/a
31	0.021	19.080	0.109	PASS
32	0.002	4.260	0.058	n/a
33	0.018	18.039	0.102	PASS
34	0.002	4.181	0.054	n/a
35	0.016	16.801	0.096	PASS
36	0.002	3.655	0.051	n/a
37	0.014	15.120	0.091	PASS
38	0.002	3.751	0.048	n/a
39	0.012	13.696	0.087	PASS
40	0.001	3.157	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.054			
2	0.005	0.313	1.620	PASS
3	0.047	1.350	3.450	PASS
4	0.005	0.703	0.645	n/a
5	0.046	2.664	1.710	PASS
6	0.006	1.362	0.450	PASS
7	0.045	3.869	1.155	PASS
8	0.005	1.398	0.345	n/a
9	0.044	7.344	0.600	PASS
10	0.004	1.596	0.276	n/a
11	0.043	8.656	0.495	PASS
12	0.005	2.012	0.230	n/a
13	0.041	13.022	0.315	PASS
14	0.005	2.381	0.197	n/a
15	0.039	17.333	0.225	PASS
16	0.004	2.601	0.173	n/a
17	0.037	18.761	0.199	PASS
18	0.004	2.822	0.153	n/a
19	0.035	19.767	0.178	PASS
20	0.004	2.931	0.138	n/a
21	0.033	20.310	0.161	PASS
22	0.004	3.187	0.125	n/a
23	0.031	20.848	0.147	PASS
24	0.004	3.292	0.115	n/a
25	0.028	20.885	0.135	PASS
26	0.003	3.218	0.106	n/a
27	0.026	20.674	0.125	PASS
28	0.003	3.480	0.099	n/a
29	0.023	20.191	0.116	PASS
30	0.003	3.275	0.092	n/a
31	0.021	19.166	0.109	PASS
32	0.003	3.298	0.086	n/a
33	0.019	18.131	0.102	PASS
34	0.003	3.212	0.081	n/a
35	0.016	16.957	0.096	PASS
36	0.002	2.865	0.077	n/a
37	0.014	15.305	0.091	PASS
38	0.002	2.947	0.073	n/a
39	0.012	13.850	0.087	PASS
40	0.002	2.494	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Voltage Fluctuations

Maximum Flicker results

■ AC/DC Adapter

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS






Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ AC/DC Adapter

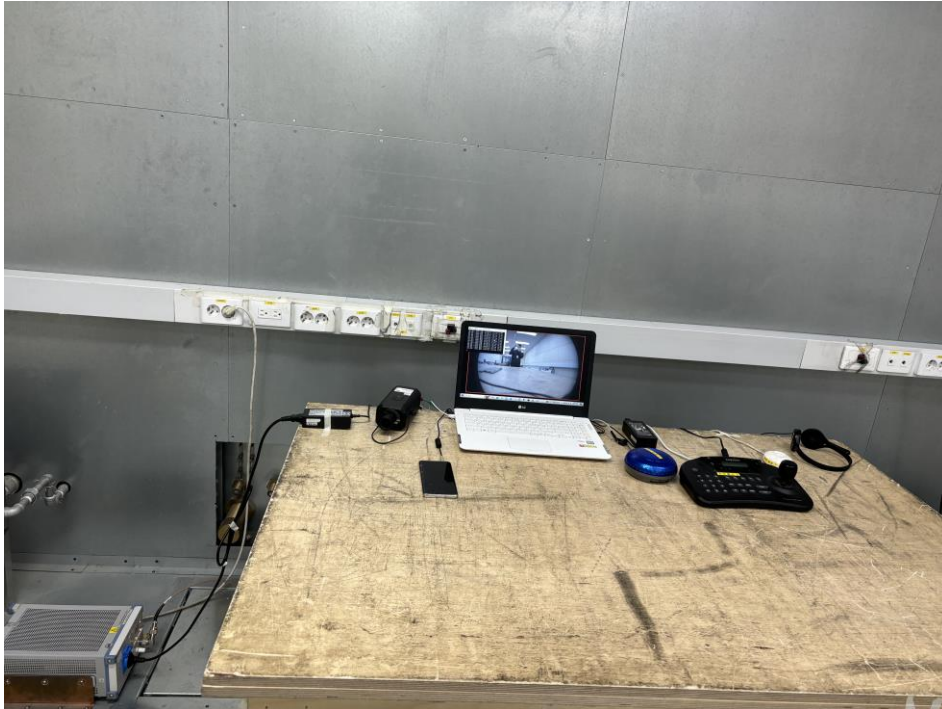




Conducted Emissions at Telecommunication Ports

■ AC/DC Adapter





■ PoE

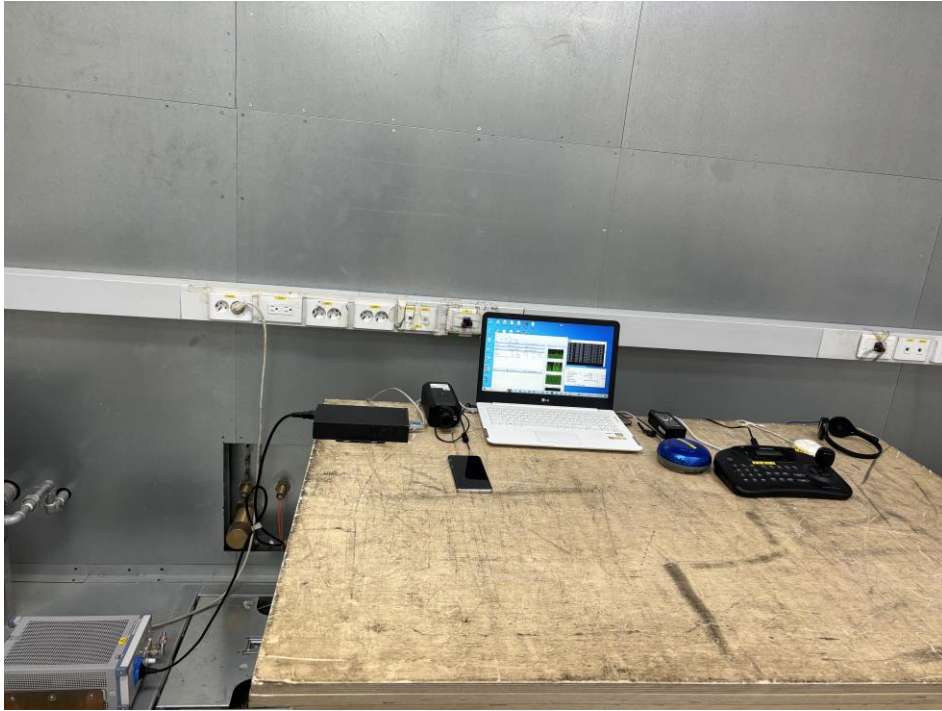



Impulse Noise (click)



N/A





Radiated Electric Field Emissions(Below 1 GHz)

■ AC/DC Adapter

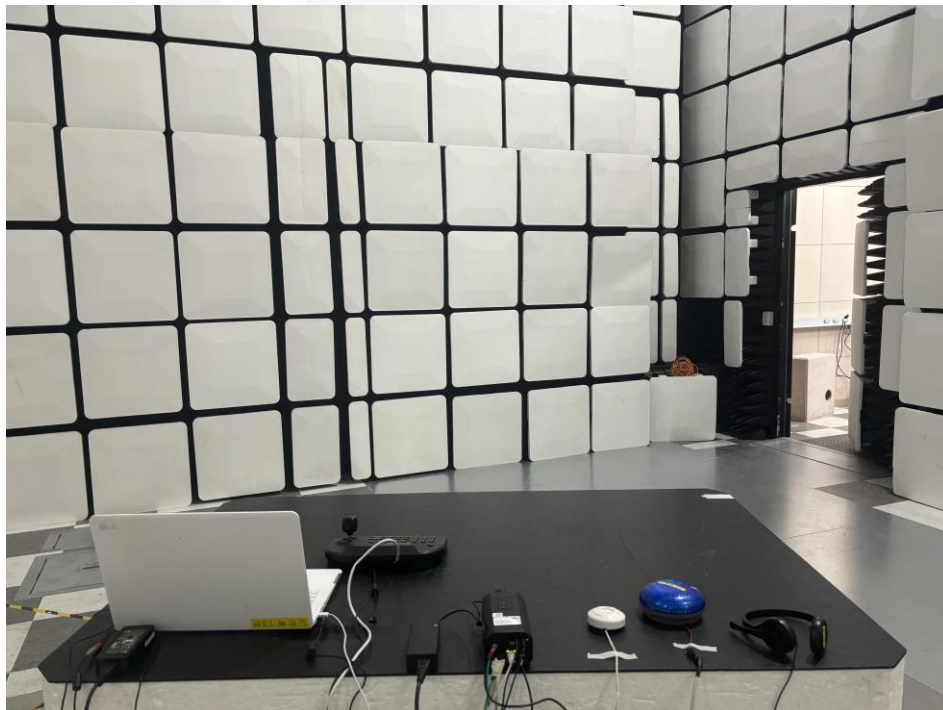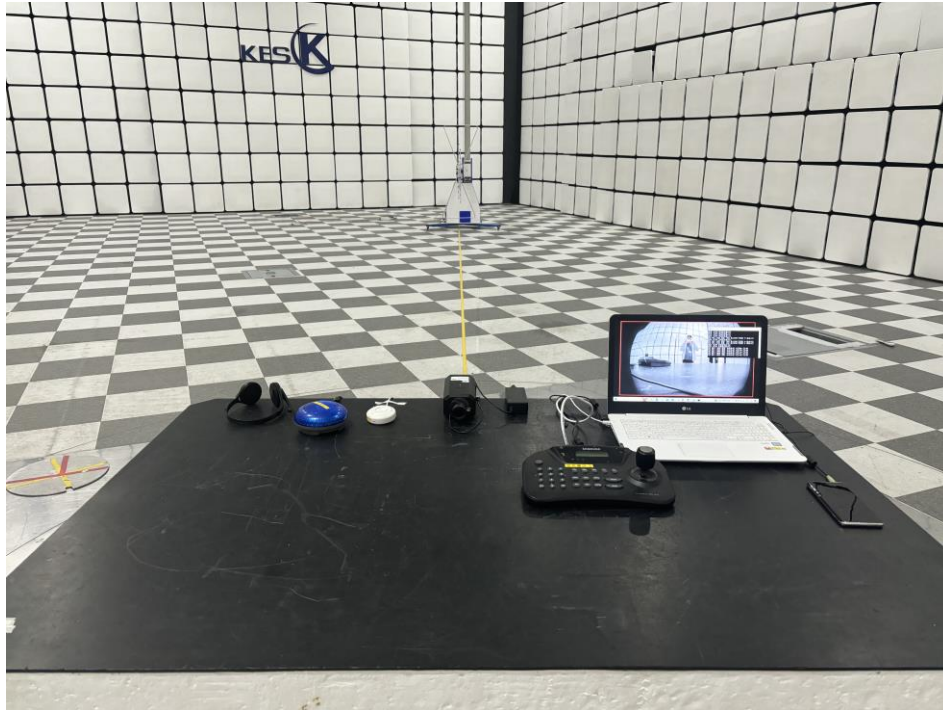





■ PoE







Radiated Electric Field Emissions(Above 1 GHz)

■ AC/DC Adapter

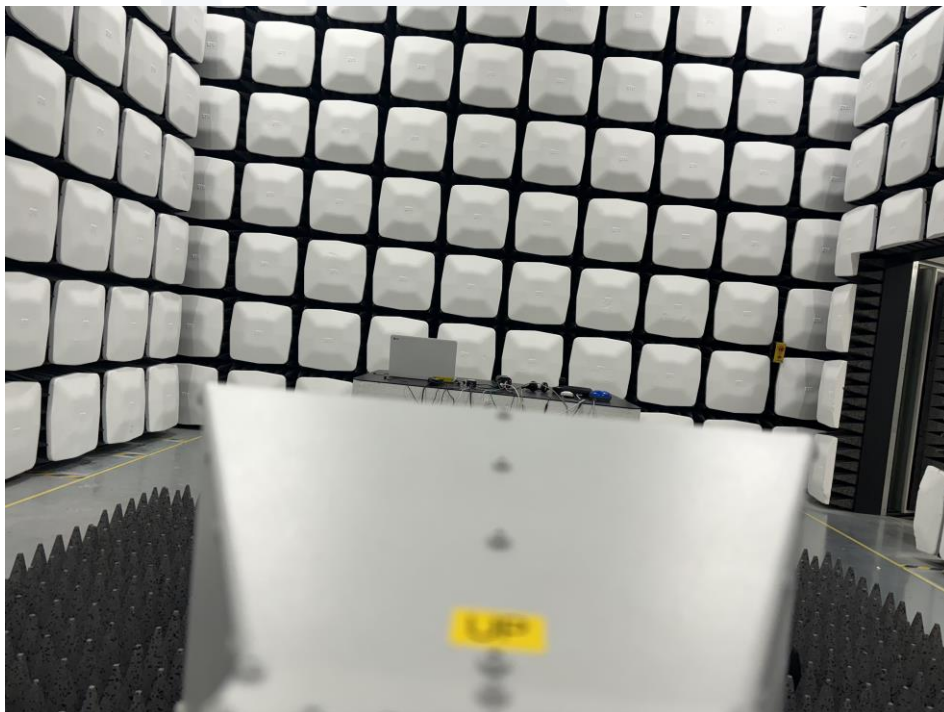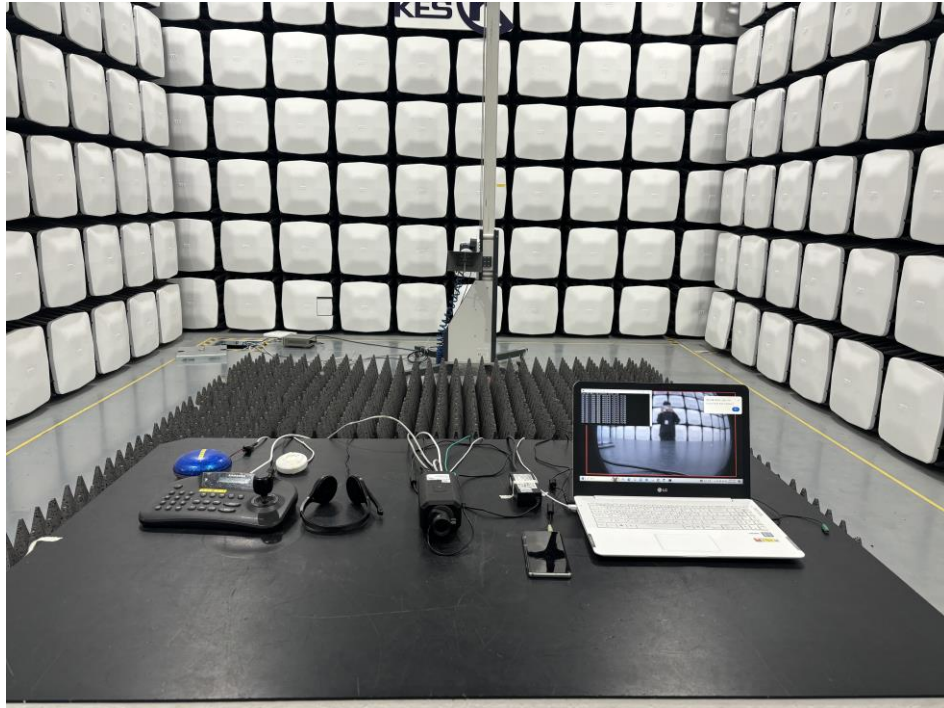



■ PoE

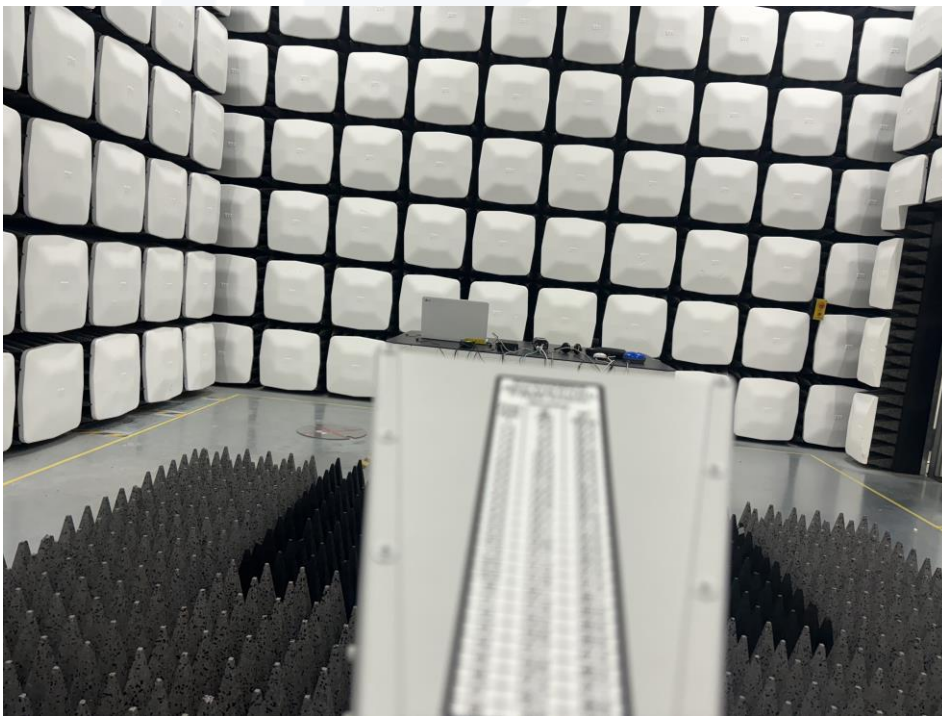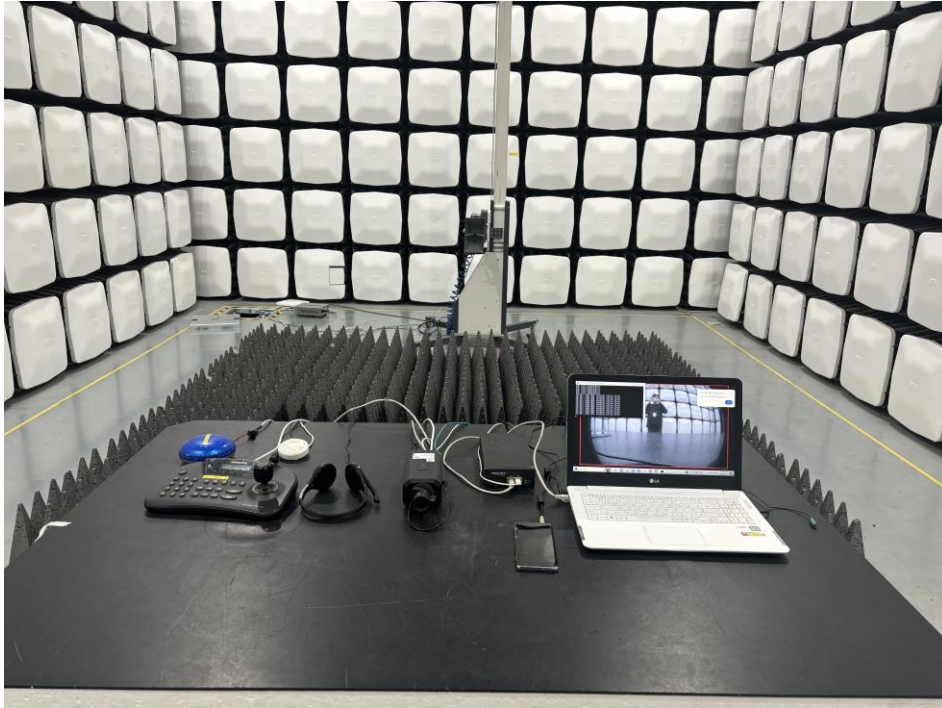



Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ AC/DC Adapter






Electrostatic Discharge

■ AC/DC Adapter



■ PoE

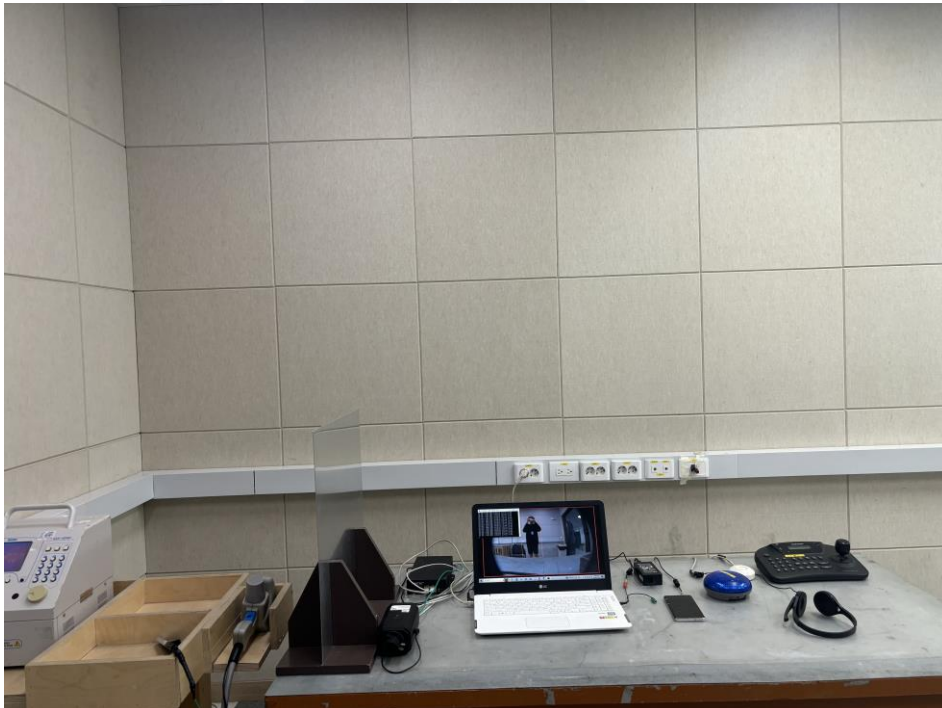




Radio-frequency Electromagnetic Field

■ AC/DC Adapter

(Below)




(Above)

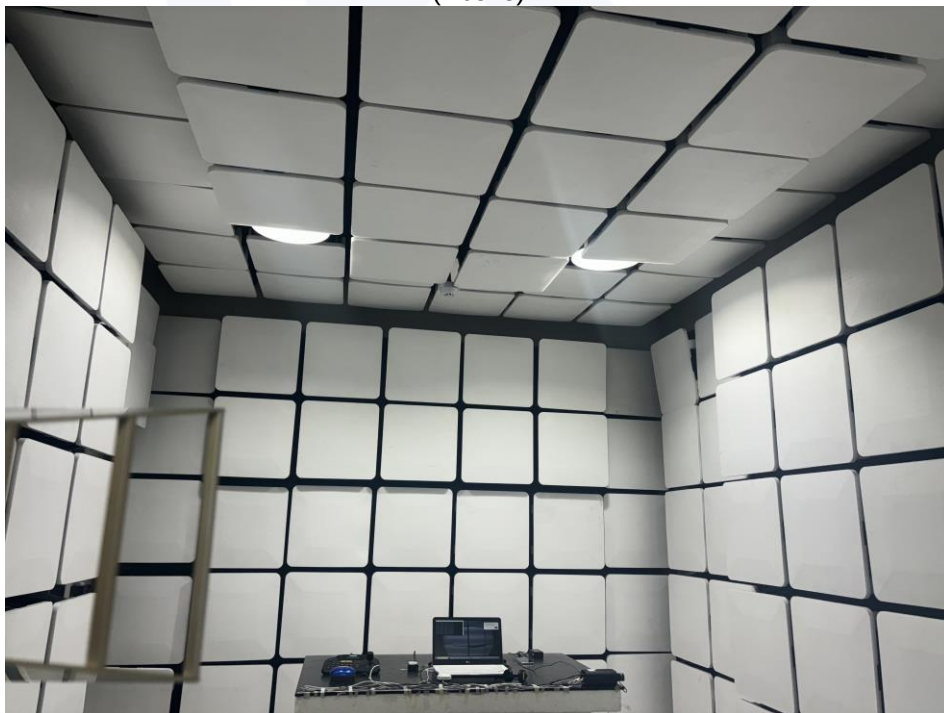




■ PoE

(Below)

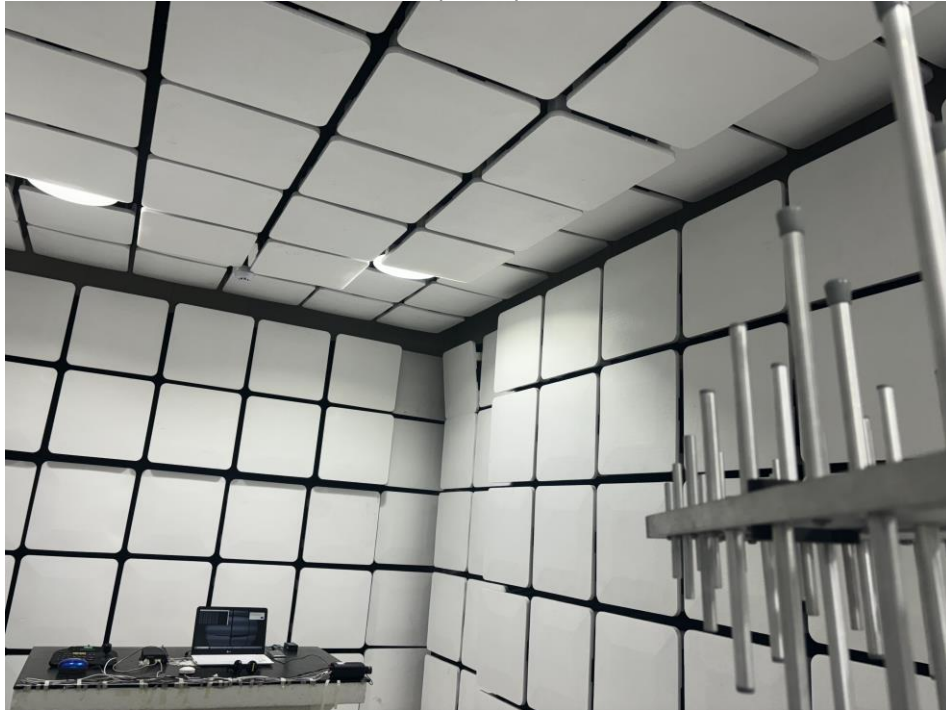

(Above)

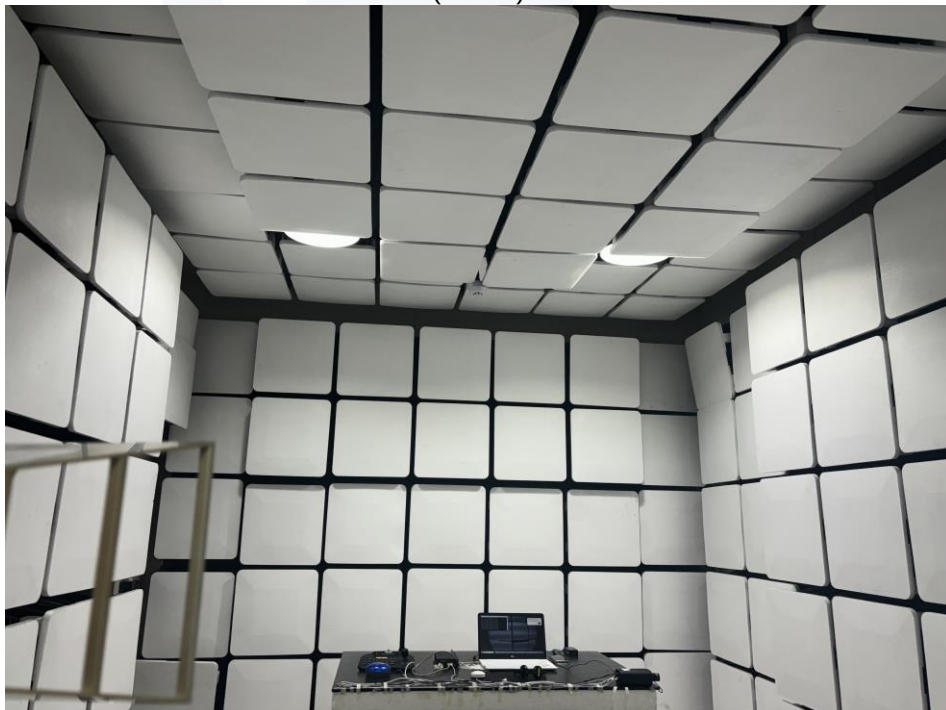



Fast Transients

■ AC/DC Adapter



■ PoE





Surges

■ AC/DC Adapter




■ PoE





Conducted Disturbance

■ AC/DC Adapter

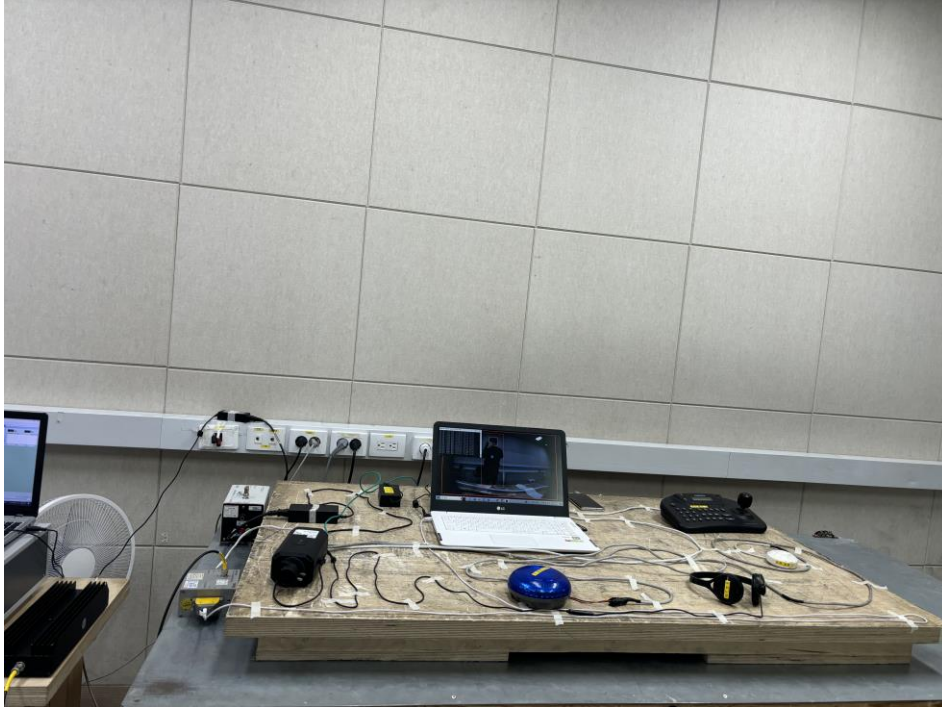

■ PoE





Power Frequency Magnetic Field Immunity

■ AC/DC Adapter

[16.7 Hz (AC), 100 A/m]




[50 Hz (AC), 100 A/m]





[0 Hz (DC), 300 A/m]

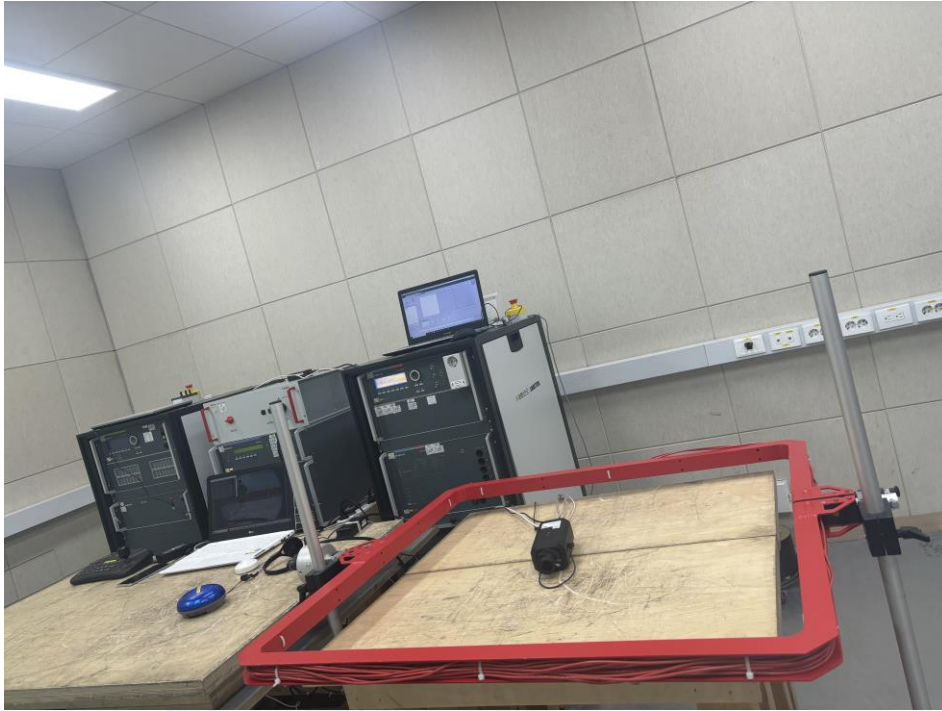




■ PoE

[16.7 Hz (AC), 100 A/m]




[50 Hz (AC), 100 A/m]

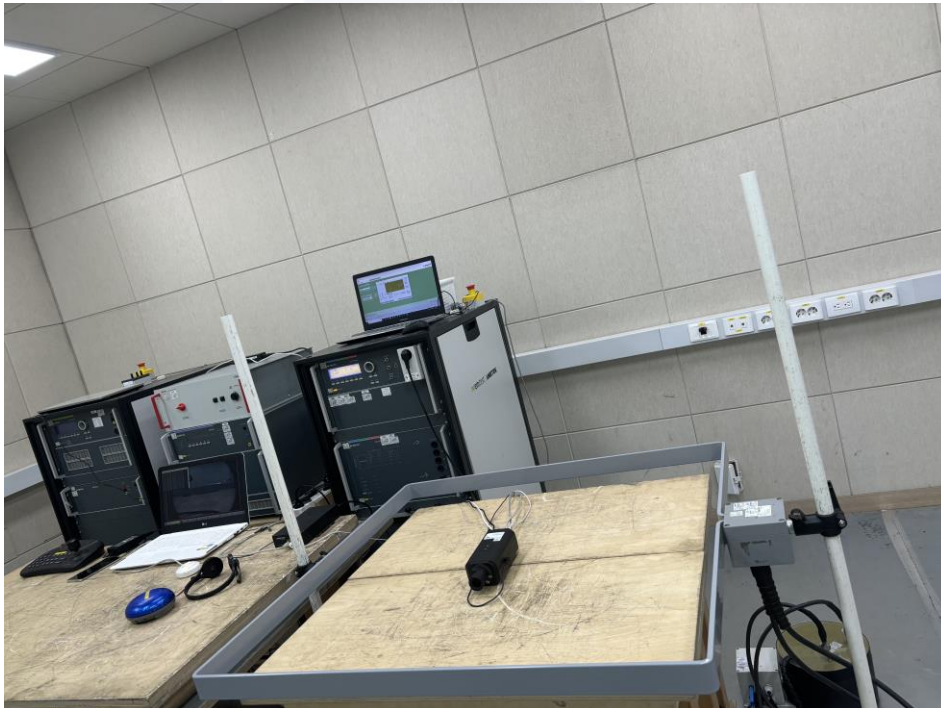



[0 Hz (DC), 300 A/m]

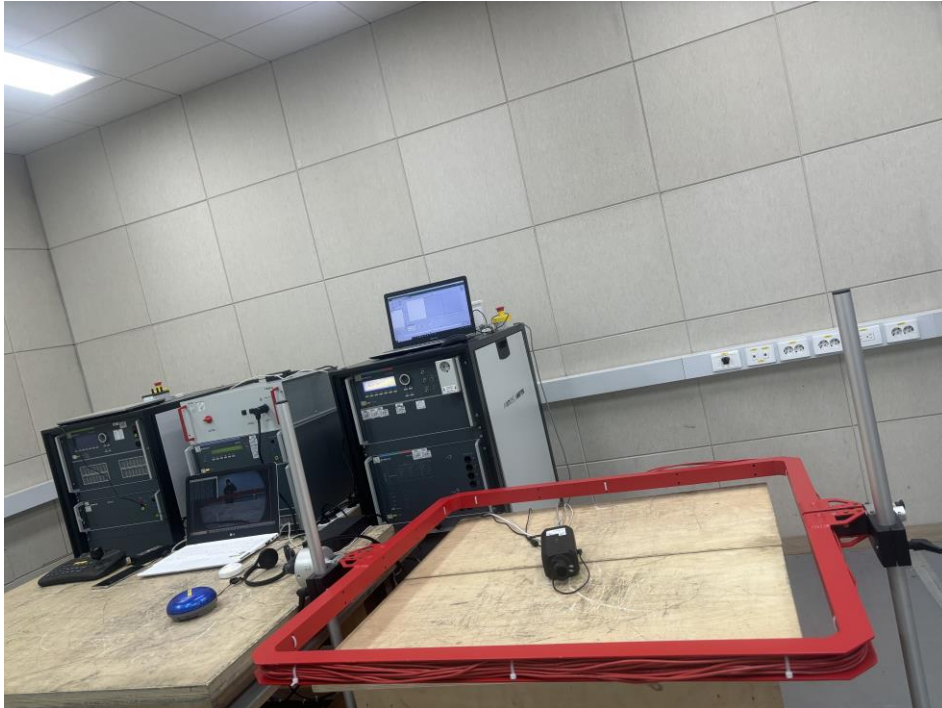



EUT Photographs

(Top)




(Bottom)






EUT Internal Layout Photographs

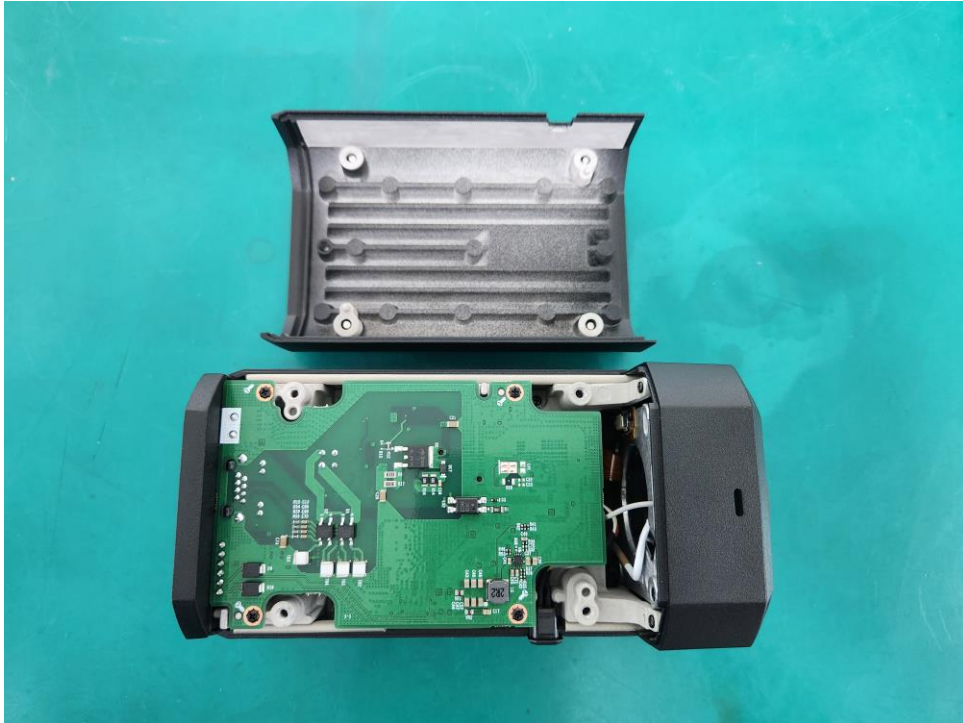




EUT Internal View – Board 1

(Top)

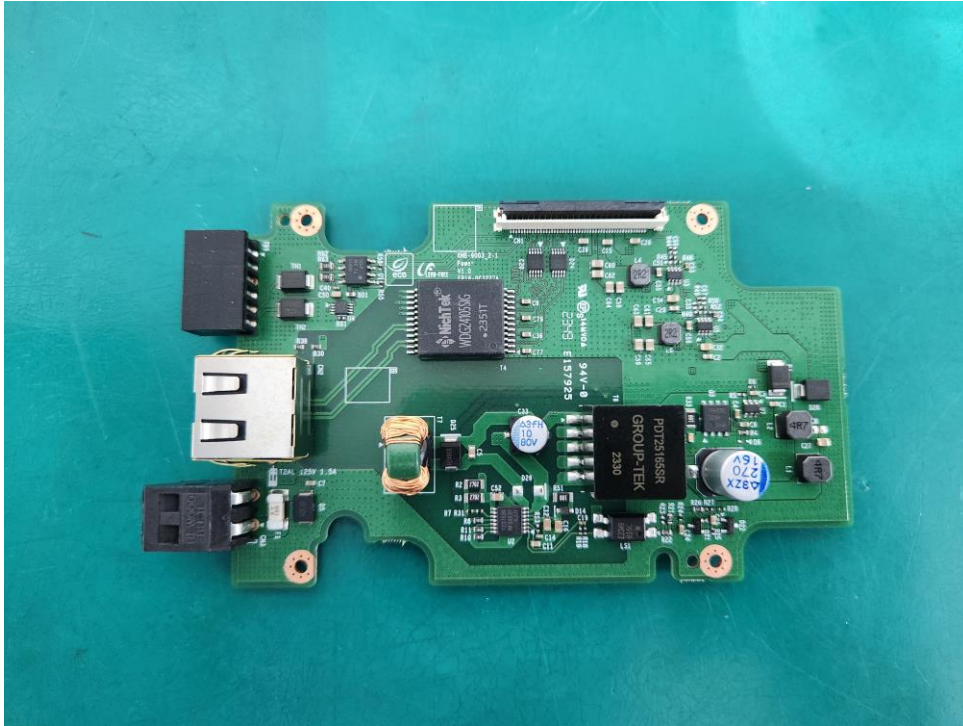

(Bottom)

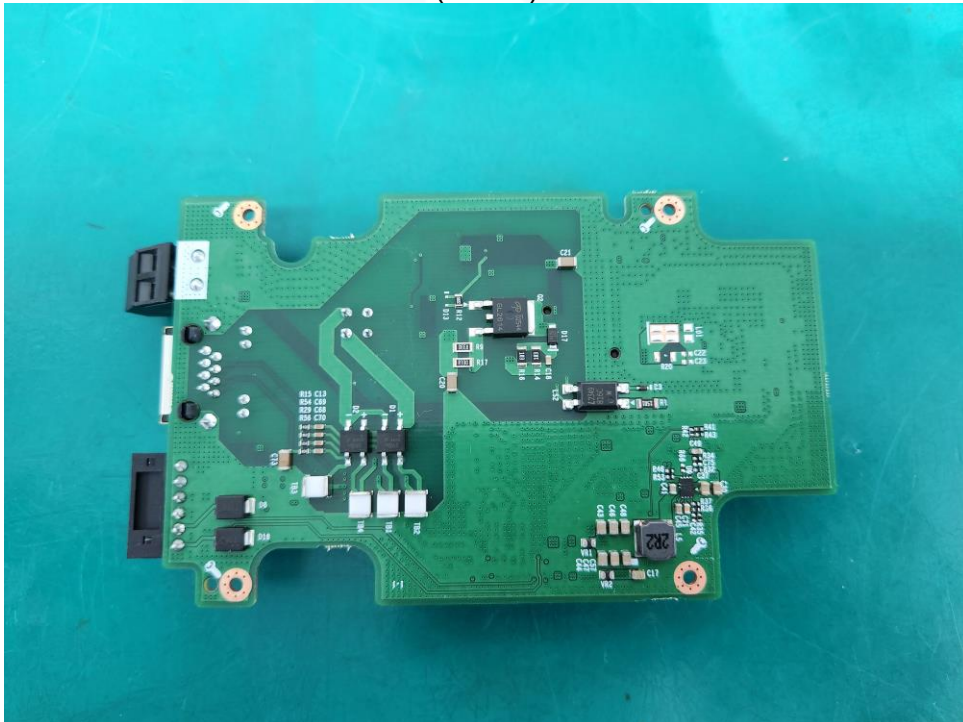




EUT Internal View – Board 2

(Top)




(Bottom)

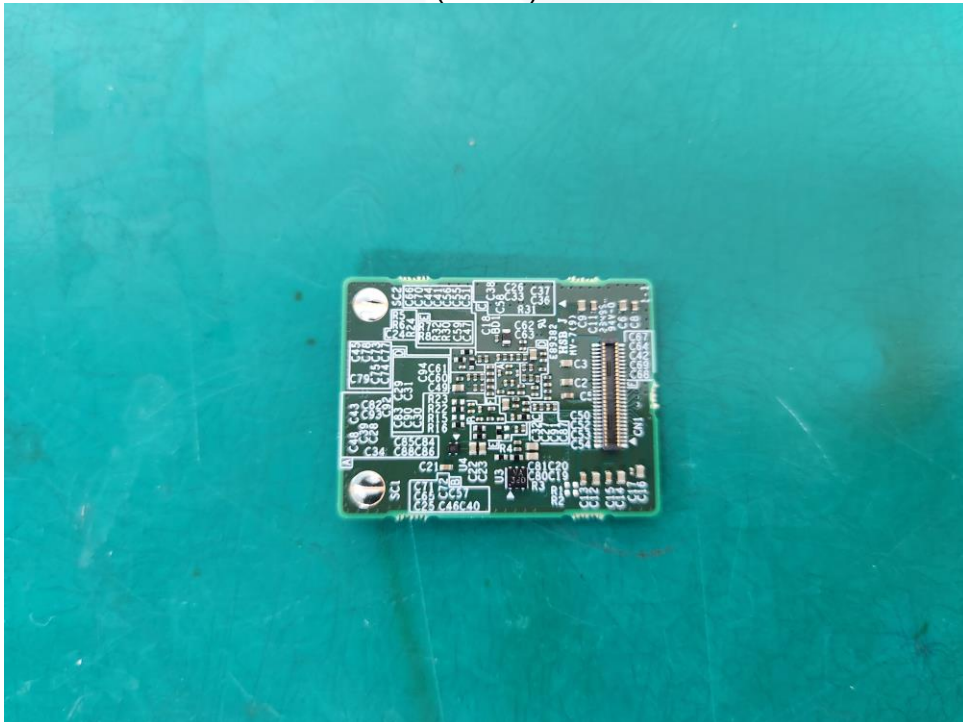




EUT Internal View – Board 3

(Top)

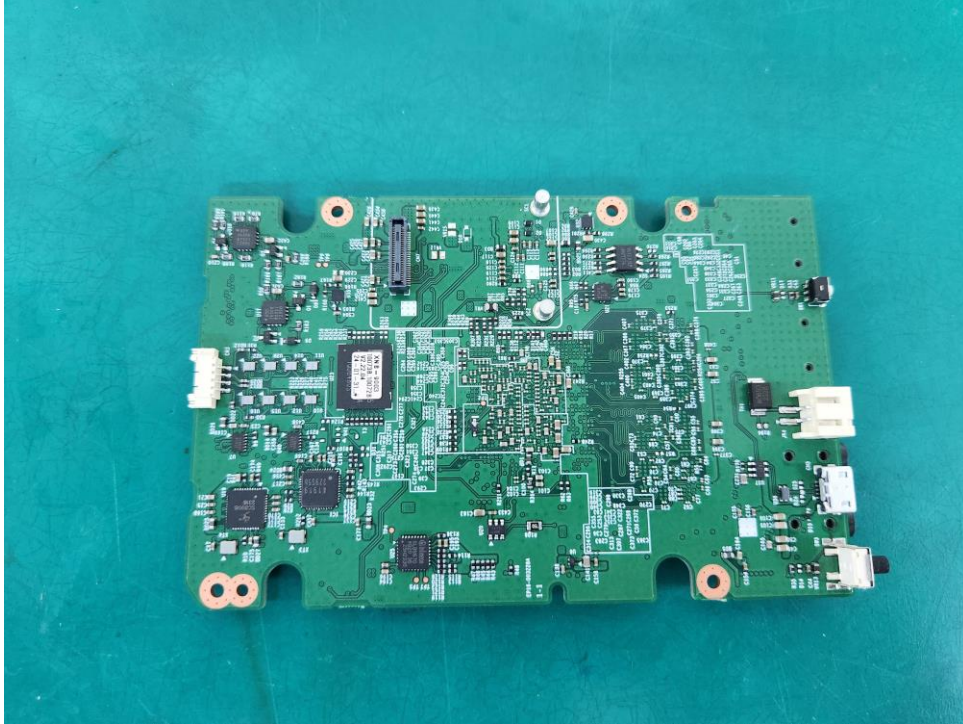

(Bottom)

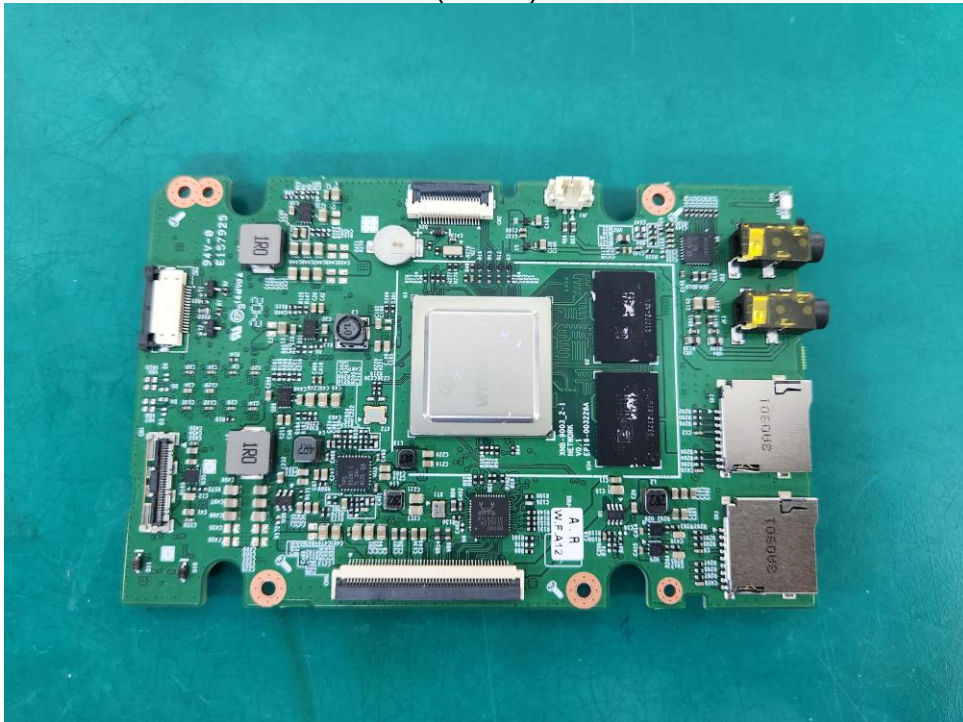




EUT Internal View – Board 4

(Top)



(Bottom)

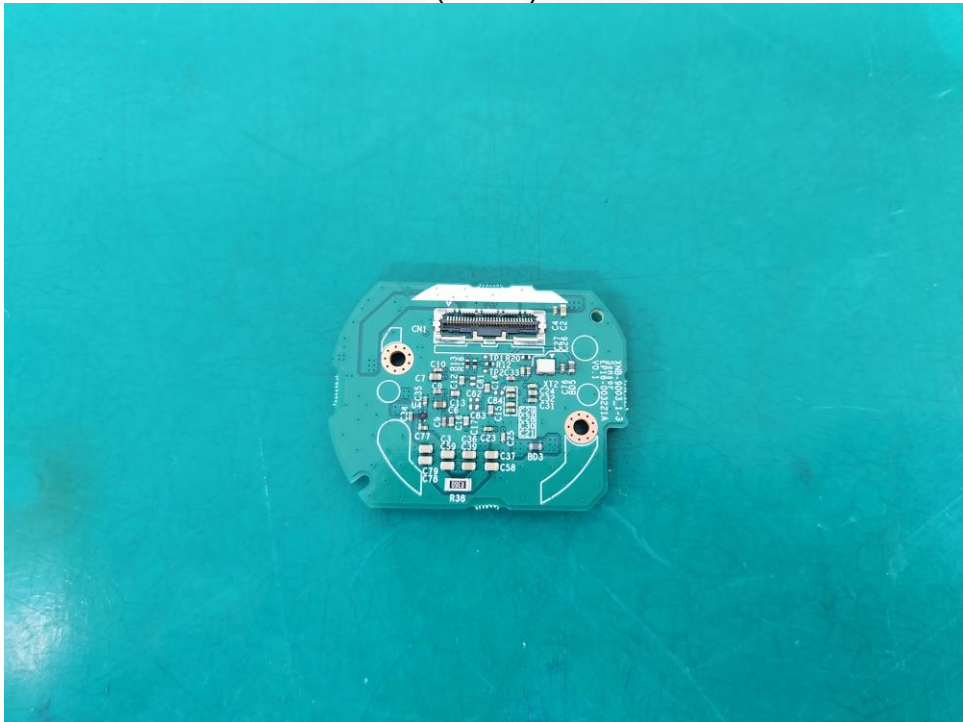



Label and Location



NETWORK CAMERA

Model No : XNB-8003

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

UK CA **CE**