Hanwha Vision



Network Dome

XND-6085

2M H.265 ネットワーク カメラ (extraLUX)

Key Features

- 最大2MP (1920 x 1080) の解像度
- H.265、H.264、MJPEG、WiseStreamII対応
- 4.1 ~ 16.4mm (4倍) 電動バリフォーカルレンズ
- 0.004Lux@F0.94 (カラー) 、0.0004Lux@F0.94 (白黒)
- デイナイト (ICR) 、WDR (150dB) 、曇り除去
- うろつき検知、方向性、霧探知、音声検出
- デジタルオートトラッキング、サウンド分類、いたずら検知
- SD/SDHC/SDXCメモリースロット (最大512GB)
- 縦表示モード (ホールウェイビュー)
- LDC、PoE/24V AC/12V DC、双方向オーディオ
- リモートPTRZ (パンニング/チルト/回転/ズーム) 制御により、画角調整コストを削減

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

XND-6085

2M H.265 ネットワーク カメラ
(extraLUX)



Specifications

映像

Imaging Device	サイズ	1/2"
	タイプ	CMOS
解像度		1920x1280, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264	60fps/50fps(60Hz/50Hz)
	MJPEG	30fps
Min. Illumination (Lux)	Color(1/30sec, 30IRE)	0.004
	BW(1/30sec, 30IRE)	0.0004
Video Out		CVBS: 1.0 Vp-p / 75Ω composite for installation, USB: Micro USB Type B. Preview and installation ONLY. Requires WiFi dongle.

レンズ

Focal Length (mm)		4.1~16.4
Zoom Ratio	Optical	4x
Max Aperture Ratio (F number)	Wide	0.94
	Tele	2.4
視野角度	Horizontal	100.0°~26.2°
	Vertical	54°~14.8°
	Diagonal	116.0°~30.0°
Min. Object Distance		0.7m(2.30ft)
Focus Control		シンプルフォーカス
Lens Type		DC auto iris

Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	Pan	-175°~175°
	Tilt	-73°~73°
	回転	-175°~175°

技能

Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC , WDR, SSDR

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

技能

Wide Dynamic Range (dB)		150
Digital Noise Reduction		SSNR V
Digital Image Stabilization		サポート
曇り除去		サポート
モーション検知	Quantity	8ea
	Shape	8point Polygonal zones
Privacy Masking	Quantity	32ea
	Shape	Polygonal zones
	Color / Option	灰色, 緑, Red, 青, 黒, 白, モザイク
ゲイン制御		低, 中, 高
ホワイトバランス		ATW, AWC, 手動, 室内, 屋外
LDC		サポート
Electronic Shutter	モード	最小, 最大, アンチフリッカー
	Speed Range	2~1/12,000sec
ビデオ回転		FLIPモード, ミラー, Hallway view(90°/270°)
Alarm Interface	In/Out	Input 1ea, Output 1ea
Alarm Triggers		分析, ネットワーク切断, アラーム入力
Alarm Events When Alarm Trigger Occurred		File upload(image): e-mail/FTP, Notification: e-mail, Recording: SD/SDHC/SDXC or NAS recording at event triggers,アラーム出力, Handover: PTZ preset
オーディオ入力		Selectable(mic in/line in), Built-in MIC
オーディオ出力		Line out

分析

分析イベント	通常	焦点ぼけ検知, モーション検知, タンパリング, フォグ検出, 顔検出, 音声検出, サウンド分類, Virtual area(Lotering, Intrusion, Enter/Exit, Appear/Disappear), Virtual area(Appear/Disappear), Virtual line(Crossing, Direction) , デジタルオートトラッキング

ネットワーク

Ethernet		RJ-45(10/100BASE-T)
映像圧縮		H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression		G.711 u-law /G.726 selectable,G.726(ADPCM) 8kHz,G.711 8kHz, G.726: 16kbps,24kbps,32kbps,40kbps, AAC-LC: 48kbps at 16kHz
Smart codec		手動, WiseStream II
ビットレートコントロール		H.265/H.264: CBR or VBR, MJPEG: VBR
Streaming	Unicast	最大 20ユーザー
	マルチキャスト	サポート
	Multiple Streaming	最大 10プロファイル

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

ネットワーク

プロトコル		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), PIM-SM
Application Programming Interface	ONVIF	s, G, T
	その他	SUNAPI(HTTP API), Hanwha Vision Open Platform
Direct Cloud Connection		Optional (needs gateway)

一般

メモリ	RAM	1GB
	フラッシュ	256MB
Edge Storage	Micro SD/SDHC/SDXC	Max. 256GB x 2slot(Total 512GB)

Environmental & Electrical

動作条件	温度	-30°C~+55°C(-22°F~+131°F)
	湿度	0~90% RH(non-condensing)
	その他	Start up should be done at above -10°C
保管条件	温度	-40°C~+60°C(-40°F~+140°F)
	湿度	0~90% RH(non-condensing)
Input Voltage		PoE(IEEE802.3af, Class3), 12VDC
消費電力	PoE	Max. 10.2W
	12VDC	Max. 8.6W

Mechanical

カラー	Ivory
材料	プラスチック
Product Dimensions	Ø160x140.0mm(6.3"x5.51")
Product Weight	1.10kg(2.43lb)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

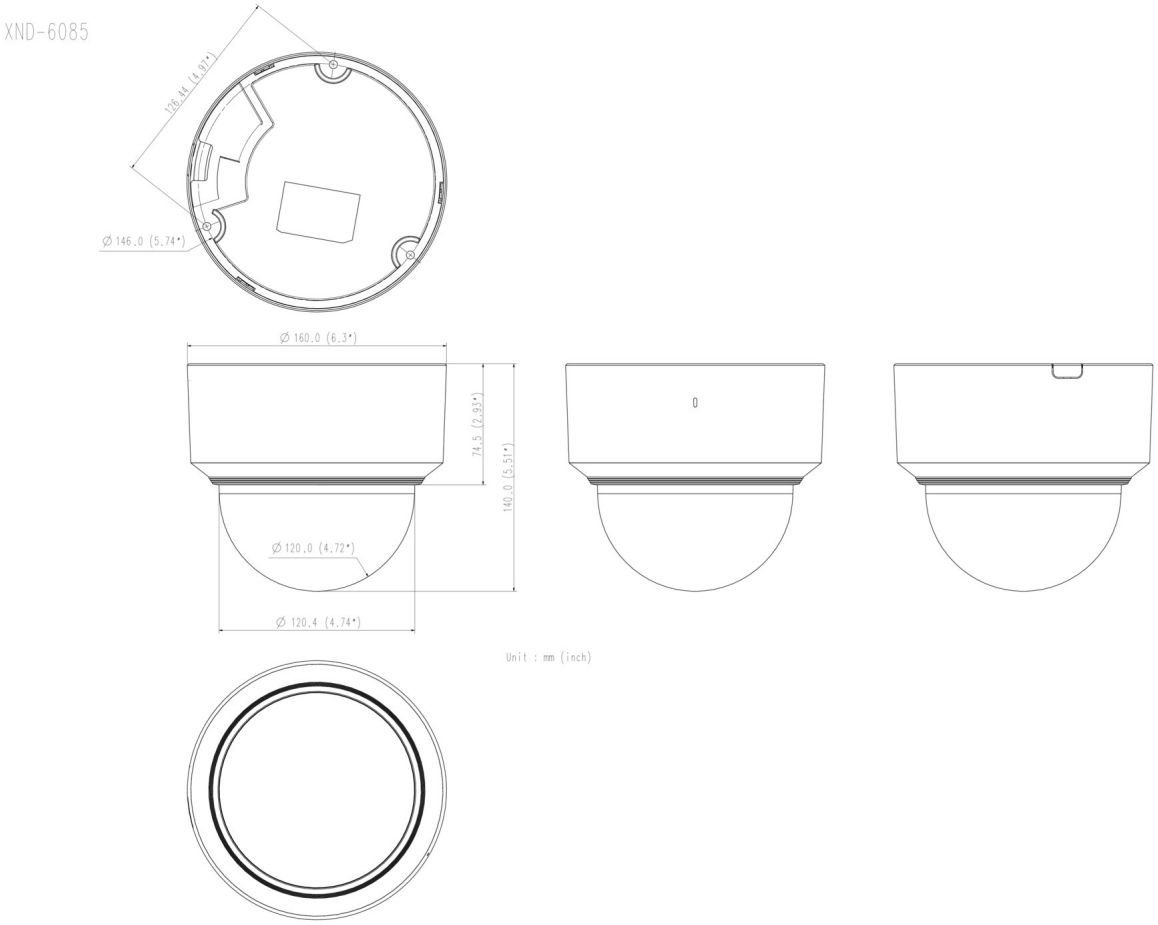
XND-6085

2M H.265 ネットワーク カメラ
(extraLUX)



CAD

Unit: mm [inch]



Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices


SBP-300HM6


SBP-300CM


SPB-IND83


SBV-158G


SBP-300PM



SBP-300KM


SBP-300WM1


SBP-300LM


SBP-300WM


SBP-300B


SBP-160TM


SHP-1680F


SBP-300NB

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.