

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0593

Page (1) of (42)

EMC TEST REPORT

Test Report No. : KES-EM-21T0593

Date of Issue : Jul. 13, 2021

Product name : NETWORK CAMERA

Model/Type No. : XND-8093RV

Variant Model : -

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea

Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)

Equipment authorization : **Supplier's Declaration of Conformity**

Date of Receipt : Jun. 03, 2021

Test date : Jun. 19, 2021 ~ Jun. 20, 2021

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Seon Ho, Choi
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0593

Page (2) of (42)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jul. 13, 2021	KES-EM-21T0593	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0593

Page (3) of (42)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	8
1.2	Variant Model Differences	8
1.3	Device Modifications	8
1.4	Equipment Under Test.....	8
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement.....	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports.....	15
2.2	Radiated Electric Field Emissions(Below 1 GHz)	16
2.3	Radiated Electric Field Emissions(Above 1 GHz)	17
APPENDIX A – TEST DATA.....		18
Conducted Emissions at Mains Power Ports.....		18
Radiated Electric Field Emissions(Below 1 GHz)		22
Radiated Electric Field Emissions(Above 1 GHz)		26
Test Setup Photos and Configuration		28
Conducted Emissions at Mains Power Ports.....		28
Radiated Electric Field Emissions(Below 1 GHz)		30
Radiated Electric Field Emissions(Above 1 GHz)		32
EUT External Photographs.....		34
EUT Internal Photographs		35

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (4) of (42)

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/1.8" progressive CMOS
Resolution	3328x1872, 3072x1728, 2592x1944, 2688x1520, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 15fps/12fps(60Hz/50Hz)
NETD	None
Pixel Size	None
Min. Illumination	(TBD) Color: 0.04Lux(F1.3, 1/30sec, 30IRE) B/W : 0.004Lux(F1.3, 1/30sec, 30IRE), 0Lux(IR LED on)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB: Micro USB Type B, 1280x720 for installation
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	10.9~29mm(2.7x) motorized varifocal
Max. Aperture Ratio	F1.7
Angular Field of View	H : 42.0°(Wide)~15.0°(Tele) V : 22.8°(Wide)~8.4°(Tele) D : 48.7°(Wide)~17.1°(Tele)
Min. Object Distance	Wide : 2.5m(8.20ft), Tele : 6m(19.69ft)
Focus Control	Simple focus, Manual
Lens Type	DC auto iris with hall sensor
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	0°~360° / -45°~85° / 0°~355°(TBD)
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (5) of (42)

Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SDR
Wide Dynamic Range	extremeWDR (120dB)
Digital Noise Reduction	WiseNRII(Based on AI engine), SSNRV
Digital Image Stabilization	Support(built-in gyro sensor)
Defog	Support
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	32ea, Quadrangle zones - Color : Gray, Green, Red, Blue, Black, White - Mosaic
Gain Control	Support
White Balance	ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor
LDC	Support (Fill/stretch mode)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec) Auto prefer shutter control(Based on AI engine)
Digital PTZ	Support
Video Rotation	Flip, Mirror, Halfway view(90°/270°)
Analytics	- Analytics events based on AI engine(NPU) : Object detection (Person/Face/Vehicle(car/truck/bus/bicycle/motorcycle)/Licence plate), IVA (Virtual line/Area, Enter/Exit, Loitering, direction, intrusion) - Analytics events : Defocus detection, Motion detection, Tampering, Fog detection, Audio detection, Sound classification, Shock detection, Appear/Disappear
Business Intelligence	Based on AI engine(NPU) : People counting, Queue management, Heatmap
Serial Interface	None
Alarm I/O	2 configurable I/O ports, DC 12V output(Max. 50mA)
Alarm Triggers	Analytics, Network disconnect, Alarm input, App event, Time schedule
Alarm Events	When alarm trigger occurred - File upload(image) : e-mail/FTP - Notification : e-mail - Recording : SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover(PTZ preset, Send message by HTTP/HTTPS/TCP) - Audio clip playback - PTZ preset
Audio In	Selectable(mic in/line in/built-in MIC) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
IR Viewable Length	WiseIR 70m(229.66ft)(T8D)
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (6) of (42)

Radiometry	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	Manual(Sea area), WiseStreamII, WiseStreamIII(Based on AI engine)
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles, 3 virtual channel support)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)
Security	TPM 2.0 (FIPS 140-2 level 2) HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2) Device Certificate(Hanwha Techwin Root CA, pre-installed) Secure by default certificate(TBD) Secure OS/Boot/Storage, Verify firmware forgery
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 2slot Max. 1TB (512GB * 2)
Memory	4GB RAM, 512MB Flash

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (7) of (42)

Environmental & Electrical	
Operating Temperature / Humidity	-25 °C ~ 50 °C (-13°F ~ +122°F) + Maximum temperature : +55°C (intermittent) less than 95% RH(non-condensing) Humidity control /w GORE vent.
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Certification	IP52/IK10
Input Voltage	PoE+(IEEE802.3at, Class4), 12VDC
Power Consumption	TBD Power redundancy failover
Mechanical	
Color / Material	White / Aluminum Hard-coated dome bubble
RAL Code	RAL9003
Product Dimensions / Weight	Ø160x125mm(6.30x4.92"), 1.6kg(3.53 lb) (TBD)
Compatible Conduit hole / Gangbox	1/2" (M20) single, double, 4" octagon, 4" square
Hanging Mount (Dome)	SBP-167HMM
Skin Cover (Dome)	None
Weather Cap (Dome)	None
Power Module	None
Backbox	None
DORI (EN62576-4 standard)	
Detect (25PPM/ 8PPF)	Wide: 173.4m(568.88ft) / Tele: 505.6m(1,658.71ft)
Observe (63PPM/ 19PPF)	Wide: 69.4m(227.55ft) / Tele: 202.2m(663.48ft)
Recognize (125PPM/ 38PPF)	Wide: 34.7m(113.78ft) / Tele: 101.1m(331.74ft)
Identify (250PPM/ 76PPF)	Wide: 17.3m(56.89ft) / Tele: 50.6m(165.87ft)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V, 60 Hz ☒ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XND-8093RV	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC / DC Adapter	EQ-4212Fctc	-	Roders Co., Ltd.	-
PoE Injector	PD-3001GC/AC	RD93560820169 64200	Power Dsine	-
Notebook	P95G001	8KM8HT2	Wistron Infocom (Chengdu) Company Limited	-
Notebook Adapter	LA65NS2-01	-	LITE-ON TECHNOLOGY(CHANGZ HOU)CO., LTD.	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
MIC	MP1000	-	-	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Button Alarm	-	-	-	-
Micro SD Card	-	-	SanDisk	4 GB
Smart Phone	SM-A720S	-	SAMSUNG	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.6 External I/O Cabling

■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	Notebook	RJ-45	3.0	S
	Audio Out	Speaker	Line-Out (3.5 mm)	1.4	U
	Audio In	MIC	XLR	1.4	U
	Alarm Out	Alarm	Alarm In	3.0	U
	Alarm In	Button Alarm	Alarm Out	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	3.5 mm	Smart Phone	3.5 mm	1.0	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Injector	RJ-45 (PoE)	3.0	S
	Audio Out	Speaker	Line-Out (3.5 mm)	1.4	U
	Audio In	MIC	XLR	1.4	U
	Alarm Out	Alarm	Alarm In	3.0	U
	Alarm In	Button Alarm	Alarm Out	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	RJ-45 (LAN)	PoE Injector	RJ-45 (LAN)	2.0	S
	3.5 mm	Smart Phone	3.5 mm	1.0	U

* Unshielded=U, Shielded=S

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (10) of (42)

1.7 EUT Operating Mode(s)

Test Mode	operating
DC Mode	Monitoring EUT Using Web Viewer, Ping Test
PoE Mode	


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ DC Mode

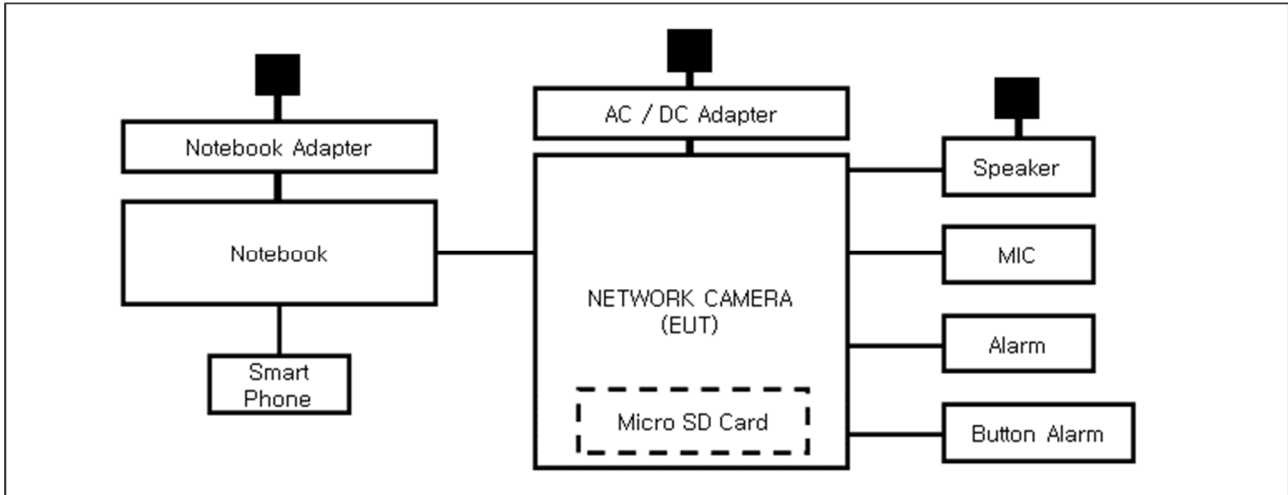

■ PoE Mode

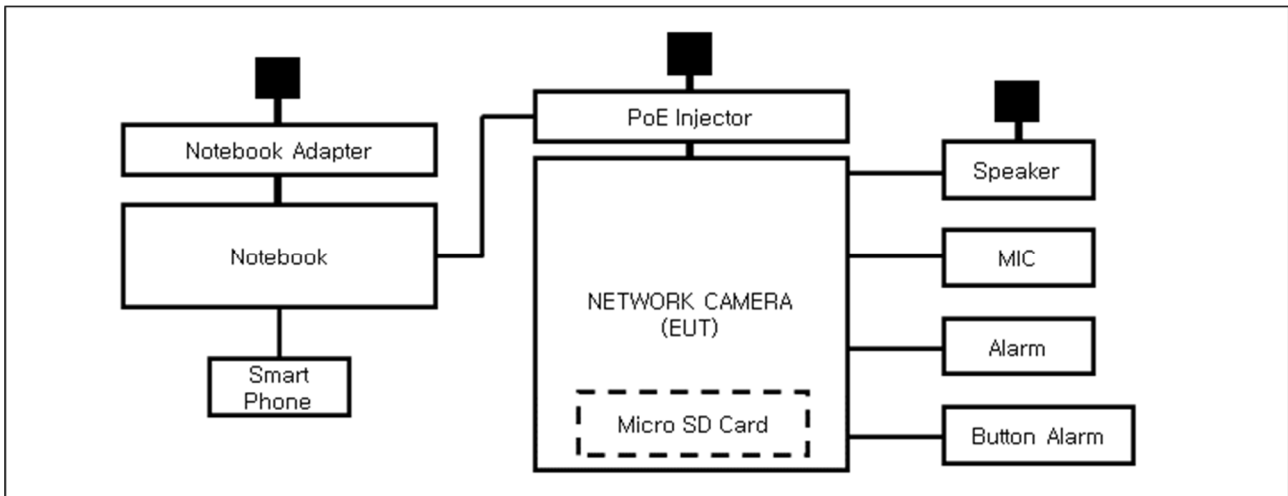

1.9 Remarks when standards applied

USB Port, VIDEO Port are for administrator use only and excluded from testing.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (14) of (42)

- | | | |
|---|---|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☒ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ ANSI C63.4-2017 | ☒ Class A | ☐ Class B |
| ☒ IC Regulation ICES-003 Issue 7 | | |
| ☒ CAN/CSA CISPR 32-17 | ☒ Class A | ☐ Class B |
| ☐ ANSI C63.4-2017 | ☐ Class A | ☐ Class B |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0593

Page (15) of (42)

2.1 Conducted Emissions at Mains Power Ports

Test Date

Jun. 19, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: (24,7 ± 0,3) °C

Relative Humidity: (47,0 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0593

Page (16) of (42)

2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jun. 19, 2021

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (23,7 ± 0,4) °C

Relative Humidity: (46,5 ± 0,2) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0593

Page (17) of (42)

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jun. 20, 2021

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.120	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	04, 01, 2022
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 14, 2021
☒	PREAMPLIFIER	8449B	HP	3008A00538	06, 21, 2022

Test Conditions

Temperature: (24,6 ± 0,5) °C

Relative Humidity: (46,2 ± 0,4) % R.H.

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XND-8093RV
Phase:	H
Mode:	DC_120 V 60 Hz
Operator Name:	KES

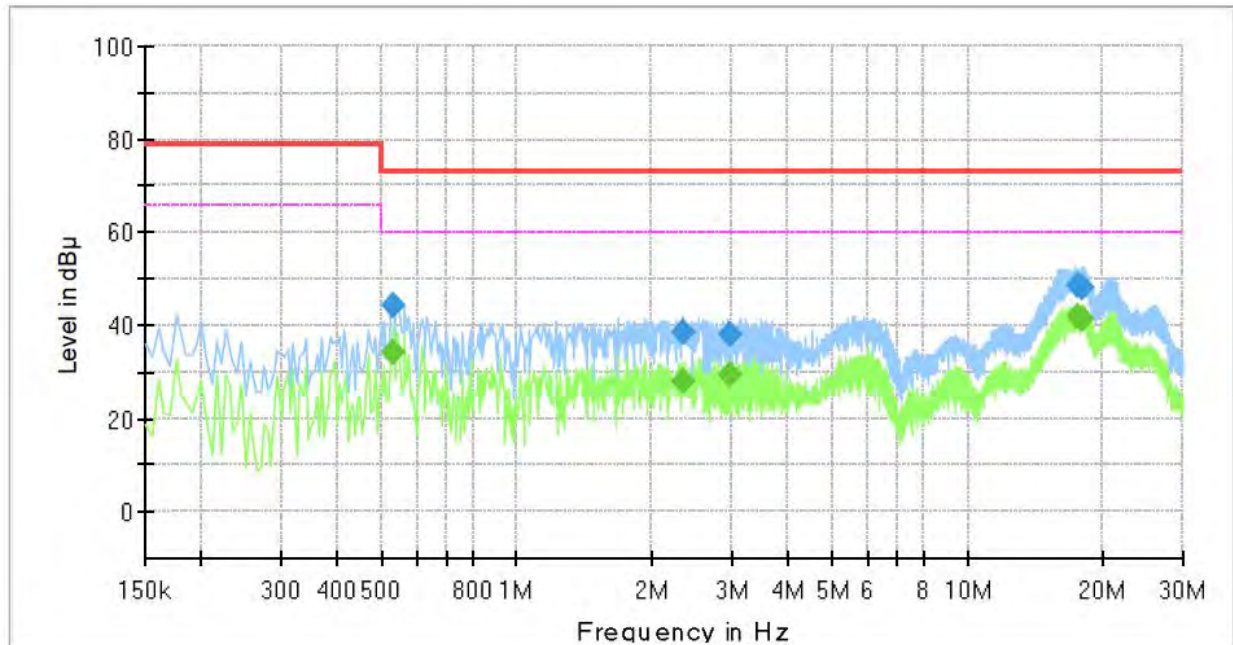

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.530000	---	34.00	60.00	26.00	1000.0	9.000	L1	19.7
0.530000	44.22	---	73.00	28.78	1000.0	9.000	L1	19.7
2.335000	---	27.91	60.00	32.09	1000.0	9.000	L1	20.2
2.335000	38.34	---	73.00	34.66	1000.0	9.000	L1	20.2
2.975000	---	29.16	60.00	30.84	1000.0	9.000	L1	20.2
2.975000	38.22	---	73.00	34.78	1000.0	9.000	L1	20.2
17.495000	---	42.09	60.00	17.91	1000.0	9.000	L1	20.0
17.495000	48.70	---	73.00	24.30	1000.0	9.000	L1	20.0
18.050000	---	41.59	60.00	18.41	1000.0	9.000	L1	20.0
18.050000	47.99	---	73.00	25.01	1000.0	9.000	L1	20.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0593

Page (19) of (42)

NEUTRAL LINE

Common Information

Test Description:

Model No.:

Phase:

Mode:

Operator Name:


Conducted Emission

XND-8093RV

N

DC_120 V 60 Hz

KES

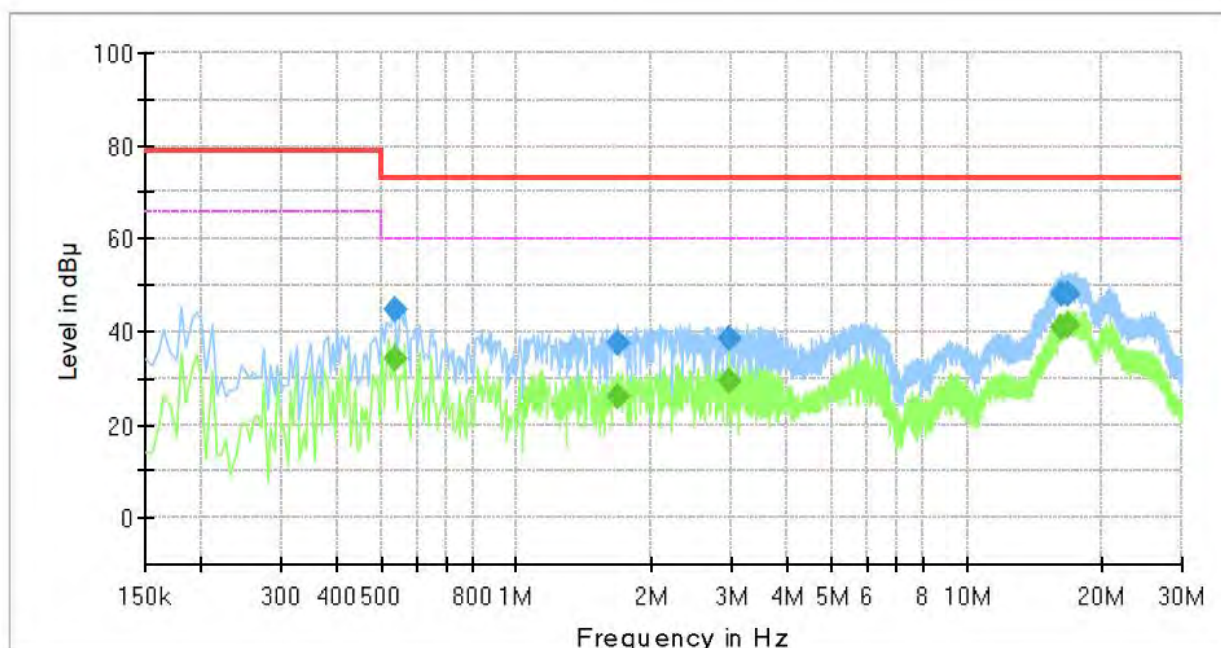

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.535000	---	34.02	60.00	25.98	1000.0	9.000	N	19.7
0.535000	44.56	---	73.00	28.44	1000.0	9.000	N	19.7
1.675000	---	25.97	60.00	34.03	1000.0	9.000	N	20.2
1.675000	37.71	---	73.00	35.29	1000.0	9.000	N	20.2
2.975000	---	29.48	60.00	30.52	1000.0	9.000	N	20.1
2.975000	38.30	---	73.00	34.70	1000.0	9.000	N	20.1
16.175000	---	40.98	60.00	19.02	1000.0	9.000	N	19.9
16.175000	48.20	---	73.00	24.80	1000.0	9.000	N	19.9
16.785000	---	41.47	60.00	18.53	1000.0	9.000	N	19.9
16.785000	48.25	---	73.00	24.75	1000.0	9.000	N	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-21T0593
Page (20) of (42)

■ PoE Mode

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: XND-8093RV
Phase: H
Mode: PoE
Operator Name: KES

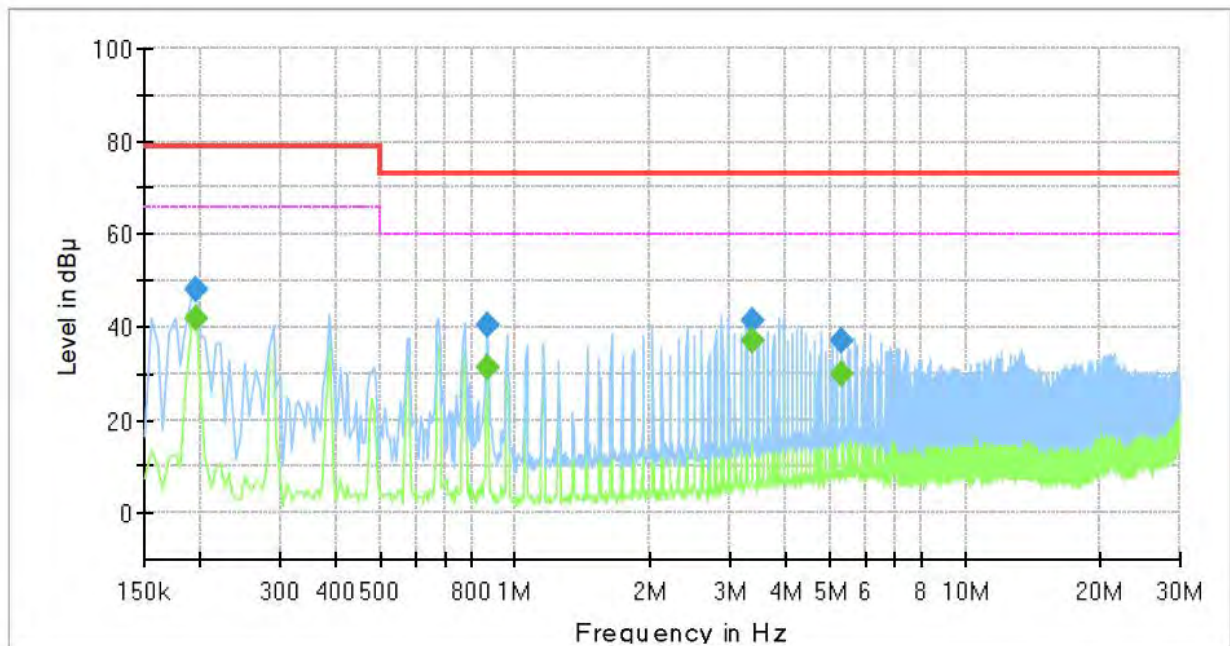

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.195000	---	41.66	66.00	24.34	1000.0	9.000	L1	19.4
0.195000	47.95	---	79.00	31.05	1000.0	9.000	L1	19.4
0.865000	---	31.27	60.00	28.73	1000.0	9.000	L1	20.0
0.865000	40.49	---	73.00	32.51	1000.0	9.000	L1	20.0
3.365000	---	36.87	60.00	23.13	1000.0	9.000	L1	20.1
3.365000	41.31	---	73.00	31.69	1000.0	9.000	L1	20.1
5.290000	---	29.96	60.00	30.04	1000.0	9.000	L1	19.6
5.290000	37.30	---	73.00	35.70	1000.0	9.000	L1	19.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XND-8093RV
Phase:	N
Mode:	PoE
Operator Name:	KES

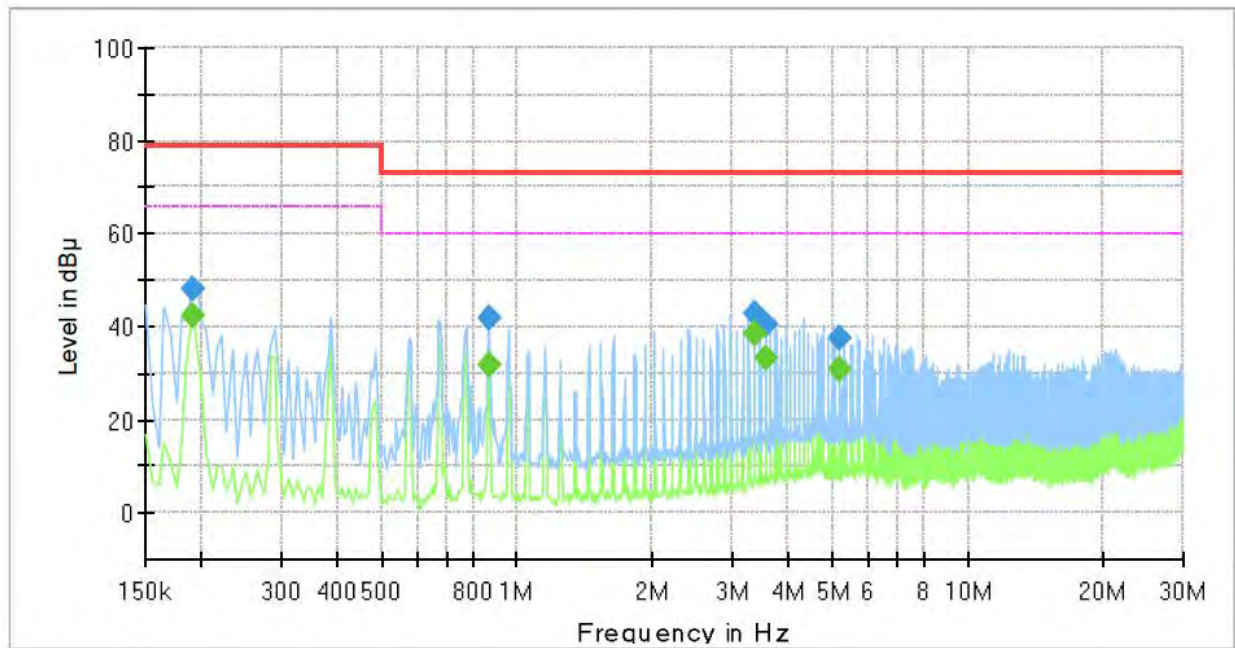

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.190000	---	42.33	66.00	23.67	1000.0	9.000	N	19.4
0.190000	48.34	---	79.00	30.66	1000.0	9.000	N	19.4
0.865000	---	31.63	60.00	28.37	1000.0	9.000	N	20.0
0.865000	41.87	---	73.00	31.13	1000.0	9.000	N	20.0
3.365000	---	38.28	60.00	21.72	1000.0	9.000	N	20.0
3.365000	42.84	---	73.00	30.16	1000.0	9.000	N	20.0
3.555000	---	33.02	60.00	26.98	1000.0	9.000	N	20.0
3.555000	40.31	---	73.00	32.69	1000.0	9.000	N	20.0
5.190000	---	30.97	60.00	29.03	1000.0	9.000	N	19.6
5.190000	37.56	---	73.00	35.44	1000.0	9.000	N	19.6

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (22) of (42)

Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

■ DC Mode

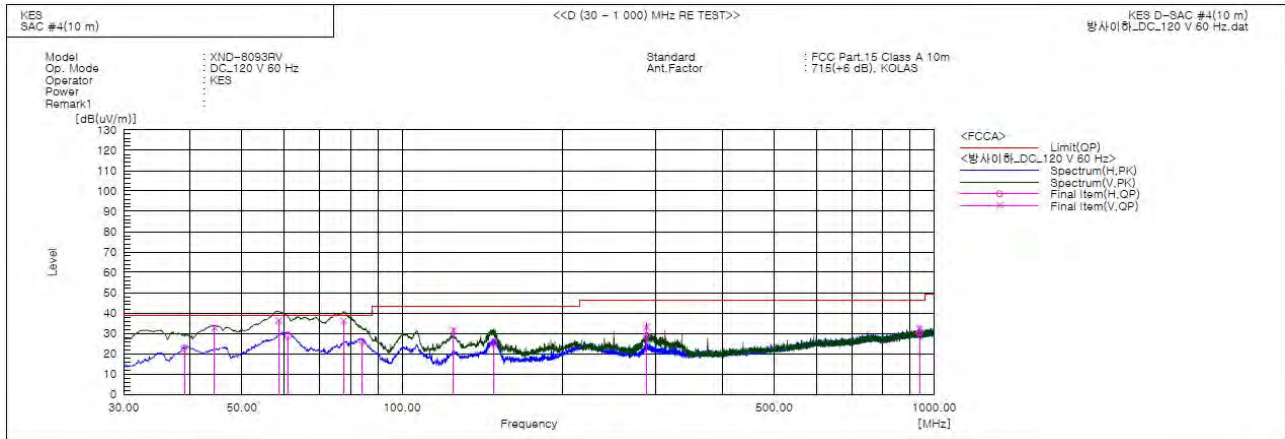

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.973	H	46.0	-23.2	22.8	39.0	16.2	392.0	145.0	
2	44.429	V	54.3	-21.5	32.8	39.0	6.2	109.0	260.0	
3	58.615	V	58.1	-21.8	36.3	39.0	2.7	101.0	298.0	
4	61.040	H	50.9	-22.2	28.7	39.0	10.3	302.0	134.0	
5	77.651	V	63.6	-27.5	36.1	39.0	2.9	103.0	249.0	
6	84.199	H	52.3	-26.5	25.8	39.0	13.2	307.0	167.0	
7	124.939	V	56.4	-24.8	31.6	43.5	11.9	196.0	252.0	
8	148.704	H	50.7	-25.1	25.6	43.5	17.9	315.0	74.0	
9	288.020	V	51.3	-18.3	33.0	46.5	13.5	192.0	166.0	
10	288.020	H	47.3	-18.3	29.0	46.5	17.5	352.0	119.0	
11	937.556	V	36.0	-3.7	32.3	46.5	14.2	153.0	309.0	
12	937.556	H	34.0	-3.7	30.3	46.5	16.2	400.0	145.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (23) of (42)

PoE Mode

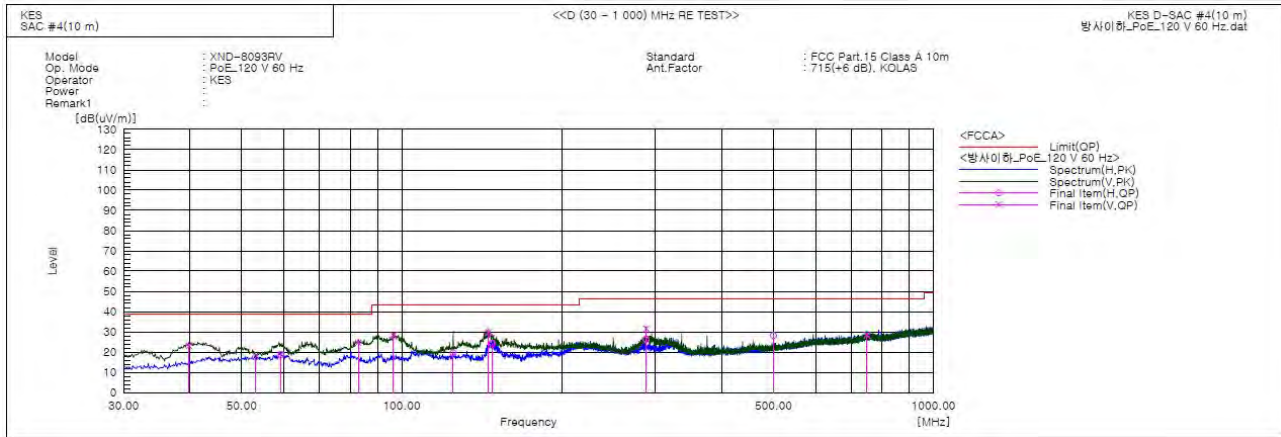

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	39.821	V	45.8	-22.7	23.1	39.0	15.9	106.0	318.0	
2	53.038	H	38.7	-21.2	17.5	39.0	21.5	400.0	253.0	
3	59.343	H	40.7	-21.9	18.8	39.0	20.2	302.0	35.0	
4	82.865	V	51.8	-27.1	24.7	39.0	14.3	101.0	76.0	
5	96.445	V	51.4	-23.2	28.2	43.5	15.3	109.0	231.0	
6	124.939	H	44.5	-24.8	19.7	43.5	23.8	391.0	168.0	
7	145.673	V	55.0	-25.2	29.8	43.5	13.7	153.0	57.0	
8	147.855	H	49.6	-25.2	24.4	43.5	19.1	309.0	123.0	
9	288.020	V	49.9	-18.3	31.6	46.5	14.9	193.0	166.0	
10	288.020	H	44.7	-18.3	26.4	46.5	20.1	392.0	302.0	
11	499.965	H	39.8	-11.6	28.2	46.5	18.3	400.0	153.0	
12	749.376	V	34.1	-5.7	28.4	46.5	18.1	194.0	329.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (24) of (42)

- IC Regulation ICES-003 Issue 7

■ DC Mode

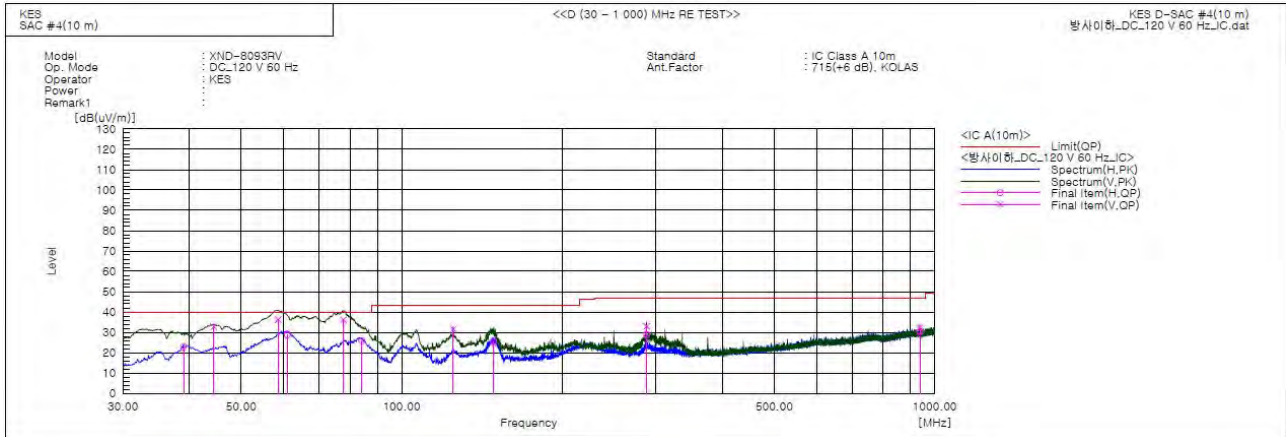

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.973	H	46.0	-23.2	22.8	40.0	17.2	392.0	145.0	
2	44.429	V	54.3	-21.5	32.8	40.0	7.2	109.0	260.0	
3	58.615	V	58.1	-21.8	36.3	40.0	3.7	101.0	298.0	
4	61.040	H	50.9	-22.2	28.7	40.0	11.3	302.0	134.0	
5	77.651	V	63.6	-27.5	36.1	40.0	3.9	103.0	249.0	
6	84.199	H	52.3	-26.5	25.8	40.0	14.2	307.0	167.0	
7	124.939	V	56.4	-24.8	31.6	43.5	11.9	196.0	252.0	
8	148.704	H	50.7	-25.1	25.6	43.5	17.9	315.0	74.0	
9	288.020	V	51.3	-18.3	33.0	47.0	14.0	192.0	166.0	
10	288.020	H	47.3	-18.3	29.0	47.0	18.0	352.0	119.0	
11	937.556	V	36.0	-3.7	32.3	47.0	14.7	153.0	309.0	
12	937.556	H	34.0	-3.7	30.3	47.0	16.7	400.0	145.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0593
Page (25) of (42)

PoE Mode

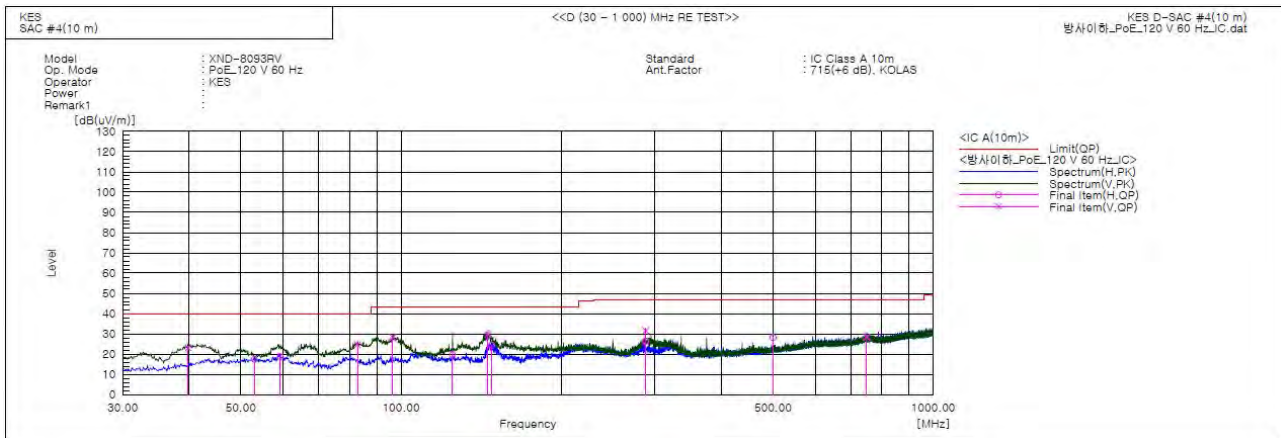

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	39.821	V	45.8	-22.7	23.1	40.0	16.9	106.0	318.0	
2	53.038	H	38.7	-21.2	17.5	40.0	22.5	400.0	253.0	
3	59.343	H	40.7	-21.9	18.8	40.0	21.2	302.0	35.0	
4	82.865	V	51.8	-27.1	24.7	40.0	15.3	101.0	76.0	
5	96.445	V	51.4	-23.2	28.2	43.5	15.3	109.0	231.0	
6	124.939	H	44.5	-24.8	19.7	43.5	23.8	391.0	168.0	
7	145.673	V	55.0	-25.2	29.8	43.5	13.7	153.0	57.0	
8	147.855	H	49.6	-25.2	24.4	43.5	19.1	309.0	123.0	
9	288.020	V	49.9	-18.3	31.6	47.0	15.4	193.0	166.0	
10	288.020	H	44.7	-18.3	26.4	47.0	20.6	392.0	302.0	
11	499.965	H	39.8	-11.6	28.2	47.0	18.8	400.0	153.0	
12	749.376	V	34.1	-5.7	28.4	47.0	18.6	194.0	329.0	

◆ Calculation - SAC #4(10 m)

Result(QP) [dB(uV/m)] = (Reading(QP)[dB(uV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(uV/m)] - Result(QP) [dB(uV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-21T0593

Page (26) of (42)

Radiated Electric Field Emissions(Above 1 GHz)

DC Mode

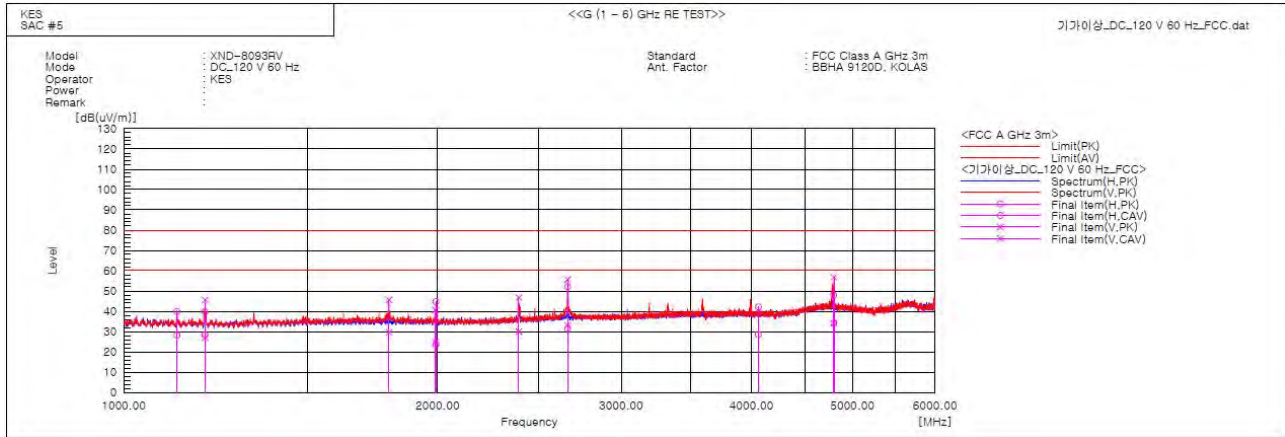

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1124.375	H	47.5	35.8	-7.6	39.9	28.2	80.0	60.0	40.1	31.8	358.0	333.8	
2	1196.250	H	47.0	35.5	-7.2	39.8	28.3	80.0	60.0	40.2	31.7	309.0	153.7	
3	1196.875	V	52.8	34.3	-7.2	45.6	27.1	80.0	60.0	34.4	32.9	102.0	274.8	
4	1796.250	V	50.2	34.2	-4.5	45.7	29.7	80.0	60.0	34.3	30.3	187.0	157.7	
5	1989.375	V	44.4	28.6	-3.8	40.6	24.8	80.0	60.0	39.4	35.2	108.0	144.6	
6	1993.125	H	48.6	27.5	-3.8	44.8	23.7	80.0	60.0	35.2	36.3	400.0	266.8	
7	2393.125	V	49.5	32.8	-2.7	46.8	30.1	80.0	60.0	33.2	29.9	193.0	318.4	
8	2665.625	H	53.7	33.1	-1.6	52.1	31.5	80.0	60.0	27.9	28.5	359.0	25.1	
9	2665.816	V	57.3	34.6	-1.6	55.7	33.0	80.0	60.0	24.3	27.0	152.0	123.8	
10	4062.500	H	40.5	26.8	1.7	42.2	28.5	80.0	60.0	37.8	31.5	302.0	260.4	
11	4796.250	H	43.1	29.3	4.9	48.0	34.2	80.0	60.0	32.0	25.8	397.0	219.6	
12	4799.375	V	51.9	29.3	4.9	56.8	34.2	80.0	60.0	23.2	25.8	154.0	148.9	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0593

Page (27) of (42)

■ PoE Mode

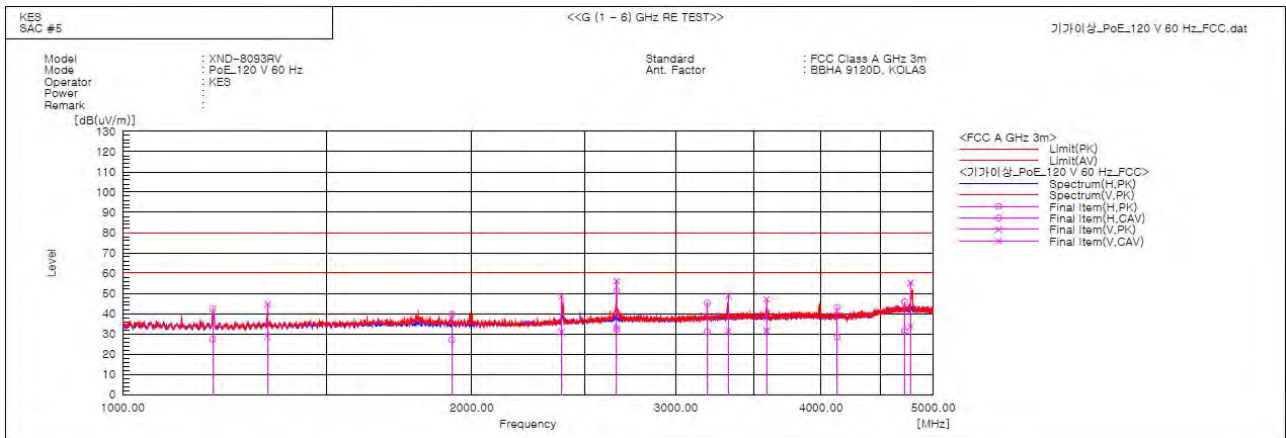

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1195.625	H	49.4	34.5	-7.2	42.2	27.3	80.0	60.0	37.8	32.7	400.0	287.1	
2	1333.125	V	51.1	35.2	-6.4	44.7	28.8	80.0	60.0	35.3	31.2	100.0	16.2	
3	1921.875	H	43.5	31.1	-4.0	39.5	27.1	80.0	60.0	40.5	32.9	301.0	356.0	
4	2388.750	V	51.2	33.6	-2.7	48.5	30.9	80.0	60.0	31.5	29.1	109.0	318.4	
5	2665.625	H	52.8	33.9	-1.6	51.2	32.3	80.0	60.0	28.8	27.7	357.0	336.0	
6	2665.625	V	57.7	34.5	-1.6	56.1	32.9	80.0	60.0	23.9	27.1	152.0	128.6	
7	3191.875	H	45.4	31.2	-0.2	45.2	31.0	80.0	60.0	34.8	29.0	352.0	22.2	
8	3329.375	V	48.9	31.5	-0.1	48.8	31.4	80.0	60.0	31.2	28.6	119.0	323.8	
9	3590.000	V	47.1	31.5	0.0	47.1	31.5	80.0	60.0	32.9	28.5	192.0	275.8	
10	4131.250	H	40.9	26.4	2.0	42.9	28.4	80.0	60.0	37.1	31.6	391.0	48.0	
11	4723.750	H	41.2	26.9	4.6	45.8	31.5	80.0	60.0	34.2	28.5	309.0	91.1	
12	4779.375	V	50.5	28.9	4.8	55.3	33.7	80.0	60.0	24.7	26.3	183.0	2.8	

◆ Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV)[dB(uV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration


Conducted Emissions at Mains Power Ports

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

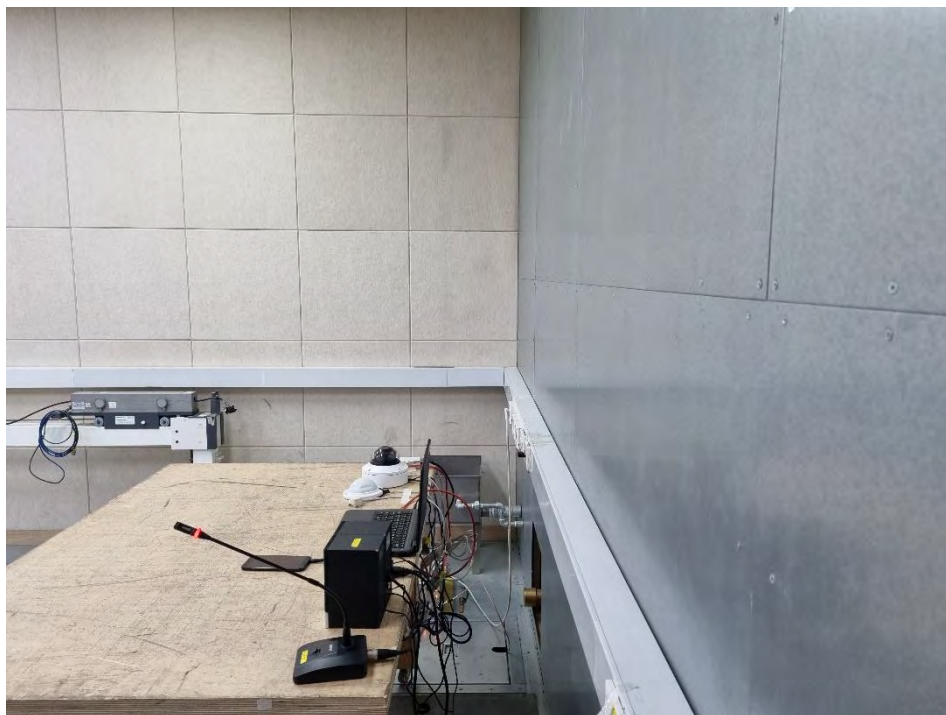

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


■ PoE Mode

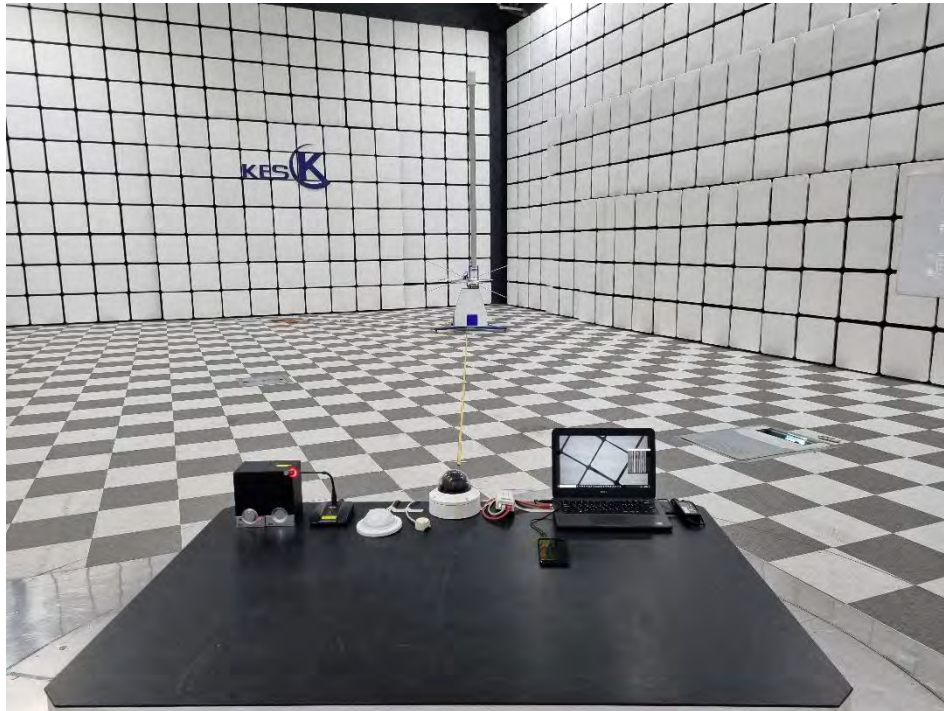

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

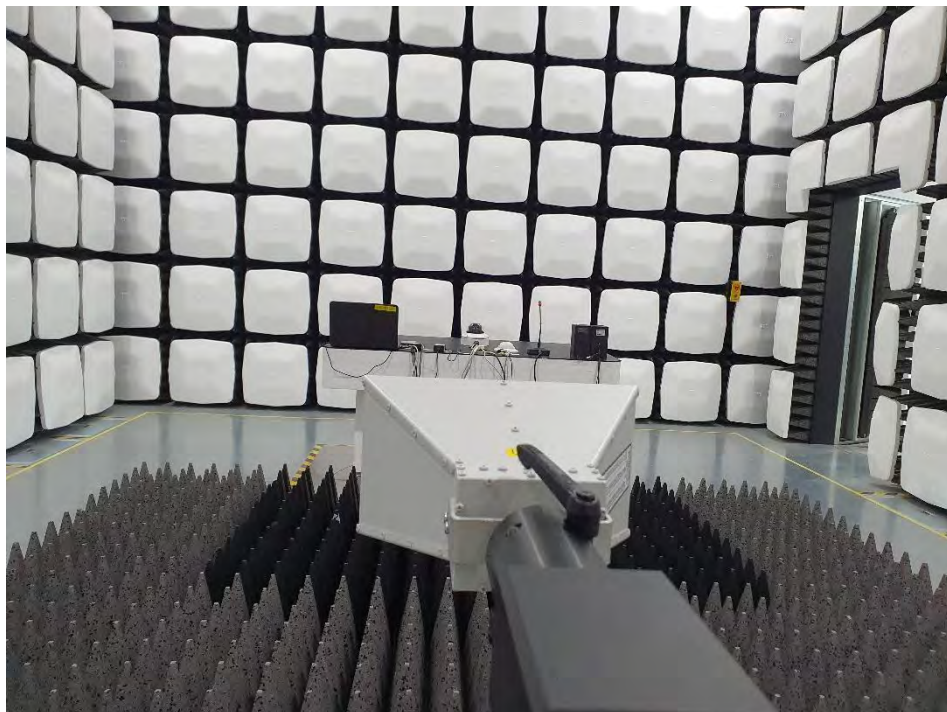

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

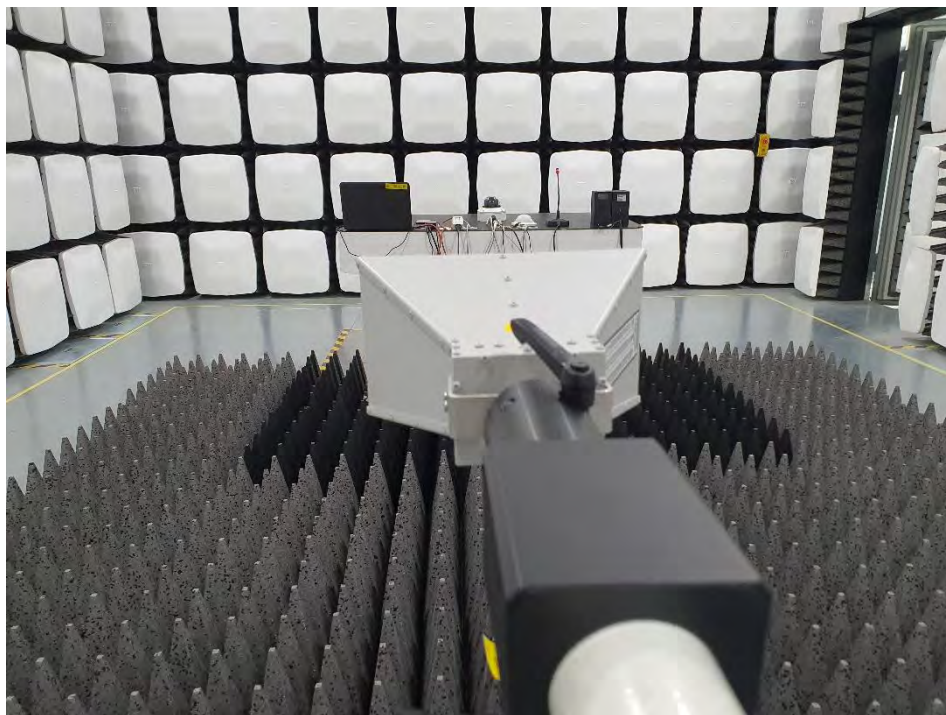

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 1

(Top)

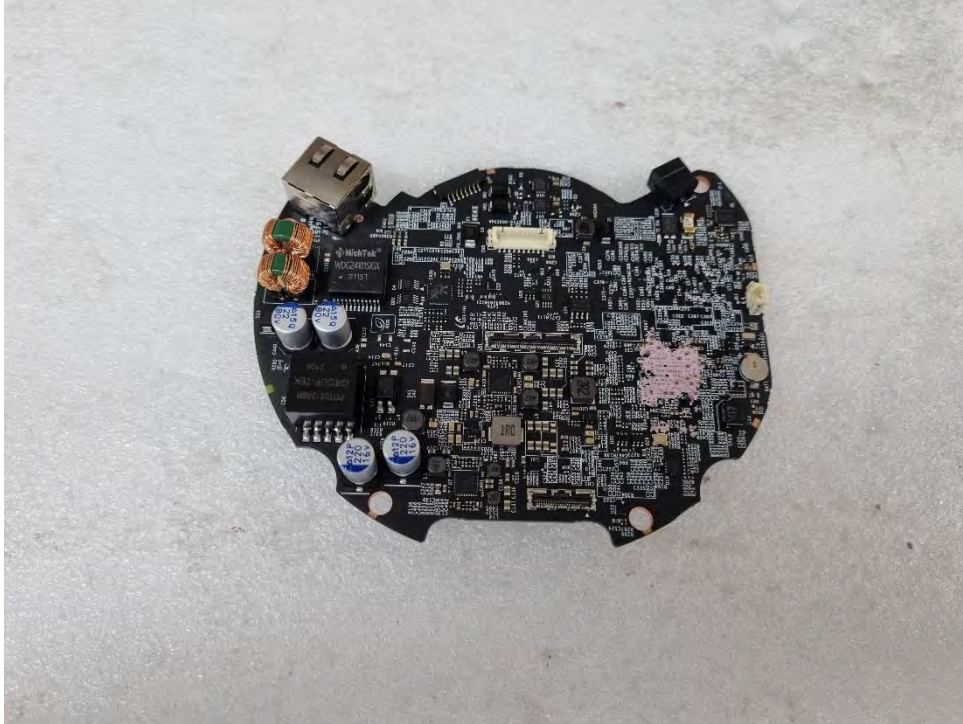


(Bottom)

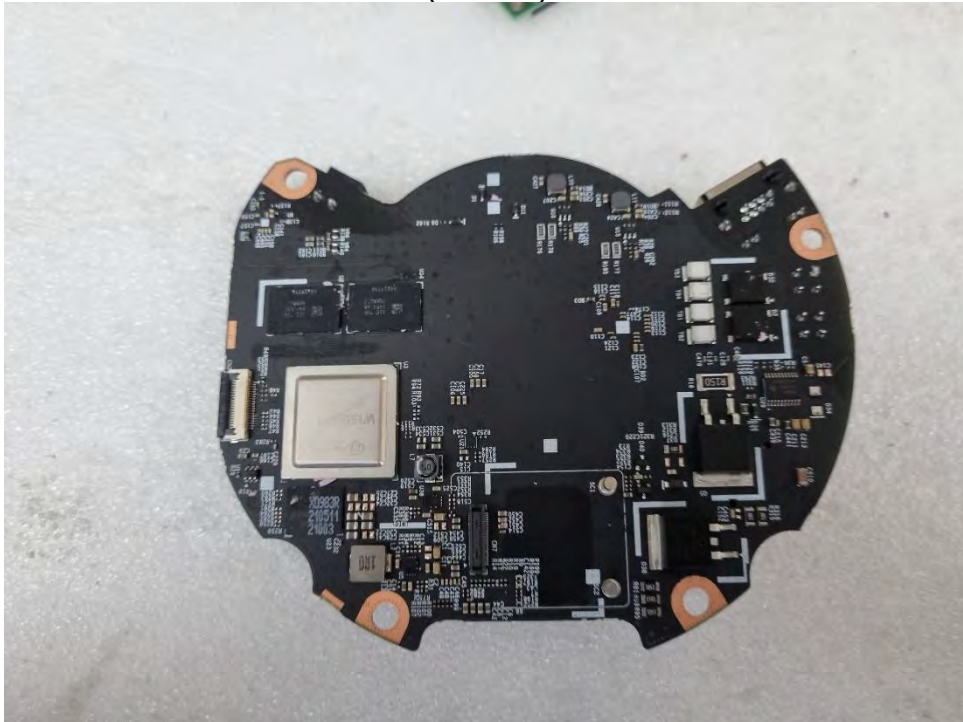

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


EUT Internal View – Board 2

(Top)

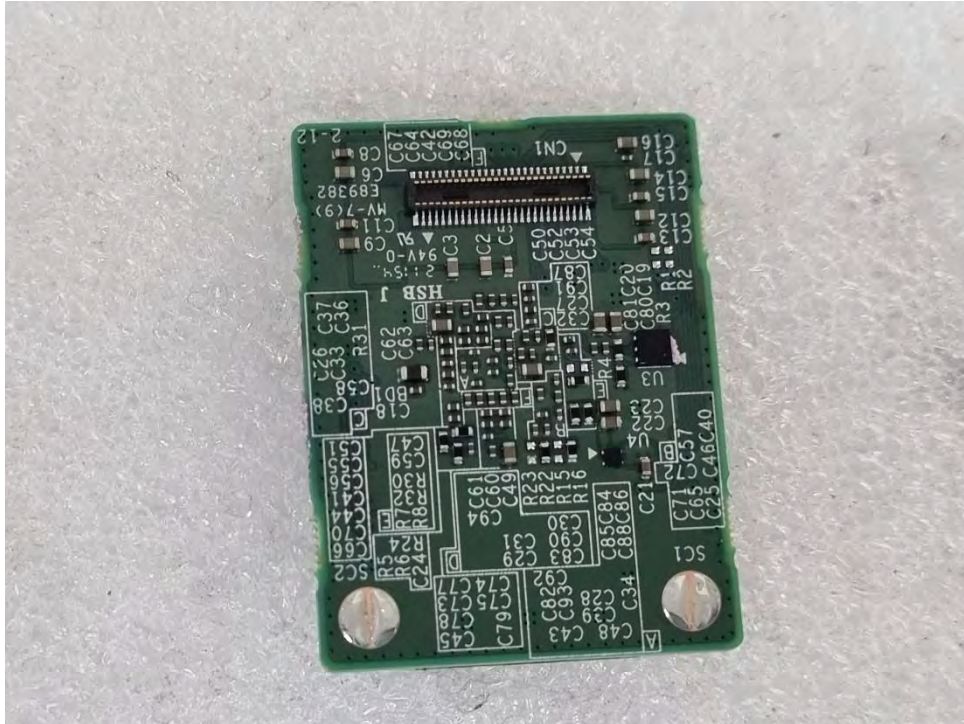


EUT Internal View – Board 3

(Top)

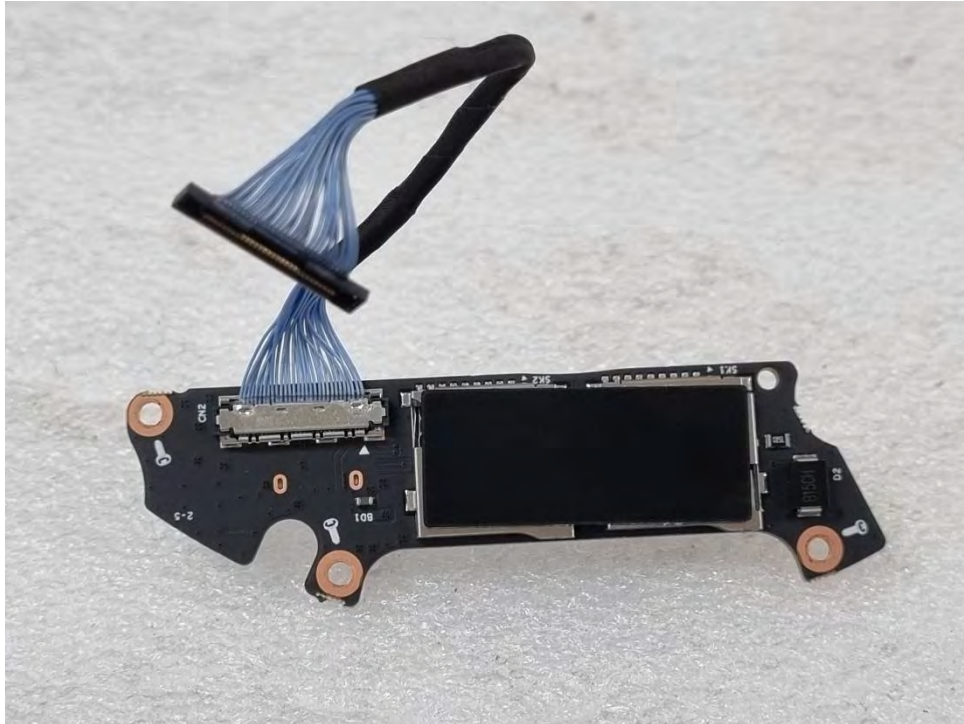

(Bottom)

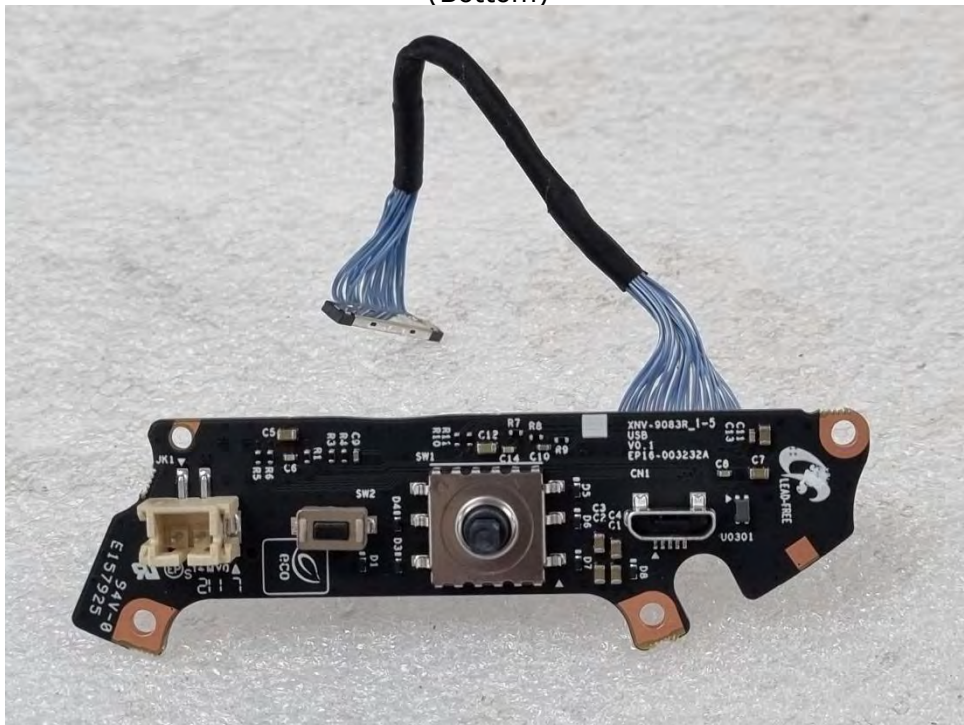

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 4

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 5

(Top)

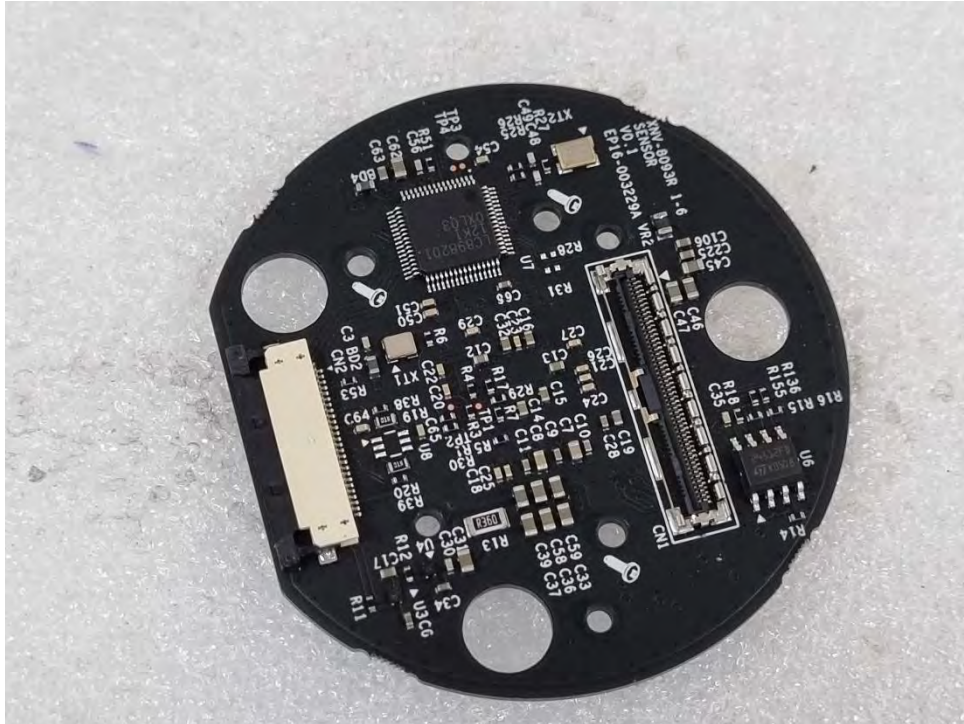


(Bottom)

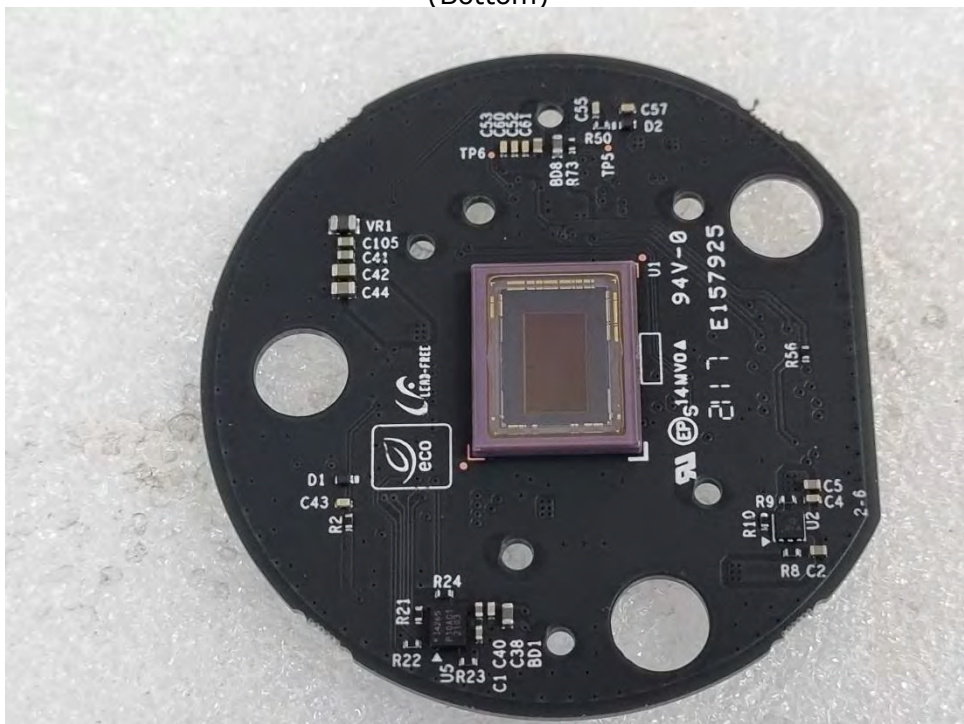

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Camera

(Top)

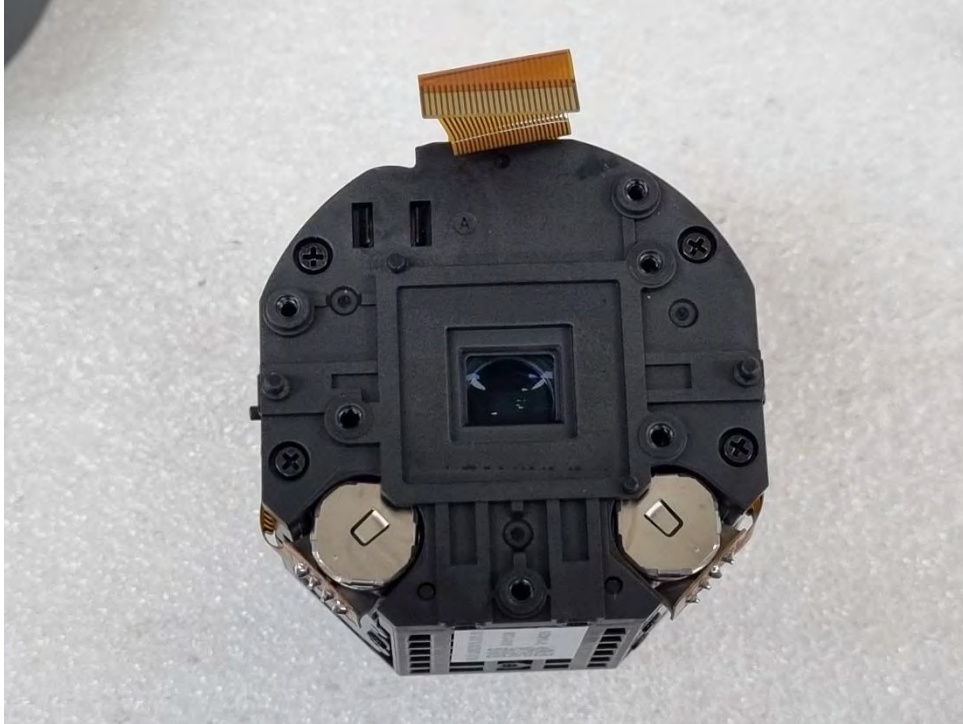


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label Photographs

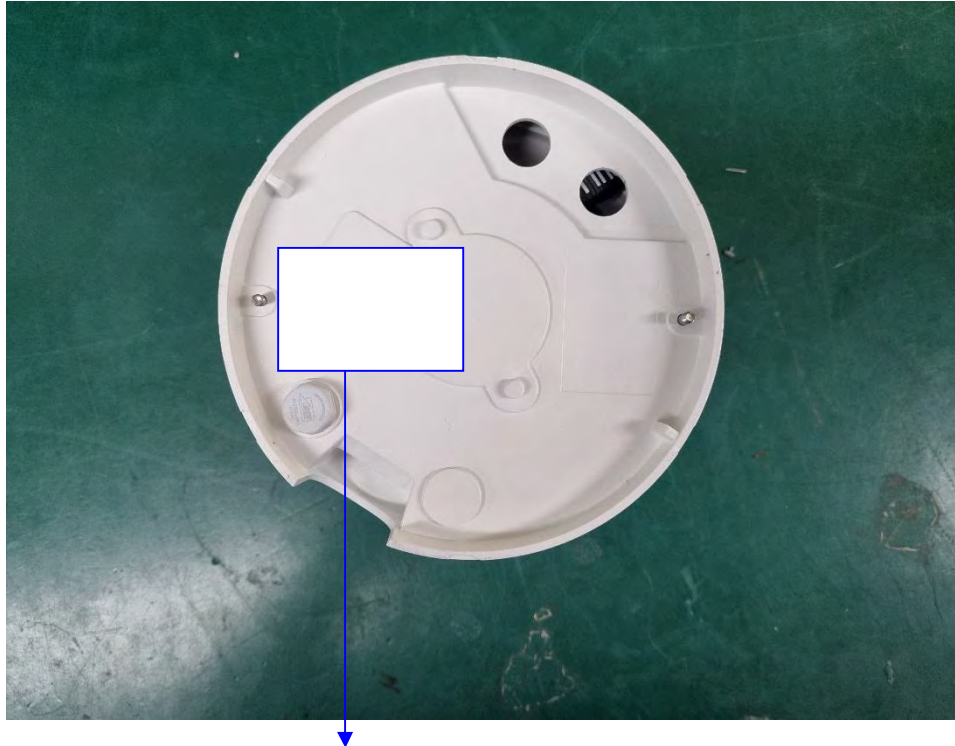

CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.