

Network | Рыбий глаз

XNF-9010RVM

12МП Fisheye камера с ИК-подсветкой - Транспортное решение

Key Features

- 1/2,3" 12 Мп КМОП
- Объектив 1,08 мм с постоянным фокусом
- Объектив со стереографической проекцией, увеличенное разрешение для периферийных зон
- Поддержка кодеков H.265, H.264, MJPEG
- Вид типа рыбий глаз, одиночная панорама, двойная панорама, 4-зональный вид
- Встроенная функция устранения искажений, цифровая функция PTZ
- extreme WDR (120 дБ), поддержка WiseStream II
- Wise IR, дальность видимости с ИК подсветкой 10 м
- Поддержка виртуального канала
- Поддержка плагинов, возможность выбора порта ввода/вывода
- Видеоаналитика, тепловая карта, подсчет людей
- Управление очередями
- Крышка для купольных камер с твердым покрытием
- Обнаружение движения, передача данных на PTZ камеру, IP66/IK10/NEMA4X
- Возможно использование в транспорте, поддержка соединения M12

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

XNF-9010RVM

12МП Fisheye камера с ИК-подсветкой - Транспортное решение





Specifications

Video

Imaging Device	Size	1/2.3"
	Type	CMOS
Resolution		3584x2688, 3584x1792, 3584x896, 3008x3008, 1792x1344, 1504x1504, 1080x1080, 960x960, 768x768, 720x720, 640x640, 640x480, 640x320, 640x160, 480x480
Max. Framerate	H.265/H.264	30fps/25fps(60Hz/50Hz)
	MJPEG	30fps(@9MP Max. 5fps)
Min. Illumination (Lux)	Color(1/30sec, 30IRE)	0.39
	BW(1/30sec, 30IRE)	0.039
Video Out		CVBS: 1.0 Vp-p / 75Ω composite for installation, USB: Micro USB Type B. Preview and installation ONLY. Requires WiFi dongle.

Lens

Focal Length (mm)		1.08
Max Aperture Ratio (F number)	Wide	2.2
Angular Field of View	Horizontal	187°
	Vertical	187°
	Diagonal	187°
Min. Object Distance		0.5m(1.64ft)
Focus Control		Simple focus

Operational

Day & Night		Auto(ICR)
Backlight Compensation		BLC, HLC, WDR, SSDR
Wide Dynamic Range (dB)		120
Digital Noise Reduction		SSNR V
Motion Detection	Quantity	8ea
	Shape	8point Polygonal zones
Privacy Masking	Quantity	32ea
	Shape	4point Quadrangle zones
	Color / Option	Gray, Green, Red, Blue, Black, White, Mosaic

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Operational

Gain Control		Off, Max gain, Manual
White Balance		ATW, NarrowATW, AWC, Manual, Indoor, Outdoor
LDC		Support(Fill/stretch mode)
Electronic Shutter	Mode	Minimum, Maximum, Anti flicker, Prefer shutter control
	Speed Range	2~1/12,000sec
Video Rotation		Flip, Mirror
Alarm Interface	In/Out	2 configurable I/O ports
Alarm Triggers		Analytics, Network disconnect, Alarm input, App event, Time schedule, MQTT subscription
Alarm Events When Alarm Trigger Occurred		File upload(image): e-mail/FTP/SFTP, File upload(video clip): FTP/SFTP, Notification: e-mail, Recording: SD/SDHC/SDXC or NAS recording at event triggers,Alarm output, Handover: PTZ preset,send message by HTTP/HTTPS/TCP,Audio clip playback, MQTT: publication
Audio In		Selectable(mic in/line in), Built-in mic
Audio Out		Line out
Light Type		IR LED
Light Viewable Length	IR	WiseIR 10m(32.8ft)
IR Wavelength		850nm

Analytics

Analytics Events	Normal	Defocus detection, Motion detection, Tampering, Audio detection, Sound classification, Virtual area(Lotering, Intrusion, Enter/Exit, Appear/Disappear), Virtual line(Crossing, Direction)
Business Intelligence	Normal	People counting, Queue management, Heatmap

Network

Ethernet		Metal shielded M12(10/100BASE-T)(through RJ45 to M12 cable)
Video Compression		H.265: Main, H.264: Main/Baseline/High,MJPEG
Audio Compression		G.711 u-law /G.726 selectable,G.726(ADPCM) 8kHz,G.711 8kHz, G.726: 16kbps,24kbps,32kbps,40kbps, AAC-LC: 48kbps at 16kHz
Smart Codec		Manual, WiseStream II
Bitrate Control		H.265/H.264: CBR or VBR, MJPEG: VBR
Streaming	Unicast	Up to 20 users
	Multicast	Support
	Multiple Streaming	Up to 10 profiles
Protocol		IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SFTP, SMTP, ICMP, IGMPv2, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, CDP, SRTP(TCP, UDP Unicast), MQTT

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Network

Application Programming Interface	ONVIF	S, G, T
	Others	SUNAPI(HTTP API), Hanwha Vision Open Platform
Direct Cloud Connection		Optional (needs gateway)

Security

OS / Firmware Protect	Encrypted firmware, Secure boot, Signed firmware
User authentication	Digest authentication, Prevent brute-force attack
Network authentication	IEEE 802.1X(EAP-TLS, EAP-LEAP, EAP-PEAP, MSCHAPv2)
Secure Communication	HTTPS, WSS(WebSocket Secure), SRTP
Access Control	IP-based access control
Data Protect	Encryption credentials, Encrypt compress for live recording file export
Audit	Access / System / Event Log management
Device ID	Device certificate(Hanwha Vision Root CA)
Secure Storage	HTPM(Hanwha Trusted Platform Module), SDcard partition encrypt(AES-256)
Security Certificate	TPM 2.0 with FIPS 140-2 level2

General

Memory	RAM	4GB
	Flash	512MB
Edge Storage	Micro SD/SDHC/SDXC	Max. 256GB x 2slot(Total 512GB)

Environmental & Electrical

Operating Condition	Temperature	-40°C~+60°C(-40°F~+140°F)
	Humidity	0~95% RH(non-condensing)
Storage Condition	Temperature	-50°C~+60°C(-58°F~+140°F)
	Humidity	0~90% RH(non-condensing)
Input Voltage		PoE(IEEE802.3af, Class3), 12VDC
Power Consumption	PoE	Max 12.95W, typical 11W
	12VDC	Max 11W, typical 9.1W

Mechanical

Color	White
Material	Aluminum
RAL Code	RAL9003
Product Dimensions	ø160x72mm(ø6.30x2.83")
Product Weight	1100g(2.43 lb)
Compatible Gang Box	Single, Double, 4" Octagon, Square

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Certifications & Standards

EMC	FCC 47 CFR 15 Subpart B Class A, ICES-3(A)/NMB-3(A), CE/UKCA - EN55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, RCM AS-NZS CISPR 32 Class A, KS C 9832 Class A, KS C 9835
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1, IEC 62471
Environment	IEC/EN 63000, IEC 60529 IP66, IEC 62262 IK10, NEMA 250 type 4X, EN 50155

DORI (EN62676-4 standard)

Detect (25PPM/ 8PPF)	Wide	34.9m(114.49ft)
Observe (63PPM/ 19PPF)	Wide	13.9m(45.60ft)
Recognize (125PPM/ 38PPF)	Wide	7.0m(22.96ft)
Identify (250PPM/ 76PPF)	Wide	3.5m(11.48ft)

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

XNF-9010RVM


12МП Fisheye камера с ИК-подсветкой - Транспортное решение





CAD

Unit: mm [inch]

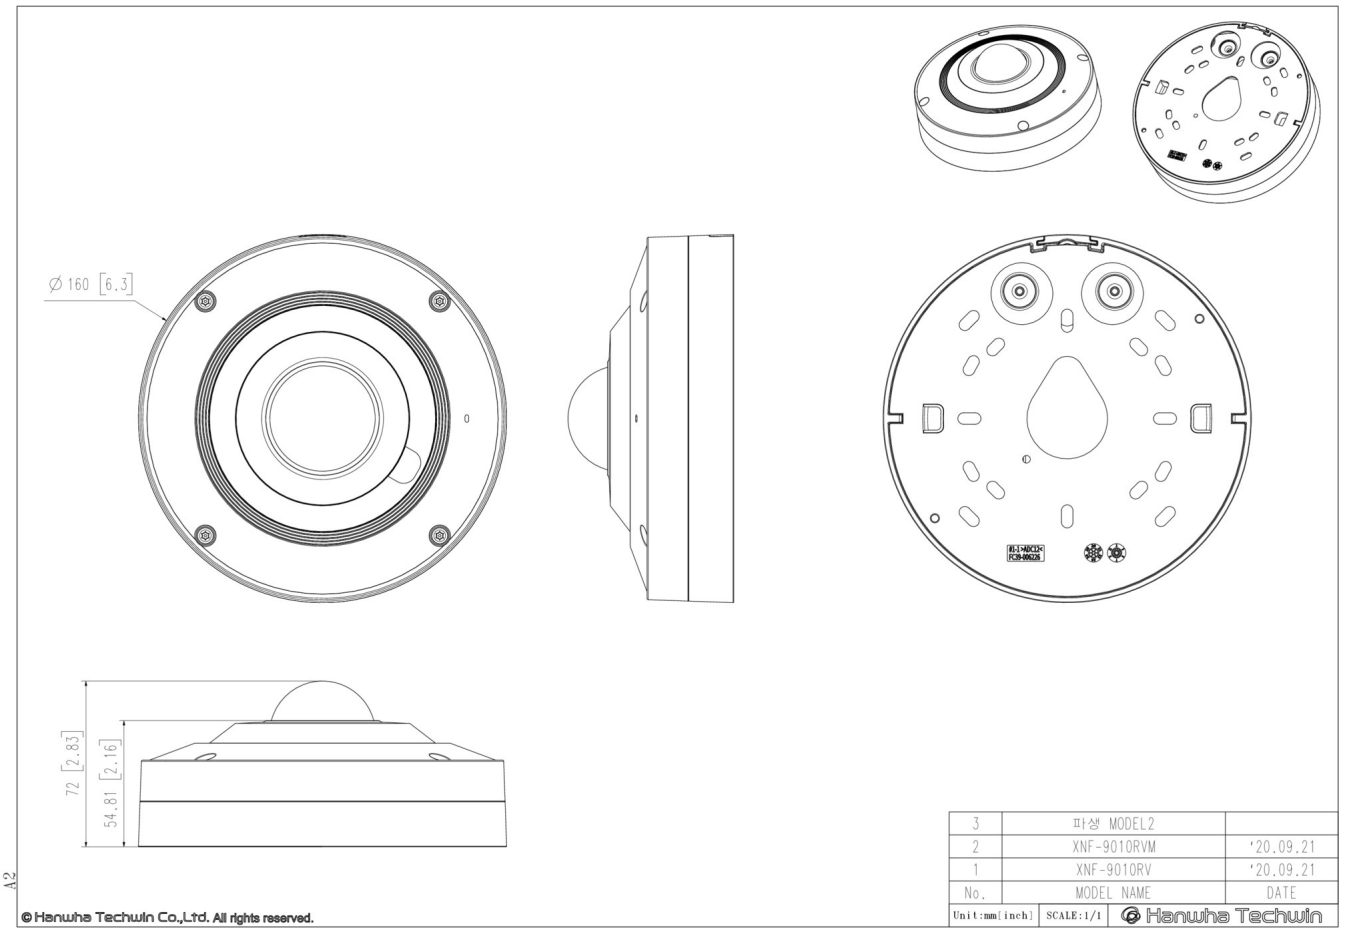

© Hanwha Vision CO., LTD. All rights reserved.

Compatible Devices


XNF-9010RV


SBP-167HMW


SBP-300CMW


SBP-300WMW


SBP-300WMW1


SBP-390WMW2


SBP-300PMW1


SHD-1600FPW


SBP-300LMW


SBP-300KMW1


SBP-160TMW1


SBP-300NBW

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.