



EMC TEST REPORT For CE

Test Report No. : KES-EM-20T0299
Date of Issue : Apr. 29, 2020
Product name : NETWORK CAMERA
Model/Type No. : XNO-9082R
Variant Model : XNO-8082R
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Apr. 06, 2020
Test date : Apr. 09, 2020 ~ Apr. 16, 2020
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Jun Soo, Jung
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (2) of (89)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Apr. 29, 2020	KES-EM-20T0299	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	8
1.2	Variant Model Differences	8
1.3	Device Modifications	8
1.4	Equipment Under Test	8
1.5	Support Equipments	9
1.6	External I/O Cabling	10
1.7	EUT Operating Mode(s)	11
1.8	Configuration	12
1.9	Remarks when standards applied	14
1.10	Calibration Details of Equipment Used for Measurement	14
1.11	Test Facility	14
1.12	Laboratory Accreditations and Listings	14
2.0	Test Regulations	15
2.1	Conducted Emissions at Mains Power Ports	17
2.2	Conducted Emissions at Telecommunication Ports	18
2.3	Radiated Electric Field Emissions(Below 1 GHz)	19
2.4	Radiated Electric Field Emissions(Above 1 GHz)	20
2.5	Harmonic Current Emissions	21
2.6	Voltage Fluctuations and Flicker	22
3.0	Criteria for compliance	23
3.1	Electrostatic Discharge	25
3.2	Radiated Electric Field Immunity	32
3.3	Electrical Fast Transients/Bursts	35
3.4	Surge Transients	39
3.5	Conducted Disturbance	43
3.6	Voltage Dips and Short Interruptions	46
APPENDIX A – TEST DATA		49
Conducted Emissions at Mains Power Ports		49
Conducted Emissions at Telecommunication Ports		53
Radiated Electric Field Emissions(Below 1 GHz)		56
Radiated Electric Field Emissions(Above 1 GHz)		59
Harmonic Current Emissions and Voltage Fluctuations and Flicker		62
Test Setup Photos and Configuration		67
Conducted Emissions at Mains Power Ports		67
Conducted Emissions at Telecommunication Ports		68
Radiated Electric Field Emissions(Below 1 GHz)		70
Radiated Electric Field Emissions(Above 1 GHz)		72
Harmonic Current Emissions and Voltage Fluctuations and Flicker		74
Electrostatic Discharge		75
Radiated Electric Field Immunity		76
Electrical Fast Transients/Bursts		77
Surge Transients		78
Conducted Disturbance		79
Voltage Dips and Short Interruptions		80
EUT External Photographs		81
EUT Internal Photographs		82



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (4) of (89)

1.0 General Product Description

Main Specifications of EUT are:

Video	XNO-9082R
Imaging Device	1/2.8" 8.46M CMOS
Effective Pixels	3864(H)x2192(V)
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.05Lux(F1.2, 1/30sec) B/W: 0Lux(IR LED On)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB: Micro USB Type B, 1280x720 for installation
Lens	
Focal Length (Zoom Ratio)	2.8~8.4mm(3x) motorized varifocal
Max. Aperture Ratio	F1.2(Wide)~F2.8(Tele)
Angular Field of View	H: 114°(Wide)~40.2°(Tele) / V: 62.0°(Wide)~22.5°(Tele) / D: 133.0°(Wide)~46.3°(Tele)
Min. Object Distance	0.7m (2.23ft)
Focus Control	Simple focus
Lens Type	DC Auto Iris, P iris
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	None
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Azimuth	None
Auto Tracking	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (5) of (89)

Operational	
IR Viewable Length	40m(131.23ft)
Camera Title	Off / On (Up to 85 characters) - W/W : English / Numeric / Special characters - China : English / Numeric / Special / Chinese characters - Common : Multi-line (Max. 5), Color (Grey / Green / Red / Blue / Black / White), Auto scale by resolution
Day & Night	Auto(ICR)/Color/BW/External/Schedule
Backlight Compensation	BLC, HLC, WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNRV
Digital Image Stabilization	Support(built-in gyro sensor)
Defog	Support
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	32ea, polygonal zones - Color : Gray, Green, Red, Blue, Black, White - Mosaic
Gain Control	Support
White Balance	ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5~1/12,000sec)
Digital PTZ	Support(Preset, Group)
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Defocus detection, Directional detection, Motion detection, Digital auto tracking, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Sound classification, Shock detection, Face/upper body detection
Business Intelligence	People counting, Queue management, Heatmap
Serial Interface	None
Alarm I/O	2 configurable I/O ports
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover Audio playback
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
IR Illuminator (Optional)	None
Wiper	None
Coaxial Protocol	None
Video Transmission Distance	None
Radiometry	
Temperature detect range	None
Temperature accuracy	None
Temperature detection	None
Additional	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (6) of (89)

Network	
Ethernet	RJ-45(10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Resolution	3840x2160, 3328x1872, 3072x1728, 2592x1944, 2688x1520, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 15fps/12fps(60Hz/50Hz)
Smart Codec	Manual(Sea area), WiseStreamII
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Quality level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 3 profiles)
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device Certificate(Hanwha Techwin Root CA)
Edge Storage	Micro SD/SDHC/SDXC 2slot 512GB(256Gx2)
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish,, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 8.1 or later, Mac OS X 10.13 or later Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Memory	4GB RAM, 512MB Flash
Environmental	
Operating Temperature / Humidity	-50°C~+60°C(-58°F ~ +140°F) / Less than 95% RH(non condensing) * Start up should be done at above -30°C
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH
Certification	IP66/IP67, IK10, NEMA4X
Electrical	
Input Voltage	PoE(IEEE802.3af), 12VDC, 24VAC
Power Consumption	PoE : typ 10.5W, max 12.95W 12VDC : typ 9.4W, max 12.5W 24VAC : typ 11.2W, max14.5W

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (7) of (89)

Mechanical	
Color / Material	Dark grey / Aluminum
RAL Code	None
Product dimensions / weight	Ø91x368.6mm(Ø3.85"x14.51"), Weight : 2.2kg
Conduit hole	3/4"
Hanging mount(Dome)	
Skin cover(Dome)	
Weather cap(Dome)	
Power module	
Backbox	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☒ 230 Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☐ PoE
Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Adding Simple Derived Models with Managed Models by Customer

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNO-9082R	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (9) of (89)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC/DC Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co.,Ltd.	-
AC/AC Adapter	DRL-246000AC	-	Dream Electronics Co., Ltd.	-
PoE Adapter	ANY4805C-LT1	-	ANY ELECTRONICS CO.,LTD.	-
Notebook	LG15N54	410NZXE015458	LG Electronics Co., Ltd.	-
Notebook Adapter	ADP-90WH B	84ZW19F1747	DELTA ELECTRONICS (JIANGSU) LTD.	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
MIC	CMK-303	-	-	-
Alarm	-	-	-	-
Button Alarm	-	-	-	-
Alarm Adapter	HN1220	-	Wifitech	-
IPhone	A1586	-	APPLE .Inc	-
Micro SD Card	-	-	SanDisk	8 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (10) of (89)

1.6 External I/O Cabling

■ DC Mode

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	Notebook	RJ-45	3.0	U
	Audio Out	Speaker	3.5 mm	1.4	U
	Audio In	MIC	3.5 mm	1.4	U
	Alarm Out	Alarm	Alarm In	3.1	U
	Alarm In	Button Alarm	Alarm Out	3.1	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	3.5 mm	IPhone	3.5 mm	0.5	U

* Unshielded=U, Shielded=S

■ PoE Mode

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	PoE Adapter	RJ-45	3.0	U
	Audio Out	Speaker	3.5 mm	1.4	U
	Audio In	MIC	3.5 mm	1.4	U
	Alarm Out	Alarm	Alarm In	3.1	U
	Alarm In	Button Alarm	Alarm Out	3.1	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	RJ-45	PoE Adapter	RJ-45	3.0	U
	3.5 mm	IPhone	3.5 mm	0.5	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



■ AC Mode

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	Note book	RJ-45	3.0	U
	Audio Out	Speaker	3.5 mm	1.4	U
	Audio In	MIC	3.5 mm	1.4	U
	Alarm Out	Alarm	Alarm In	3.1	U
	Alarm In	Button Alarm	Alarm Out	3.1	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	3.5 mm	IPhone	3.5 mm	0.5	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test Mode	operating
DC Mode, PoE Mode, AC Mode	Checked the normal operated of the web viewer and network ping tested.

EUT Test operating S / W		
Name	Version	Manufacture Company
Web Viewer	-	-


1.8 Configuration

■ AC Main
 □ DC Main


■ DC Mode

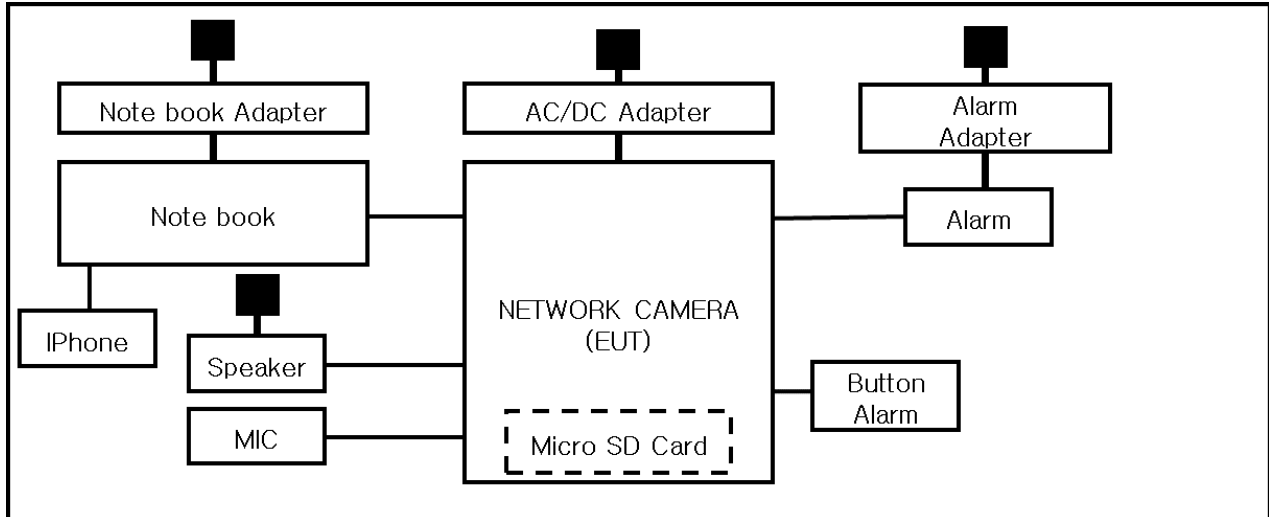

■ PoE Mode

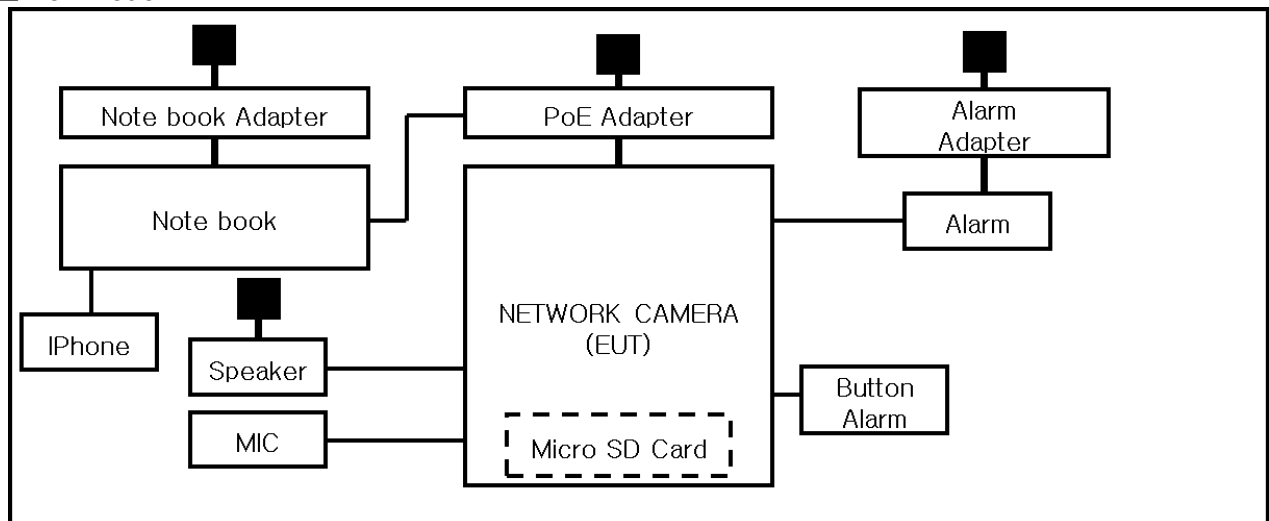

■ AC Mode

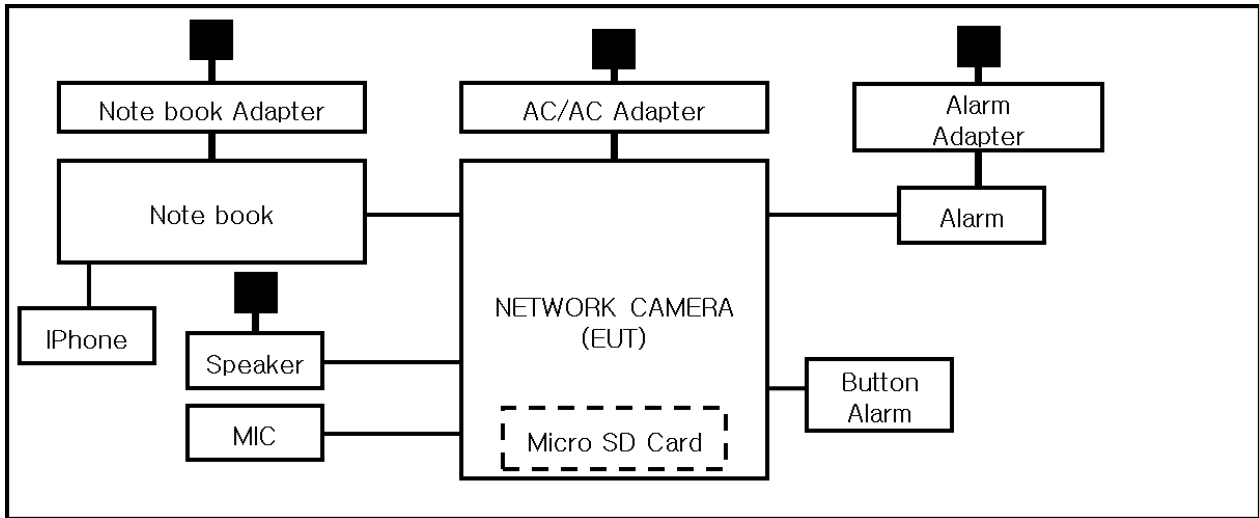

1.9 Remarks when standards applied

The USB port and VIDEO port are excluded for testing as the manager port.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0003



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ EMC – Directive 2014 / 30 / EU

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (16) of (89)

-
- | | | |
|--|----------------------------------|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ RE- Directive 2014 / 53 / EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (17) of (89)

2.1 Conducted Emissions at Mains Power Ports

Test Date
Apr. 09, 2020

Test Location
Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESU26	R & S	100552	04, 01, 2021
☒	LISN	ENV216	R & S	101787	01, 02, 2021
☒	LISN	ESH2-Z5	R & S	100450	01, 02, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	01, 02, 2021

Test Conditions

Temperature: 23,7 °C
Relative Humidity: 45,9 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (18) of (89)

2.2 Conducted Emissions at Telecommunication Ports

Test Date
Apr. 09, 2020

Test Location
Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESU26	R & S	100552	04, 01, 2021
☒	LISN	ENV216	R & S	101787	01, 02, 2021
☒	LISN	ESH2-Z5	R & S	100450	01, 02, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	01, 02, 2021
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2021
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2021
☐	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 10, 2021
☐	CDN	CDNS502A	TESEQ	40431	01, 02, 2021

Test Conditions

Temperature: 23,7 °C
Relative Humidity: 45,9 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (19) of (89)

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date
Apr. 10, 2020

Test Location
☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2021
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2020
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2021

Test Conditions
Temperature: 23,3 °C
Relative Humidity: 45,6 % R.H.

Frequency Range of Measurement
30 MHz to 1 GHz

Instrument Settings
IF Band Width: 120 kHz

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date
Apr. 10, 2020

Test Location
SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2020
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 27, 2020
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2021
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2021

Test Conditions
Temperature: 23,5 °C
Relative Humidity: 45,4 % R.H.

Frequency Range of Measurement
1 GHz to 6 GHz

Instrument Settings
IF Band Width: 1 MHz

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date
Apr. 11, 2020

Test Location
Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions
Temperature: 23,4 °C
Relative Humidity: 42,8 % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results
The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (22) of (89)

2.6 Voltage Fluctuations and Flicker

Test Date
Apr. 11, 2020

Test Location
Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: 23,4 °C
Relative Humidity: 42,8 % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test

report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.



Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any

change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any

change in outputs, which could be interpreted by associated equipment as a change,

and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable settings etc.)

(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and

(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip / interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual

change in the EUT or any change in outputs, which could be interpreted by associated equipment

as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.



3.1 Electrostatic Discharge

Reference Standard
EN 61000-4-2:2009

Test Date
Apr. 11, 2020

Test Location
EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	01, 28, 2021
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: 23,4 °C
Relative Humidity: 46,1 % R.H.
Atmospheric Pressure: 100,4 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane


Required Performance Criteria: ☒ Complied

Location of Discharge:


Air
Contact



■ DC Mode, AC Mode

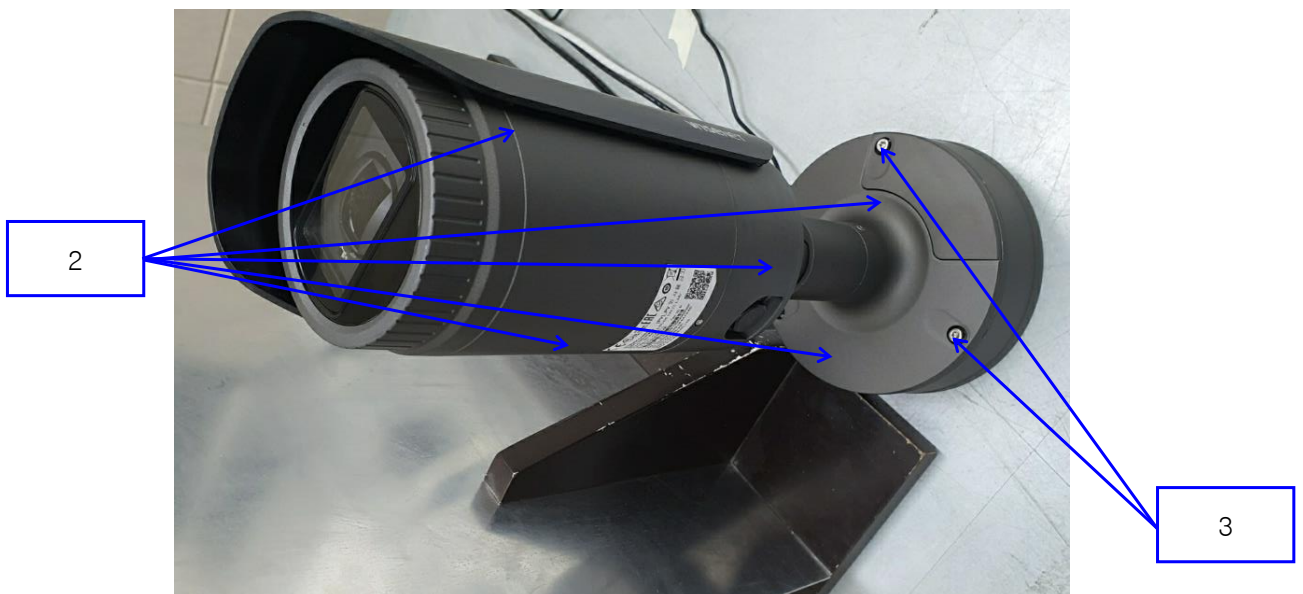



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

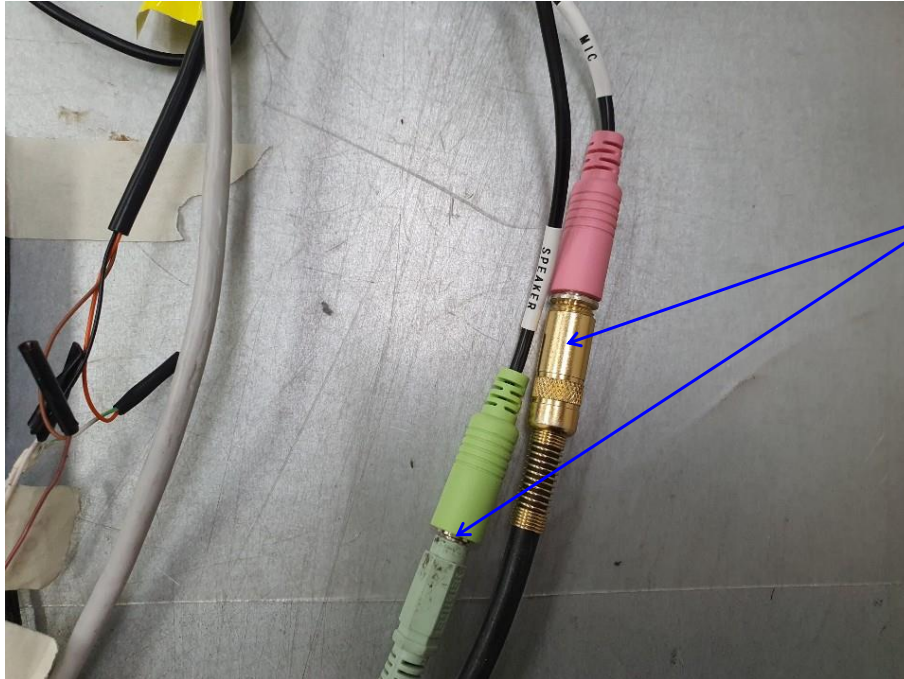

4

■ PoE Mode

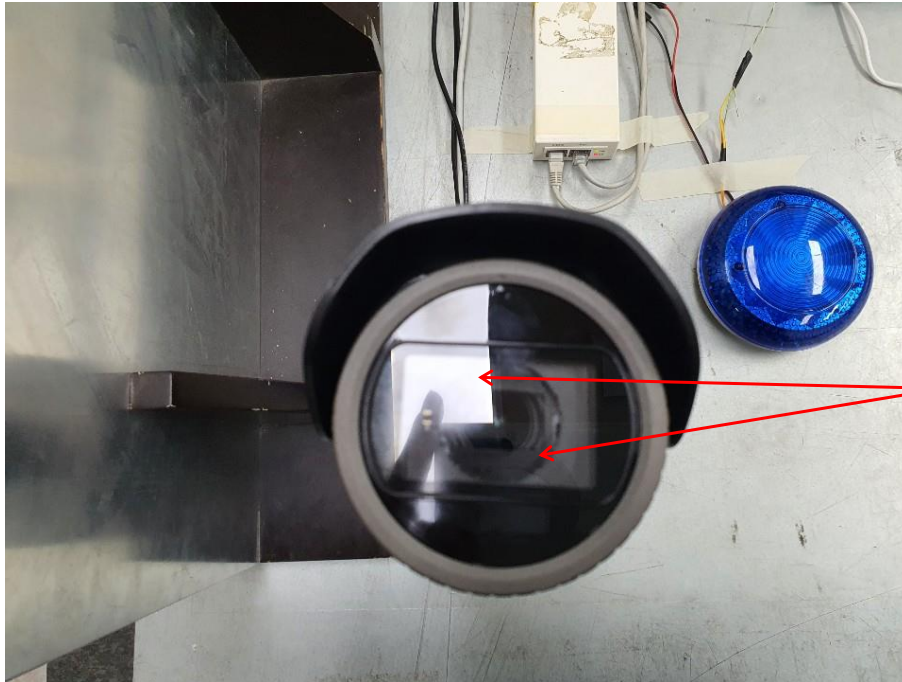

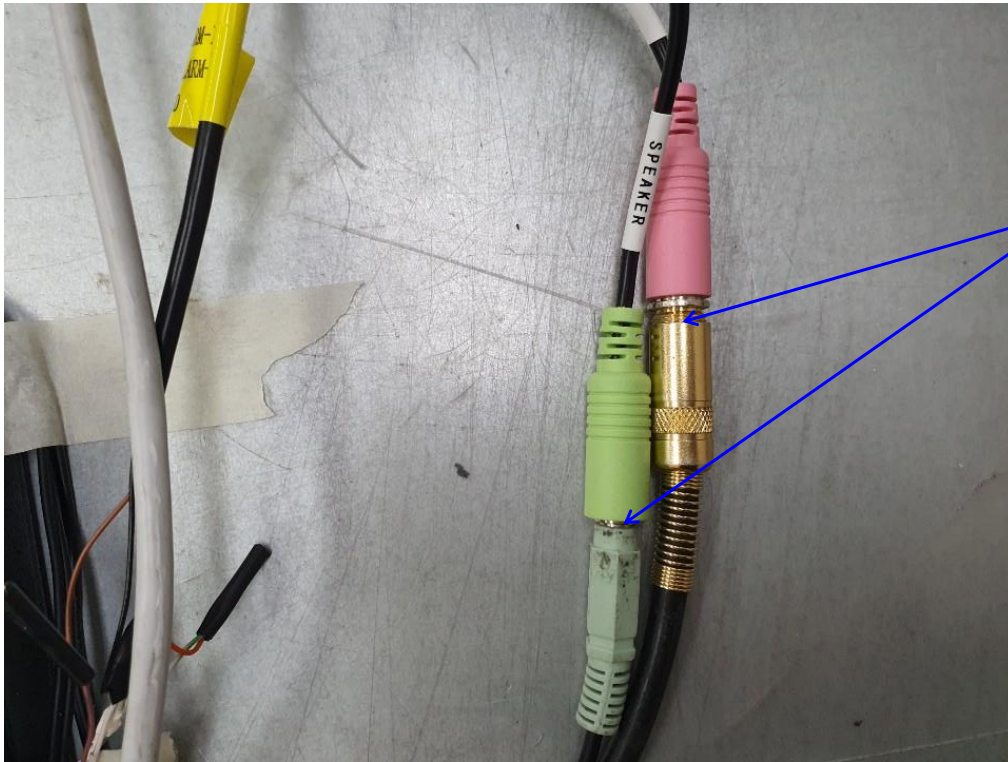

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (30) of (89)

Test Data**■ DC Mode****Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Lens	Air Discharge	Complied	-
2	Enclosure	Contact Discharge	Complied	-
3	Screw	Contact Discharge	Complied	-
4	Port	Contact Discharge	Complied	-

■ AC Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Lens	Air Discharge	Complied	-
2	Enclosure	Contact Discharge	Complied	-
3	Screw	Contact Discharge	Complied	-
4	Port	Contact Discharge	Complied	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (31) of (89)

■ PoE Mode**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Lens	Air Discharge	Complied	-
2	Enclosure	Contact Discharge	Complied	-
3	Screw	Contact Discharge	Complied	-
4	Port	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (32) of (89)

3.2 Radiated Electric Field Immunity

Reference Standard
EN 61000-4-3:2006 +A2:2010

Test Date
Apr. 13, 2020

Test Location
EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	R & S	177586	08, 06, 2020
☒	BROADBAND AMPLIFIER	BBA100	R & S	101239	08, 06, 2020
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 06, 2020
☒	POWER METER	NRP2	R & S	103475	08, 06, 2020
☒	AVG POWER SENSOR	NRP-Z91	R & S	102526	08, 06, 2020
☒	AVG POWER SENSOR	NRP-Z91	R & S	102527	08, 06, 2020
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	KY TELECOM	KY150001	08, 06, 2020
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	03, 11, 2021

Test Conditions
Temperature: 23,3 °C
Relative Humidity: 46,1 % R.H.
Atmospheric Pressure: 100,3 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (33) of (89)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (34) of (89)

Test Data**■ DC Mode**

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ AC Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ PoE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



3.3 Electrical Fast Transients / Bursts

Reference Standard
EN 61000-4-4:2012

Test Date
Apr. 15, 2020

Test Location
EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2020
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2020
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 27, 2020

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 45,2 % R.H.
Atmospheric Pressure: 100,5 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (36) of (89)

Test Data**■ DC Mode**☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	-	-
L – N	Complied	Complied
L – PE	-	-
N – PE	-	-
L – N – PE	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (37) of (89)

■ AC Mode☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	-	-
L – N	Complied	Complied
L – PE	-	-
N – PE	-	-
L – N – PE	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (38) of (89)

■ PoE Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	-	-
N	-	-
PE	-	-
L – N	-	-
L – PE	-	-
N – PE	-	-
L – N – PE	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (39) of (89)

3.4 Surge Transients

Reference Standard
EN 61000-4-5:2014

Test Date
Apr. 16, 2020

Test Location
EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2020
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2020
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 27, 2020

Test Conditions

Temperature: 23,2 °C
Relative Humidity: 45,8 % R.H.
Atmospheric Pressure: 100,3 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (40) of (89)

Test Specifications**AC Power Lines**

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (41) of (89)

Test Data**■ DC Mode**☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N – PE	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45	CDN	Complied	Complied
	LINE	Complied	Complied

■ AC Mode☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N – PE	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45	CDN	Complied	Complied
	LINE	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (42) of (89)

■ PoE Mode☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N - PE	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria



3.5 Conducted Disturbance

Reference Standard
EN 61000-4-6:2014

Test Date
Apr. 14, 2020

Test Location
EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 25, 2020
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 25, 2020
☒	CDN	CDN M016	TESEQ	43694	11, 25, 2020
☒	CDN	CDN M016	TESEQ	43697	11, 25, 2020
☒	CDN	CDN T800	TESEQ	42800	11, 25, 2020
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 26, 2020

Test Conditions

Temperature: 22,3 °C
Relative Humidity: 45,7 % R.H.
Atmospheric Pressure: 100,3 kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

Test Data

■ DC Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied

■ AC Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (45) of (89)

■ PoE Mode☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.6 Voltage Dips and Short Interruptions

Reference Standard
EN 61000-4-11:2004

Test Date
Apr. 11, 2020

Test Location
EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2020
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2020

Test Conditions

Temperature: 23,4 °C
Relative Humidity: 46,1 % R.H.
Atmospheric Pressure: 100,4 kPa



Test Specifications & Observations/Remarks

■ DC Mode

- Voltage Dips and Short Interruptions

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (48) of (89)

■ AC Mode**- Voltage Dips and Short Interruptions**

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (49) of (89)

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XNO-9082R
Phase:	L1
Mode:	DC
Operator Name:	KES

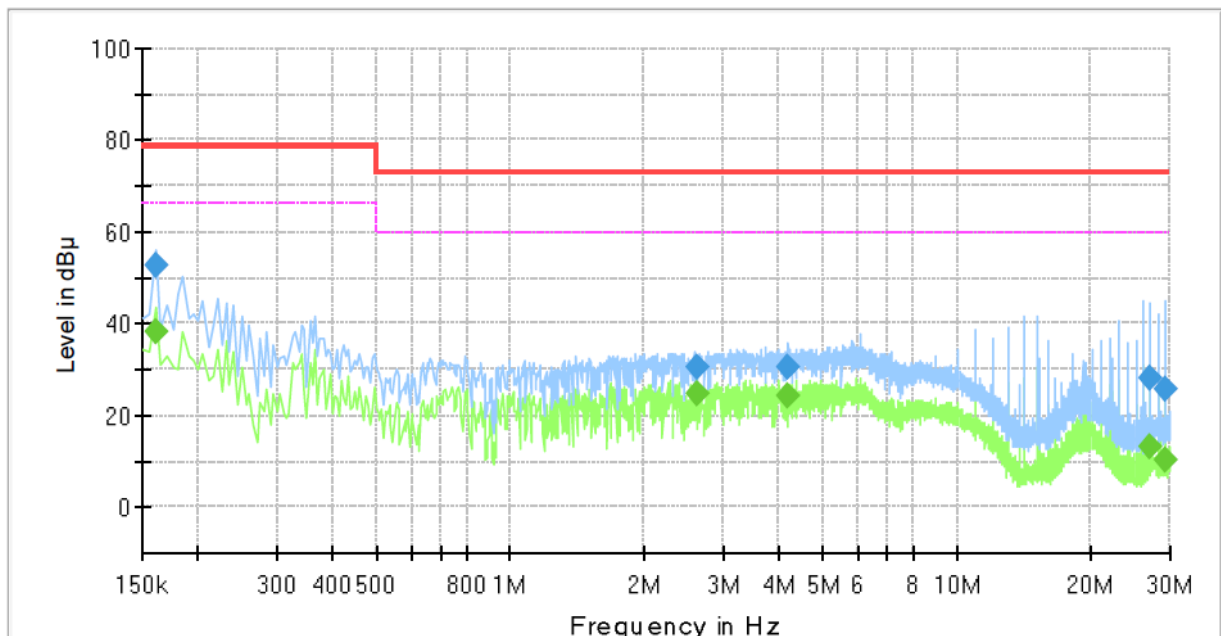

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	38.27	66.00	27.73	1000.0	9.000	L1	19.5
0.160000	52.55	---	79.00	26.45	1000.0	9.000	L1	19.5
2.605000	---	24.65	60.00	35.35	1000.0	9.000	L1	19.7
2.605000	30.73	---	73.00	42.27	1000.0	9.000	L1	19.7
4.200000	---	24.05	60.00	35.95	1000.0	9.000	L1	19.7
4.200000	30.59	---	73.00	42.41	1000.0	9.000	L1	19.7
27.220000	---	13.17	60.00	46.83	1000.0	9.000	L1	20.4
27.220000	28.23	---	73.00	44.77	1000.0	9.000	L1	20.4
29.255000	---	10.04	60.00	49.96	1000.0	9.000	L1	20.4
29.255000	25.86	---	73.00	47.14	1000.0	9.000	L1	20.4

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (50) of (89)

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: XNO-9082R
Phase: N
Mode: DC
Operator Name: KES

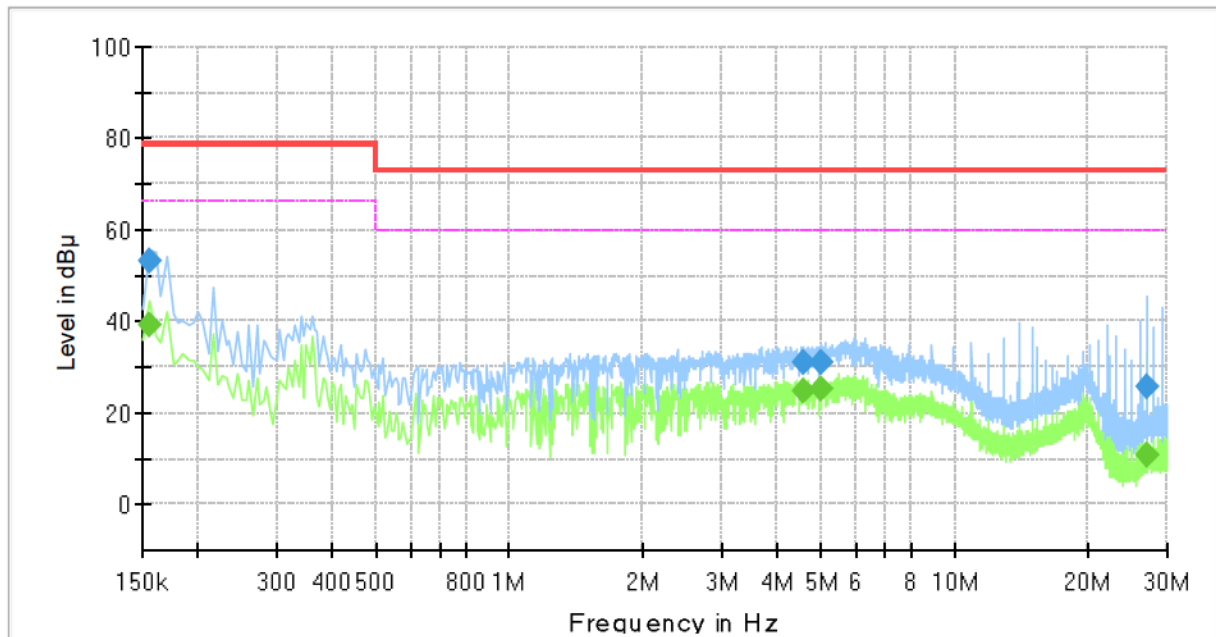

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	39.03	66.00	26.97	1000.0	9.000	N	19.5
0.155000	53.07	---	79.00	25.93	1000.0	9.000	N	19.5
4.595000	---	24.73	60.00	35.27	1000.0	9.000	N	19.7
4.595000	31.03	---	73.00	41.97	1000.0	9.000	N	19.7
5.040000	---	25.13	60.00	34.87	1000.0	9.000	N	19.7
5.040000	31.21	---	73.00	41.79	1000.0	9.000	N	19.7
27.140000	---	10.54	60.00	49.46	1000.0	9.000	N	20.5
27.140000	25.48	---	73.00	47.52	1000.0	9.000	N	20.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-20T0299
Page (51) of (89)

■ AC Mode

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: XNO-9082R
Phase: L1
Mode: AC
Operator Name: KES

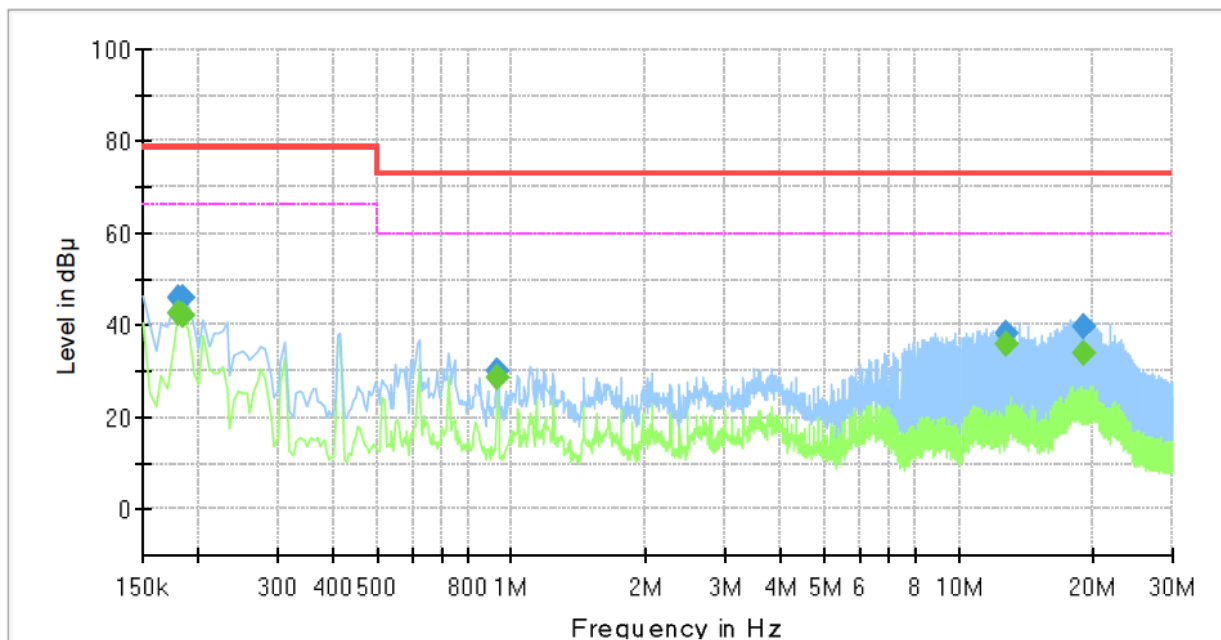

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.180000	---	42.59	66.00	23.41	1000.0	9.000	L1	19.5
0.180000	46.15	---	79.00	32.85	1000.0	9.000	L1	19.5
0.185000	---	42.25	66.00	23.75	1000.0	9.000	L1	19.5
0.185000	46.19	---	79.00	32.81	1000.0	9.000	L1	19.5
0.930000	---	28.75	60.00	31.25	1000.0	9.000	L1	19.7
0.930000	30.14	---	73.00	42.86	1000.0	9.000	L1	19.7
12.805000	---	35.74	60.00	24.26	1000.0	9.000	L1	20.0
12.805000	38.48	---	73.00	34.52	1000.0	9.000	L1	20.0
19.100000	---	33.68	60.00	26.32	1000.0	9.000	L1	20.2
19.100000	39.71	---	73.00	33.29	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (52) of (89)

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: XNO-9082R
Phase: N
Mode: AC
Operator Name: KES

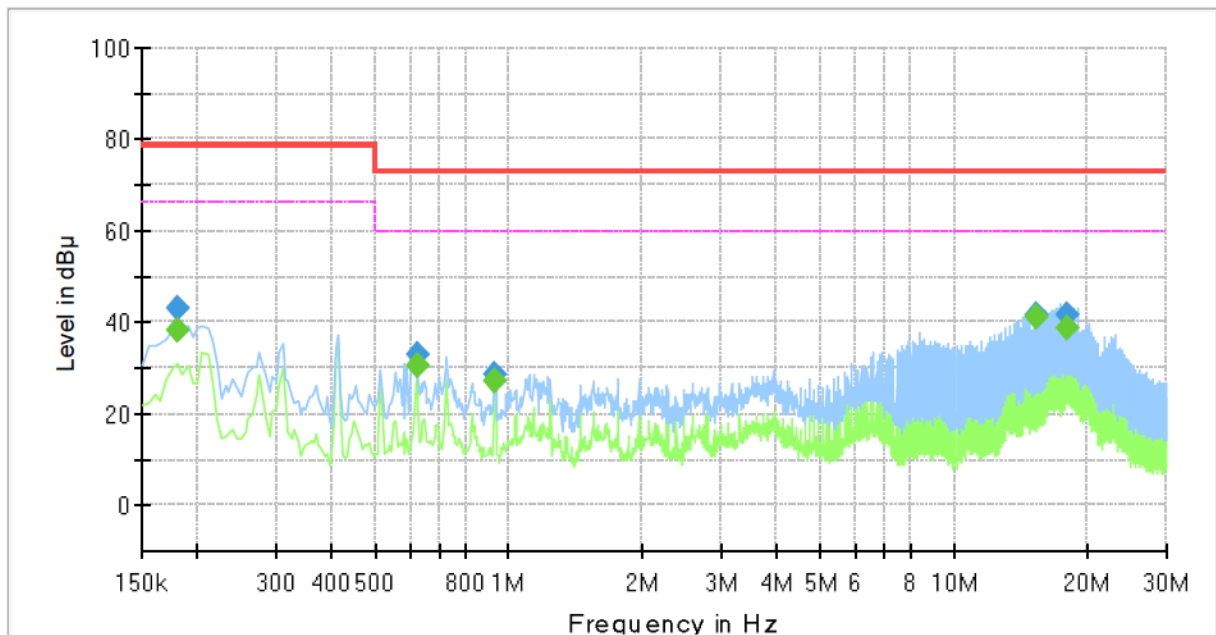

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.180000	---	38.45	66.00	27.55	1000.0	9.000	N	19.5
0.180000	43.25	---	79.00	35.75	1000.0	9.000	N	19.5
0.620000	---	30.47	60.00	29.53	1000.0	9.000	N	19.6
0.620000	32.78	---	73.00	40.22	1000.0	9.000	N	19.6
0.930000	---	27.18	60.00	32.82	1000.0	9.000	N	19.7
0.930000	28.59	---	73.00	44.41	1000.0	9.000	N	19.7
15.360000	---	41.27	60.00	18.73	1000.0	9.000	N	20.1
15.360000	41.59	---	73.00	31.41	1000.0	9.000	N	20.1
17.865000	---	38.79	60.00	21.21	1000.0	9.000	N	20.2
17.865000	41.68	---	73.00	31.32	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (53) of (89)


Conducted Emissions at Telecommunication Ports

■ DC Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-9082R
Mode :	DC
Speed :	1 000 Mbps
Operator Name:	KES

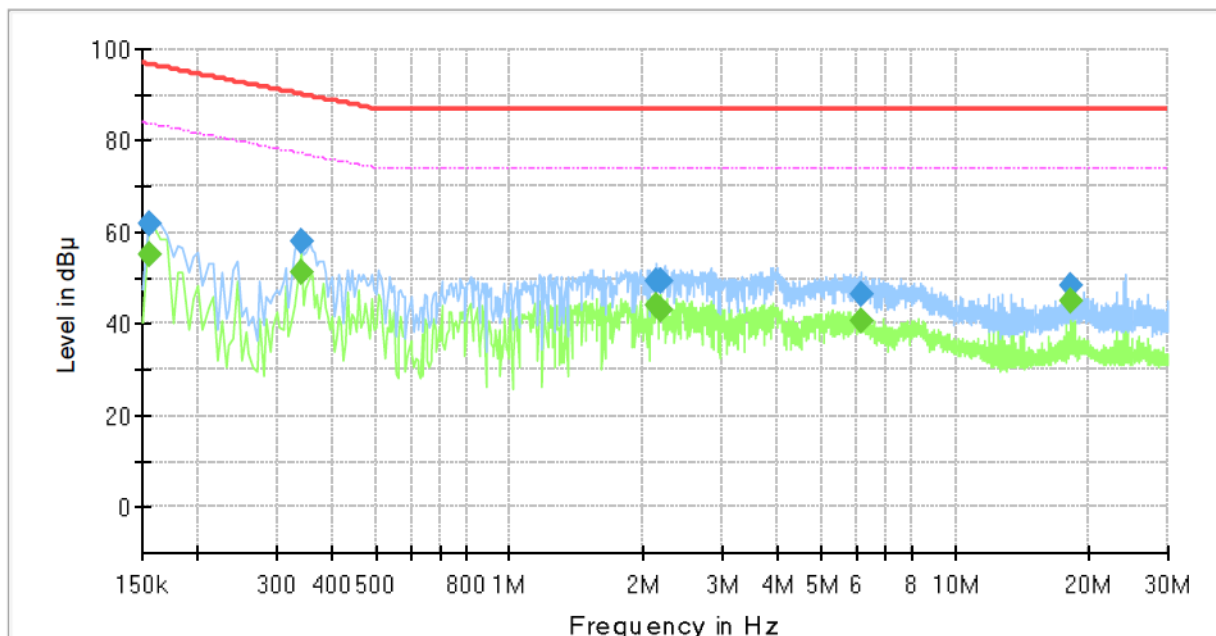

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	55.31	83.73	28.42	1000.0	9.000	Single Line	19.9
0.155000	61.85	---	96.73	34.88	1000.0	9.000	Single Line	19.9
0.340000	---	51.18	77.20	26.02	1000.0	9.000	Single Line	19.7
0.340000	57.89	---	90.20	32.31	1000.0	9.000	Single Line	19.7
2.130000	---	43.99	74.00	30.01	1000.0	9.000	Single Line	19.4
2.130000	49.42	---	87.00	37.58	1000.0	9.000	Single Line	19.4
2.190000	---	43.23	74.00	30.77	1000.0	9.000	Single Line	19.4
2.190000	49.57	---	87.00	37.43	1000.0	9.000	Single Line	19.4
6.150000	---	40.45	74.00	33.55	1000.0	9.000	Single Line	19.6
6.150000	46.36	---	87.00	40.64	1000.0	9.000	Single Line	19.6
18.245000	---	44.82	74.00	29.18	1000.0	9.000	Single Line	19.9
18.245000	48.46	---	87.00	38.54	1000.0	9.000	Single Line	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-20T0299
Page (54) of (89)

■ AC Mode

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNO-9082R
Mode : AC
Speed : 1 000 Mbps
Operator Name: KES

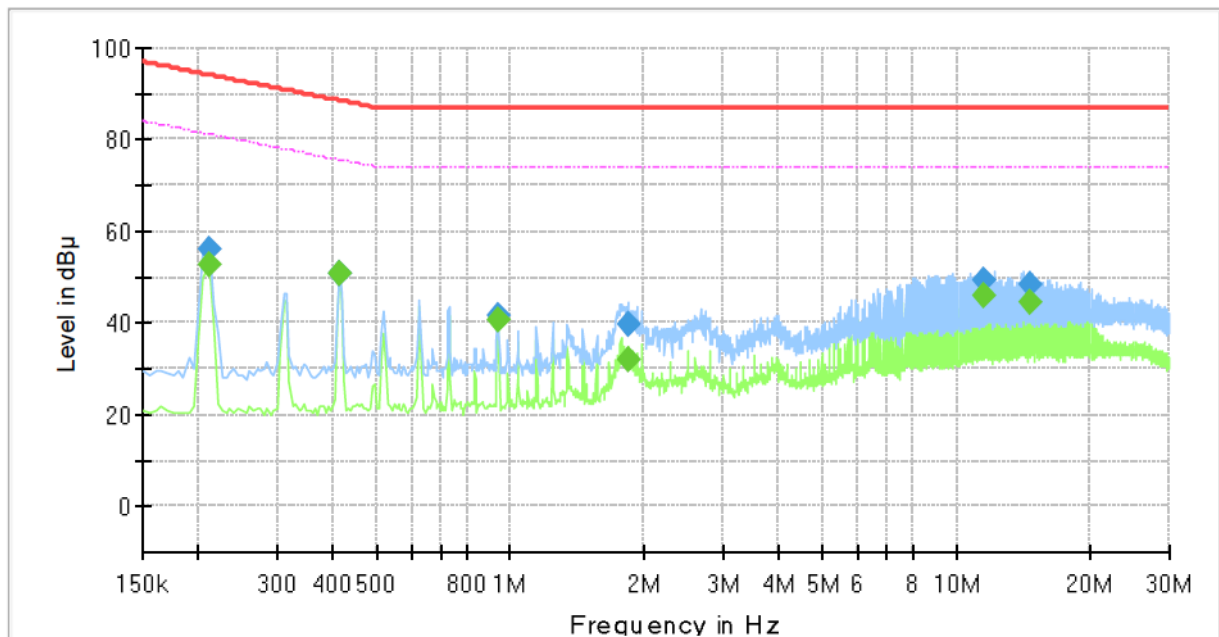

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.210000	---	52.51	81.21	28.70	1000.0	9.000	Single Line	19.8
0.210000	56.31	---	94.21	37.90	1000.0	9.000	Single Line	19.8
0.415000	---	50.87	75.55	24.68	1000.0	9.000	Single Line	19.6
0.415000	51.00	---	88.55	37.55	1000.0	9.000	Single Line	19.6
0.935000	---	40.60	74.00	33.40	1000.0	9.000	Single Line	19.6
0.935000	41.46	---	87.00	45.54	1000.0	9.000	Single Line	19.6
1.845000	---	32.07	74.00	41.93	1000.0	9.000	Single Line	19.5
1.845000	39.66	---	87.00	47.34	1000.0	9.000	Single Line	19.5
11.540000	---	45.74	74.00	28.26	1000.0	9.000	Single Line	19.8
11.540000	49.31	---	87.00	37.69	1000.0	9.000	Single Line	19.8
14.555000	---	44.56	74.00	29.44	1000.0	9.000	Single Line	19.9
14.555000	48.55	---	87.00	38.45	1000.0	9.000	Single Line	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-20T0299
Page (55) of (89)

■ PoE Mode

[1 000 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNO-9082R
Mode :	PoE
Speed :	1 000 Mbps
Operator Name:	KES

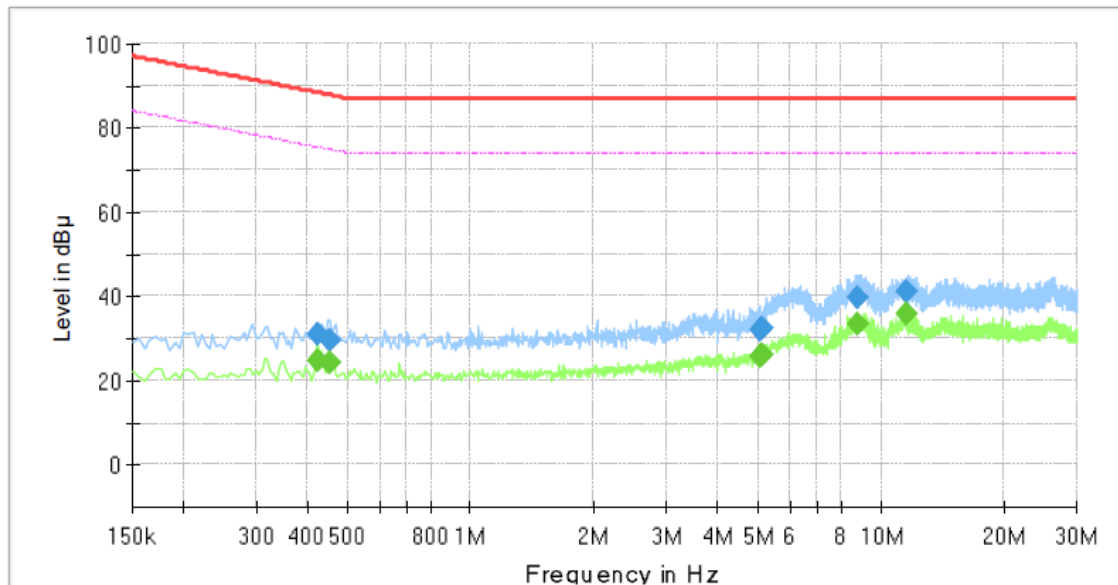

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.425000	---	24.93	75.35	50.42	1000.0	9.000	Single Line	19.6
0.425000	31.05	---	88.35	57.30	1000.0	9.000	Single Line	19.6
0.455000	---	24.14	74.78	50.64	1000.0	9.000	Single Line	19.6
0.455000	29.80	---	87.78	57.98	1000.0	9.000	Single Line	19.6
5.085000	---	25.89	74.00	48.11	1000.0	9.000	Single Line	19.5
5.085000	31.95	---	87.00	55.05	1000.0	9.000	Single Line	19.5
5.120000	---	26.13	74.00	47.87	1000.0	9.000	Single Line	19.5
5.120000	32.44	---	87.00	54.56	1000.0	9.000	Single Line	19.5
8.760000	---	33.40	74.00	40.60	1000.0	9.000	Single Line	19.8
8.760000	39.68	---	87.00	47.32	1000.0	9.000	Single Line	19.8
11.535000	---	35.84	74.00	38.16	1000.0	9.000	Single Line	19.8
11.535000	41.29	---	87.00	45.71	1000.0	9.000	Single Line	19.8

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-20T0299

Page (56) of (89)

Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode

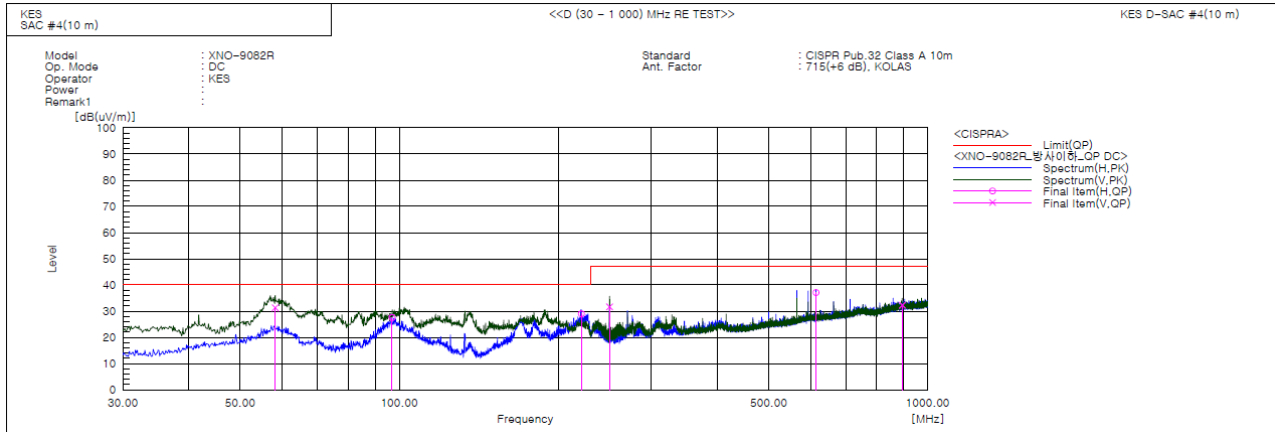

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	58.251	V	53.5	-22.2	31.3	40.0	8.7	100.0	127.0	
2	96.930	H	50.5	-22.9	27.6	40.0	12.4	394.0	174.0	
3	221.211	H	49.4	-20.4	29.0	40.0	11.0	400.0	218.0	
4	249.948	V	51.6	-19.9	31.7	47.0	15.3	107.0	351.0	
5	614.425	H	46.6	-9.5	37.1	47.0	9.9	171.0	111.0	
6	894.391	V	37.7	-5.4	32.3	47.0	14.7	124.0	225.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (57) of (89)

AC Mode

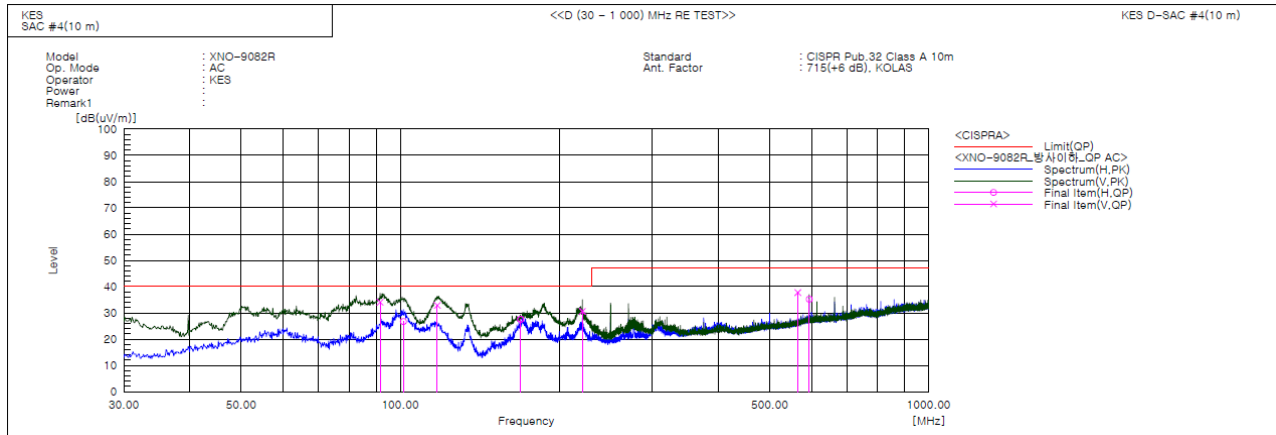

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	91.595	V	58.4	-24.3	34.1	40.0	5.9	110.0	107.0	
2	101.416	H	49.1	-22.4	26.7	40.0	13.3	400.0	229.0	
3	117.543	V	56.5	-23.6	32.9	40.0	7.1	102.0	190.0	
4	168.953	H	52.0	-24.4	27.6	40.0	12.4	378.0	222.0	
5	221.211	V	51.0	-20.4	30.6	40.0	9.4	121.0	91.0	
6	565.319	V	48.8	-11.0	37.8	47.0	9.2	324.0	90.0	
7	594.055	H	45.0	-9.8	35.2	47.0	11.8	271.0	188.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (58) of (89)

PoE Mode

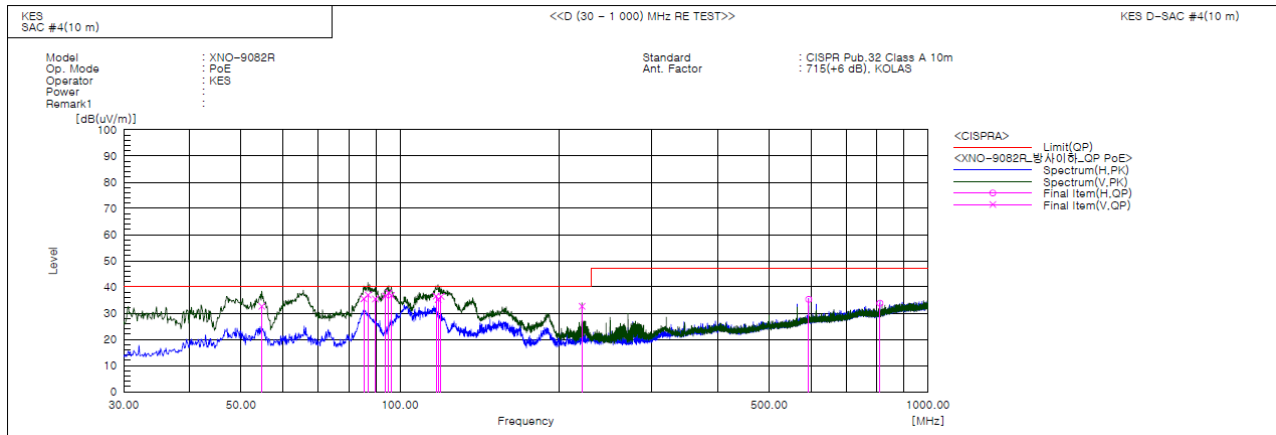

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	54.735	V	54.4	-21.7	32.7	40.0	7.3	105.0	280.0	
2	85.411	V	61.6	-26.1	35.5	40.0	4.5	120.0	54.0	
3	86.988	V	62.6	-25.6	37.0	40.0	3.0	121.0	75.0	
4	89.776	V	60.2	-24.8	35.4	40.0	4.6	111.0	59.0	
5	93.899	V	60.2	-23.6	36.6	40.0	3.4	116.0	143.0	
6	95.233	V	61.0	-23.3	37.7	40.0	2.3	107.0	122.0	
7	96.324	V	59.8	-23.0	36.8	40.0	3.2	119.0	159.0	
8	117.058	V	60.0	-23.5	36.5	40.0	3.5	103.0	210.0	
9	118.149	V	58.9	-23.7	35.2	40.0	4.8	100.0	221.0	
10	119.604	V	60.3	-23.9	36.4	40.0	3.6	105.0	221.0	
11	221.211	V	53.1	-20.4	32.7	40.0	7.3	107.0	217.0	
12	593.934	H	45.1	-9.8	35.3	47.0	11.7	256.0	111.0	
13	811.093	H	41.2	-7.4	33.8	47.0	13.2	255.0	186.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-20T0299

Page (59) of (89)

Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

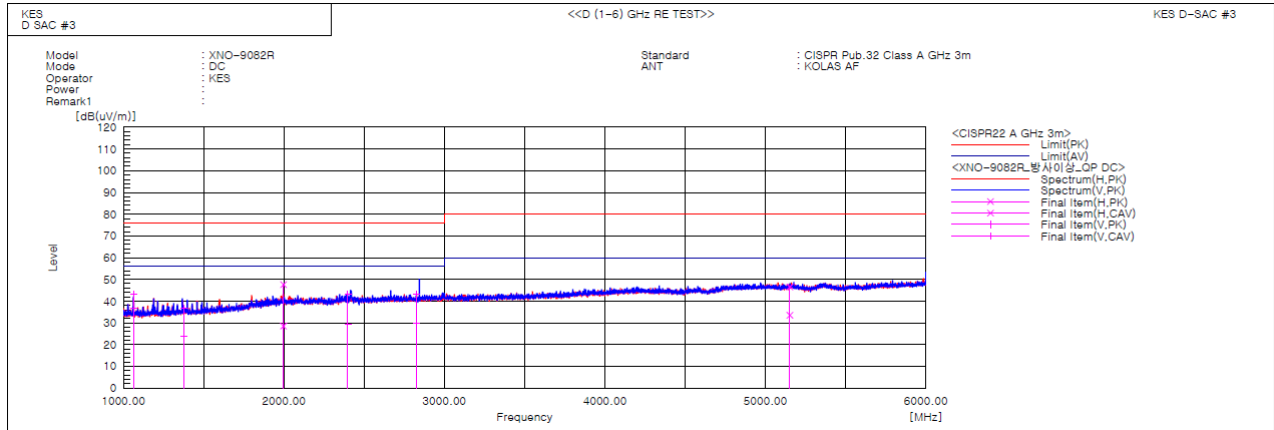

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1062.530	V	52.3	45.7	-9.1	43.2	36.6	76.0	56.0	32.8	19.4	100.0	294.7	
2	1375.158	V	43.9	31.1	-7.2	36.7	23.9	76.0	56.0	39.3	32.1	100.0	38.7	
3	1996.230	H	49.6	30.5	-2.0	47.6	28.5	76.0	56.0	28.4	27.5	100.0	119.6	
4	2398.023	V	43.5	29.5	-0.3	43.2	29.2	76.0	56.0	32.8	26.8	100.0	263.6	
5	2824.184	V	42.2	28.9	0.9	43.1	29.8	76.0	56.0	32.9	26.2	100.0	276.7	
6	5152.002	H	37.9	24.9	8.6	46.5	33.5	80.0	60.0	33.5	26.5	100.0	68.4	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0299

Page (60) of (89)

AC Mode

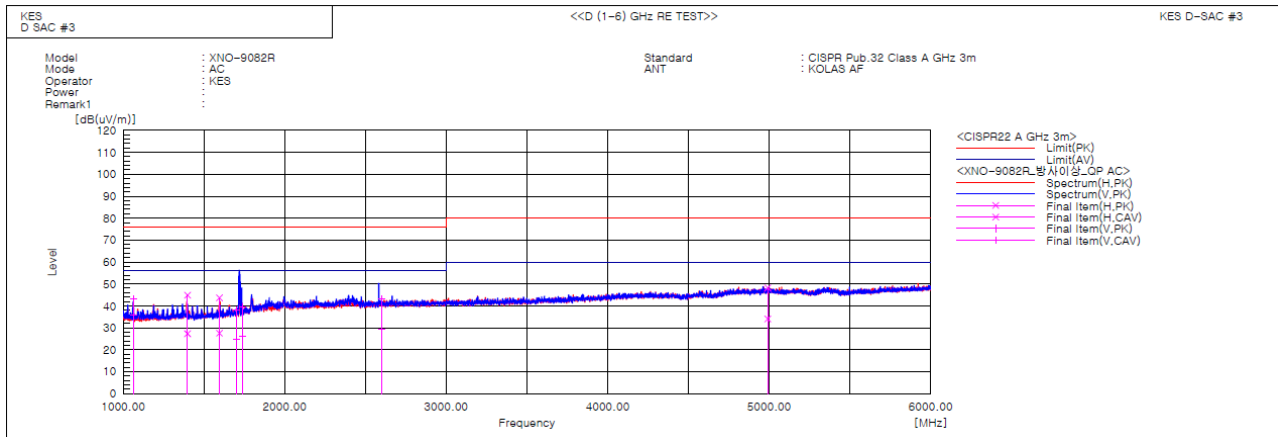

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1062.460	V	52.2	45.0	-9.1	43.1	35.9	76.0	56.0	32.9	20.1	100.0	194.7	
2	1397.999	H	52.0	34.4	-7.1	44.9	27.3	76.0	56.0	31.1	28.7	100.0	283.6	
3	1595.531	H	49.4	33.3	-5.7	43.7	27.6	76.0	56.0	32.3	28.4	100.0	180.1	
4	1736.526	V	43.9	30.5	-4.3	39.6	26.2	76.0	56.0	36.4	29.8	100.0	345.6	
5	1702.934	V	42.7	29.4	-4.7	38.0	24.7	76.0	56.0	38.0	31.3	100.0	4.9	
6	2597.727	V	42.6	28.8	0.5	43.1	29.3	76.0	56.0	32.9	26.7	100.0	217.6	
7	4990.395	H	39.7	25.5	8.5	48.2	34.0	80.0	60.0	31.8	26.0	100.0	175.9	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (61) of (89)

PoE Mode

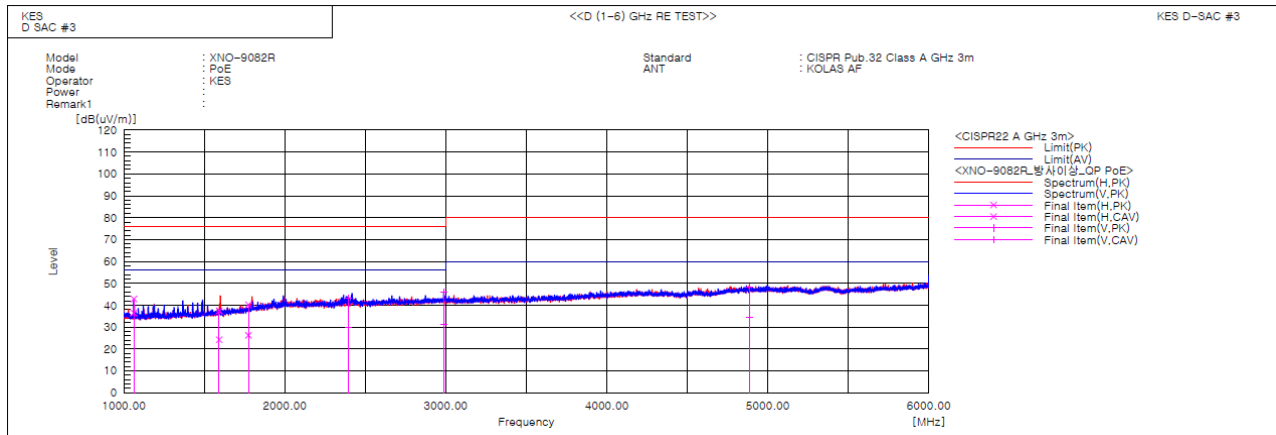

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1062.360	H	51.9	45.5	-9.1	42.8	36.4	76.0	56.0	33.2	19.6	100.0	7.4	
2	1591.622	H	43.3	30.0	-5.8	37.5	24.2	76.0	56.0	38.5	31.8	100.0	192.1	
3	1773.235	H	44.1	30.1	-3.9	40.2	26.2	76.0	56.0	35.8	29.8	100.0	143.4	
4	2392.105	V	43.6	30.0	-0.4	43.2	29.6	76.0	56.0	32.8	26.4	100.0	44.9	
5	2988.790	V	44.7	29.8	1.4	46.1	31.2	76.0	56.0	29.9	24.8	100.0	118.7	
6	4884.787	V	39.9	26.5	8.2	48.1	34.7	80.0	60.0	31.9	25.3	100.0	57.2	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ DC Mode

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.046			
2	0.003	0.236	1.080	n/a
3	0.039	1.715	2.300	PASS
4	0.003	0.809	0.430	n/a
5	0.040	3.505	1.140	PASS
6	0.003	1.106	0.300	n/a
7	0.040	5.136	0.770	PASS
8	0.003	1.431	0.230	n/a
9	0.037	9.162	0.400	PASS
10	0.003	1.748	0.184	n/a
11	0.035	10.472	0.330	PASS
12	0.003	2.066	0.153	n/a
13	0.033	15.479	0.210	PASS
14	0.003	2.407	0.131	n/a
15	0.030	19.992	0.150	PASS
16	0.003	2.650	0.115	n/a
17	0.027	20.766	0.132	PASS
18	0.003	2.908	0.102	n/a
19	0.025	21.069	0.118	PASS
20	0.003	3.200	0.092	n/a
21	0.022	13.915	0.161	PASS
22	0.003	3.462	0.084	n/a
23	0.020	13.335	0.147	PASS
24	0.003	3.683	0.077	n/a
25	0.017	12.702	0.135	PASS
26	0.003	3.911	0.071	n/a
27	0.015	11.843	0.125	PASS
28	0.003	4.178	0.066	n/a
29	0.012	10.603	0.116	PASS
30	0.003	4.345	0.061	n/a
31	0.011	9.656	0.109	PASS
32	0.003	4.529	0.058	n/a
33	0.009	8.487	0.102	PASS
34	0.003	4.650	0.054	n/a
35	0.007	7.702	0.096	PASS
36	0.002	4.759	0.051	n/a
37	0.006	7.021	0.091	PASS
38	0.002	4.848	0.048	n/a
39	0.006	6.688	0.087	PASS
40	0.002	4.789	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.047			
2	0.003	0.190	1.620	n/a
3	0.040	1.163	3.450	PASS
4	0.004	0.582	0.645	n/a
5	0.040	2.353	1.710	PASS
6	0.004	0.815	0.450	n/a
7	0.040	3.450	1.155	PASS
8	0.004	1.051	0.345	n/a
9	0.037	6.150	0.600	PASS
10	0.003	1.259	0.276	n/a
11	0.035	7.035	0.495	PASS
12	0.003	1.474	0.230	n/a
13	0.033	10.379	0.315	PASS
14	0.003	1.742	0.197	n/a
15	0.030	13.403	0.225	PASS
16	0.003	1.995	0.173	n/a
17	0.028	13.933	0.199	PASS
18	0.003	2.161	0.153	n/a
19	0.025	14.124	0.178	PASS
20	0.003	2.409	0.138	n/a
21	0.023	14.014	0.161	PASS
22	0.003	2.556	0.125	n/a
23	0.020	13.484	0.147	PASS
24	0.003	2.779	0.115	n/a
25	0.017	12.820	0.135	PASS
26	0.003	2.944	0.106	n/a
27	0.015	11.985	0.125	PASS
28	0.003	3.205	0.099	n/a
29	0.012	10.735	0.116	PASS
30	0.003	3.206	0.092	n/a
31	0.011	9.835	0.109	PASS
32	0.003	3.363	0.086	n/a
33	0.009	8.659	0.102	PASS
34	0.003	3.470	0.081	n/a
35	0.008	7.849	0.096	PASS
36	0.003	3.549	0.077	n/a
37	0.007	7.244	0.091	PASS
38	0.003	3.548	0.073	n/a
39	0.006	6.833	0.087	PASS
40	0.002	3.504	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0299

Page (64) of (89)

■ AC Mode

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.180			
2	0.003	0.297	1.080	n/a
3	0.062	2.700	2.300	PASS
4	0.003	0.674	0.430	n/a
5	0.036	3.168	1.140	PASS
6	0.002	0.619	0.300	n/a
7	0.015	2.006	0.770	PASS
8	0.001	0.525	0.230	n/a
9	0.012	2.879	0.400	PASS
10	0.001	0.451	0.184	n/a
11	0.004	1.095	0.330	n/a
12	0.001	0.510	0.153	n/a
13	0.002	0.940	0.210	n/a
14	0.001	0.560	0.131	n/a
15	0.002	1.541	0.150	n/a
16	0.001	0.656	0.115	n/a
17	0.002	1.663	0.132	n/a
18	0.001	0.714	0.102	n/a
19	0.001	1.064	0.118	n/a
20	0.001	0.826	0.092	n/a
21	0.001	0.709	0.161	n/a
22	0.001	0.805	0.084	n/a
23	0.001	0.754	0.147	n/a
24	0.001	0.836	0.077	n/a
25	0.001	0.890	0.135	n/a
26	0.001	0.940	0.071	n/a
27	0.001	0.758	0.125	n/a
28	0.001	1.024	0.066	n/a
29	0.001	0.644	0.116	n/a
30	0.001	1.234	0.061	n/a
31	0.001	0.709	0.109	n/a
32	0.001	1.129	0.058	n/a
33	0.001	0.823	0.102	n/a
34	0.001	1.554	0.054	n/a
35	0.001	0.738	0.096	n/a
36	0.001	1.445	0.051	n/a
37	0.001	0.903	0.091	n/a
38	0.001	1.432	0.048	n/a
39	0.001	0.858	0.087	n/a
40	0.001	1.641	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.181			
2	0.004	0.222	1.620	n/a
3	0.062	1.808	3.450	PASS
4	0.003	0.515	0.645	n/a
5	0.037	2.137	1.710	PASS
6	0.002	0.455	0.450	n/a
7	0.016	1.370	1.155	PASS
8	0.001	0.398	0.345	n/a
9	0.012	2.010	0.600	PASS
10	0.001	0.386	0.276	n/a
11	0.004	0.855	0.495	n/a
12	0.001	0.399	0.230	n/a
13	0.003	0.818	0.315	n/a
14	0.001	0.445	0.197	n/a
15	0.003	1.180	0.225	n/a
16	0.001	0.479	0.173	n/a
17	0.003	1.342	0.199	n/a
18	0.001	0.581	0.153	n/a
19	0.002	1.070	0.178	n/a
20	0.001	0.628	0.138	n/a
21	0.002	0.980	0.161	n/a
22	0.001	0.654	0.125	n/a
23	0.002	1.076	0.147	n/a
24	0.001	0.685	0.115	n/a
25	0.001	0.996	0.135	n/a
26	0.001	0.744	0.106	n/a
27	0.001	0.899	0.125	n/a
28	0.001	0.808	0.099	n/a
29	0.001	0.848	0.116	n/a
30	0.001	0.966	0.092	n/a
31	0.001	0.932	0.109	n/a
32	0.001	0.888	0.086	n/a
33	0.001	1.108	0.102	n/a
34	0.001	1.167	0.081	n/a
35	0.001	1.124	0.096	n/a
36	0.001	1.080	0.077	n/a
37	0.001	1.135	0.091	n/a
38	0.001	1.099	0.073	n/a
39	0.001	1.175	0.087	n/a
40	0.001	1.369	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0299
Page (66) of (89)

Test Data - Voltage Fluctuations**Maximum Flicker results****■ DC Mode**

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

■ AC Mode

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ DC, AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Emissions at Telecommunication Ports

■ DC, AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

■ DC, AC Mode

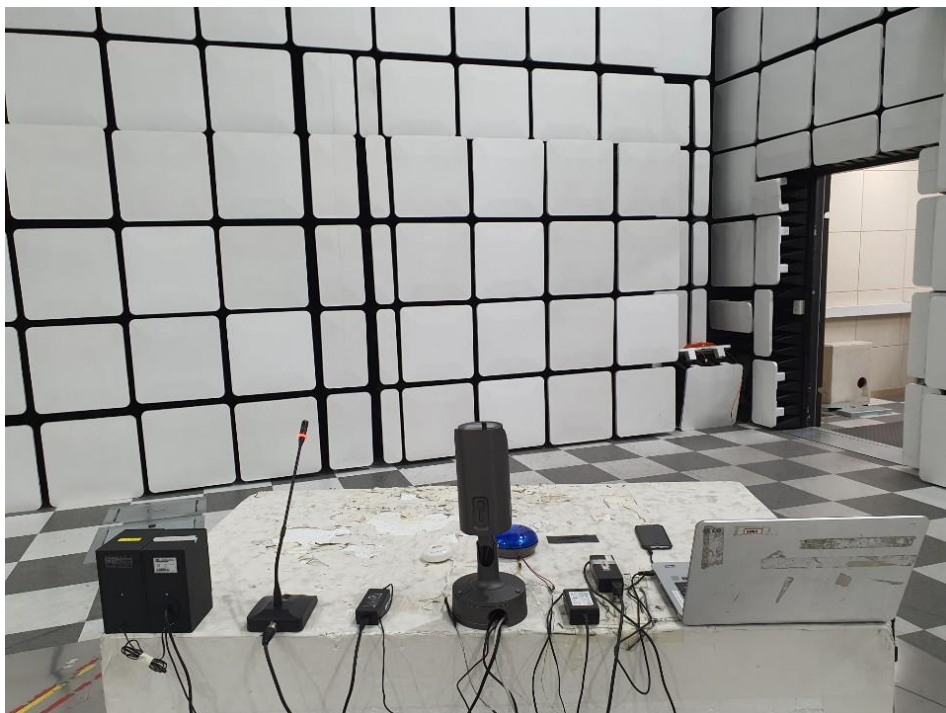

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

■ DC, AC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker

■ DC, AC Mode




Electrostatic Discharge

■ DC, AC Mode



■ PoE Mode

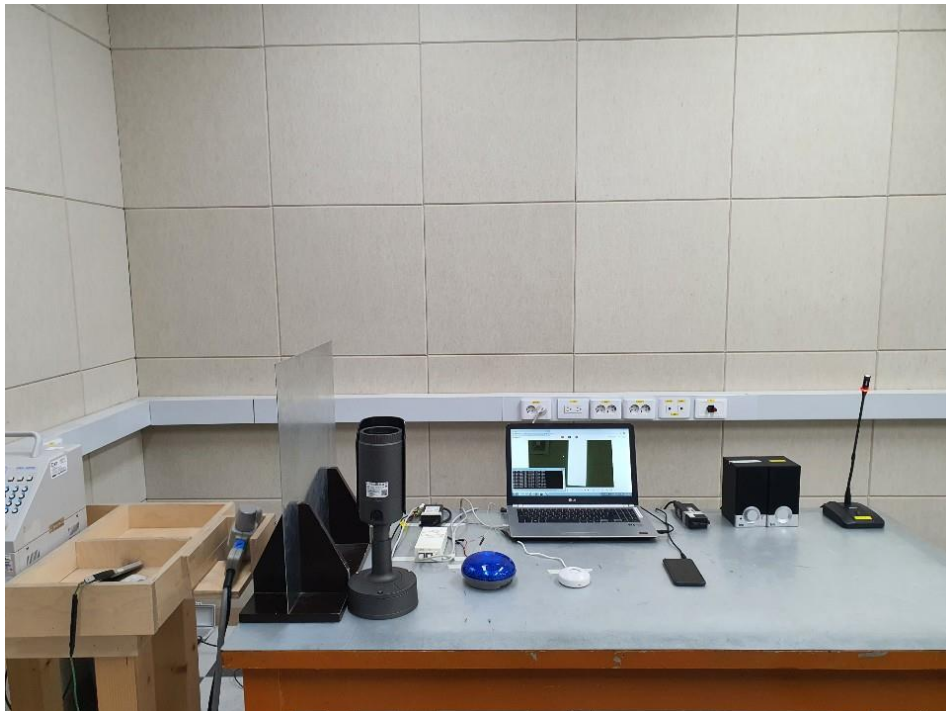

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Immunity

■ DC, AC Mode



■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients/Bursts

■ DC, AC Mode



■ PoE Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Surge Transients

■ DC, AC Mode




■ PoE Mode

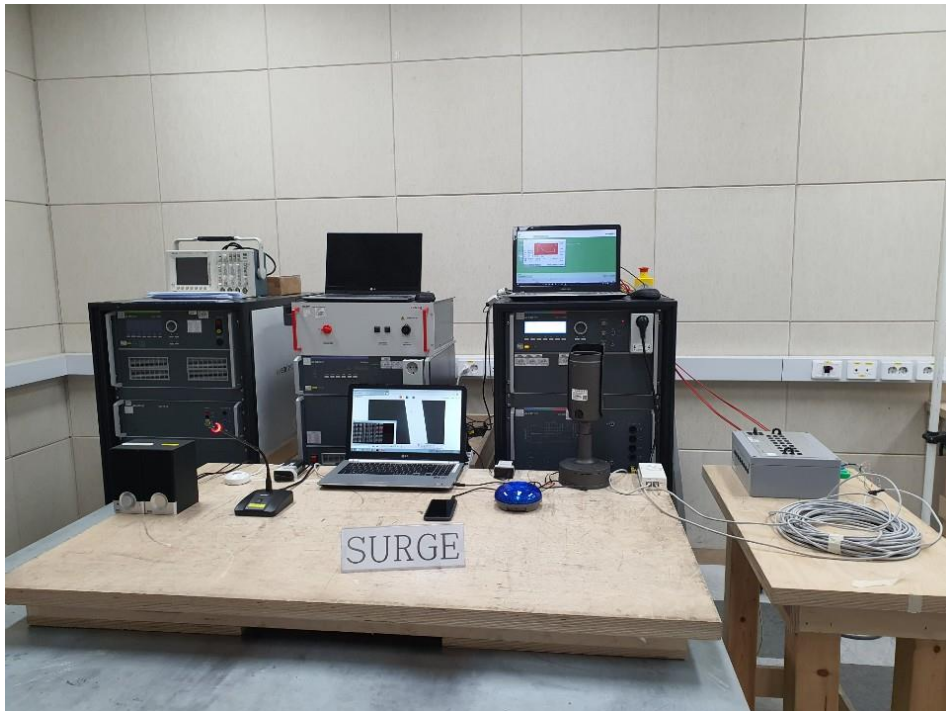


Conducted Disturbance

■ DC, AC Mode

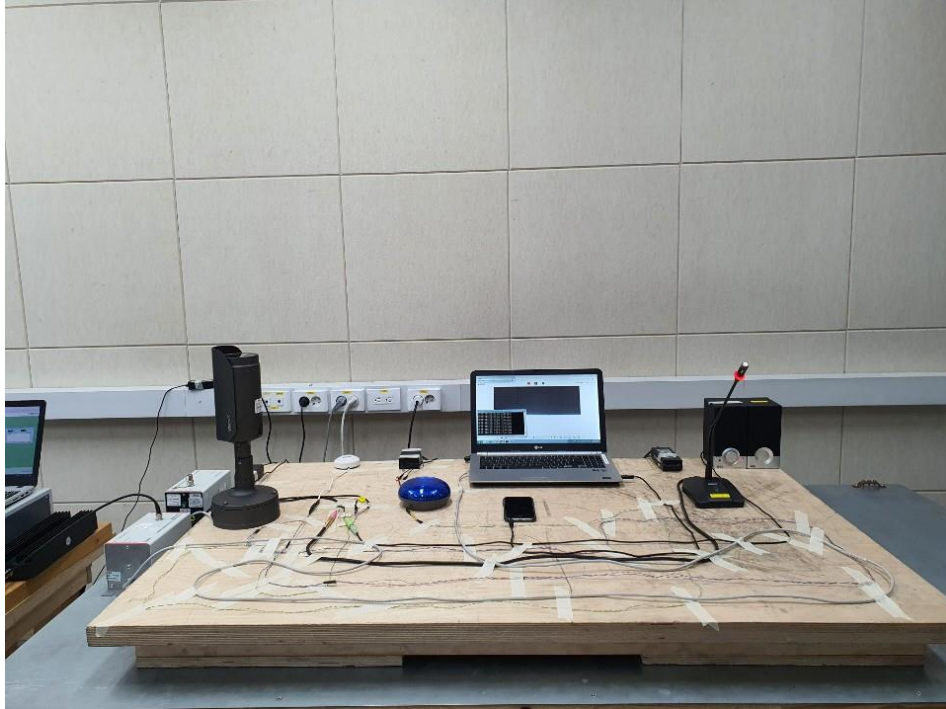

■ PoE Mode

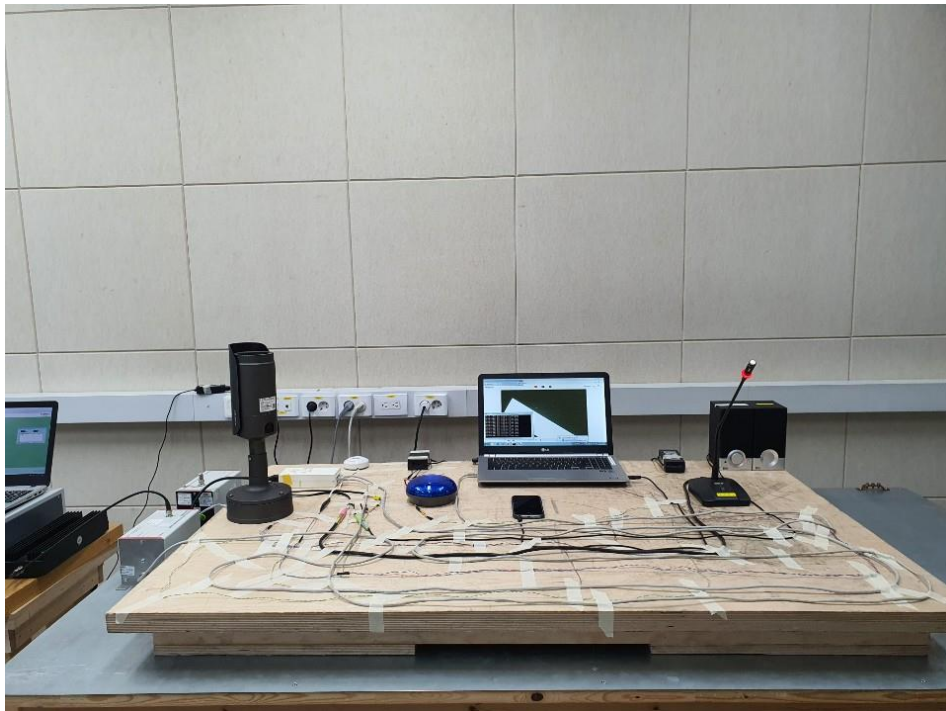

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Voltage Dips and Short Interruptions

■ DC, AC Mode



EUT External Photographs

(Top)



(Bottom)




EUT Internal Photographs

(Internal View)



EUT Internal View – Board 1

(Top)

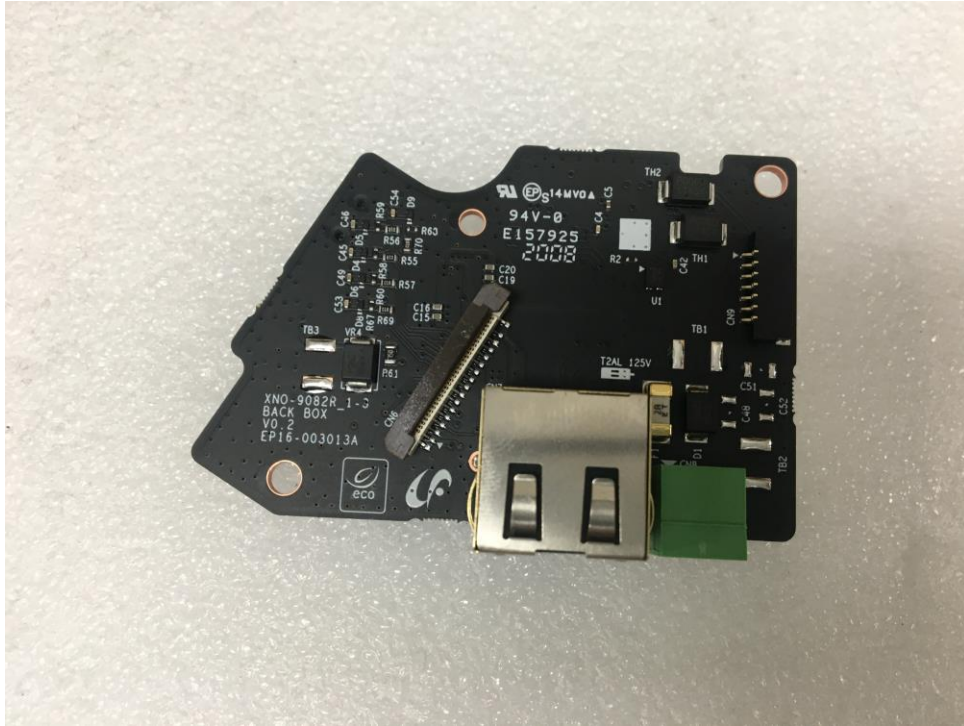

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 2

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 3

(Top)

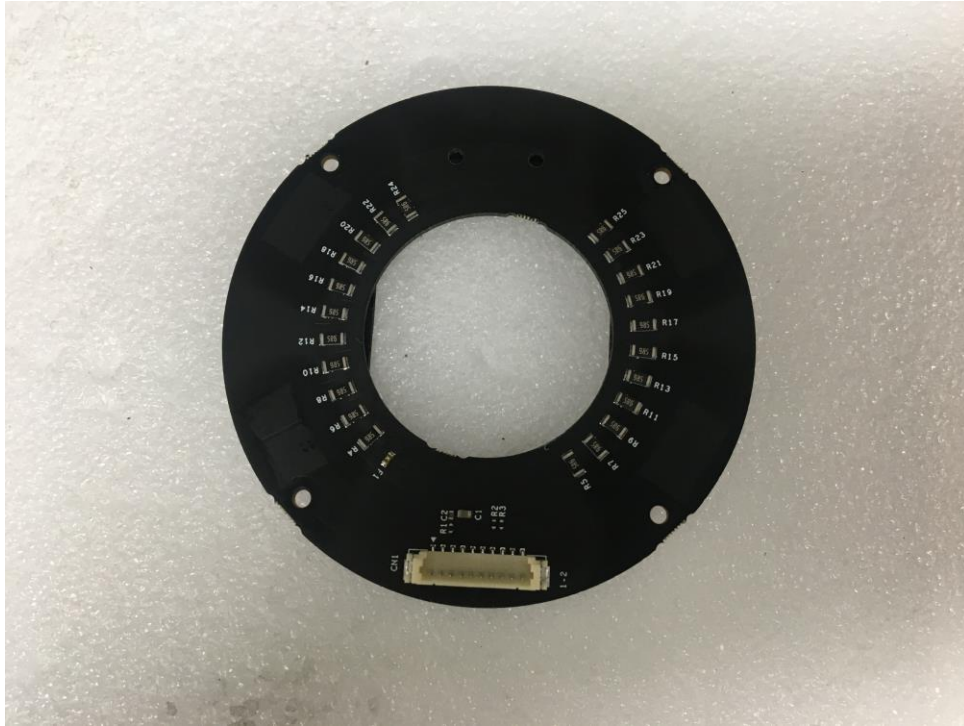


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 4



(Top)

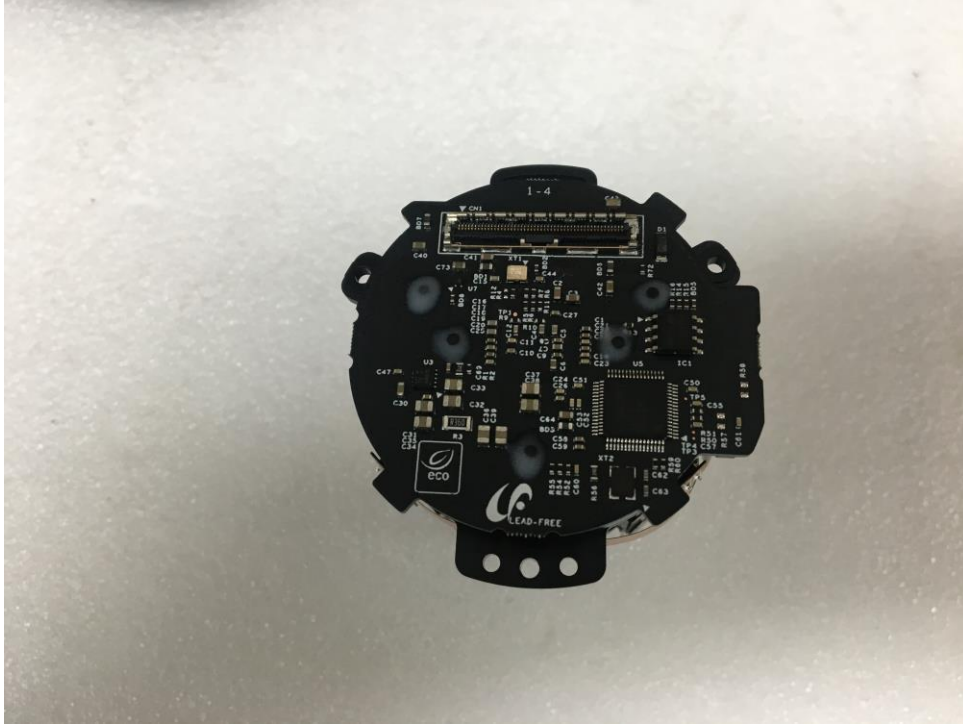

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 5



(Top)

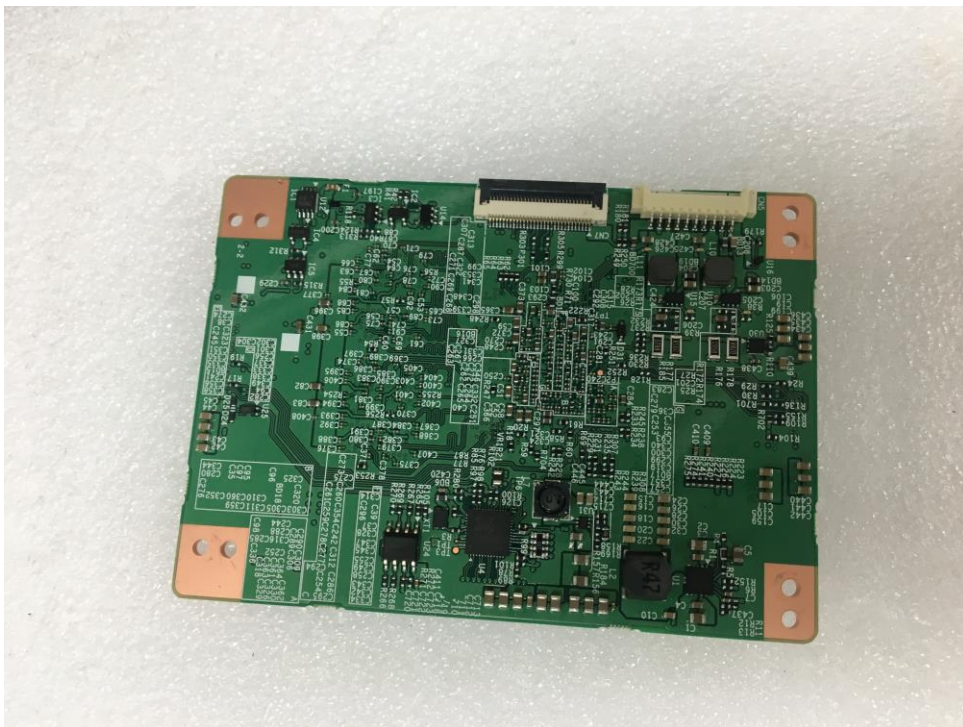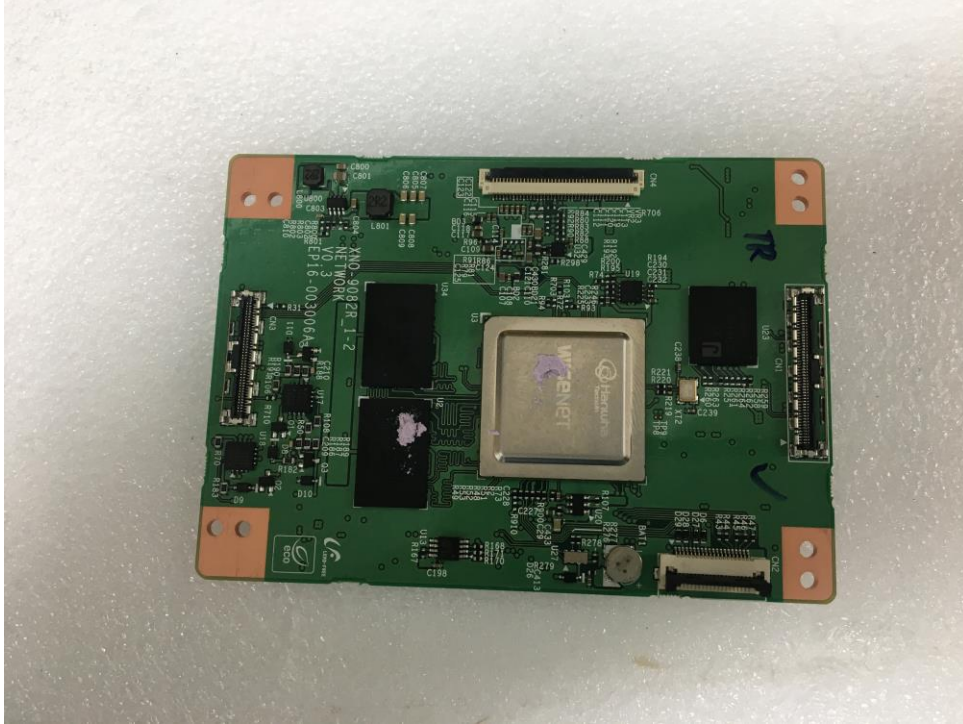

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


EUT Internal View – Board 6

(Top)

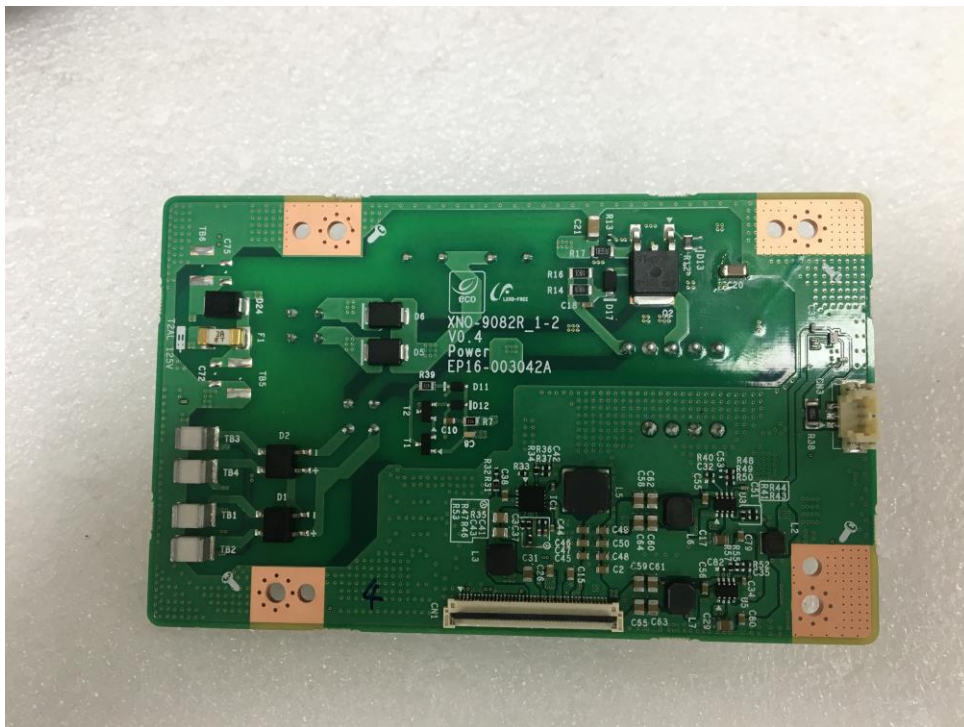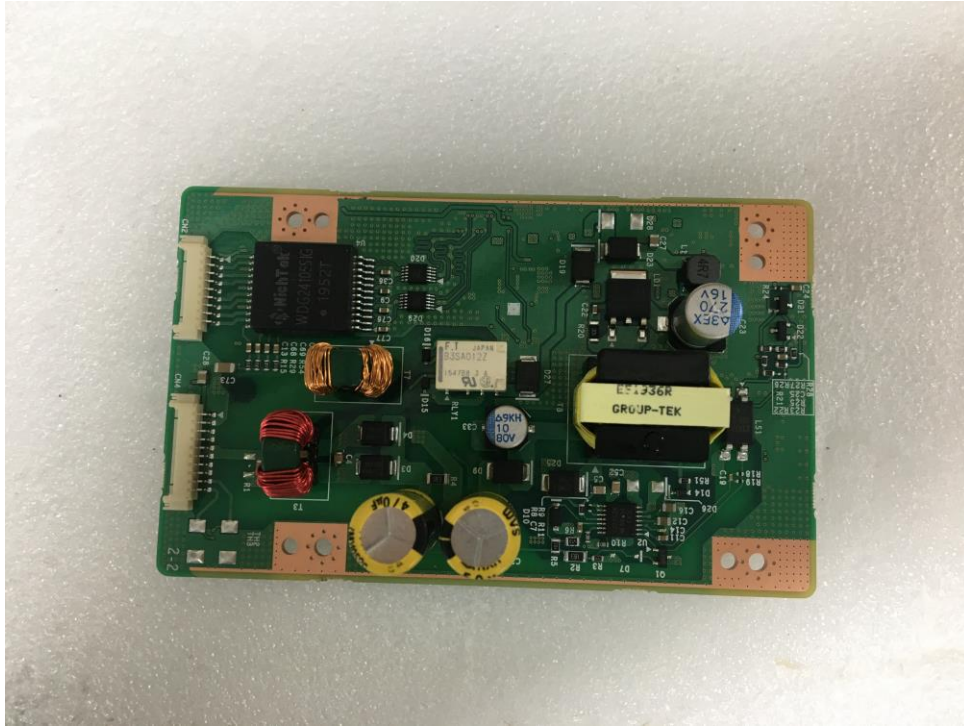

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

Label and Location

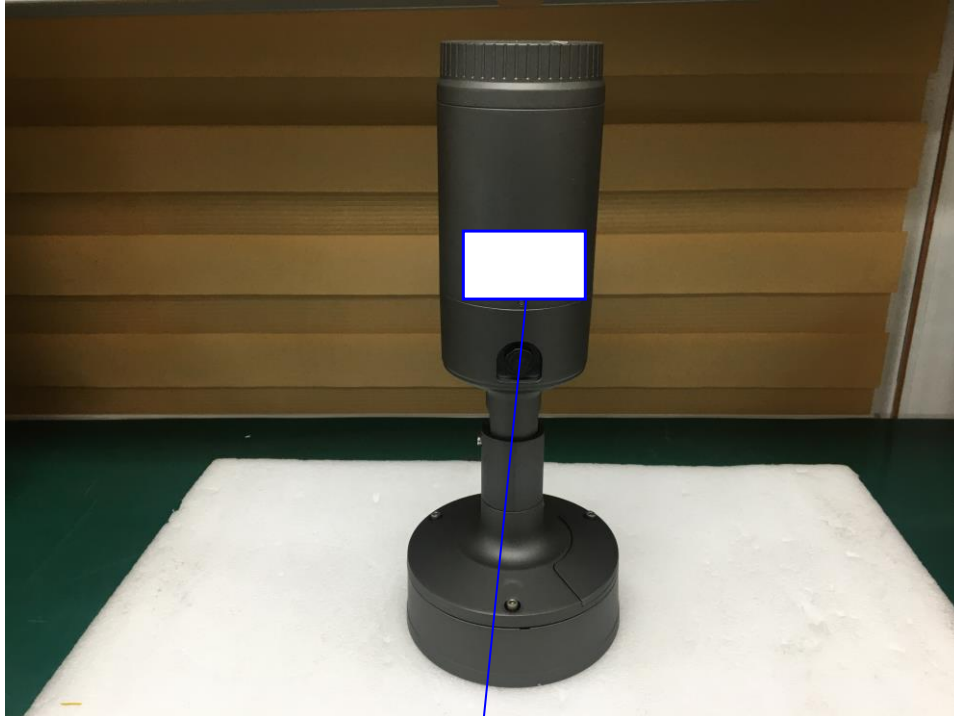

NETWORK CAMERA

Model No : XNO-9082R

Manufacturer : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.

Made in Vietnam

