



EMC TEST REPORT For CE

Test Report No. : KES-EM-20T0362
Date of Issue : Jun. 18, 2020
Product name : NETWORK CAMERA
Model/Type No. : XNP-6400RW
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Jun. 05, 2020
Test date : Jun. 12, 2020 ~ Jun. 14, 2020
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Min Seong, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (2) of (64)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jun. 18, 2020	KES-EM-20T0362	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	7
1.8	Configuration	8
1.9	Remarks when standards applied	9
1.10	Calibration Details of Equipment Used for Measurement	9
1.11	Test Facility	9
1.12	Laboratory Accreditations and Listings	9
2.0	Test Regulations	10
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Conducted Emissions at Telecommunication Ports	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
2.5	Harmonic Current Emissions	16
2.6	Voltage Fluctuations and Flicker	17
3.0	Criteria for compliance	18
3.1	Electrostatic Discharge	20
3.2	Radiated Electric Field Immunity	24
3.3	Electrical Fast Transients/Bursts	27
3.4	Surge Transients	29
3.5	Conducted Disturbance	32
3.6	Voltage Dips and Short Interruptions	34
APPENDIX A – TEST DATA		36
Conducted Emissions at Mains Power Ports		36
Conducted Emissions at Telecommunication Ports		38
Radiated Electric Field Emissions(Below 1 GHz)		39
Radiated Electric Field Emissions(Above 1 GHz)		40
Harmonic Current Emissions and Voltage Fluctuations and Flicker		41
Test Setup Photos and Configuration		44
Conducted Emissions at Mains Power Ports		44
Conducted Emissions at Telecommunication Ports		45
Radiated Electric Field Emissions(Below 1 GHz)		46
Radiated Electric Field Emissions(Above 1 GHz)		47
Harmonic Current Emissions and Voltage Fluctuations and Flicker		48
Electrostatic Discharge		49
Radiated Electric Field Immunity		49
Electrical Fast Transients/Bursts		50
Surge Transients		50
Conducted Disturbance		51
Voltage Dips and Short Interruptions		51
EUT External Photographs		52
EUT Internal Photographs		53



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (4) of (64)

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2MP CMOS
Effective Pixels	1944(H)x1212(V)
Min. Illumination	Color: 0.05Lux(F1.6, 1/30sec) BW: 0Lux(IR LED On)
Video Out	None
Lens	
Focal Length (Zoom Ratio)	4.25~170mm(40x) zoom
Max. Aperture Ratio	F1.6(Wide)~F4.95(Tele)
Angular Field of View	H: 65.66°(Wide)~1.88°(Tele) / V: 39.40°(Wide)~1.09°(Tele)
Min. Object Distance	Wide: 1.5m(4.92ft), Tele: 3m(9.84ft)
Focus Control	Oneshot AF, Focus save
Lens Type	DC auto iris
Pan / Tilt / Rotate	
Pan Range	360° Endless
Pan Speed	Max. 500°/sec, Manual: 0.024°/sec~250°/sec
Tilt Range	110°(-20°~90°)
Tilt Speed	Max. 350°/sec, Manual: 0.024°/sec~250°/sec
Sequence	Preset(300ea), Swing, Group(6ea), Trace, Tour, Auto Run, Schedule, Preset trace recording
Preset Accuracy	±0.1°
Azimuth	Support
Auto Tracking	Object auto tracking(Person/Vehicle)
Operational	
IR Viewable Length	300m(984.25ft)
Camera Title	Displayed up to 85 characters, Direction Indicator
Day & Night	Auto(ICR)/Color/BW/Schedule
Backlight Compensation	BLC, HLC, WDR
Wide Dynamic Range	150 dB
Digital Noise Reduction	SSNRV
Digital Image Stabilization	Support(built-in gyro sensor)
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, rectangular Support - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	None
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Video Rotation	Flip, Mirror
Analytics	Directional detection, Fog detection, Face detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Shock detection * Audio detection, Sound classification(with NW I/O Box)
Business Intelligence	None
Serial Interface	None
Alarm I/O	None
Alarm Triggers	Analytics, Network disconnect * Alarm input(with NW I/O Box)
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers PTZ Preset * Alarm output(with NW I/O Box)
Audio In	None
Audio Out	None
Wiper	Support

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (5) of (64)

Network	
Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.265/H.264,MJPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Smart Codec	Manual(5ea area), WiseStreamII
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast (128 user) Multiple streaming(Up to 10 profiles)
Audio Compression	None
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour,LLDP, SRTP
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device certificate(Hanwha Techwin Root CA)
Edge Storage	Micro SD/SDHC/SDXC 2slot 1TB
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Memory	4GB RAM, 512MB Flash
Environmental	
Operating Temperature / Humidity (TBD)	-40°C~+60°C (-40°F ~ +140°F) / Less than 95% RH(Non-condensing) Maximum Temperature : +60°C(+140°F), □ □ □ within 8 hours Absolute maximum(According to NEMA TS2, 2.2.7):+74°C → TBD
Storage Temperature / Humidity	-50°C~+60°C (-58°F~+140°F) / Less than 95% RH(Non-condensing)
Certification	IP66, IK10(Camera body only→TBD), NEMA4X
Electrical	
Input Voltage(TBD)	HPoE(IEEE802.3bt, Class7, Type4). TBD(Power Class)
Power Consumption(TBD)	Typ.20W, Max.35W Camera only
Mechanical	
Color / Material	White, Black / Aluminum + Polycarbonate + ASA (Sun shield) + Tempered glass (Window)
RAL Code	White : RAL 9003 / Black : RAL 9005
Product dimensions / weight	Ø184.9 x 318.8mm / 5.4Kg
Conduit hole	None
Hanging mount(Dome)	None
Skin cover(Dome)	None
Weather cap(Dome)	None
Power module	None
Backbox	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☒ 230 Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☐ PoE

Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNP-6400RW	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT
Fiber PoE Injector	PT-PSE109GBRO- AH-S	-	Dongguan PROCET Network Technology Co.,Ltd	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook 1	P95G001	8KM8HT2	Wistron Infocom (Chengdu) Company Limited	-
Notebook 1 Adapter	LA65NS2-01	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	-
Micro SD Card	-	-	SanDisk	8 GB
PoE Switch	GS728TPP	-	NETGEAR	-
Notebook 2	LG15N54	410NZGK015231	LG Electronics Co., Ltd.	-
Notebook 2 Adapter	ADP-90WH B	84ZW19F1663	DELTA ELECTRONICS (JIANGSU) LTD.	-



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	Fiber PoE Injector (EUT)	PoE	1.0	S
	SLOT	Micro SD Card	SLOT	-	-
Fiber PoE Injector (EUT)	LAN	Notebook 1	RJ-45	3.0	S
	SFP	PoE Switch	SFP	10.0	U
PoE Switch	LAN	Notebook 2	RJ-45	1.0	S

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Test Mode	operating
Operation mode	checked that the camera video output was working properly in the web viewer and used the ping test to verify that the network behavior was working properly.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	-

1.8 Configuration

■ AC Main
 □ DC Main

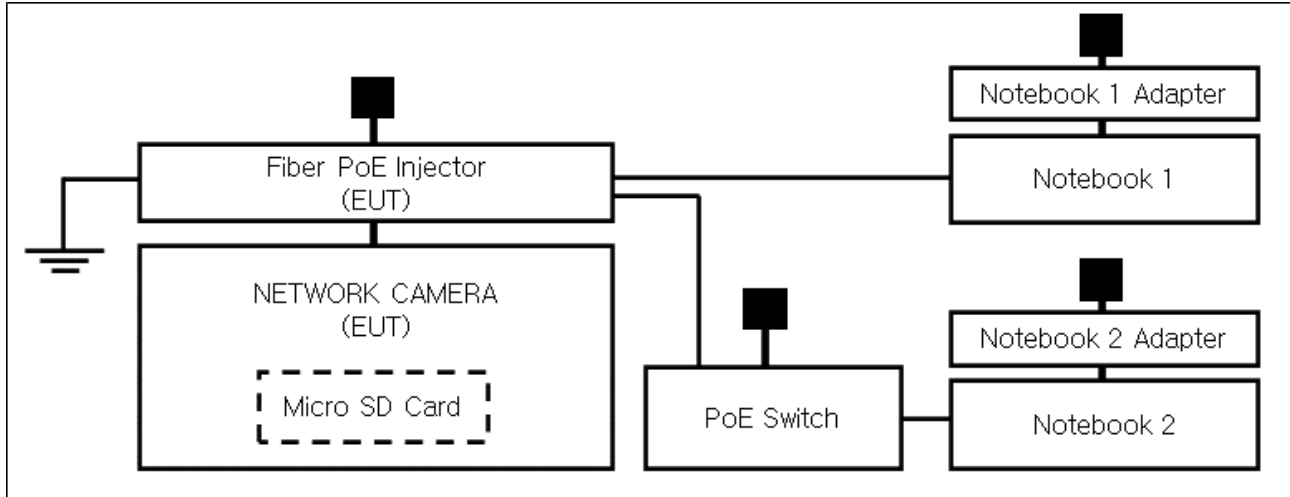

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0003



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ EMC – Directive 2014 / 30 / EU

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (11) of (64)

-
- | | | |
|--|----------------------------------|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ RE- Directive 2014 / 53 / EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (12) of (64)

2.1 Conducted Emissions at Mains Power Ports

Test Date
Jun. 12, 2020

Test Location
Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 20, 2021
☒	LISN	ENV216	R & S	101787	01, 02, 2021
☒	LISN	ESH2-Z5	R & S	100450	01, 02, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	01, 02, 2021

Test Conditions
Temperature: 23,5 °C
Relative Humidity: 48,1 % R.H.

Frequency Range of Measurement
150 kHz to 30 MHz

Instrument Settings
IF Band Width: 9 kHz

Test Results
The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (13) of (64)

2.2 Conducted Emissions at Telecommunication Ports

Test Date
Jun. 12, 2020

Test Location
Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 20, 2021
☒	LISN	ENV216	R & S	101787	01, 02, 2021
☒	LISN	ESH2-Z5	R & S	100450	01, 02, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	01, 02, 2021
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2021
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2021
☒	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 10, 2021
☐	CDN	CDNS502A	TESEQ	40431	01, 02, 2021

Test Conditions

Temperature: 23,5 °C
Relative Humidity: 48,1 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date
Jun. 12, 2020

Test Location
☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2021
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2020
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2021

Test Conditions
Temperature: 23,5 °C
Relative Humidity: 48,9 % R.H.

Frequency Range of Measurement
30 MHz to 1 GHz

Instrument Settings
IF Band Width: 120 kHz

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date
Jun. 13, 2020

Test Location
SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2020
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 20, 2021
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2021
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2021

Test Conditions
Temperature: 23,2 °C
Relative Humidity: 48,1 % R.H.

Frequency Range of Measurement
1 GHz to 6 GHz

Instrument Settings
IF Band Width: 1 MHz

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date
Jun. 12, 2020

Test Location
Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions
Temperature: 23,3 °C
Relative Humidity: 49,8 % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results
The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date
Jun. 12, 2020

Test Location
Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions
Temperature: 23,3 °C
Relative Humidity: 49,8 % R.H.

Test Results
The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test

report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.



Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any

change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any

change in outputs, which could be interpreted by associated equipment as a change,

and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable settings etc.)

(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and

(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip / interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual

change in the EUT or any change in outputs, which could be interpreted by associated equipment

as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.



3.1 Electrostatic Discharge

Reference Standard
EN 61000-4-2:2009

Test Date
Jun. 14, 2020

Test Location
EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	01, 28, 2021
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions
Temperature: 22,4 °C
Relative Humidity: 49,7 % R.H.
Atmospheric Pressure: 99,0 kPa

Test Specifications
Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative
Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV


Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Location of Discharge:

Air
Contact





1

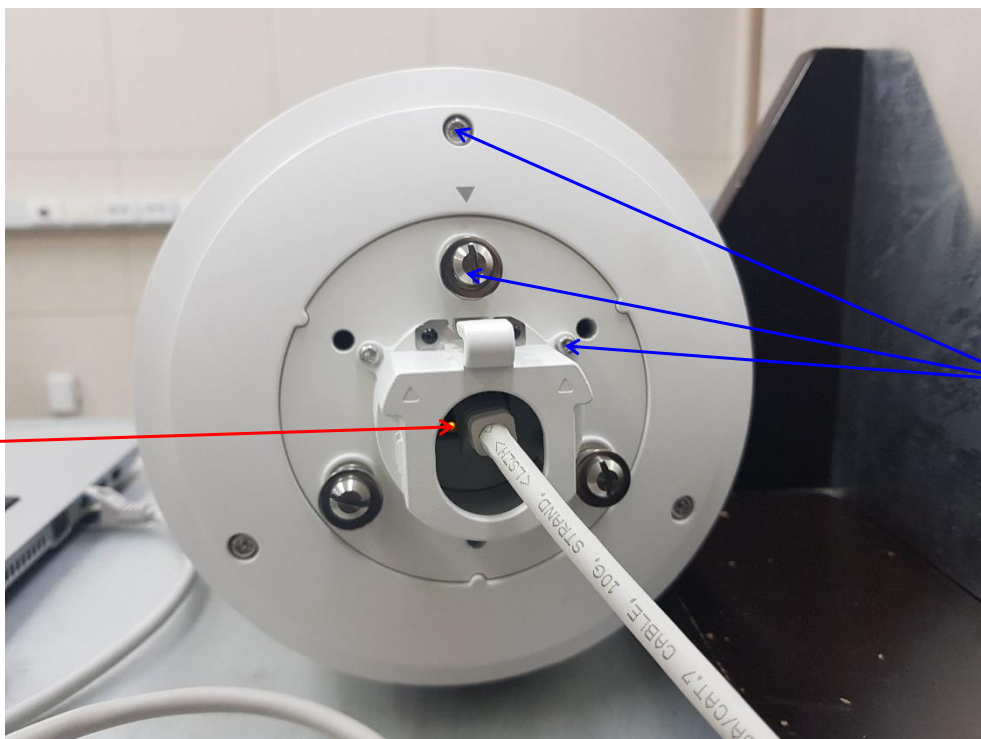

2

3

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

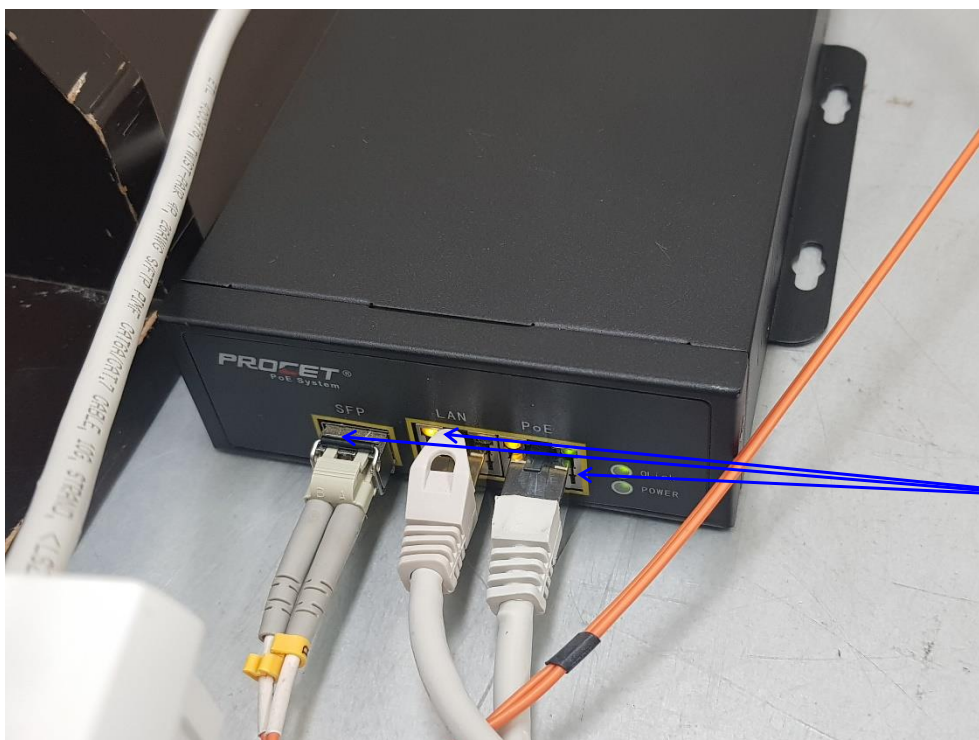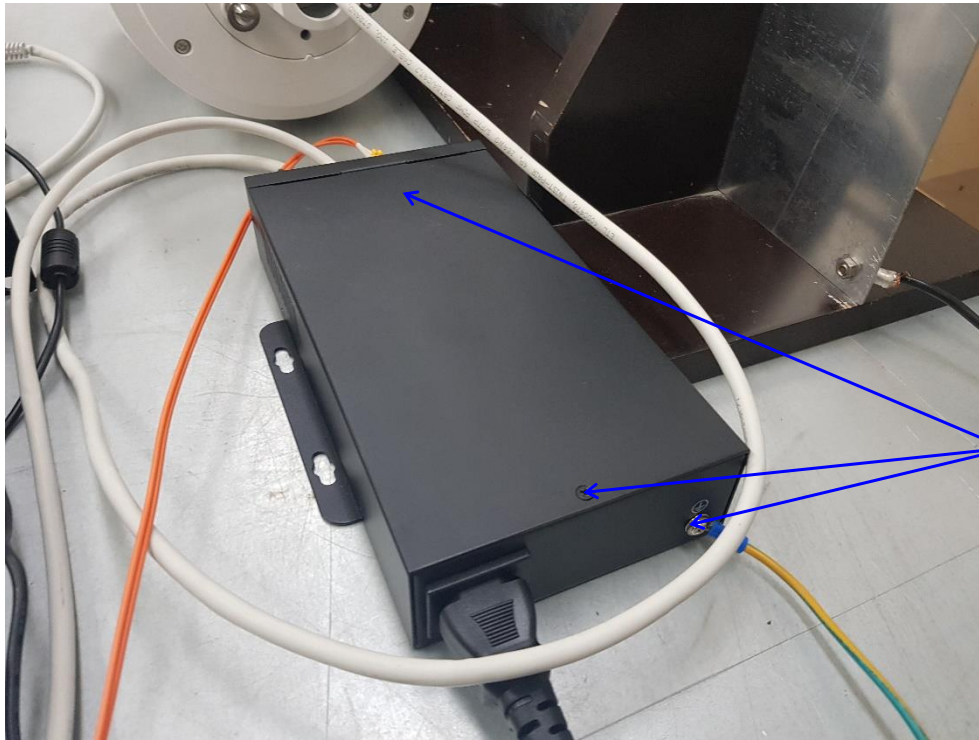

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (23) of (64)

Test Data**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure	Air Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-
3	Port	Air Discharge	Complied	-
4	Fiber PoE Injector Enclosure, Screws	Contact Discharge	Complied	-
5	Fiber PoE Injector Ports	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



3.2 Radiated Electric Field Immunity

Reference Standard
EN 61000-4-3:2006 +A2:2010

Test Date
Jun. 13, 2020

Test Location
EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	9.12.00	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 06, 2020
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	04, 20, 2021
☒	CW POWER SENSOR	E4412A	Agilent	US38488240	04, 20, 2021
☒	CW POWER SENSOR	E4412A	Agilent	MY41501662	04, 20, 2021
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	03, 11, 2021

Test Conditions
Temperature: 23,2 °C
Relative Humidity: 48,1 % R.H.
Atmospheric Pressure: 99,3 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (25) of (64)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (26) of (64)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



3.3 Electrical Fast Transients / Bursts

Reference Standard
EN 61000-4-4:2012

Test Date
Jun. 14, 2020

Test Location
EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2020
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2020
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 27, 2020

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 49,7 % R.H.
Atmospheric Pressure: 99,0 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (28) of (64)

Test Data

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
LAN	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (29) of (64)

3.4 Surge Transients

Reference Standard
EN 61000-4-5:2014

Test Date
Jun. 14, 2020

Test Location
EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2020
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2020
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 27, 2020

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 49,7 % R.H.
Atmospheric Pressure: 99,0 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (30) of (64)

Test Specifications**AC Power Lines**

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines**Source Impedance:**

42 ohm for common Mode

Surge Amplitude:Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (31) of (64)

Test Data☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
LAN	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria

3.5 Conducted Disturbance

Reference Standard
EN 61000-4-6:2014

Test Date
Jun. 14, 2020

Test Location
EMS-CS: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.7	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1	EM TEST	V0936105119	08, 06, 2020
☒	ATTENUATOR	ATT6	EM TEST	1208-34	08, 06, 2020
☒	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 06, 2020
☒	CDN	CDN ST08A	TESEQ	43886	11, 25, 2020

Test Conditions

Temperature: 24,0 °C
Relative Humidity: 48,6 % R.H.
Atmospheric Pressure: 100,0 kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (33) of (64)

Test Data

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N - PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
LAN	CDN	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (34) of (64)

3.6 Voltage Dips and Short Interruptions

Reference Standard
EN 61000-4-11:2004

Test Date
Jun. 14, 2020

Test Location
EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2020
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2020

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 49,7 % R.H.
Atmospheric Pressure: 99,0 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test Specifications & Observations/Remarks

- Voltage Dips and Short Interruptions

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.




APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNP-6400RW
Phase:	-
Mode:	H
Operator Name:	KES

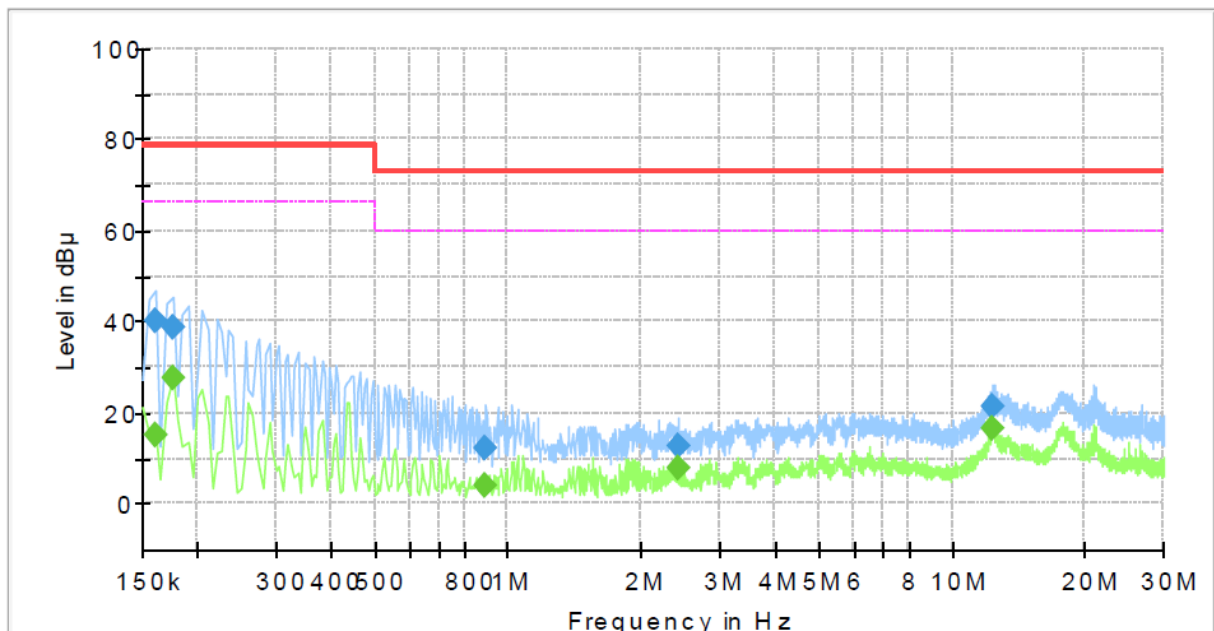

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	15.19	66.00	50.81	1000.0	9.000	L1	19.5
0.160000	40.31	---	79.00	38.69	1000.0	9.000	L1	19.5
0.175000	---	27.77	66.00	38.23	1000.0	9.000	L1	19.5
0.175000	38.83	---	79.00	40.17	1000.0	9.000	L1	19.5
0.890000	---	3.89	60.00	56.11	1000.0	9.000	L1	19.6
0.890000	12.23	---	73.00	60.77	1000.0	9.000	L1	19.6
2.425000	---	7.94	60.00	52.06	1000.0	9.000	L1	19.7
2.425000	12.64	---	73.00	60.36	1000.0	9.000	L1	19.7
12.310000	---	16.38	60.00	43.62	1000.0	9.000	L1	20.0
12.310000	21.38	---	73.00	51.62	1000.0	9.000	L1	20.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (37) of (64)

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XNP-6400RW
Phase: -
Mode: N
Operator Name: KES

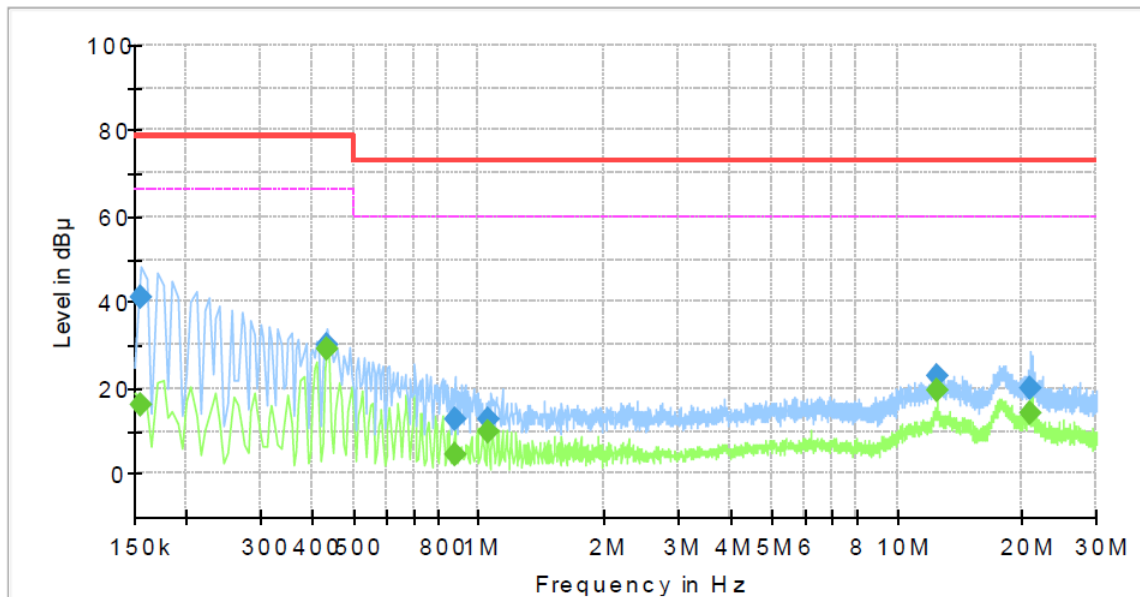

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	15.87	66.00	50.13	1000.0	9.000	N	19.5
0.155000	41.03	---	79.00	37.97	1000.0	9.000	N	19.5
0.435000	---	29.03	66.00	36.97	1000.0	9.000	N	19.6
0.435000	30.21	---	79.00	48.79	1000.0	9.000	N	19.6
0.880000	---	4.67	60.00	55.33	1000.0	9.000	N	19.6
0.880000	12.79	---	73.00	60.21	1000.0	9.000	N	19.6
1.050000	---	9.77	60.00	50.23	1000.0	9.000	N	19.7
1.050000	12.71	---	73.00	60.29	1000.0	9.000	N	19.7
12.500000	---	19.54	60.00	40.46	1000.0	9.000	N	20.1
12.500000	22.85	---	73.00	50.15	1000.0	9.000	N	20.1
20.905000	---	14.25	60.00	45.75	1000.0	9.000	N	20.3
20.905000	19.90	---	73.00	53.10	1000.0	9.000	N	20.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Emissions at Telecommunication Ports [100 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: XNP-6400RW
 Mode :
 Speed : 100 Mbps
 Operator Name: KES

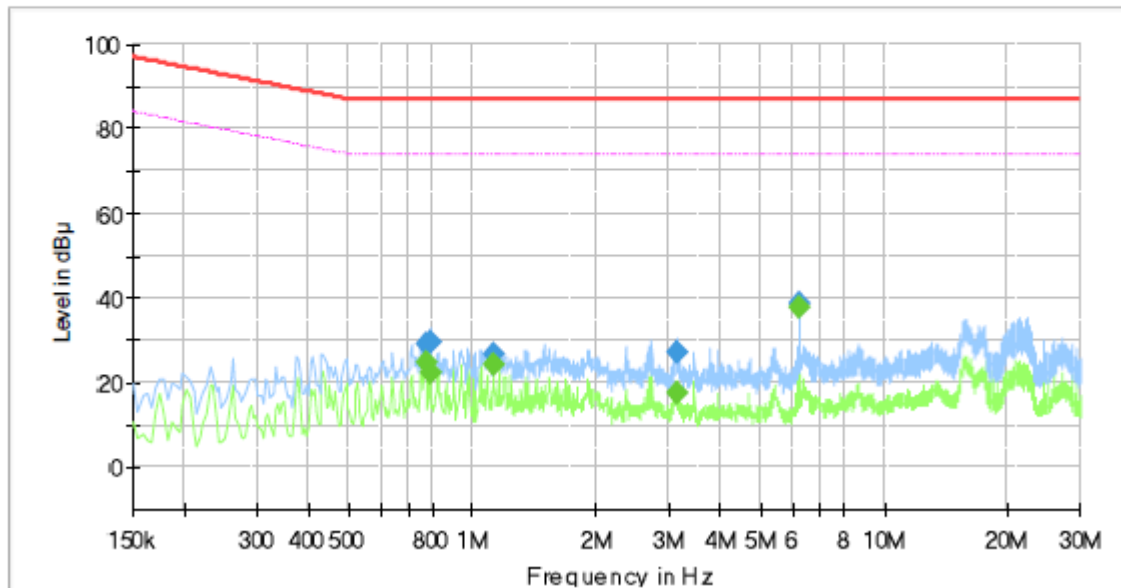

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.770000	---	24.68	74.00	49.32	1000.0	9.000	Single Line	19.6
0.770000	29.02	---	87.00	57.98	1000.0	9.000	Single Line	19.6
0.790000	---	22.21	74.00	51.79	1000.0	9.000	Single Line	19.6
0.790000	29.79	---	87.00	57.21	1000.0	9.000	Single Line	19.6
1.126000	---	24.49	74.00	49.51	1000.0	9.000	Single Line	19.6
1.126000	26.62	---	87.00	60.38	1000.0	9.000	Single Line	19.6
3.146000	---	17.67	74.00	56.33	1000.0	9.000	Single Line	19.6
3.146000	27.17	---	87.00	59.83	1000.0	9.000	Single Line	19.6
6.250000	---	37.62	74.00	36.38	1000.0	9.000	Single Line	19.7
6.250000	38.61	---	87.00	48.39	1000.0	9.000	Single Line	19.7

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (39) of (64)

Radiated Electric Field Emissions(Below 1 GHz)

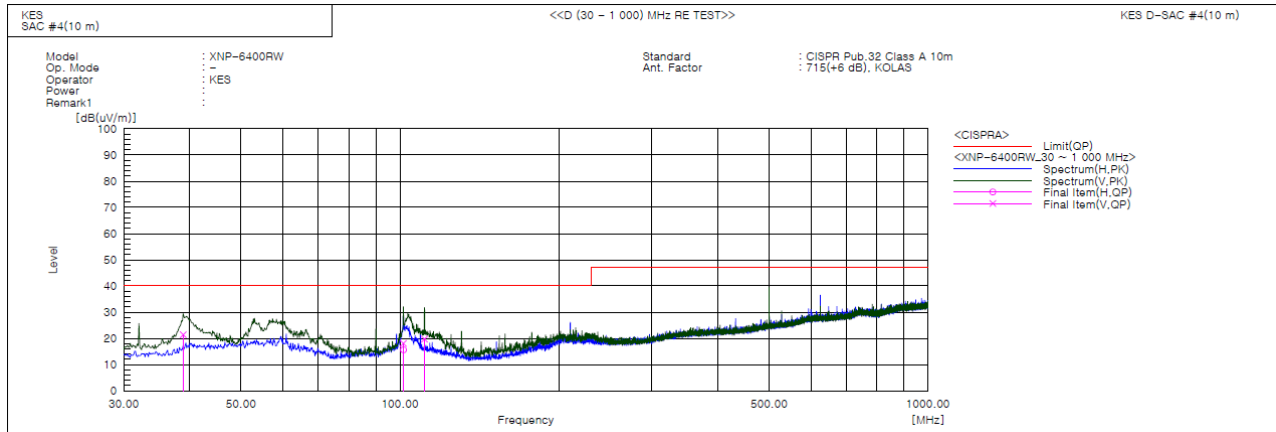

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.851	V	45.0	-23.6	21.4	40.0	18.6	100.0	292.0	
2	101.536	V	40.7	-22.6	18.1	40.0	21.9	138.0	129.0	
3	101.538	H	38.2	-22.6	15.6	40.0	24.4	314.0	104.0	
4	111.238	V	42.6	-22.9	19.7	40.0	20.3	108.0	134.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (40) of (64)

Radiated Electric Field Emissions(Above 1 GHz)

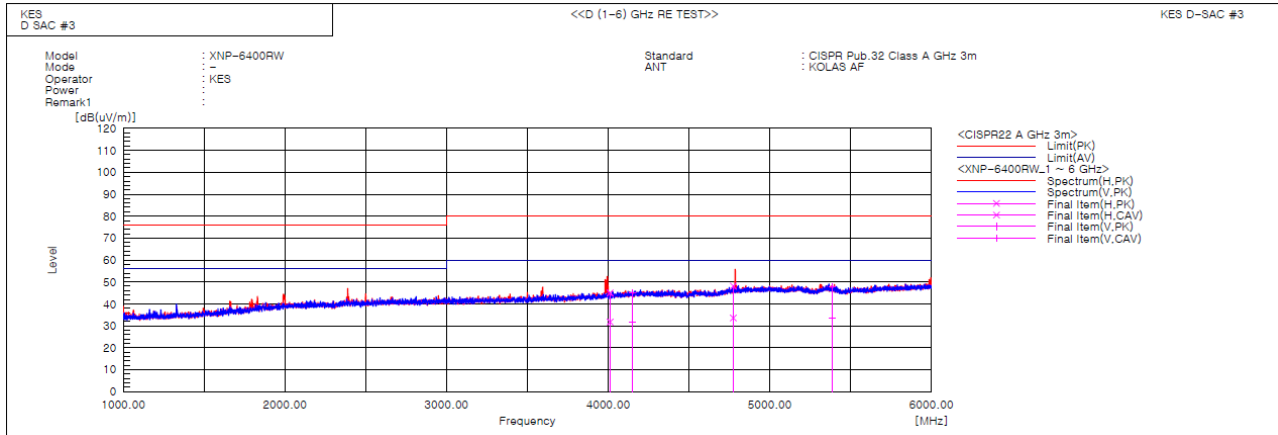

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	4011.147	H	40.2	26.9	4.8	45.0	31.7	80.0	60.0	35.0	28.3	100.0	152.6	
2	4147.764	V	39.5	26.1	5.6	45.1	31.7	80.0	60.0	34.9	28.3	100.0	146.1	
3	4773.402	H	40.7	26.1	7.5	48.2	33.6	80.0	60.0	31.8	26.4	100.0	36.9	
4	5383.777	V	39.4	25.3	8.4	47.8	33.7	80.0	60.0	32.2	26.3	100.0	150.4	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.075			
2	0.002	0.208	1.080	n/a
3	0.065	2.826	2.300	PASS
4	0.004	0.881	0.430	n/a
5	0.063	5.518	1.140	PASS
6	0.003	0.968	0.300	n/a
7	0.060	7.809	0.770	PASS
8	0.002	1.072	0.230	n/a
9	0.056	14.095	0.400	PASS
10	0.004	1.932	0.184	n/a
11	0.052	15.801	0.330	PASS
12	0.003	1.890	0.153	n/a
13	0.047	22.555	0.210	PASS
14	0.002	1.342	0.131	n/a
15	0.042	28.122	0.150	PASS
16	0.001	1.288	0.115	n/a
17	0.037	27.867	0.132	PASS
18	0.002	1.581	0.102	n/a
19	0.031	26.407	0.118	PASS
20	0.001	1.510	0.092	n/a
21	0.026	15.972	0.161	PASS
22	0.001	1.194	0.084	n/a
23	0.021	14.171	0.147	PASS
24	0.001	1.193	0.077	n/a
25	0.016	11.889	0.135	PASS
26	0.001	1.031	0.071	n/a
27	0.012	9.415	0.125	PASS
28	0.001	1.037	0.066	n/a
29	0.008	7.089	0.116	PASS
30	0.001	1.111	0.061	n/a
31	0.005	4.722	0.109	PASS
32	0.001	1.125	0.058	n/a
33	0.003	2.944	0.102	n/a
34	0.001	1.226	0.054	n/a
35	0.002	2.309	0.096	n/a
36	0.001	1.178	0.051	n/a
37	0.003	2.749	0.091	n/a
38	0.001	1.300	0.048	n/a
39	0.003	3.325	0.087	n/a
40	0.001	1.308	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.076			
2	0.004	0.223	1.620	n/a
3	0.065	1.888	3.450	PASS
4	0.004	0.677	0.645	n/a
5	0.063	3.691	1.710	PASS
6	0.004	0.813	0.450	n/a
7	0.060	5.224	1.155	PASS
8	0.003	0.930	0.345	n/a
9	0.057	9.429	0.600	PASS
10	0.004	1.550	0.276	n/a
11	0.053	10.607	0.495	PASS
12	0.003	1.447	0.230	n/a
13	0.047	15.073	0.315	PASS
14	0.003	1.270	0.197	n/a
15	0.042	18.876	0.225	PASS
16	0.002	1.220	0.173	n/a
17	0.037	18.656	0.199	PASS
18	0.002	1.237	0.153	n/a
19	0.031	17.723	0.178	PASS
20	0.002	1.161	0.138	n/a
21	0.026	16.056	0.161	PASS
22	0.001	1.025	0.125	n/a
23	0.021	14.492	0.147	PASS
24	0.001	0.951	0.115	n/a
25	0.016	11.984	0.135	PASS
26	0.001	0.878	0.106	n/a
27	0.012	9.509	0.125	PASS
28	0.001	0.880	0.099	n/a
29	0.008	7.202	0.116	PASS
30	0.001	0.847	0.092	n/a
31	0.005	4.940	0.109	PASS
32	0.001	0.842	0.086	n/a
33	0.003	3.141	0.102	n/a
34	0.001	0.947	0.081	n/a
35	0.003	2.607	0.096	n/a
36	0.001	0.975	0.077	n/a
37	0.003	3.293	0.091	n/a
38	0.001	1.008	0.073	n/a
39	0.003	3.528	0.087	n/a
40	0.001	1.001	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0362
Page (43) of (64)

Test Data - Voltage Fluctuations

Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Emissions at Telecommunication Ports



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrostatic Discharge



Radiated Electric Field Immunity




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients/Bursts



Surge Transients

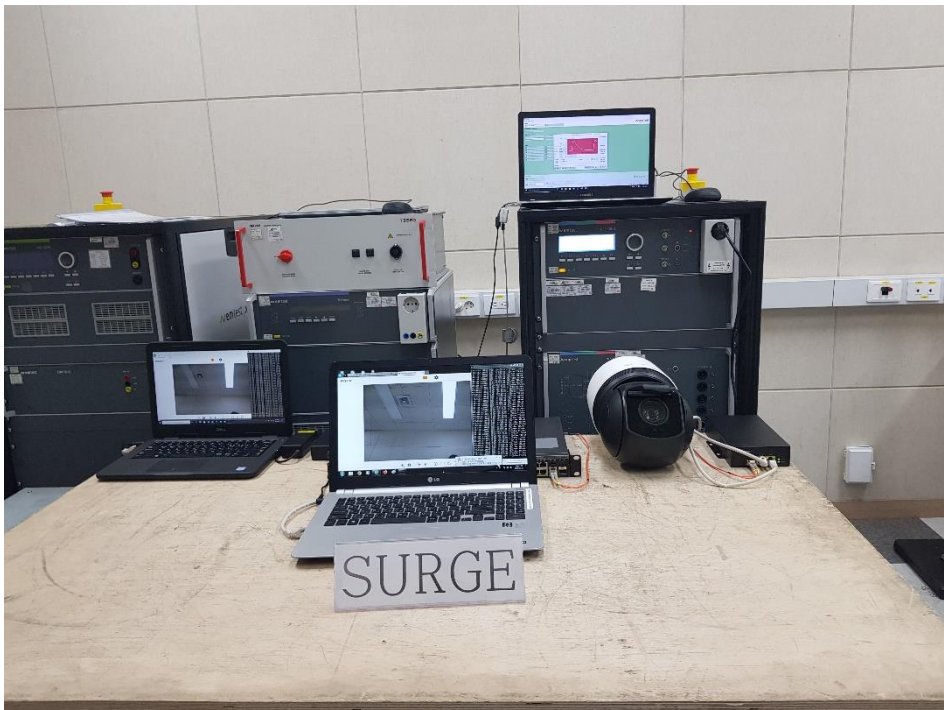

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – DRIVE Board

(Top)

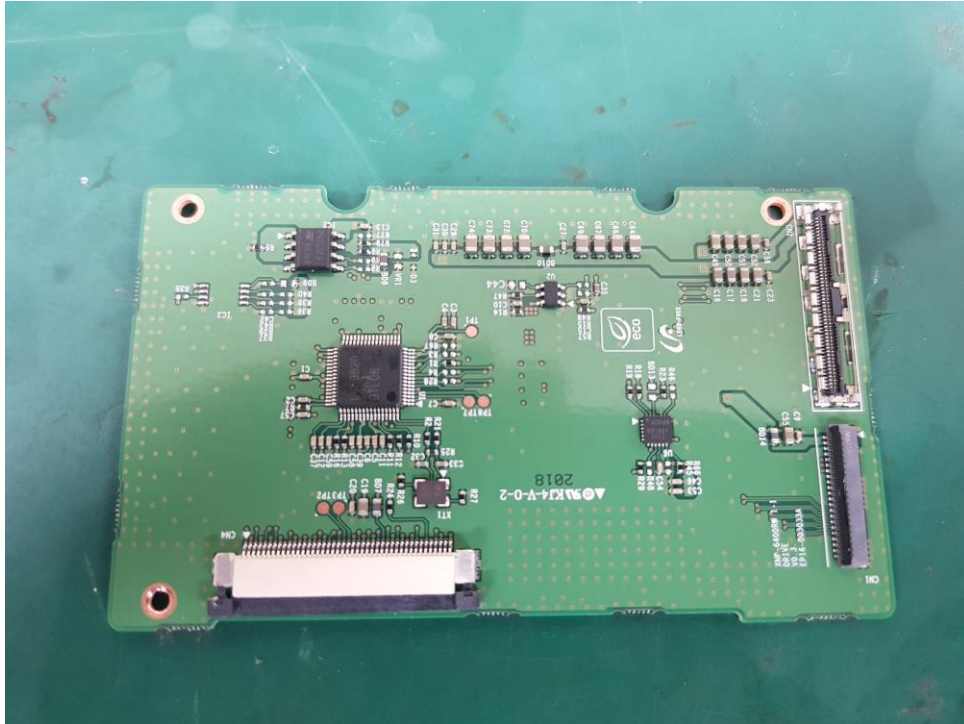

(Bottom)

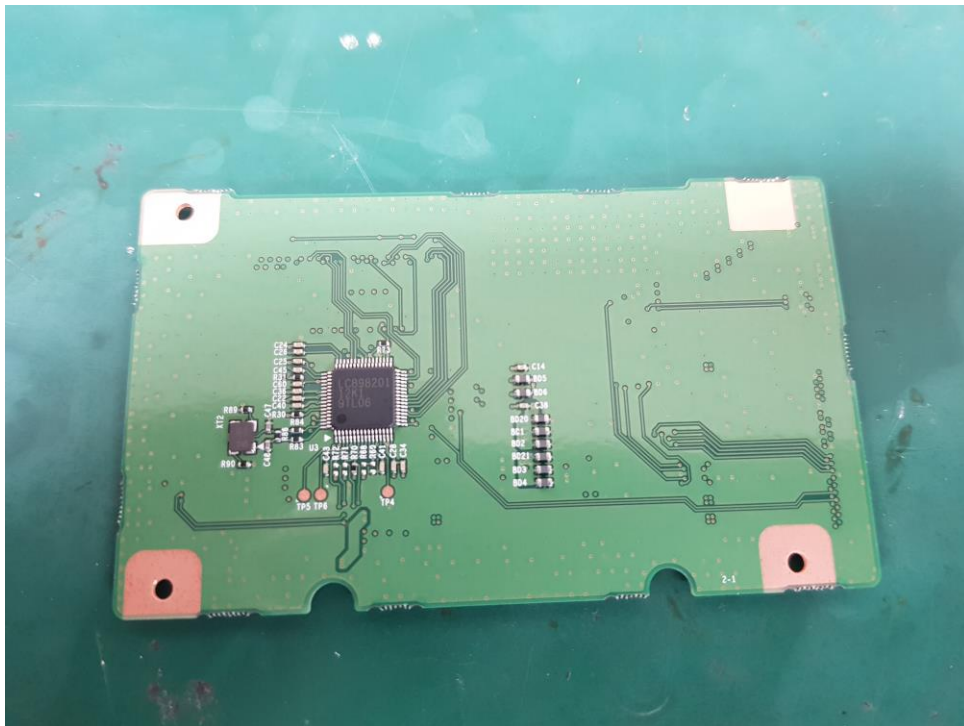


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – HALL Board

(Top)




(Bottom)

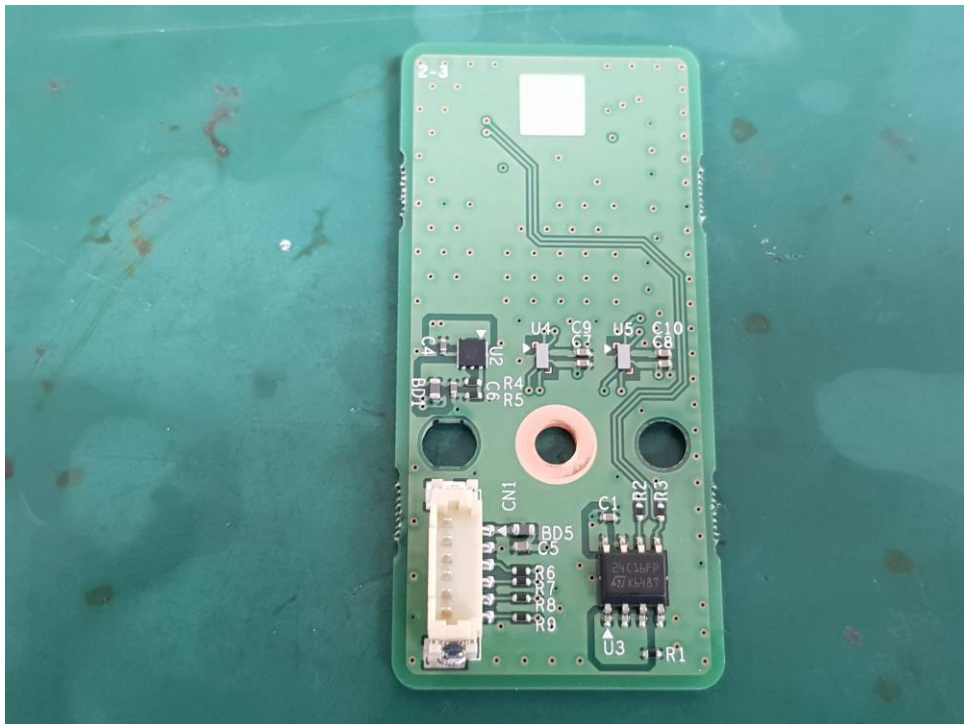


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – IR-LED LEFT Board

(Top)

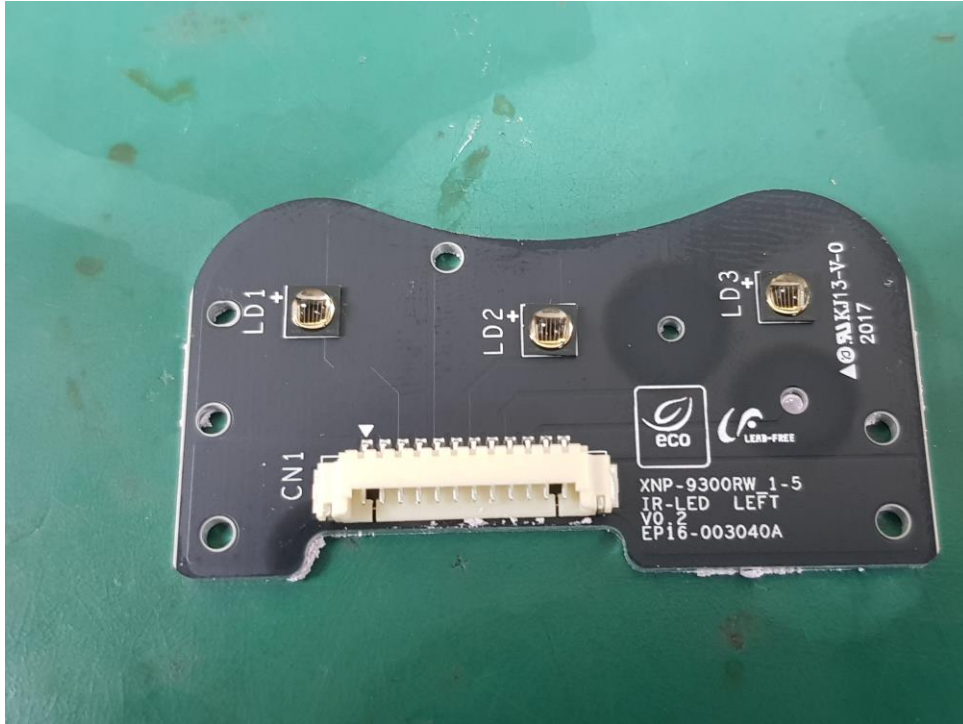


(Bottom)

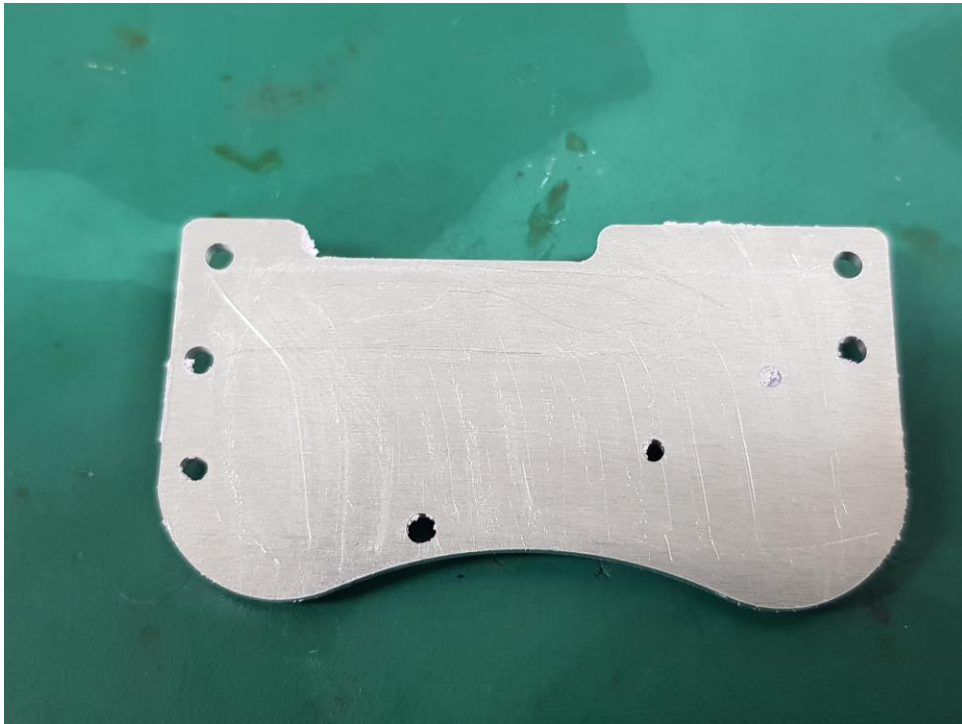

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – IR-LED RIGHT Board

(Top)

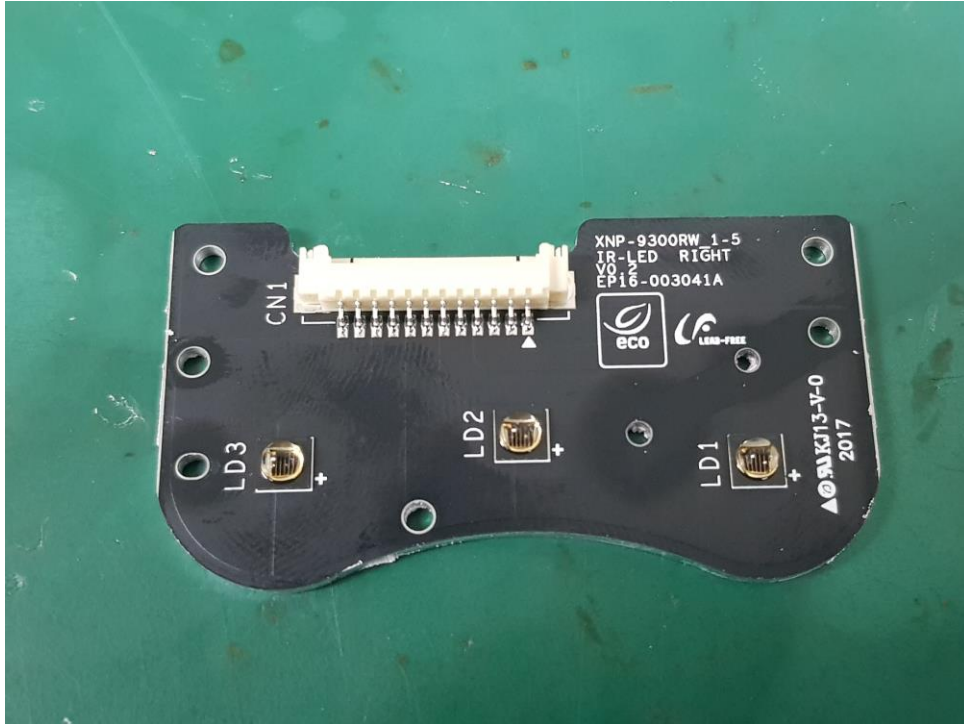


(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – MOTION Board

(Top)

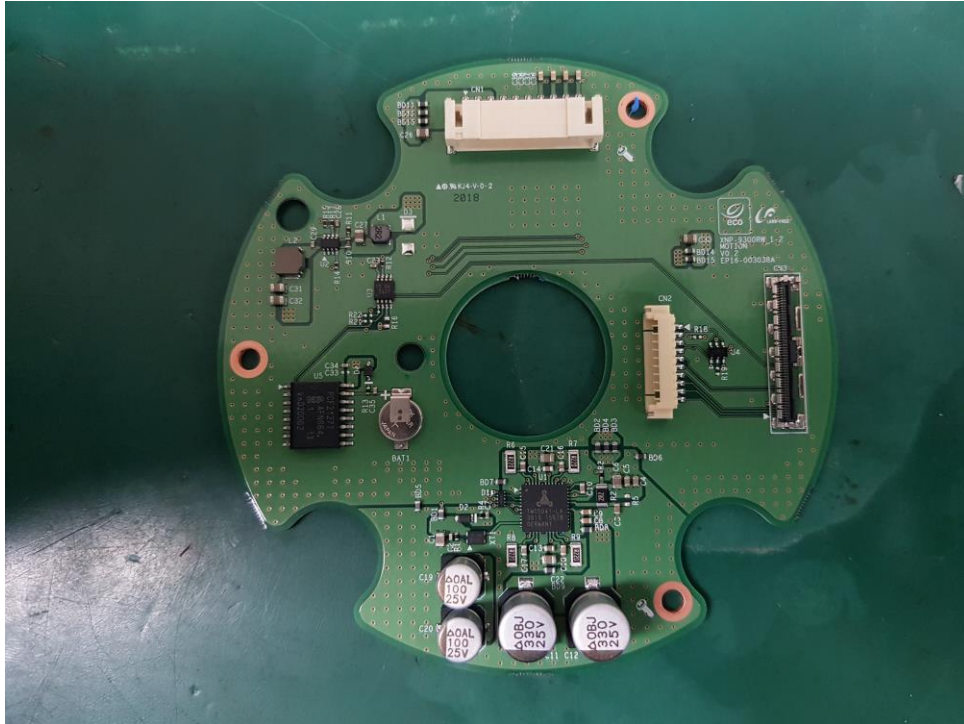


(Bottom)

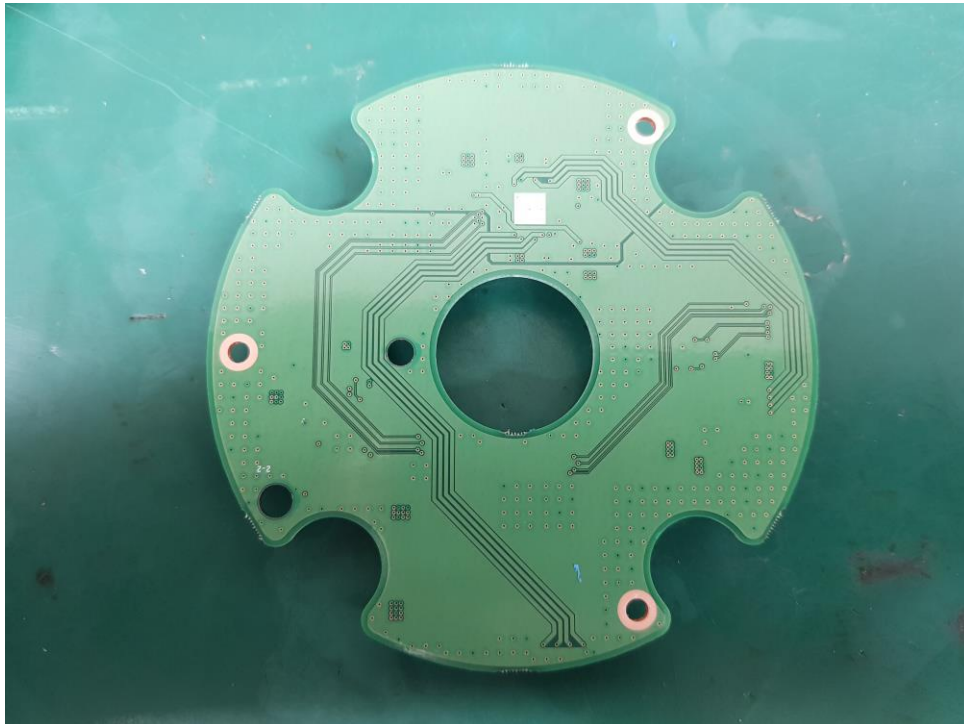


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – NETWORK Board

(Top)

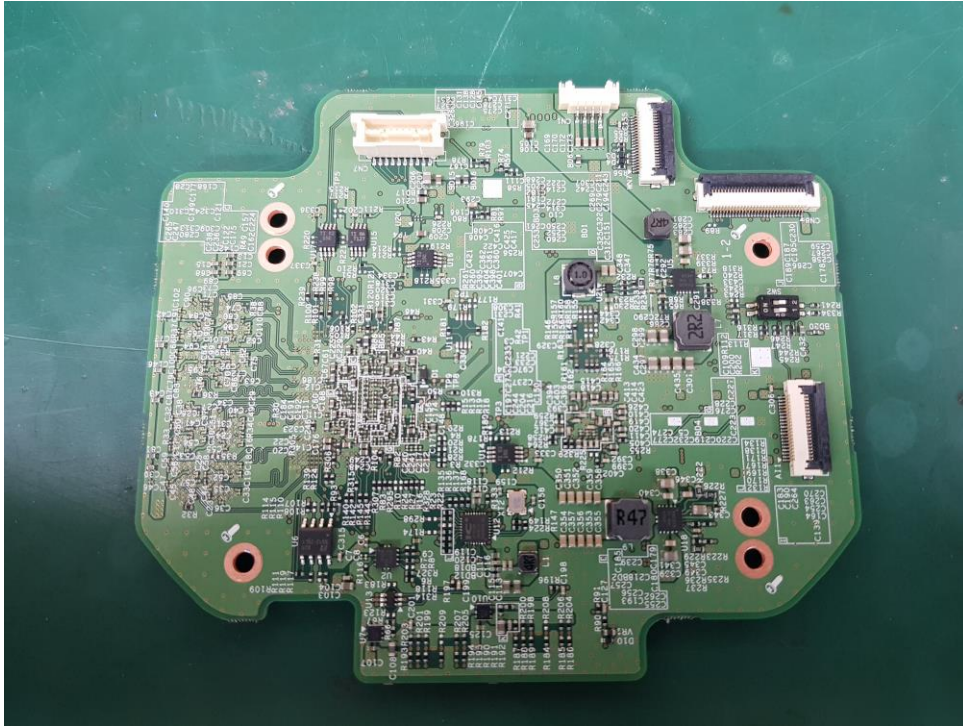


(Bottom)

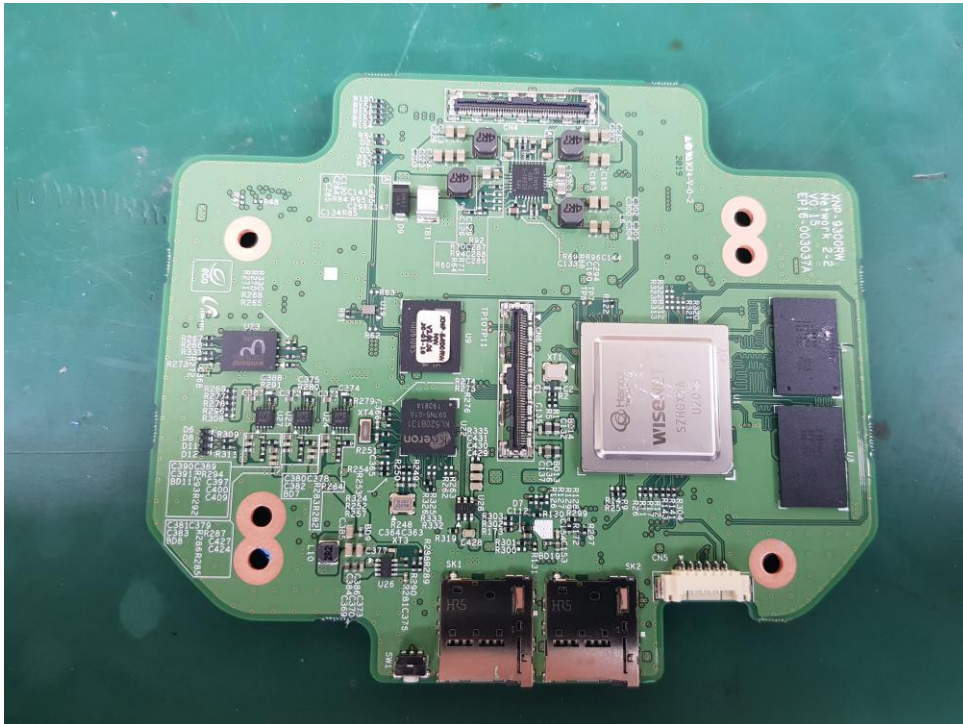


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – SENSOR Board

(Top)

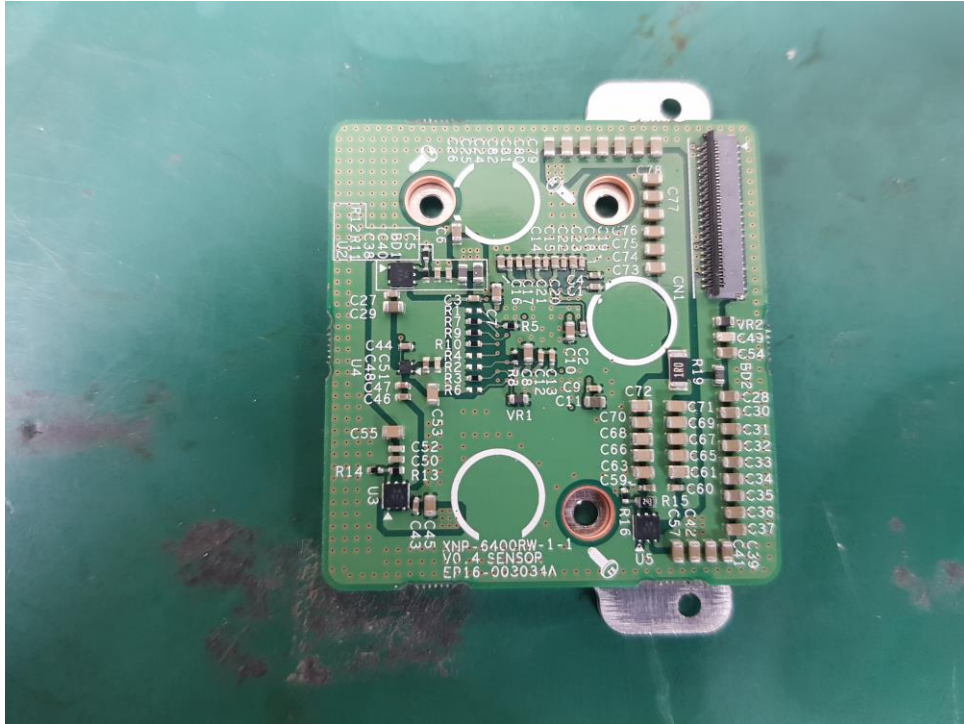

(Bottom)

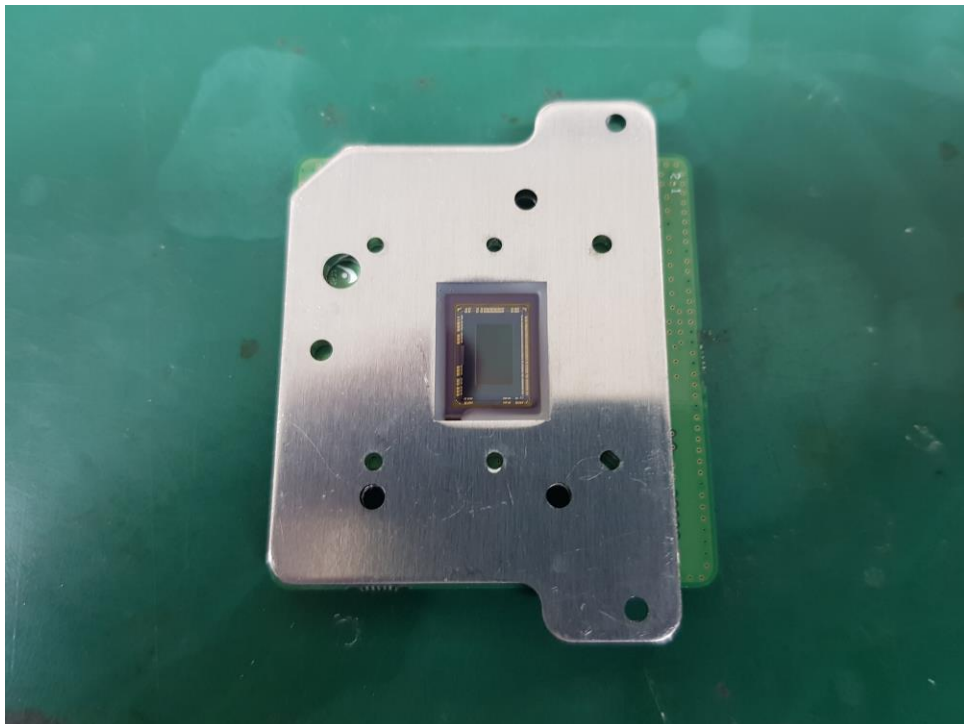

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – WIPER Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – LENS

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Fiber PoE Injector

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label and Location



NETWORK CAMERA

Model No : XNP-6400RW

Manufacturer : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.

Made in Vietnam

