

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0075-R2

Page (1) of (29)

EMC TEST REPORT

Test Report No. : KES-E1-18T0075-R2

Date of Issue : Feb. 24, 2023

Product name : Network Camera

Model/Type No. : XNV-6012M

Variant Mode : -

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)

Equipment authorization : **Supplier's Declaration of Conformity**

Date of Receipt : Dec. 21, 2017

Test date : Jan. 04, 2018

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Sung Min, Choi
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 10, 2018	KES-E1-18T0075	Issued
Nov. 19, 2021	KES-E1-18T0075-R1	- Changed customer's address and factory due to customer request. - IC Regulation ICES-003 Issue 7 Update ANSI C63.4-2014 or ANSI C63.4-2014 amended as per ANSI C63.4a-2017
Feb. 24, 2023	KES-E1-18T0075-R2	Change the Applicant and Manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0075-R2
Page (3) of (29)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	8
1.8	Configuration.....	9
1.9	Remarks when standards applied	10
1.10	Calibration Details of Equipment Used for Measurement	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Radiated Electric Field Emissions(Below 1 GHz)	15
2.3	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Radiated Electric Field Emissions(Below 1 GHz)		20
Radiated Electric Field Emissions(Above 1 GHz).....		21
Test Setup Photos and Configuration		22
Conducted Voltage Emissions		22
Radiated Electric Field Emissions(Below 1 GHz)		23
Radiated Electric Field Emissions(Above 1 GHz).....		24
EUT External Photographs		25
EUT Internal Photographs		26

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.0 General Product Description

Main Specifications of EUT are:

1/2.8" 2M CMOS
1945(H) x 1109(V) 2.16M
1945(H) x 1097(V) 2.13M
Progressive Scan
Color : 0.055 lux(F2.0, 1/30sec) (TBD)
B/W : 0.0055Lux
50dB
USB : Micro USB type B, 1280x720, for Installation
2.4mm Fixed
F2.0
H 139" V 73" D167" (TBD)
0.4m(1.31ft)
Manual
Fixed
Board-in type
±5°/0-67°/±90°
-
Off / On (Displayed up to 85 characters)
- WW : English/Numeric/Special Characters
- China : English/Numeric/Special/Chinese Characters
- Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White),
Transparency, Auto Scale by Resolution
Auto (ICR) / Color / B/W / External / Schedule
Off / BLC / HLC(Masking/Dimming), WDR
150dB
SSDR (Off / On)
SSNR5 (2D+3D Noise Filter) (Off / On)
Off / On
Auto(Input from fog detection) / Manual / Off
Off / On(8ea, 8point Polygonal zones), Handover
Off / On (32ea, polygonal zones)
- Color : Grey/Green/Red/Blue/Black/White
- Mosaic
Off / Low / Middle / High
ATW / AWC / Manual / Indoor / Outdoor((Included Mercury & Sodium)
level adjustment
On/Off (5 levels with Min/Max)
Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
24X, Digital PTZ(Preset, Group)
Flip : On/Off
Mirror : On/Off
Hallway view : 90°/270°
Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection,
Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion
Detection, Digital Auto Tracking, Sound Classification
-
Motion Detection, Video & Audio Analytics, Network Disconnect
File upload via FTP, E-Mail
Notification via E-Mail
local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers
External output
DPTZ preset
Selectable (Mic IN/Line IN), Built-in microphone
Supply voltage: 2.5VDC(4mA), Input Impedance: approx. 2K Ohm
Line out, Max output level: 1 Vrms
Off / On
Support

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0075-R2

Page (5) of (29)

M12 (10/100BASE-T)
H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
H.265/H.264 : Max. 60fps at all resolutions Motion JPEG : Max. 30fps
Manual Mode (area-based : 5EA)
Support
H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
H.264/H.265 : CBR or VBR MJPEG : VBR
Multiple Streaming (Up to 10 Profiles)
G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz
Bi-directional (2-Way)
IPv4, IPv6
TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Unicast / Multicast
20 users at Unicast Mode
SD/SDHC/SDXC slot (up to 256 GB) - Motion images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Non-plugin Webviewer - Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49(Windows 64bit only) , Apple Safari 9 (Mac OS X only) Plug-in Webviewer - Supported Browser : MS Explore 11, Apple Safari 9 (Mac OS X only)
Smartviewer, SSM
-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH *Start up should be done at above -20°C
-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
IP66
EN55011:2009+A1:2010, EN50581:2012, EN50121-3-2:2015, EN61000-4-2:2009 EN61000-4-3:2006+A2:2010, EN61000-4-4:2012, EN61000-4-5:2014 EN61000-4-6:2009, EN50155:2007, NEMA 4X
IK10, NEMA4X
PoE(IEEE802.3af, Class3)
TBD
Ivory / Metal
99 x 52 x 100
296g(TBD)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 120 Vac ☐ 24 Vac ☐ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	XNV-6012M	-	HANWHA VISION VIETNAM COMPANY LIMITED	E.U.T



1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adaptor	POE 36U-1AT-R	P90215791A1	PHIHONG	-
Laptop	LG15N54	410NZET022292	LG	-
Laptop Adaptor	DA-1900-08	9700591703	Dongguang Lite Power 2 nd Plant	-
Micro SD Card	-	-	SanDisk	16 GB
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	-
MIC	CMK-303	-	CAMAC	-
PoE Adaptor	PT-PSE109GBRO- AH	-	Dongguan PROCET Network Technology Co.,Ltd	Conducted Emissions
Laptop	LG15N54	507NZET040180	LG	Conducted Emissions
Laptop Adaptor	PA-1900-14	OF4A263348701J247	LITE-ON TECHNOLOGY COPORATION	Conducted Emissions
MIC	MP1000	-	-	Conducted Emissions



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (E.U.T)	RJ-45 (PoE)	PoE Adaptor	RJ-45 (PoE)	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	Mike	3.5 mm	1.7	U
	SLOT	Micro SD Card	SLOT	-	-
PoE Adaptor	RJ-45 (Data)	Laptop	RJ-45 (Data)	3.0	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Test mode	operating
PoE	E.U.T Monitoring, Ping Test

E.U.T Test operating S/W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Vision Co., Ltd

1.8 Configuration

■ AC Main
 □ DC Main

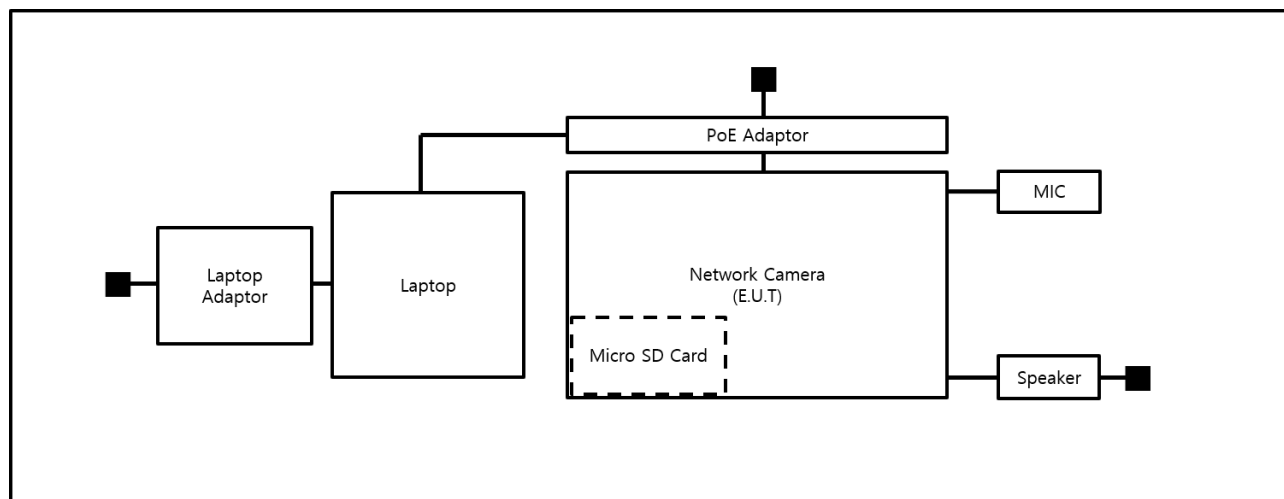

1.9 Remarks when standards applied

In the Conducted Emissions at Mains Power Ports test, PoE Adaptor, Laptop and MIC were changed and tested.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1

☐ Group 2

☐ Class A

☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0075-R2

Page (13) of (29)

☐ **VCCI V-3 / 2015.04**

☐ Class A

☐ Class B

☐ **AS/NZS:2013**

☐ Class A

☐ Class B

☒ **47 CFR Part 15, Subpart B**

☒ CISPR 22:2009 +A1:2010

☒ Class A

☐ Class B

☐ ANSI C63.4a-2017

☐ Class A

☐ Class B

☒ **IC Regulation ICES-003 Issue 7**

☒ CAN/CSA-CISPR 32:17

☒ Class A

☐ Class B

☐ ANSI C63.4a-2017

☐ **RE- Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions at Mains Power Ports

Test Date

Jan. 04, 2018

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☒	LISN	ENV216	R & S	101787	01, 11, 2018
☒	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 27, 2018
☐	LISN	NNBM8124	SCHWARZBECK	8124-1002	08, 07, 2018
☐	LISN	NNBM8124	SCHWARZBECK	8124-1003	08, 07, 2018

Test ConditionsTemperature: 23,8 °C
Relative Humidity: 41,7 % R.H.**Frequency Range of Measurement**

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jan. 04, 2018

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
☒	AMPLIFIER	SCU 01	R & S	100603	11, 27, 2018
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2018

Test Conditions

Temperature: 23,8 °C
Relative Humidity: 41,7 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jan. 04, 2018

Test Location

SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 17, 2018
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2018
☐	ATTENUATOR	8491A	HP	32173	03, 24, 2018
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test ConditionsTemperature: 23,8 °C
Relative Humidity: 41,7 % R.H.**Frequency Range of Measurement**

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0075-R2

Page (17) of (29)


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: XNV-6012M
Phase: H
Mode: PoE
Operator Name: KES

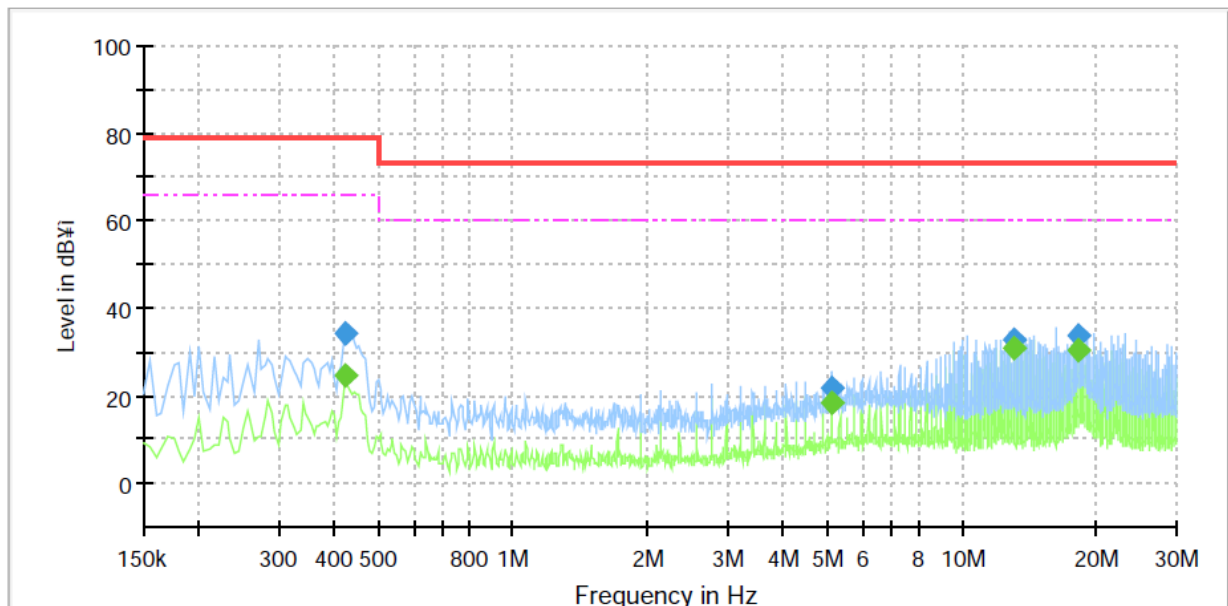

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.425000	---	24.42	66.00	41.58	1000.0	9.000	L1	19.6
0.425000	34.17	---	79.00	44.83	1000.0	9.000	L1	19.6
5.125000	---	18.27	60.00	41.73	1000.0	9.000	L1	19.8
5.125000	21.59	---	73.00	51.41	1000.0	9.000	L1	19.8
13.030000	---	30.72	60.00	29.28	1000.0	9.000	L1	20.0
13.030000	32.73	---	73.00	40.27	1000.0	9.000	L1	20.0
18.245000	---	30.37	60.00	29.63	1000.0	9.000	L1	20.1
18.245000	33.86	---	73.00	39.14	1000.0	9.000	L1	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6012M
Phase:	N
Mode:	PoE
Operator Name:	KES

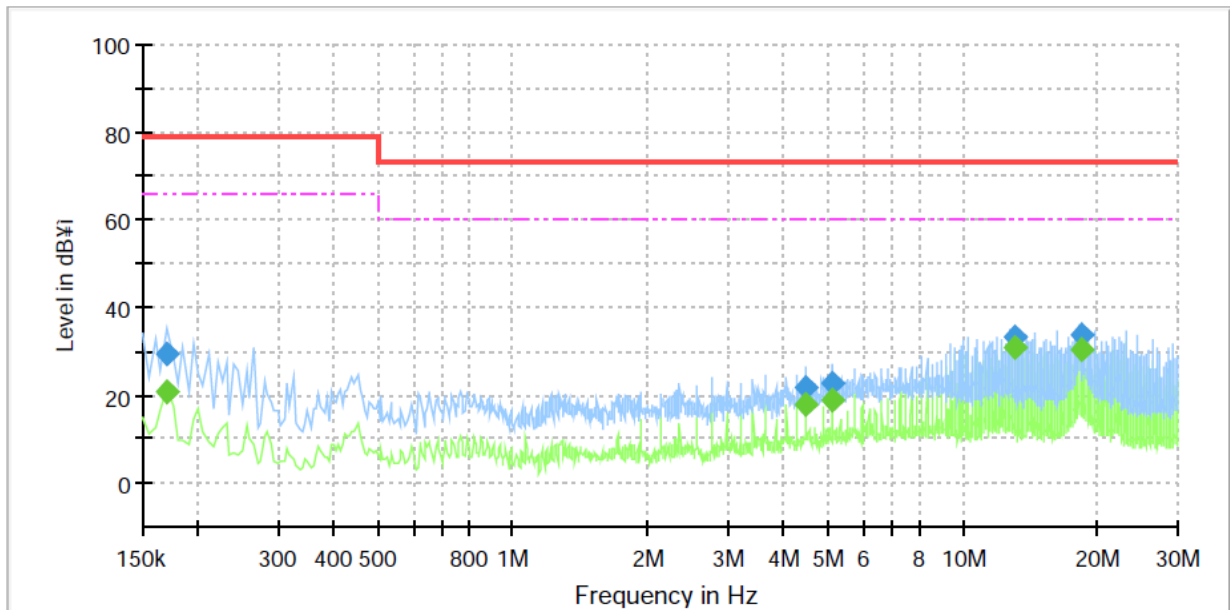

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.170000	---	20.94	66.00	45.06	1000.0	9.000	N	19.6
0.170000	29.16	---	79.00	49.84	1000.0	9.000	N	19.6
4.485000	---	18.09	60.00	41.91	1000.0	9.000	N	19.8
4.485000	21.78	---	73.00	51.22	1000.0	9.000	N	19.8
5.125000	---	18.67	60.00	41.33	1000.0	9.000	N	19.8
5.125000	22.64	---	73.00	50.36	1000.0	9.000	N	19.8
13.030000	---	30.85	60.00	29.15	1000.0	9.000	N	20.1
13.030000	33.02	---	73.00	39.98	1000.0	9.000	N	20.1
18.305000	---	30.18	60.00	29.82	1000.0	9.000	N	20.3
18.305000	33.89	---	73.00	39.11	1000.0	9.000	N	20.3

◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-18T0075-R2

Page (19) of (29)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-18T0075-R2
Page (20) of (29)

Radiated Electric Field Emissions(Below 1 GHz)

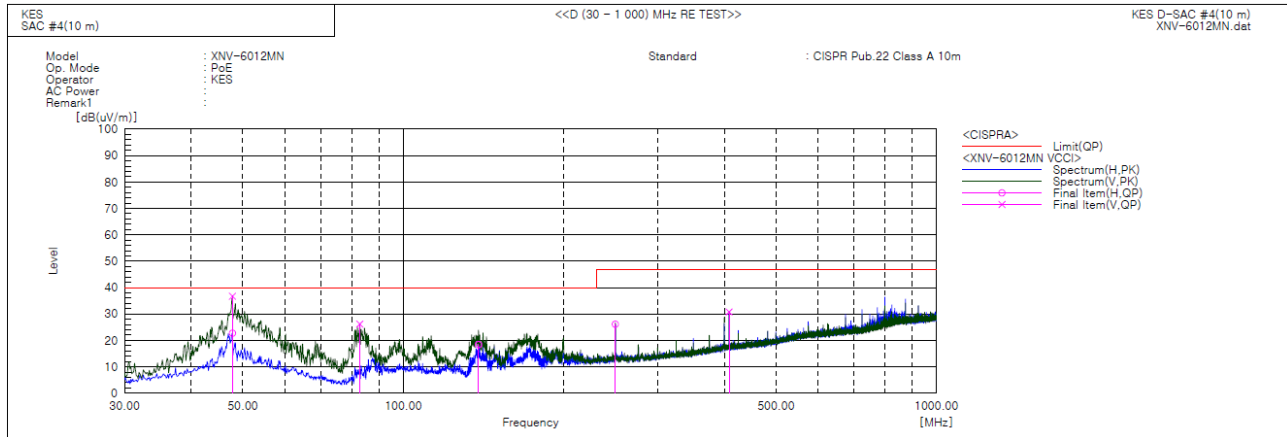

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.803	V	64.6	-27.9	36.7	40.0	3.3	267.0	341.0	
2	47.824	H	50.6	-27.9	22.7	40.0	17.3	100.0	150.0	
3	82.865	V	59.5	-33.3	26.2	40.0	13.8	150.0	250.0	
4	138.398	H	50.3	-31.9	18.4	40.0	21.6	400.0	3.0	
5	249.948	H	51.5	-25.4	26.1	47.0	20.9	400.0	142.0	
6	408.421	V	51.0	-20.2	30.8	47.0	16.2	100.0	225.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]


Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Above 1 GHz)

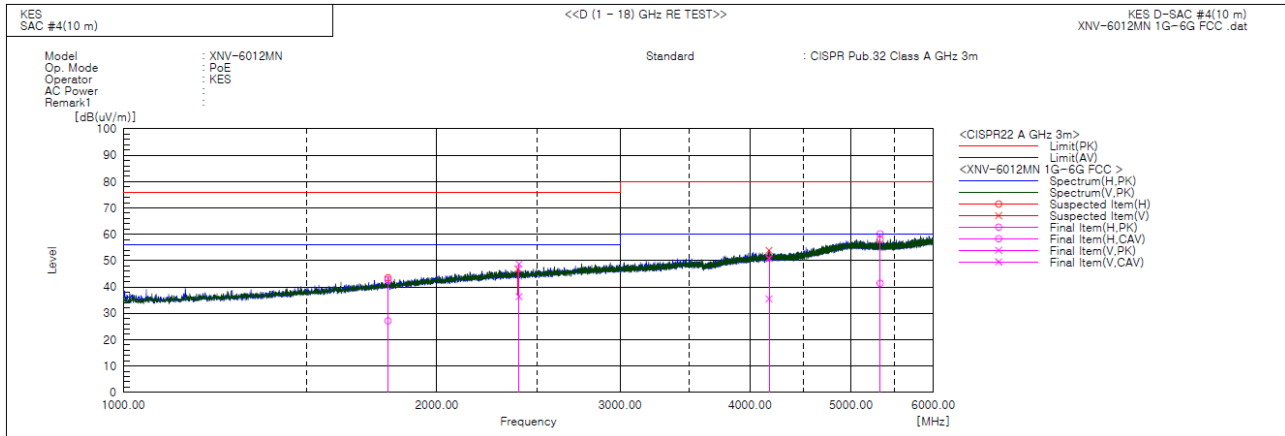

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1796.288	H	41.9	26.2	0.9	42.8	27.1	76.0	56.0	33.2	28.9	361.0	19.0	
2	2399.994	V	43.7	31.4	5.0	48.7	36.4	76.0	56.0	27.3	19.6	109.0	253.0	
3	4172.500	V	38.0	22.7	12.8	50.8	35.5	80.0	60.0	29.2	24.5	100.0	87.0	
4	5334.375	H	42.9	24.1	17.3	60.2	41.4	80.0	60.0	19.8	18.6	100.0	171.0	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



Test Setup Photos and Configuration

Conducted Voltage Emissions




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

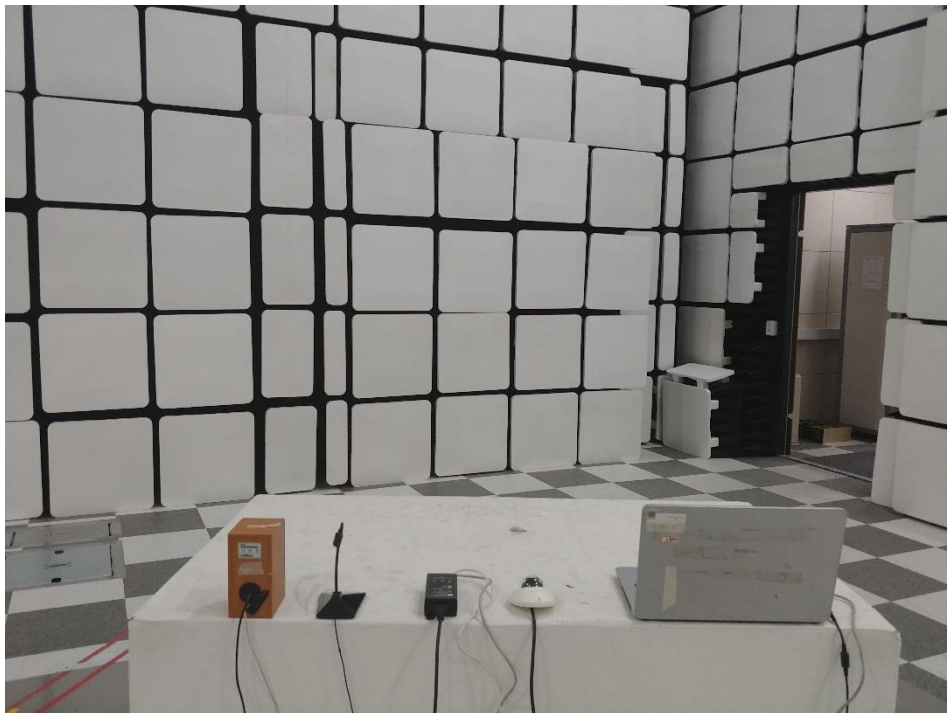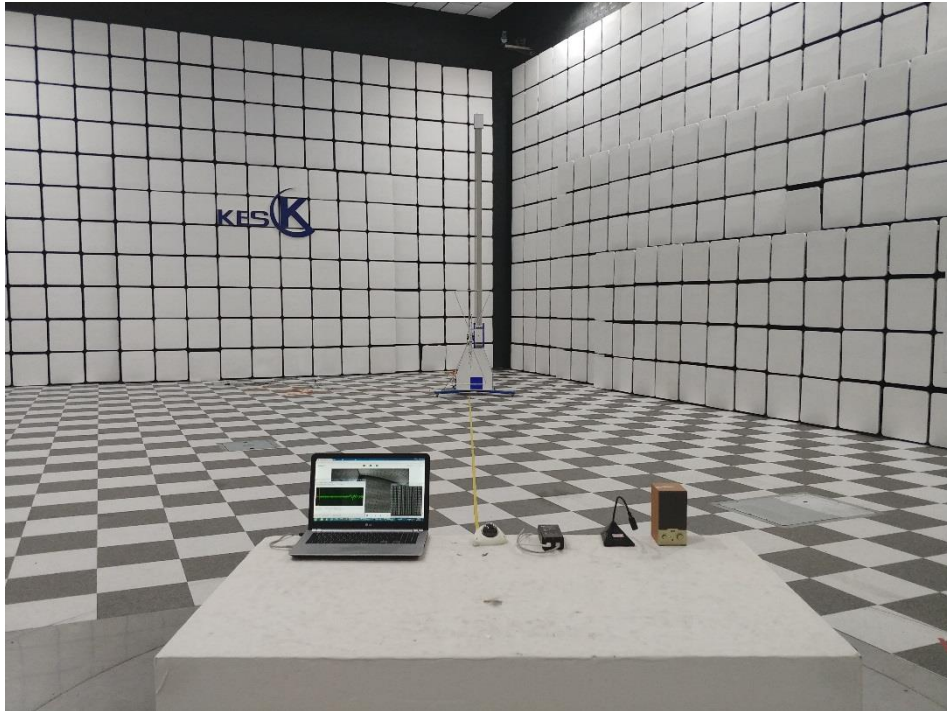

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

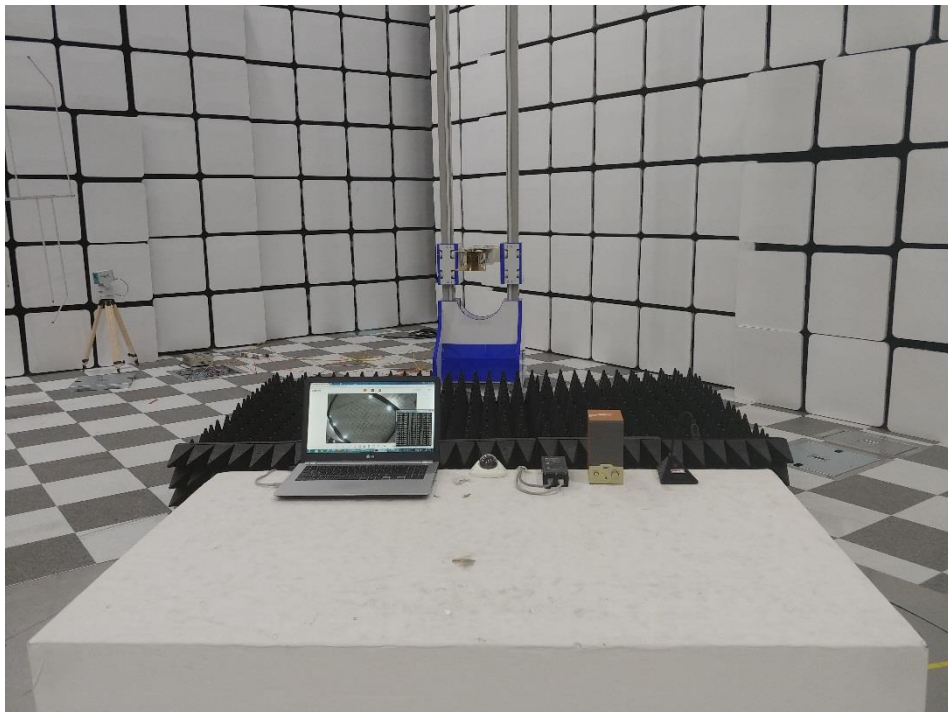

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)



EUT Internal View –board 1

(Top)

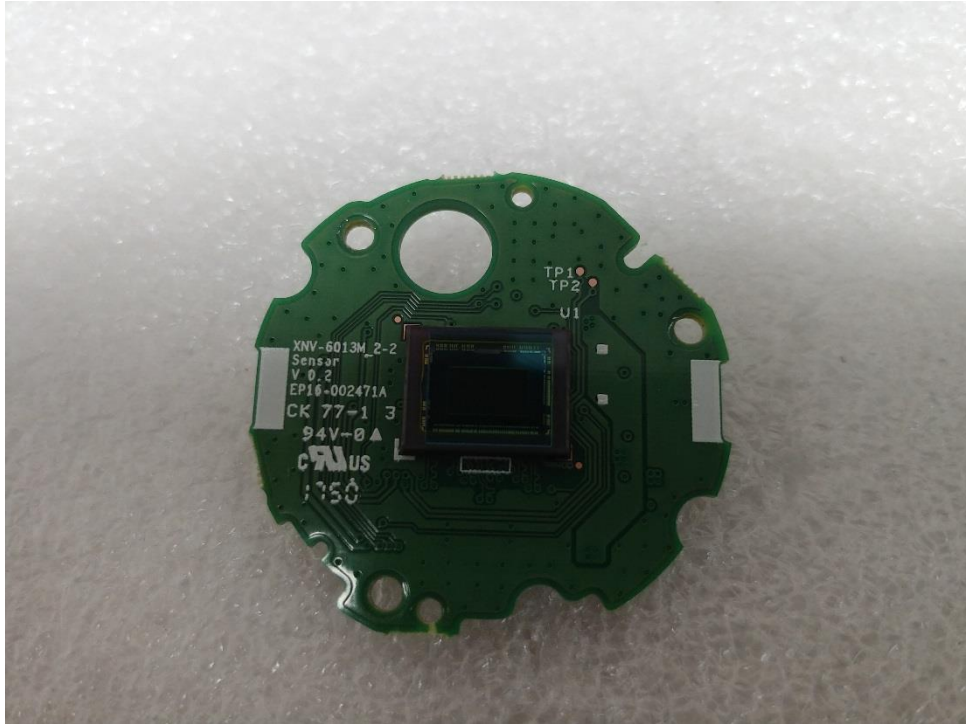


(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View –board 2

(Top)

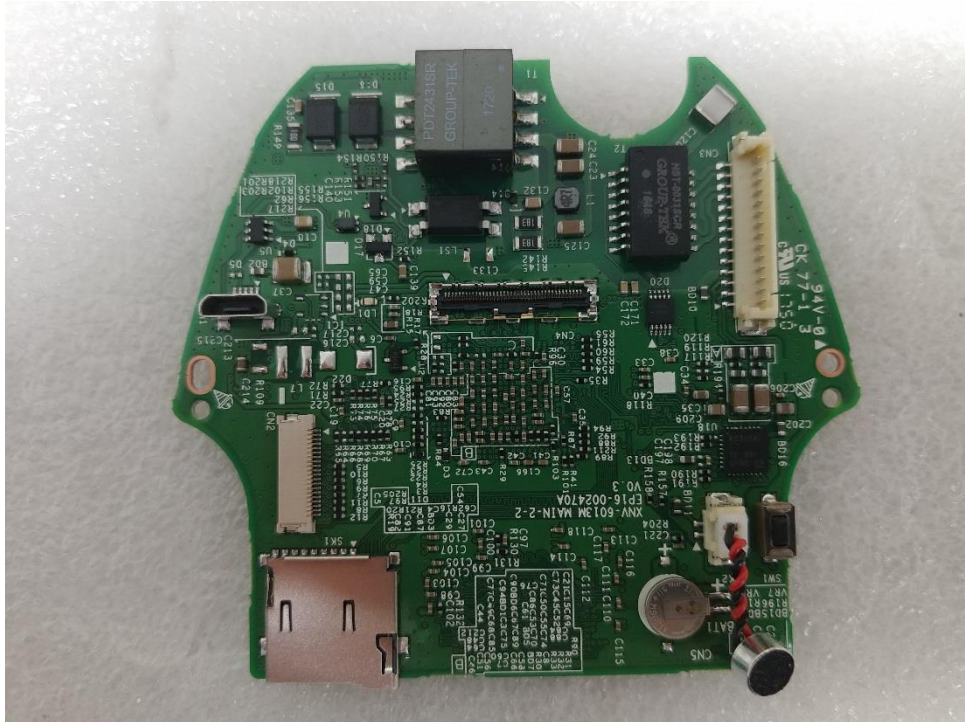

(Bottom)

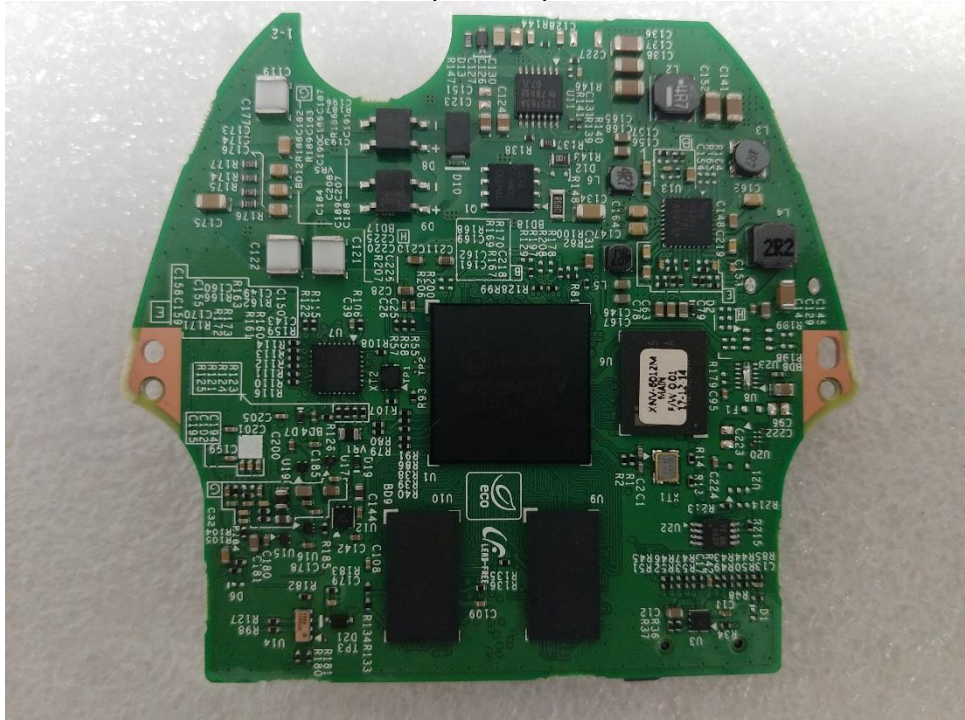

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

Label Photographs



CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.