EU Declaration of Conformity

SAMSUNG

CE

We hereby declare that the product

Type of equipment	:	*NETWORK CAMERA*
Brand Name / Trade Mark	:	*SAMSUNG*
Model number	:	*XNV-8040RP*
Variant Model	:	*-*

satisfies all the technical regulations applicable to the product within the scope of Council Directives 2014/30/EU

EN 55022:2010	:	*Limits and methods of measurement of radio disturbance characteristics of information technology equipment*
EN 50581:2012		*Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances*
EN 50130-4:2011+A1:2014		*Product family standard: Immunity requirements for components of fire,intruder and social alarm systems*

EN 61000-4-2:2009	:	*Electrostatic discharge immunity test*
EN 61000-4-3:2006+A2:2010	:	*Radiated, radio-frequency, electromagnetic field immunity test*
EN 61000-4-4:2012	:	*Electrical fast transient/burst immunity test*
EN 61000-4-5:2014	:	*Surge immunity test*
EN 61000-4-6:2014	:	*Immunity to conducted disturbances, induced by radio-frequency fields*

All essential testing suites have been carrier out.

Manufacturer	:	*Hanwha Techwin (Tianjin) Co.,Ltd.*
Manufacturer address	:	*No.11 Weiliu Rd,Micro-Electronic Industrial Park,TEDA,Tianjin,300385,People's Republic of China*
Telephone / Fax	:	*82-02-729-2900 /82-02-729-2904 (www.hanwhatechwin.com)*
Applicant	:	*Hanwha Techwin Co., Ltd.*
Applicant address	:	*1204, Changwon-daero, Seongsan-gu, Chang-won-si, Gyeongsangnam-do, korea*

This declaration is issued under the sole responsibility of the manufacturer and his authorised representative.

Authorized signatory

Name / Title	:	*Jei Soon, Kang / Principal Research Engineer*
Date of issue	:	*Jan. 24, 2017*



EMC TEST REPORT For CE

Test Report No.	:	KES-E1-17T0058
Date of Issue	:	Jan, 24, 2017
Product name	:	NETWORK CAMERA
Model/Type No.	:	XNV-8040RP
Variant Model	:	-
Applicant	:	Hanwha Techwin Co., Ltd.
Applicant Address	:	1204, Changwon-daero, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea
Manufacturer	:	Hanwha Techwin (Tianjin) Co.,Ltd.
Manufacturer Address	:	No.11 Weiliu Rd,Micro-Electronic Industrial Park,TEDA,Tianjin,300385,People's Republic of China
Date of Receipt	:	Jan, 10, 2017
Test date	:	Jan, 16, 2017 – Jan, 19, 2017
Test Results	:	☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Young Jun, Jo
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 24, 2017	KES-E1-17T0058	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0 General Product Description 4
1.1 Test Voltage & Frequency 6
1.2 Variant Model Differences 6
1.3 Device Modifications 6
1.4 Equipment Under Test 6
1.5 Support Equipments 6
1.6 External I/O Cabling 7
1.7 E.U.T Operating Mode(s) 8
1.8 Configuration 9
1.9 Calibration Details of Equipment Used for Measurement 10
1.10 Test Facility 10
1.11 Laboratory Accreditations and Listings 10
2.0 Test Regulations 11
2.1 Conducted Emissions at Mains Power Ports 13
2.2 Conducted Emissions at Telecommunication Ports 14
2.3 Radiated Electric Field Emissions(Below 1 ㎓) 15
2.4 Radiated Electric Field Emissions(Above 1 ㎓) 16
2.5 Harmonic Current Emissions 17
2.6 Voltage Fluctuations and Flicker 18
3.0 Criteria for compliance 19
3.1 Electrostatic Discharge 21
3.2 Radiated Electric Field Immunity 24
3.3 Electrical Fast Transients/Bursts 27
3.4 Surge Transients 30
3.5 Conducted Disturbance 34
3.6 Voltage Dips and Short Interruptions 38
APPENDIX A – TEST DATA 40
Conducted Emissions at Mains Power Ports 40
Conducted Emissions at Telecommunication Ports 42
Radiated Electric Field Emissions(Below 1 ㎓) 46
Radiated Electric Field Emissions(Above 1 ㎓) 48
Harmonic Current Emissions and Voltage Fluctuations and Flicker 56
Test Setup Photos and Configuration 59
Conducted Voltage Emissions 59
Conducted Telecommunication Emissions 60
Radiated Electric Field Emissions(Below 1 ㎓) 62
Radiated Electric Field Emissions(Above 1 ㎓) 64
Harmonic Current Emissions and Voltage Fluctuations and Flicker 66
Electrostatic Discharge 67
Radiated Electric Field Immunity 68
Electrical Fast Transients/Bursts 69
Surge Transients 71
Conducted Disturbance 73
Voltage Dips and Short Interruptions 75
EUT External Photographs 76
EUT Internal Photographs 77

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.0 General Product Description

Main Specifications of E.U.T are:

	XNV-8040R
Video	
Imaging Device	1/1.8" 6M CMOS
Total Pixels	3096(H) x 2094(V)
Effective Pixels	2616(H) x 1976(V)
Scanning System	Progressive Scan
Min. Illumination	Color : 0.2 lux(F1.6, 1/30sec) B/W : 0 Lux (IR LED On)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1280x720, for installation
Lens	
Focal Length (Zoom Ratio	7.0mm Fixed
Max. Aperture Ratio	F1.6
Angular Field of View	H: 50.7°, V:37.8°, D: 63.8°
Min. Object Distance	0.4m
Focus Control	Manual
Lens Type	Fixed
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan / Tilt / Rotate range	0° ~ 354° / 0° ~ 67° / 0° ~ 355°
Operational	
IR Viewable Length	30m(98.43ft)
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR
Wide Dynamic Range	120dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto(input from fog detection) / Manual / Off
Motion Detection	Off/ On(8ea, 8point Polygonal zones), Handover
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital PTZ	24X, 'Digital PTZ(Preset, Group)
Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Video & Audio Analytics	Tampering, Loitering, Directional Detection, Defocus Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection, Digital Auto Tracking, Sound Classification, People counting, Heat map, Queue management
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Alarm Input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output DPTZ preset
Audio In	Selectable (Mic IN/Line IN) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out, Max output level: 1 Vrms

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Pixel Counter	Support
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Forma	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	2560 x 1920, 2560 x 1440, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1280 x 960 1280 x 720, 1024 x 768, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360, 320 x
Max. Framerate	H.265/H.264 : Max. 30fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream II	Support
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264/H.265 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Forma	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 8/16/32/48KHz
Audio Communication	Bi-dierctional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming I	ONVIF Profile S/G SUNAPI(HTTP API) Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish,, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10. 10.11 10.12 **Non-plugin Webviewer** Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49(Window 64bit only) , Apple Safari 9 (Mac OS X only) **Plug-in Webviewer** Supported Browser : MS Explore 11, Apple Safari 9 (Mac OS X only)
Central Management Soft	SmartViewer, SSM
Environmental	
Operating Temperature / Humidity	-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH *Start up should be done at above -20°C
Storage Temperature / Humidity	-50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP67, IP66
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	DC12V,PoE(IEEE802.3af,Class3)
Power Consumption	Max. 8W(12VDC), Max. 9W(PoE)
Mechanical	
Color / Material	Ivory / Metal
Dimension (WxHxD)	Ø120xH97.5mm(Ø4.72" x 3.84")

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 220 Vac ☐ 230 Vac ☐ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNV-8040RP	-	Hanwha Techwin (Tianjin) Co., Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter	PD-3001GC/AC	RD9356082016964200	Power Dsine	-
Notebook	RV518	HTK991NC600187E	Samsung Electronics Co., Ltd.	-
Notebook Adapter	ADP-60ZH	CNBA4400242ABZ040 8D5432	DELTA ELECTRONICS, INC	-
IPad	A1432	DQXJWFHDF193	APPLE .Inc	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
Alarm	SIP-1201DD D0	C53R67JZ301878 L	SAMSUNG TECHWIN CO., LTD.	-
Micro SD card	-	-	SanDisk	8 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	Audio OUT	Speaker	Audio IN	1.6	U
	Audio IN	IPad	Audio OUT	1.0	U
	3 pin	Alarm	3 pin	3.0	U
	Micro SD Slot	Micro SD card	Micro SD Slot	-	-

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45	PoE Adapter	RJ-45	3.0	U
	Audio OUT	Speaker	Audio IN	1.6	U
	Audio IN	IPad	Audio OUT	1.0	U
	3 pin	Alarm	3 pin	3.0	U
	Micro SD Slot	Micro SD card	Micro SD Slot	-	-
PoE Adapter	RJ-45	Notebook	RJ-45	3.0	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.7 E.U.T Operating Mode(s)

Test mode	operating
DC 12 V , PoE	E.U.T Monitoring


E.U.T Test operating S/W		
Name	Version	Manufacture Company
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


1.8 Configuration

■ AC Main
□ DC Main

- DC 12 V Mode

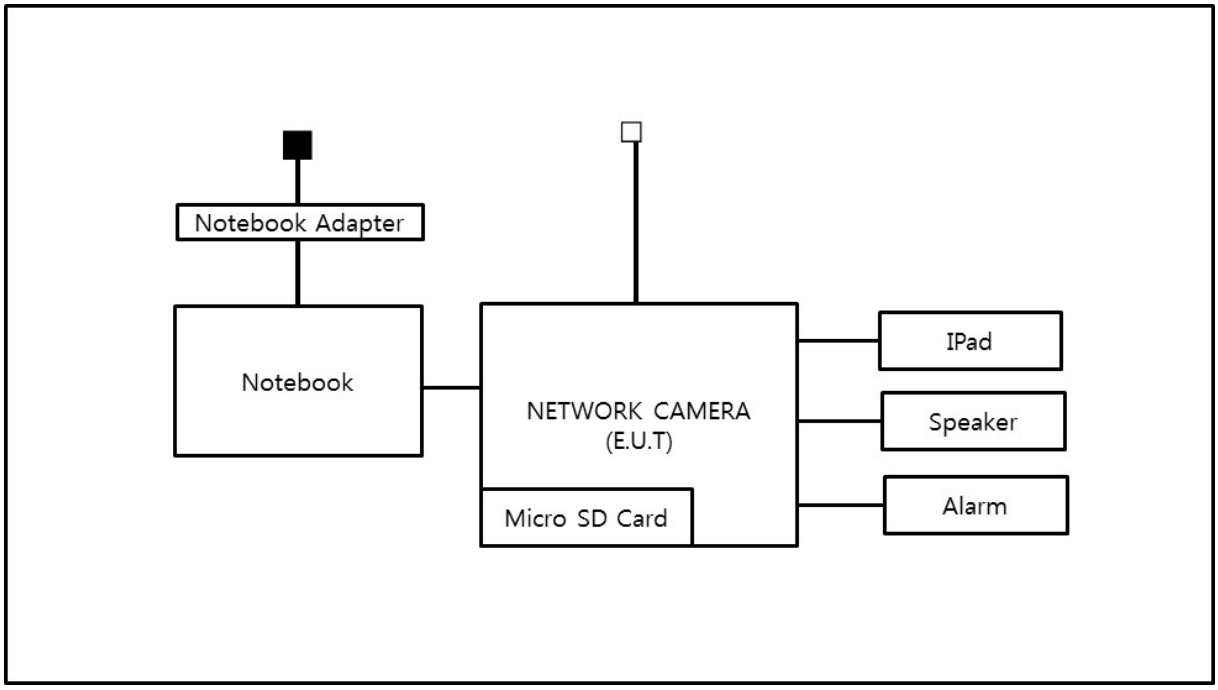

- PoE Mode

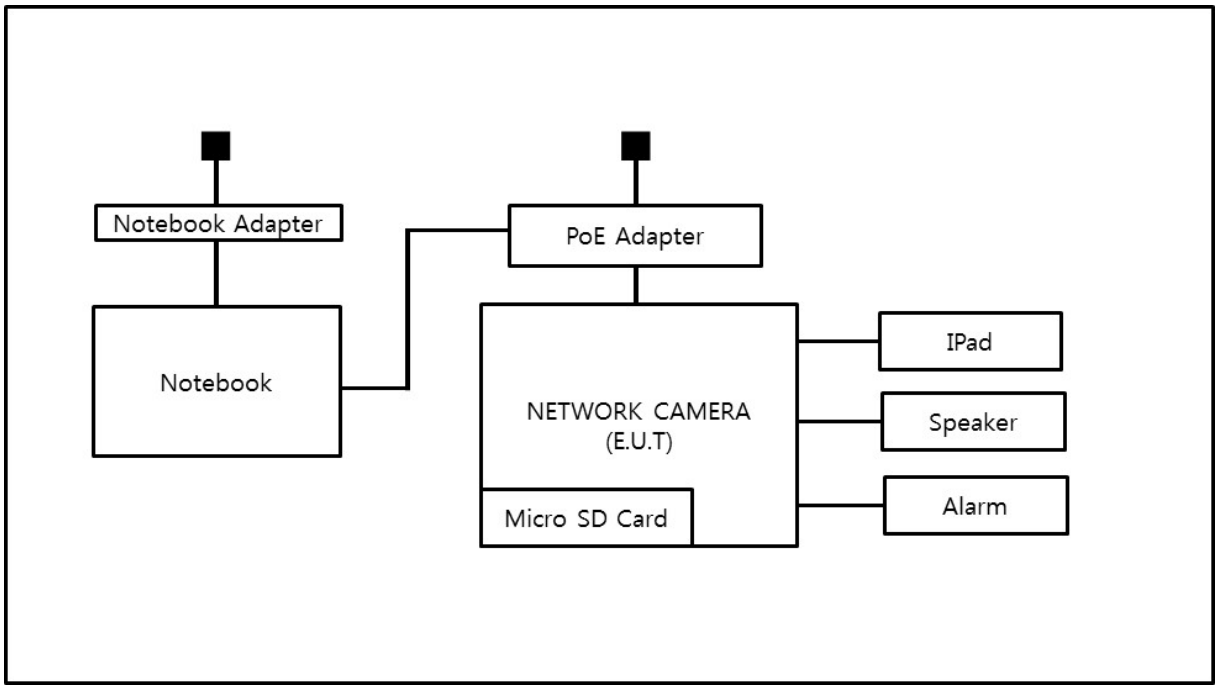

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	**FCC**	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	**VCCI**	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	R-4308, C-4798, T-2311, G-914
KOREA	**MSIP**	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KR0100
Canada	**IC**	3 & 10 meter Open Area Test Sites and one conducted site	4769B-1
Europe	**CE**	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	**KOLAS**	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011		
☐ EN 61000-6-1:2007		
☐ EN 61000-6-4:2007 +A1:2011		
☐ EN 61000-6-2:2005		
☐ EN 55011:2007 +A1:2010	☐ Group 1 ☐ Class A	☐ Group 2 ☐ Class B
☐ EN 55014-1:2006 +A2:2011		
☐ EN 55014-2:1997 +A2:2008		
☐ EN 55015:2013		
☐ EN 61547:2009		
☒ EN 55022:2010	☒ Class A	☐ Class B
☐ EN 55024:2010 +A1:2015		
☒ EN 50130-4:2011 +A1:2014		
☐ EN 61000-3-2:2014		
☐ EN 61000-3-3:2013		
☐ EN 61326-1:2013		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

☐ **VCCI V-3 / 2015.04** ☐ Class A ☐ Class B

☐ **AS/NZS CISPR22:2009 +A1:2010** ☐ Class A ☐ Class B

☐ **47 CFR Part 15, Subpart B**

- ☐ CISPR 22:2009 +A1:2010 ☐ Class A ☐ Class B
- ☐ ANSI C63.4-2009

☐ **IC Regulation ICES-003 : 2016**

- ☐ CAN/CSA CISPR 22-10 ☐ Class A ☐ Class B
- ☐ ANSI C63.4-2014

☐ **RE– Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.1 Conducted Emissions at Mains Power Ports

Test Date
N/A

Test Location
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☐	LISN	ENV216	R & S	101137	02, 04, 2017
☐	LISN	ENV216	R & S	101786	05, 02, 2017
☐	Electro wave Shieldroom	-	SEMITEC	-	-
☐	EMI Test S/W	EMC32	R&S	9.12.00	-

Test Conditions
Temperature: ℃
Relative Humidity: %

.

Frequency Range of Measurement
150 ㎑ to 30 ㎒

Instrument Settings
IF Band Width: 9 ㎑

Test Results
The requirements are:

☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks
N/A Because the E.U.T power is 12 v (dc) power and PoE, limits are not specified.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.2 Conducted Emissions at Telecommunication Ports

Test Date
Jan, 16, 2017

Test Location
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101783	05, 03, 2017
☒	LISN	ENV216	R&S	101137	02, 04, 2017
☒	LISN	ENV216	R&S	101786	05, 02, 2017
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
☒	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017
☒	Electro wave Shieldroom	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R&S	9.12.00	-

Test Conditions
Temperature: 24,1 ℃
Relative Humidity: 40,2 %

Frequency Range of Measurement
150 ㎑ to 30 ㎒

Instrument Settings
IF Band Width: 9 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.3 Radiated Electric Field Emissions(Below 1 ㎓)

Test Date
Jan, 17, 2017

Test Location
☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	714	11, 28, 2018
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions
Temperature: 1,8 ℃
Relative Humidity: 55,0 %

Frequency Range of Measurement
30 ㎒ to 1 ㎓

Instrument Settings
IF Band Width: 120 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.4 Radiated Electric Field Emissions(Above 1 ㎓)

Test Date
Jan, 17, 2017

Test Location
Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	EMI Test Receiver	ESU26	R&S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	Semi Anachoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions
Temperature: 23,3 ℃
Relative Humidity: 38,1 %

Frequency Range of Measurement
1 ㎓ to 6 ㎓

Instrument Settings
IF Band Width: 1 ㎒

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.5 Harmonic Current Emissions

Test Date
N/A

Test Location
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM TEST	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM TEST	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions
Temperature: ℃
Relative Humidity: %

Classification of Equipment for Harmonic Current Emissions
☐ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results
The requirements are:

☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks
N/A Because the E.U.T power is less than 75 W, limits are not specified.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.6 Voltage Fluctuations and Flicker

Test Date
N/A

Test Location
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM test	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM test	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions
Temperature: ℃
Relative Humidity: %

Test Results
The requirements are:

☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks
N/A Because the E.U.T power is 12 v (dc) power and PoE, limits are not specified.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:
EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,

and no such flickering of indicators oeuvres at U = 130 $dB\mu V$.

For component of CCTV systems, where the status is monitored by observing the TV picture,

then deterioration of the picture is allowed at U = 140 $dB\mu V$, providing:

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable settings etc.)

(b) at U = 130 $dB\mu V$, any deterioration of the picture is so minor that the system could

still be used; and

(c) there in no observable deterioration of the picture at U = 120 $dB\mu V$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.1 Electrostatic Discharge

Reference Standard
EN 61000-4-2:2009

Test Date
Jan, 18, 2017

Test Location
EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 24, 2017
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-
☒	EMS Test S/W	-	-	-	-

Test Conditions
Temperature: 23,8 ℃
Relative Humidity: 38,7 %
Atmospheric Pressure: 100,4 kPa

Test Specifications
Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:

Contact	Air	HCP	VCP
☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane


Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Location of Discharge:

Air
Contact



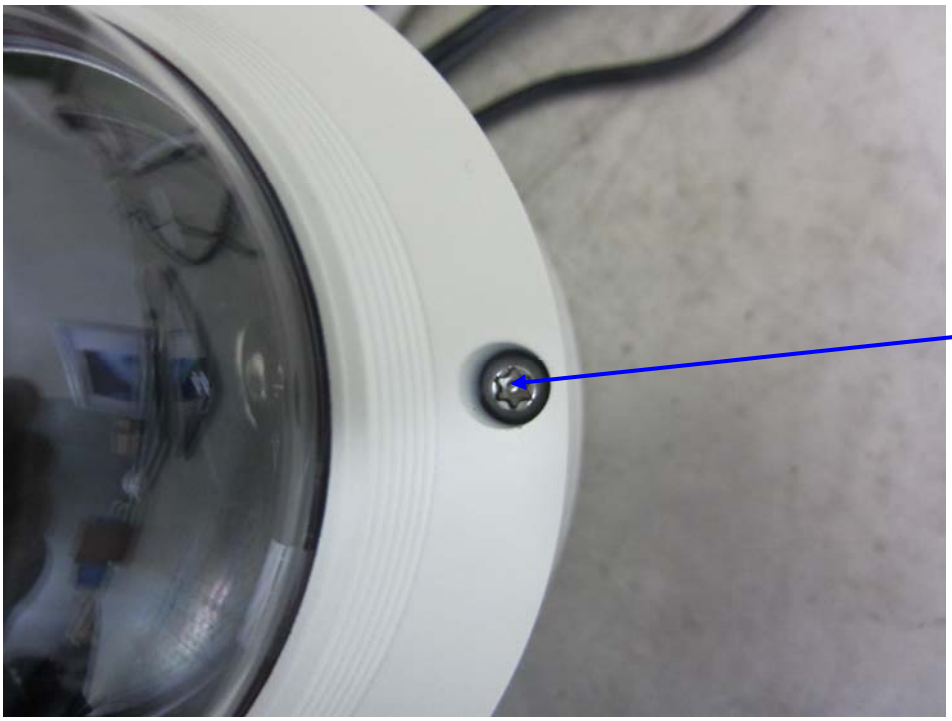

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

- PoE Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.2 Radiated Electric Field Immunity

Reference Standard
EN 61000-4-3:2006 +A2:2010

Test Date
Jan, 19, 2017

Test Location
EMS-RS: ☐ Semi Anechoic Chamber #1 ☒ Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Signal Generator	ESG-3000A	HP	US37040210	11, 01, 2017
☒	Amplifier	ITA0300-200	Infinitech	-	11, 01, 2017
☒	Amplifier	ITA0750-200	Infinitech	-	11, 01, 2017
☒	Amplifier	ITA1500-100	Infinitech	-	11, 01, 2017
☒	Amplifier	ITA2500-100	Infinitech	-	11, 01, 2017
☒	GPIB INTERFACE CONTROL	SYSTEM CONTROL UNIT	Infinitech	-	-
☒	POWER SUPPLY	SYSTEM POWER SUPPLY	Infinitech	-	-
☒	Power Meter	E4419B	Agilent	MY45101506	06, 27, 2017
☒	Average Power Sensor	E9301A	Agilent	-	06, 27, 2017
☒	Average Power Sensor	E9301A	Agilent	MY41495698	11, 17, 2017
☒	Stacked Double Log-Per- Antenna	STPL9128 D	SCHWARZBECK	9128D038	-
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	EMS Test S/W	KTI_RS2012	KOREA TECHNOLOGY INSTITUDE CO., LTD	2.1.1	-

Test Conditions

Temperature: 24,7 ℃
Relative Humidity: 37,1 %
Atmospheric Pressure: 100,1 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Specifications

Antenna Polarization:	Horizontal & vertical unless indicated otherwise	
Antenna Distance:	☒ 3 m	
Field Strength:	☐ 1 V/m ☒ 10 V/m	☐ 3 V/m
Frequency Range:	☐ 80 MHz to 1 GHz ☒ 80 MHz to 2,7 GHz	☐ 1,4 GHz to 2,7 GHz
Modulation:	☒ AM, 80 %, 1 kHz sine wave ☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)	
Frequency step:	☒ 1 % step	
Dwell Time:	☐ 1 s	☒ 3 s
# of Sides Radiated:	☒ 4	
Required Performance Criteria:	☒ Complied	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- PoE Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.3 Electrical Fast Transients / Bursts

Reference Standard
EN 61000-4-4:2012

Test Date
Jan, 18, 2017

Test Location
EMS-EFT: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Capacitive Coupling Clamp	HFK	EM TEST	070925	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions
Temperature: 23,8 ℃
Relative Humidity: 38.7 %
Atmospheric Pressure: 100,4 kPa

Test Specifications

Pulse Amplitude & Polarity: (DC Power Lines)	☐ ± 1.0 kV ☐ ± 4.0 kV	☐ ± 2.0 kV
Pulse Amplitude & Polarity: (Other supply / Signal Lines)	☐ ± 0.5 kV	☒ ± 1.0 kV ☐ ± 2.0 kV
Burst Period:	☒ 300 ms	☐ 2 s
Repetition Rate:	☐ 5 kHz	☒ 100 kHz
Duration of Test Voltage:	☒ ≥ 1 min	
Required Performance Criteria:	☒ Complied	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
L1 – L2	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
RJ-45	Complied	Complied
RS 485 (Alarm)	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (㎸)	(-) Burst (㎸)
RJ-45	Complied	Complied
RS 485 (Alarm)	Complied	Complied

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.4 Surge Transients

Reference Standard
EN 61000-4-5:2014

Test Date
Jan, 18, 2017

Test Location
EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☐	CDN	CNV 504N	EM TEST	V0936105121	06, 27, 2017
☐	CDN	CNV 508T5	EM TEST	P1549168422	04, 27, 2017
☒	CDN	CNV 508N1	EM TEST	P1551168979	04, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions
Temperature: 23,8 ℃
Relative Humidity: 38,7 %
Atmospheric Pressure: 100,4 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude : Common Mode
☐ (0,5 / 1,0 / 2,0) kV
Differential Mode
☐ (0,5 / 1,0) kV

Number of Surges: ☐ 5 surges per angle

Angle: ☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity: ☐ Positive & Negative

Repetition Rate: ☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common mode
Surge Amplitude: Common Mode
☒ (0,5 / 1,0) kV

Number of Surges: ☒ 5 Surges

Polarity: ☒ Positive & Negative

Repetition Rate: ☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
L – N	-	-
L – PE	-	-
N - PE	-	-

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
L1-PE	Complied	Complied
L2-PE	Complied	Complied

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
RJ-45	Complied	Complied
RS 485 (Alarm)	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- POE Mode

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
L – N	-	-
L – PE	-	-
N - PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
L1-PE	-	-
L2-PE	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (㎸)	(-) Surge (㎸)
RJ-45	Complied	Complied
RS 485 (Alarm)	Complied	Complied

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.5 Conducted Disturbance

Reference Standard
EN 61000-4-6:2014

Test Date
Jan, 18, 2017

Test Location
EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Continuous Wave Generator	CWS 500N1	EM TEST	V0936105119	08, 08, 2017
☒	6 dB Attenuator	ATT6	EM TEST	1208-34	08, 08, 2017
☒	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 08, 2017
☐	CDN	CDN-T2-RJ11	EM TEST	0909-07	08, 08, 2017
☐	CDN	CDN-T4	EM TEST	0909-08	08, 08, 2017
☐	CDN	CDN-T8RJ45	EM TEST	0909-09	08, 08, 2017
☐	CDN	CDN-AF2	EM TEST	0909-10	08, 08, 2017
☐	CDN	CDN-AF4	EM TEST	0909-11	08, 08, 2017
☒	EM Injection Clamp	EM 101	Liithi	35943	02, 04, 2017
☒	EMS Test S/W	icd.control	EM TEST AG	5.3.7	-

Test Conditions
Temperature: 23,8 ℃
Relative Humidity: 38,7 %
Atmospheric Pressure: 100,4 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Specifications

Frequency range:	☒ 150 ㎑ to 100 ㎒	☐ 150 ㎑ to 80 ㎒
Voltage Level:	☐ 1 Vrms ☒ 10 Vrms	☐ 3 Vrms
Modulation:	☒ AM, 80 %, 1 ㎑ sine wave ☒ PM, 1 ㎐ (0,5 s ON : 0,5 s OFF)	
Frequency step:	☒ 1 % step	
Dwell Time:	☒ 1 s	☐ 3 s
Required Performance Criteria:	☒ Complied	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N	CDN (☒M2, ☐M3)	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐M2, ☐M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	Complied	Complied
RS 485 (Alarm)	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐M2, ☐M3)	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐M2, ☐M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	Complied	Complied
RS 485 (Alarm)	Complied	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.6 Voltage Dips and Short Interruptions

Reference Standard
EN 61000-4-11:2004

Test Date
N/A

Test Location
EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☐	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☐	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions
Temperature: ℃
Relative Humidity: %
Atmospheric Pressure: kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Specifications & Observations / Remarks

(Test Voltage : 50 ㎐)

Test Level	Duration [in period/ms (50 ㎐)]	Results
☐ 20 % dip	☐ 250 /5000	N/A
☐ 30 % dip	☐ 25 /500	N/A
☐ 60 % dip	☐ 10 /200	N/A
☐ 100 % dip	☐ 250 /5000	N/A

- Voltage cariations

☐ Unom + 10 %	☐ 253 V (ac)	N/A
☐ Unom - 15 %	☐ 195.5 V (ac)	N/A

Observations:
Complied – No degradation of function

Test Results

☐ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☒ NOT APPLICABLE

Remarks

N/A Because the E.U.T power is 12 v (dc) power and PoE, limits are not specified.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[NEUTRAL]

N/A

♦ Calculation
QuasiPeak[㏈uV] / CAverage [㏈uV] = Reading Value[㏈uV] + Corr. [㏈]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (LISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Conducted Emissions at Telecommunication Ports

- DC 12 V Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-8040RP
Mode	Dc 12v 10 Mbps
Operator Name:	KES

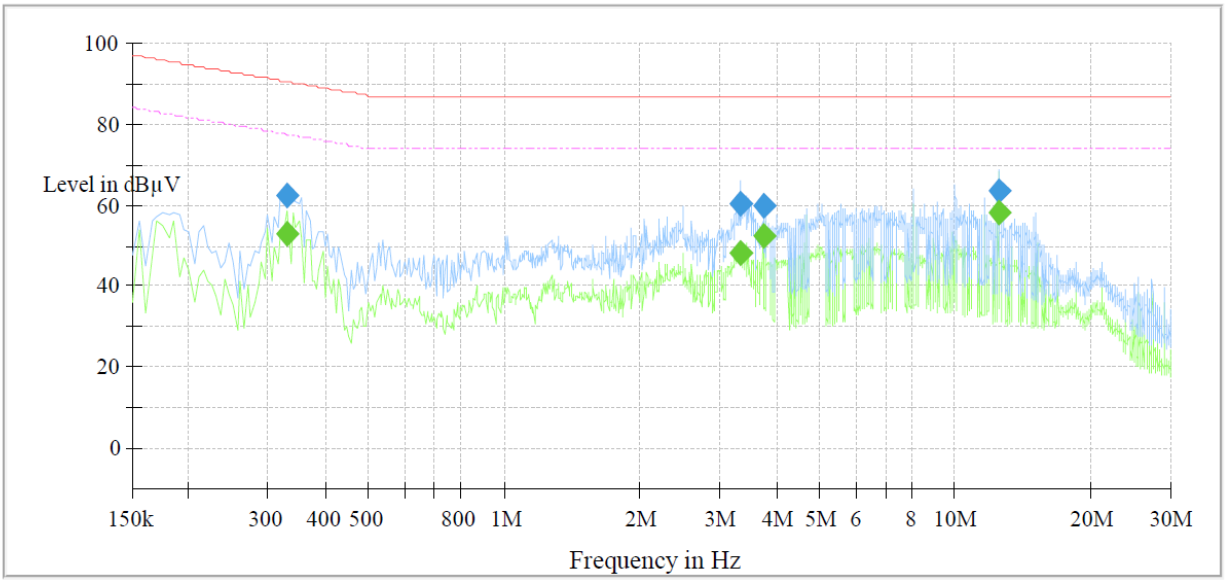

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.330000	---	53.15	77.45	24.30	1000.0	9.000	Single Line	21.1
0.330000	62.58	---	90.45	27.87	1000.0	9.000	Single Line	21.1
3.340000	---	48.07	74.00	25.93	1000.0	9.000	Single Line	19.8
3.340000	60.36	---	87.00	26.64	1000.0	9.000	Single Line	19.8
3.750000	---	52.43	74.00	21.57	1000.0	9.000	Single Line	19.8
3.750000	59.76	---	87.00	27.24	1000.0	9.000	Single Line	19.8
12.500000	---	58.28	74.00	15.72	1000.0	9.000	Single Line	20.0
12.500000	63.52	---	87.00	23.48	1000.0	9.000	Single Line	20.0


♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-8040RP
Mode	Dc 12v 100 Mbps
Operator Name:	KES

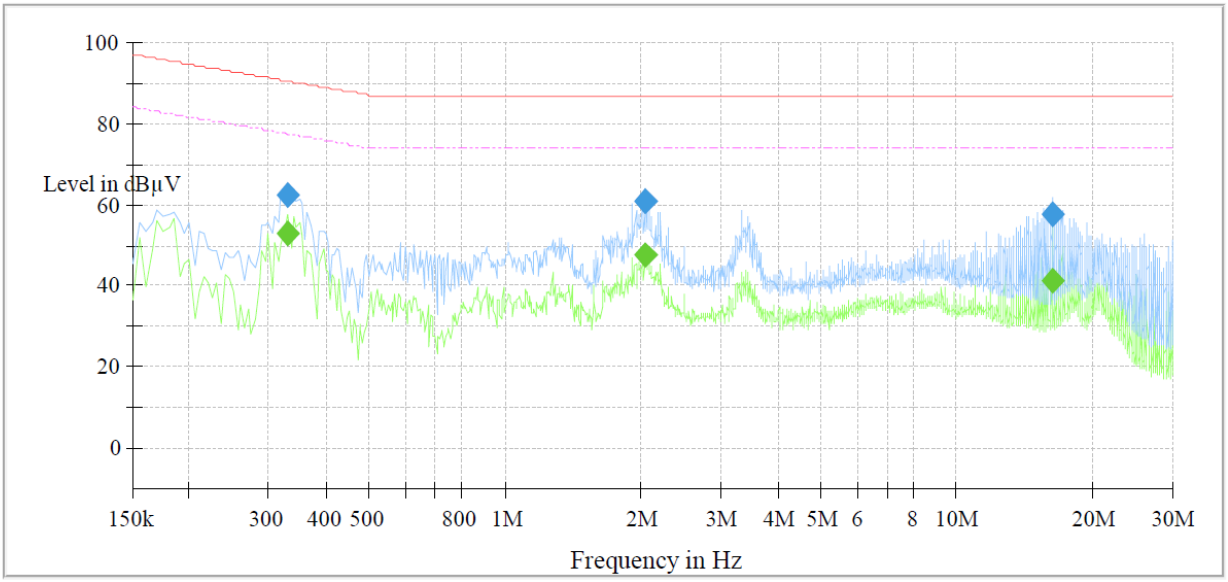

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.330000	---	52.85	77.45	24.60	1000.0	9.000	Single Line	20.6
0.330000	62.41	---	90.45	28.04	1000.0	9.000	Single Line	20.6
2.040000	---	47.86	74.00	26.14	1000.0	9.000	Single Line	19.4
2.040000	61.05	---	87.00	25.95	1000.0	9.000	Single Line	19.4
16.230000	---	41.26	74.00	32.74	1000.0	9.000	Single Line	19.6
16.230000	57.56	---	87.00	29.44	1000.0	9.000	Single Line	19.6

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (ISN FACTOR+ Cable Loss)


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-8040RP
Mode	POE 10 Mbps
Operator Name:	KES

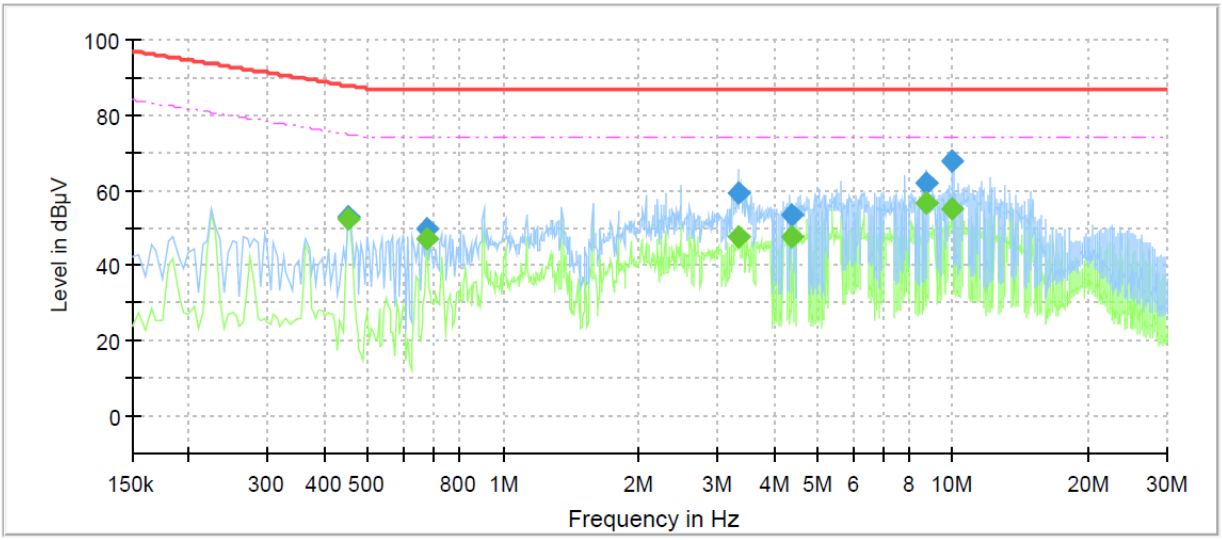

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.450000	---	52.42	74.88	22.46	1000.0	9.000	Single Line	20.9
0.450000	53.09	---	87.88	34.79	1000.0	9.000	Single Line	20.9
0.675000	---	47.04	74.00	26.96	1000.0	9.000	Single Line	20.6
0.675000	49.70	---	87.00	37.30	1000.0	9.000	Single Line	20.6
3.345000	---	47.56	74.00	26.44	1000.0	9.000	Single Line	19.8
3.345000	59.43	---	87.00	27.57	1000.0	9.000	Single Line	19.8
4.400000	---	47.86	74.00	26.14	1000.0	9.000	Single Line	19.8
4.400000	53.46	---	87.00	33.54	1000.0	9.000	Single Line	19.8
8.750000	---	56.67	74.00	17.33	1000.0	9.000	Single Line	19.9
8.750000	62.07	---	87.00	24.93	1000.0	9.000	Single Line	19.9
10.000000	---	55.30	74.00	18.70	1000.0	9.000	Single Line	20.0
10.000000	67.98	---	87.00	19.02	1000.0	9.000	Single Line	20.0


♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XNV-8040RP
Mode	POE 100 Mbps
Operator Name:	KES

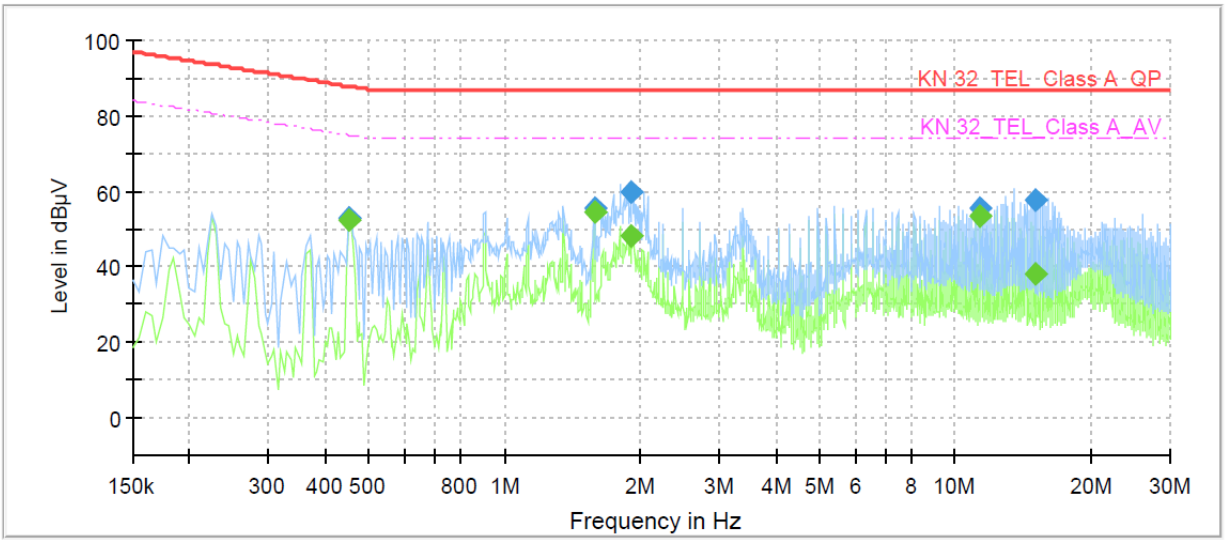

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.450000	---	52.48	74.88	22.40	1000.0	9.000	Single Line	20.4
0.450000	53.18	---	87.88	34.70	1000.0	9.000	Single Line	20.4
1.580000	---	54.67	74.00	19.33	1000.0	9.000	Single Line	19.6
1.580000	55.83	---	87.00	31.17	1000.0	9.000	Single Line	19.6
1.910000	---	47.92	74.00	26.08	1000.0	9.000	Single Line	19.5
1.910000	60.05	---	87.00	26.95	1000.0	9.000	Single Line	19.5
11.295000	---	53.34	74.00	20.66	1000.0	9.000	Single Line	19.5
11.295000	55.64	---	87.00	31.36	1000.0	9.000	Single Line	19.5
15.020000	---	38.33	74.00	35.67	1000.0	9.000	Single Line	19.6
15.020000	57.85	---	87.00	29.15	1000.0	9.000	Single Line	19.6

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (ISN FACTOR+ Cable Loss)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 ㎓)

- DC 12 V Mode

Frequency	Amplitude	ANT Polar. (H/V)	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin [dB]
[㎒]	[dB㎶]		[m]	ANT. [dB/m]	Cable [dB]	[dB㎶/m]	[dB㎶/m]	
150.01	12.38	H	3.96	7.89	3.57	23.84	40.00	16.16
150.69	18.90	V	1.00	7.91	3.58	30.39	40.00	9.61
225.01	8.57	H	3.75	12.15	4.42	25.14	40.00	14.86
249.99	19.65	H	3.77	12.49	4.72	36.86	47.00	10.14
249.99	21.39	V	1.26	12.49	4.72	38.60	47.00	8.40
300.01	9.04	H	3.17	13.42	5.15	27.61	47.00	19.39
350.01	22.29	H	4.00	14.52	5.64	42.45	47.00	4.55
350.01	13.91	V	1.02	14.52	5.64	34.07	47.00	12.93
500.03	12.60	V	1.00	17.35	7.01	36.96	47.00	10.04

* H : Horizontal, V : Vertical

♦ Calculation
Corrected Amplitude [㏈uV] = Amplitude[㏈uV] + Correction Factor [㏈]
Corrected Amplitude : The Final Value, Amplitude : Reading Value,
Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

Frequency	Amplitude	ANT Polar. (H/V)	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[㎒]	[dBμV]		[m]	ANT. [dB/m]	Cable [dB]	[dBμV/m]	[dBμV/m]	[dB]
135.00	12.35	H	3.52	7.86	3.38	23.59	40.00	16.41
195.71	8.34	H	3.67	11.25	4.07	23.66	40.00	16.34
250.01	22.23	H	4.00	12.49	4.72	39.44	47.00	7.56
251.01	21.06	V	1.00	12.51	4.73	38.30	47.00	8.70
300.00	10.39	H	3.25	13.42	5.15	28.96	47.00	18.04
300.01	11.60	V	2.17	13.42	5.15	30.17	47.00	16.83
349.98	12.24	H	2.38	14.51	5.64	32.39	47.00	14.61
400.00	10.70	V	1.00	15.61	6.17	32.48	47.00	14.52


* H : Horizontal, V : Vertical

♦ Calculation
Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]
Corrected Amplitude : The Final Value, Amplitude : Reading Value,
Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 ㎓)

- DC 12 V Mode

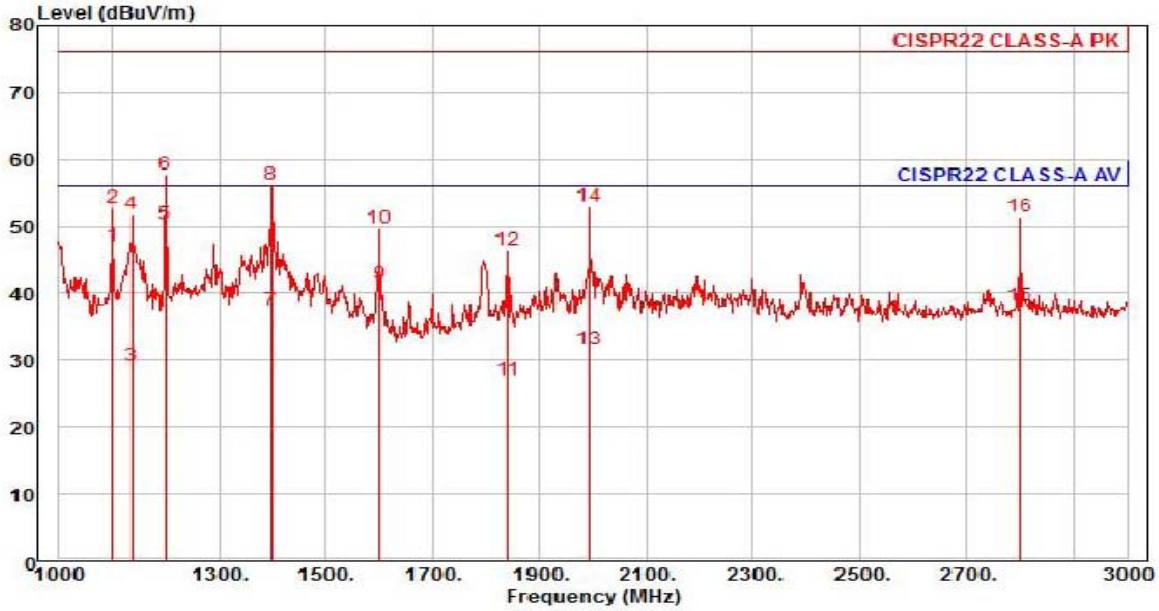

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8040RP
Mode : DC 12V
Memo : 1 - 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1100.00	55.71	24.31	6.81	39.85	88	56.00	-9.02	horizontal	Average
2	1100.00	61.56	24.31	6.81	39.85	88	76.00	-23.17	horizontal	Peak
3	1136.00	37.64	24.45	6.93	39.76	329	56.00	-26.74	horizontal	Average
4	1136.00	60.15	24.45	6.93	39.76	329	76.00	-24.23	horizontal	Peak
5 pp	1200.00	58.07	24.70	7.14	39.61	233	56.00	-5.70	horizontal	Average
6 pk	1200.00	65.48	24.70	7.14	39.61	233	76.00	-18.29	horizontal	Peak
7	1398.00	43.34	25.49	7.72	39.13	345	56.00	-18.58	horizontal	Average
8	1398.00	62.20	25.49	7.72	39.13	345	76.00	-19.72	horizontal	Peak
9	1600.00	45.98	26.29	8.31	39.22	163	56.00	-14.64	horizontal	Average
10	1600.00	54.34	26.29	8.31	39.22	163	76.00	-26.28	horizontal	Peak
11	1840.00	30.12	27.24	8.93	39.34	92	56.00	-29.05	horizontal	Average
12	1840.00	49.54	27.24	8.93	39.34	92	76.00	-29.63	horizontal	Peak
13	1994.00	33.82	27.86	9.32	39.41	149	56.00	-24.41	horizontal	Average
14	1994.00	55.16	27.86	9.32	39.41	149	76.00	-23.07	horizontal	Peak
15	2800.00	36.85	29.84	11.23	39.88	284	56.00	-17.96	horizontal	Average
16	2800.00	50.28	29.84	11.23	39.88	284	76.00	-24.53	horizontal	Peak

♦ Calculation

Over Limit [㏈] = (Read Level[㏈uV] + Ant Factor[㏈/m] + Cable Loss [㏈] − Preamp Factor [㏈]) − Limit Line[㏈uV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

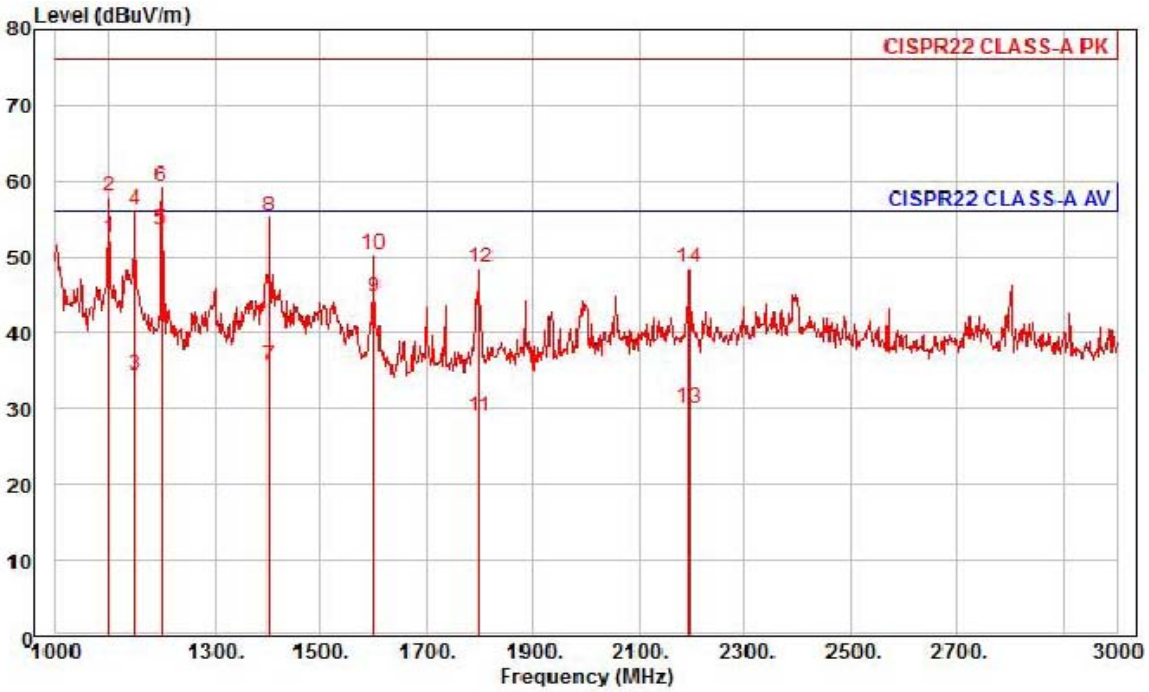

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8040RP
Mode : DC 12V
Memo : 1 - 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1100.00	61.21	24.31	6.81	39.85	13	56.00	-3.52	vertical	Average
2	1100.00	66.80	24.31	6.81	39.85	13	76.00	-17.93	vertical	Peak
3	1148.00	42.72	24.50	6.97	39.73	7	56.00	-21.54	vertical	Average
4	1148.00	64.60	24.50	6.97	39.73	7	76.00	-19.66	vertical	Peak
5 pp	1200.00	61.43	24.70	7.14	39.61	13	56.00	-2.34	vertical	Average
6 pk	1200.00	67.06	24.70	7.14	39.61	13	76.00	-16.71	vertical	Peak
7	1402.00	41.65	25.51	7.73	39.13	334	56.00	-20.24	vertical	Average
8	1402.00	61.21	25.51	7.73	39.13	334	76.00	-20.68	vertical	Peak
9	1600.00	49.37	26.29	8.31	39.22	224	56.00	-11.25	vertical	Average
10	1600.00	54.95	26.29	8.31	39.22	224	76.00	-25.67	vertical	Peak
11	1800.00	32.46	27.09	8.83	39.32	129	56.00	-26.94	vertical	Average
12	1800.00	52.10	27.09	8.83	39.32	129	76.00	-27.30	vertical	Peak
13	2196.00	31.23	28.36	9.79	39.41	168	56.00	-26.03	vertical	Average
14	2196.00	49.92	28.36	9.79	39.41	168	76.00	-27.34	vertical	Peak

♦ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] − Preamp Factor [dB]) − Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

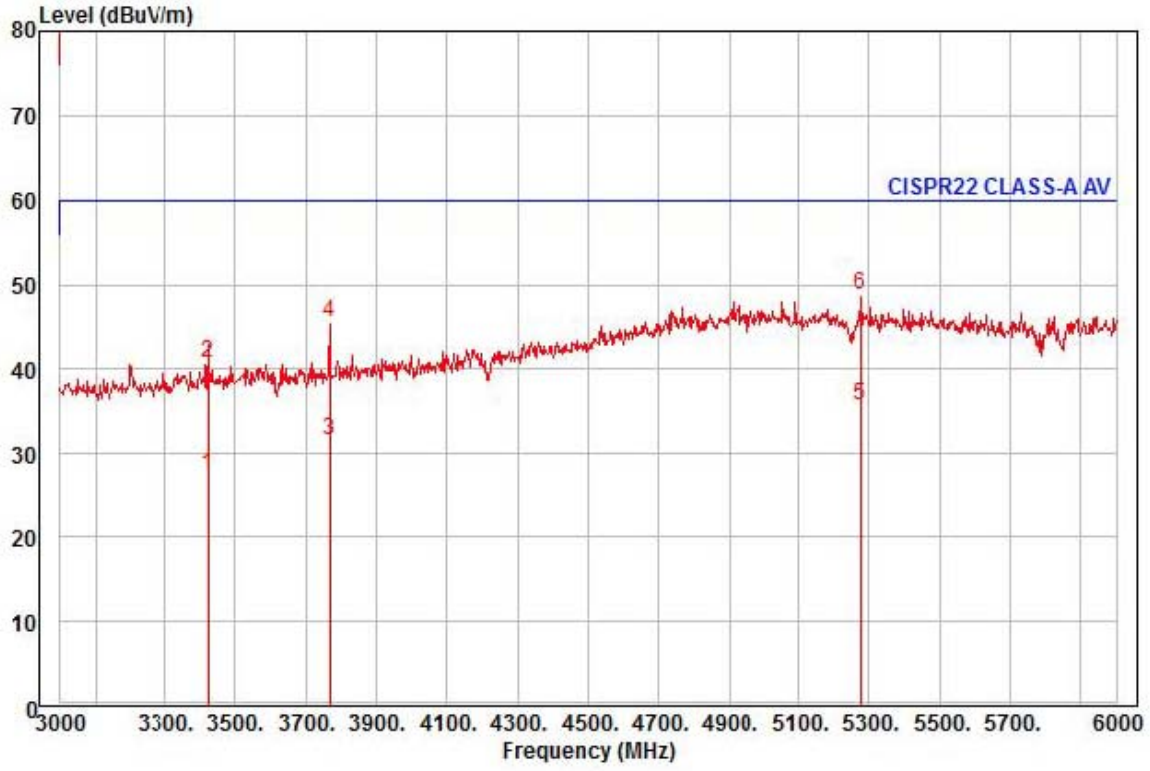

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8040RP
Mode : DC 12V
Memo : 3 - 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3423.00	24.64	31.04	12.49	40.76	315	60.00	-32.59	horizontal	Average
2	3423.00	38.05	31.04	12.49	40.76	315	80.00	-39.18	horizontal	Peak
3	3768.00	27.75	31.62	13.12	40.78	319	60.00	-28.29	horizontal	Average
4	3768.00	41.54	31.62	13.12	40.78	319	80.00	-34.50	horizontal	Peak
5 pp	5277.00	23.39	37.16	15.83	40.73	307	60.00	-24.35	horizontal	Average
6 pk	5277.00	36.55	37.16	15.83	40.73	307	80.00	-31.19	horizontal	Peak

♦ Calculation

Over Limit [㏈] = (Read Level[㏈uV] + Ant Factor[㏈/m] + Cable Loss [㏈] − Preamp Factor [㏈]) − Limit Line[㏈uV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

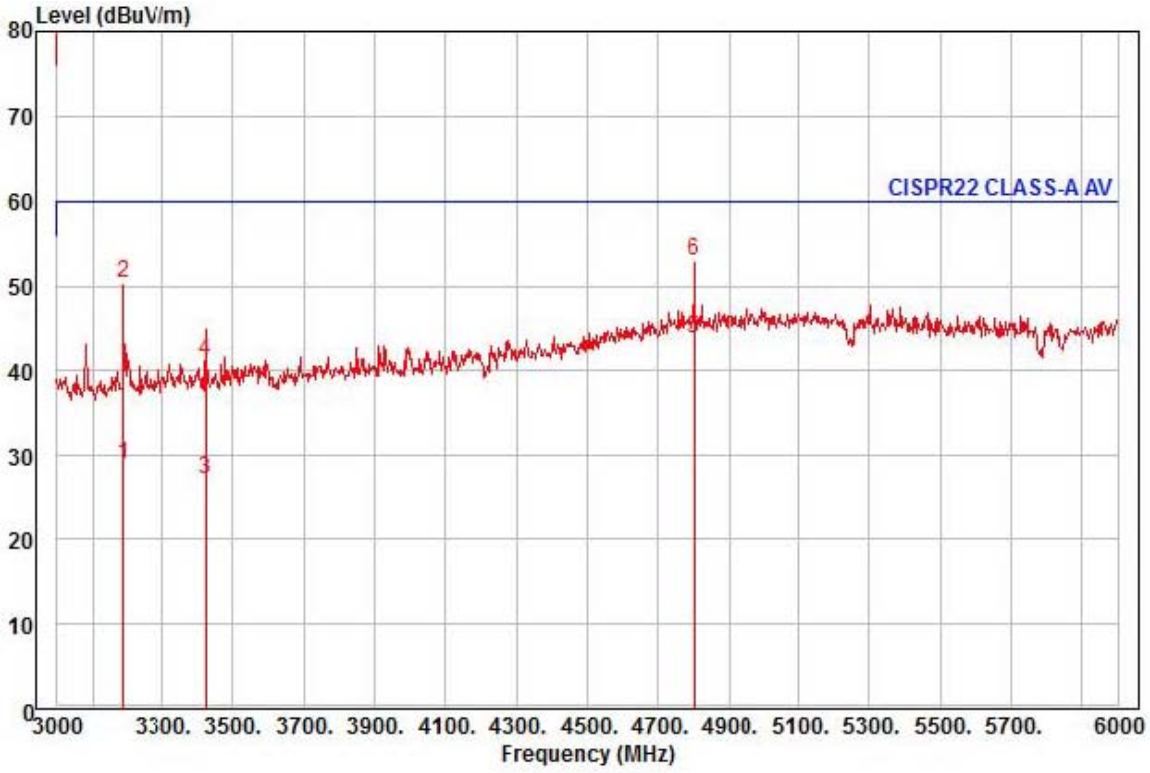

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8040RP
Mode : DC 12V
Memo : 3 - 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3186.00	26.71	30.64	12.03	40.40	215	60.00	-31.02	vertical	Average
2	3186.00	47.99	30.64	12.03	40.40	215	80.00	-29.74	vertical	Peak
3	3423.00	24.54	31.04	12.49	40.76	181	60.00	-32.69	vertical	Average
4	3423.00	38.46	31.04	12.49	40.76	181	80.00	-38.77	vertical	Peak
5 pp	4800.00	32.66	36.58	15.10	40.47	263	60.00	-16.13	vertical	Average
6 pk	4800.00	41.86	36.58	15.10	40.47	263	80.00	-26.93	vertical	Peak


♦ Calculation

Over Limit [㏈] = (Read Level[㏈uV] + Ant Factor[㏈/m] + Cable Loss [㏈] − Preamp Factor [㏈]) − Limit Line[㏈uV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

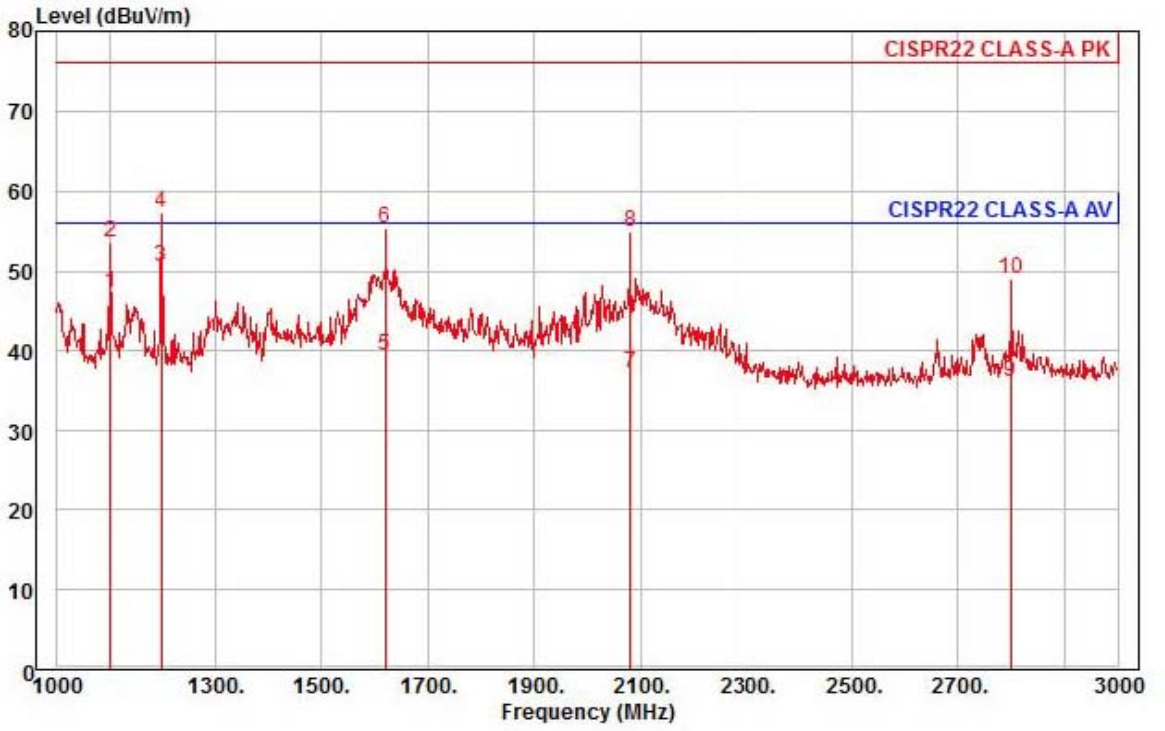

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8040RP
Mode : POE
Memo : 1 - 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1100.00	56.12	24.31	6.81	39.85	253	56.00	-8.61	horizontal	Average
2	1100.00	62.40	24.31	6.81	39.85	253	76.00	-22.33	horizontal	Peak
3 pp	1200.00	58.25	24.70	7.14	39.61	270	56.00	-5.52	horizontal	Average
4 pk	1200.00	65.06	24.70	7.14	39.61	270	76.00	-18.71	horizontal	Peak
5	1620.00	44.02	26.37	8.36	39.23	268	56.00	-16.48	horizontal	Average
6	1620.00	59.81	26.37	8.36	39.23	268	76.00	-20.69	horizontal	Peak
7	2080.00	39.08	28.08	9.52	39.41	208	56.00	-18.73	horizontal	Average
8	2080.00	56.70	28.08	9.52	39.41	208	76.00	-21.11	horizontal	Peak
9	2800.00	35.03	29.84	11.23	39.88	3	56.00	-19.78	horizontal	Average
10	2800.00	47.77	29.84	11.23	39.88	3	76.00	-27.04	horizontal	Peak

♦ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] − Preamp Factor [dB]) − Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

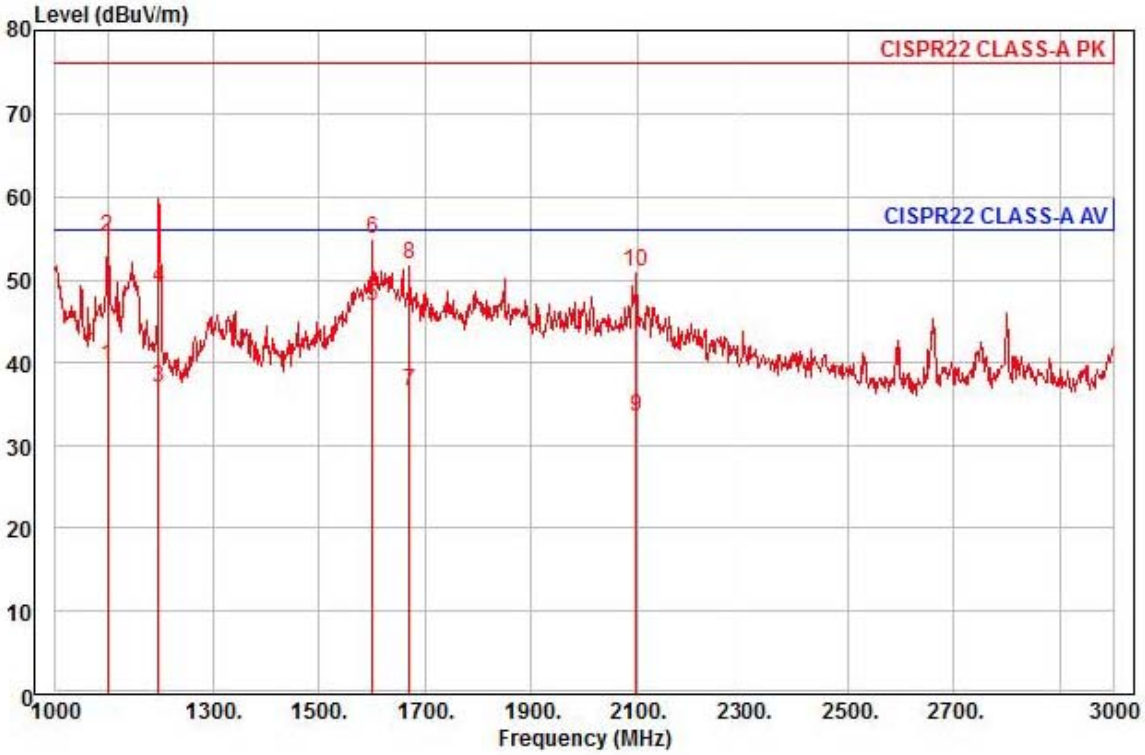

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8040RP
Mode : POE
Memo : 1 - 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1098.00	48.35	24.30	6.80	39.85	342	56.00	-16.40	vertical	Average
2 pk	1098.00	63.87	24.30	6.80	39.85	342	76.00	-20.88	vertical	Peak
3	1198.00	44.86	24.70	7.13	39.61	347	56.00	-18.92	vertical	Average
4	1198.00	56.90	24.70	7.13	39.61	347	76.00	-26.88	vertical	Peak
5 pp	1600.00	51.53	26.29	8.31	39.22	223	56.00	-9.09	vertical	Average
6	1600.00	59.57	26.29	8.31	39.22	223	76.00	-21.05	vertical	Peak
7	1670.00	40.82	26.57	8.49	39.26	275	56.00	-19.38	vertical	Average
8	1670.00	56.07	26.57	8.49	39.26	275	76.00	-24.13	vertical	Peak
9	2098.00	35.35	28.12	9.56	39.41	310	56.00	-22.38	vertical	Average
10	2098.00	52.73	28.12	9.56	39.41	310	76.00	-25.00	vertical	Peak

♦ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] − Preamp Factor [dB]) − Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

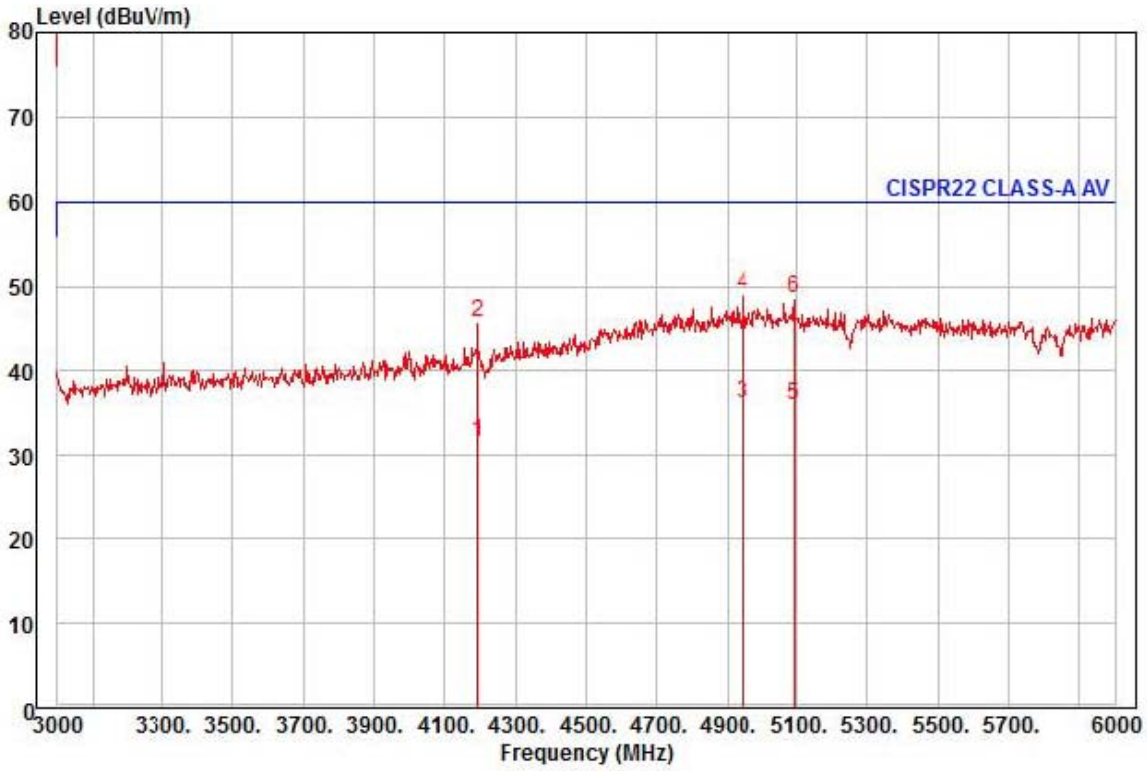

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8040RP
Mode : POE
Memo : 3 - 6 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4194.00	25.18	33.12	13.93	40.73	146	60.00	-28.50	horizontal	Average
2	4194.00	39.54	33.12	13.93	40.73	146	80.00	-34.14	horizontal	Peak
3 pp	4944.00	23.82	37.40	15.25	40.33	248	60.00	-23.86	horizontal	Average
4 pk	4944.00	36.67	37.40	15.25	40.33	248	80.00	-31.01	horizontal	Peak
5	5094.00	23.39	37.53	15.50	40.43	308	60.00	-24.01	horizontal	Average
6	5094.00	35.99	37.53	15.50	40.43	308	80.00	-31.41	horizontal	Peak

♦ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] − Preamp Factor [dB]) − Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

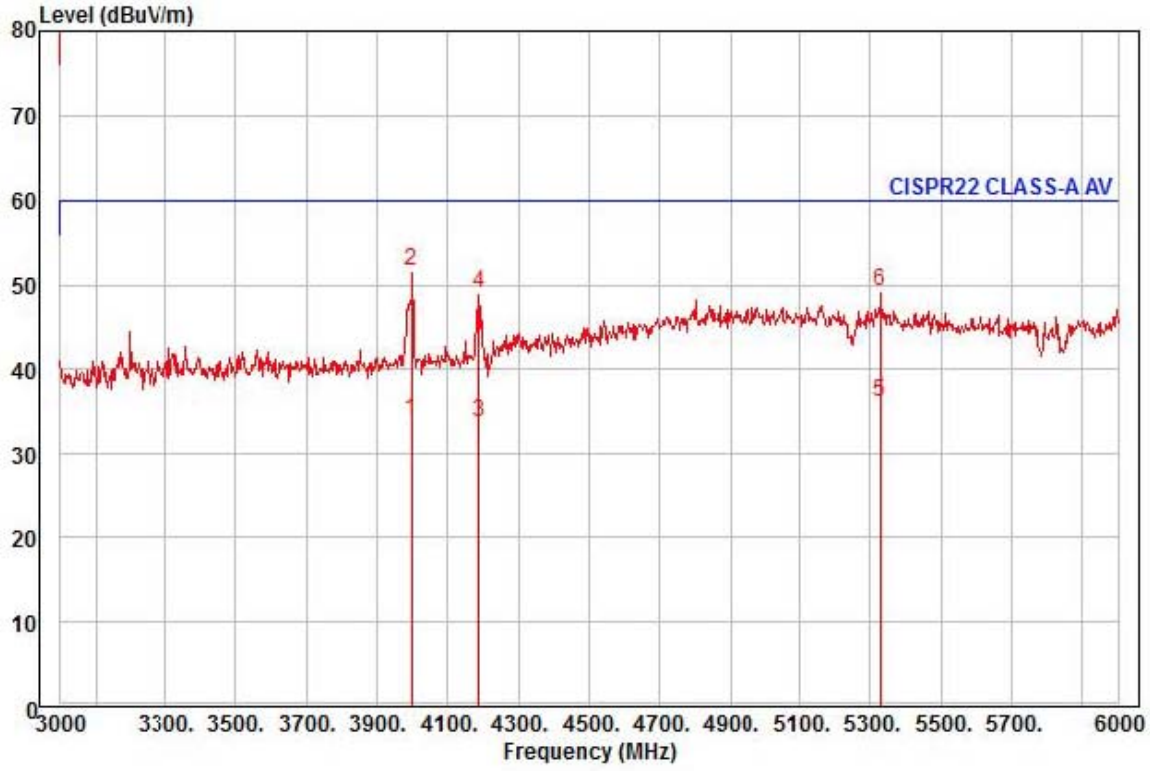

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XNV-8040RP
Mode : POE
Memo : 3 - 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3999.00	29.10	32.01	13.56	40.70	105	60.00	-26.03	vertical	Average
2 pk	3999.00	46.77	32.01	13.56	40.70	105	80.00	-28.36	vertical	Peak
3	4188.00	27.55	33.08	13.92	40.73	191	60.00	-26.18	vertical	Average
4	4188.00	42.68	33.08	13.92	40.73	191	80.00	-31.05	vertical	Peak
5 pp	5328.00	24.05	37.06	15.92	40.81	214	60.00	-23.78	vertical	Average
6	5328.00	37.08	37.06	15.92	40.81	214	80.00	-30.75	vertical	Peak

♦ Calculation

Over Limit [㏈] = (Read Level[㏈uV] + Ant Factor[㏈/m] + Cable Loss [㏈] − Preamp Factor [㏈]) − Limit Line[㏈uV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor, Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results

Hn	Ieff [A]	% of Limit	Limit [A]	Result
N/A				

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data - Harmonics (continued)

Maximum harmonic current results

Hn	Ieff [A]	% of Limit	Limit [A]	Result
N/A				

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data - Voltage Fluctuations

Maximum Flicker results

	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Telecommunication Emissions

- DC 12 V Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 ㎓)


- DC 12 V Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

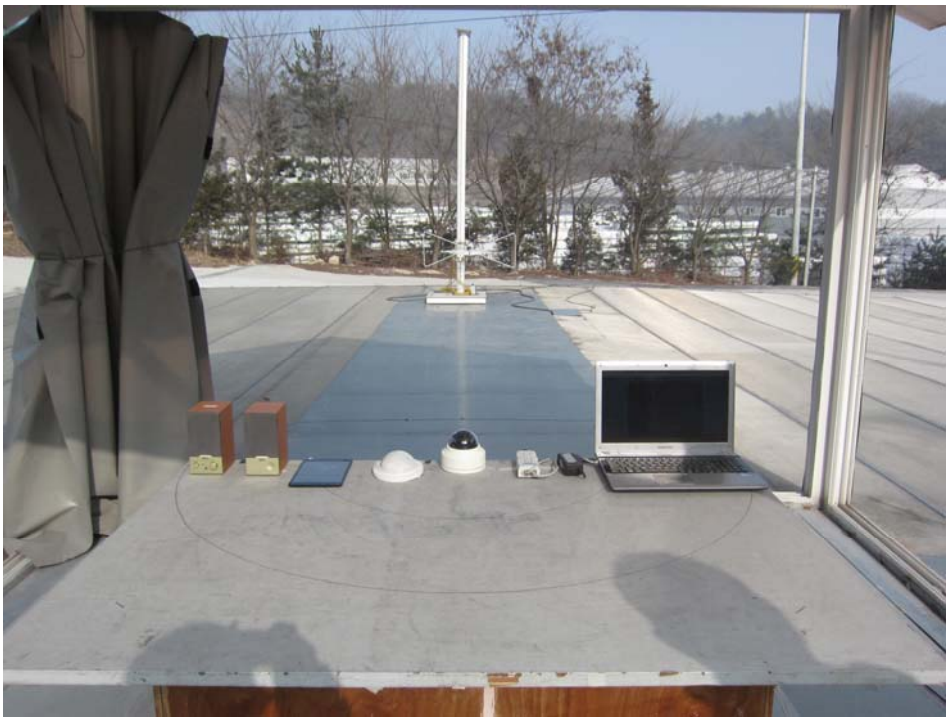



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 ㎓)


- DC 12 V Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

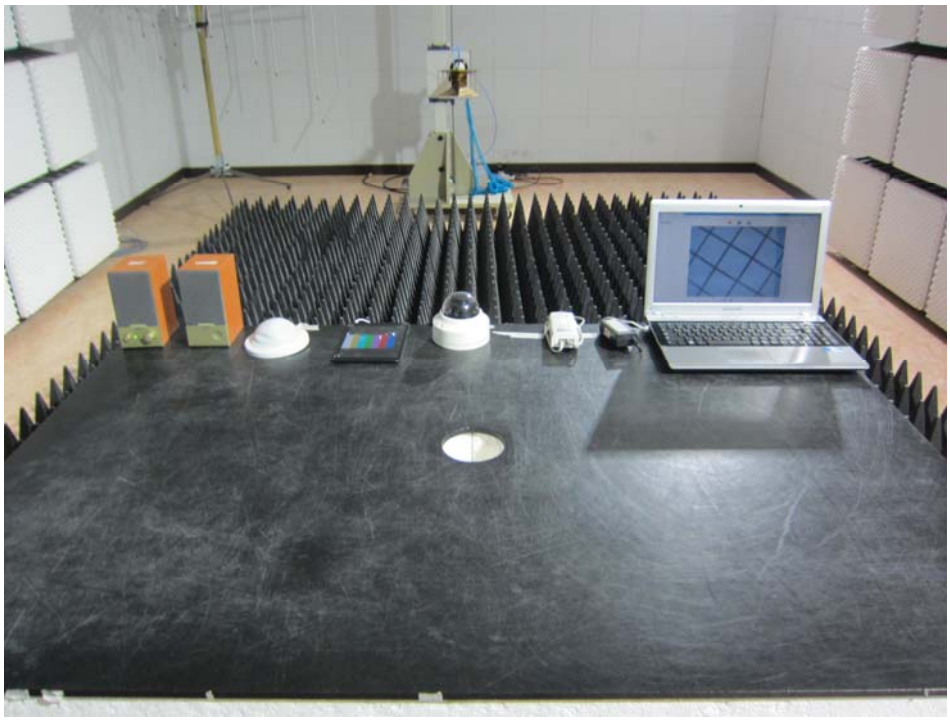



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrostatic Discharge

- DC 12 V Mode



- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Immunity

- DC 12 V Mode



- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrical Fast Transients / Bursts

- DC 12 V Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Surge Transients

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Disturbance

- DC 12 V Mode





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Voltage Dips and Short Interruptions

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 1

(Top)

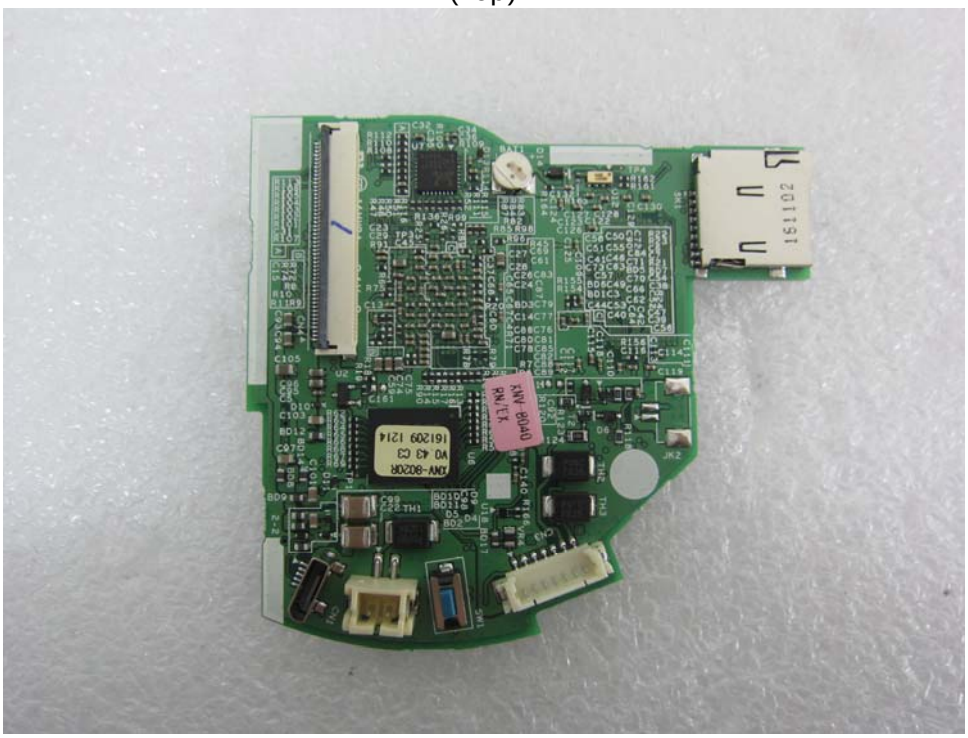


(Bottom)

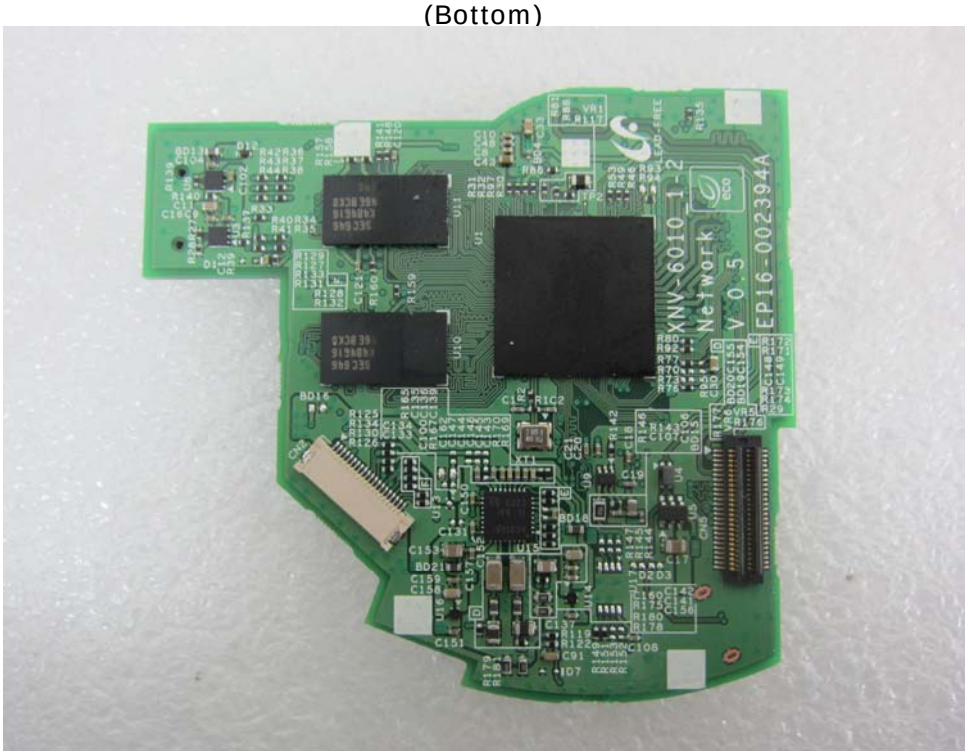


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 2

(Top)

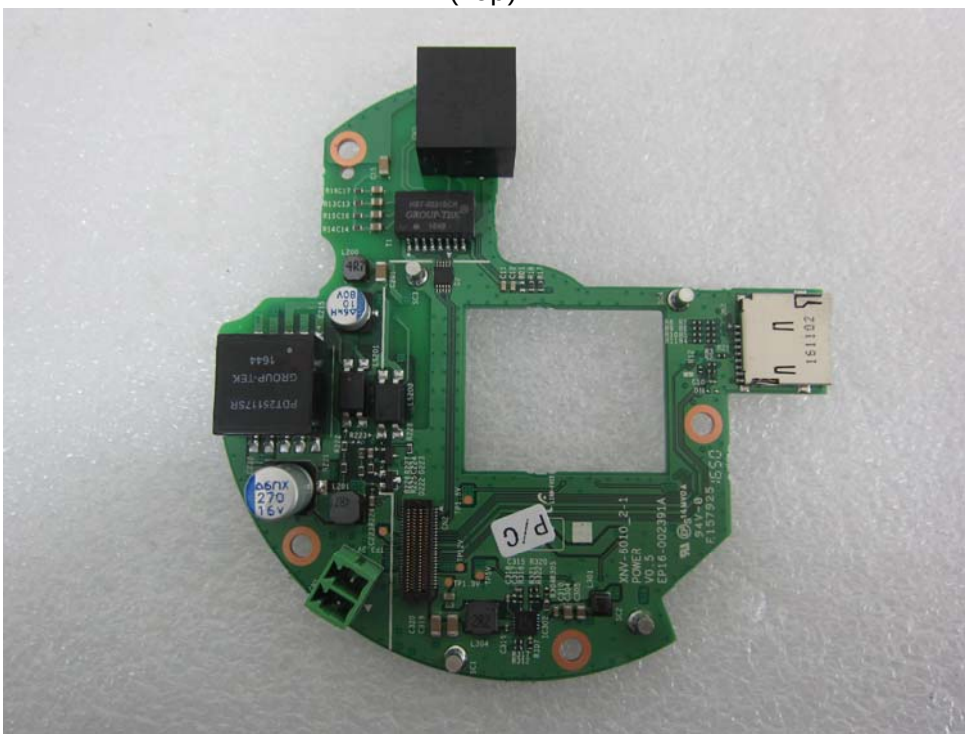

(Bottom)

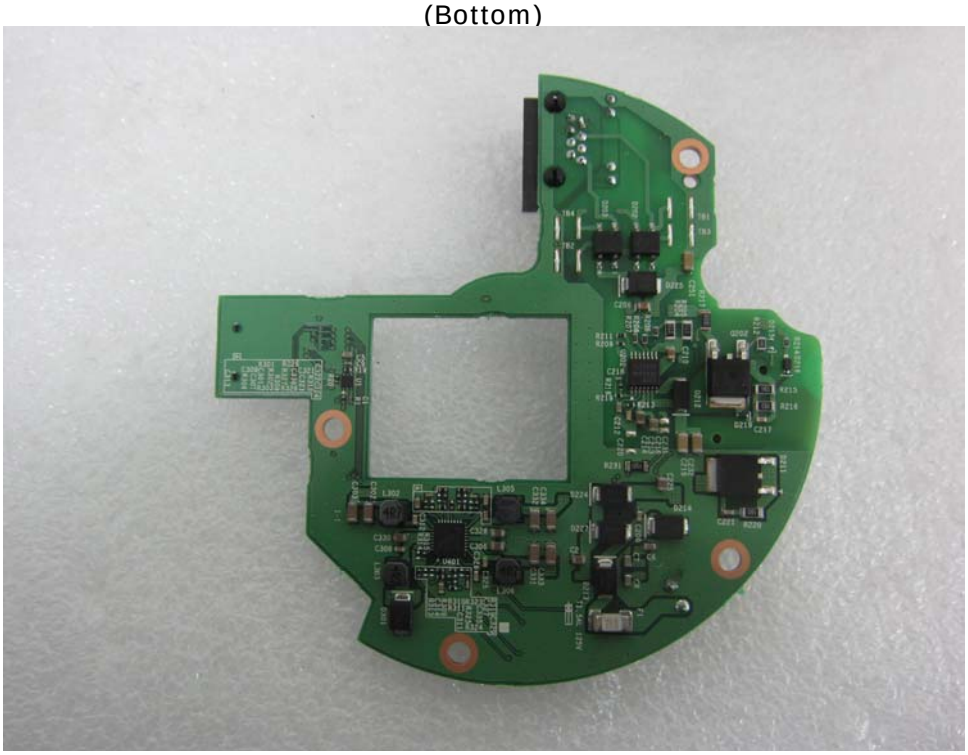

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 3

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 4

(Top)

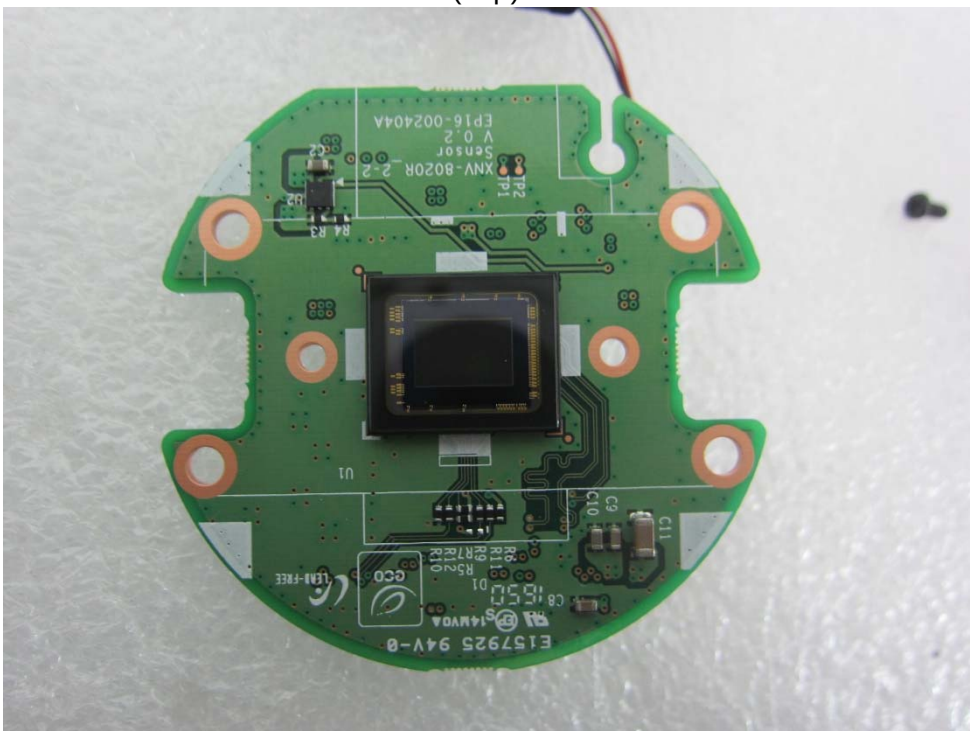

(Bottom)

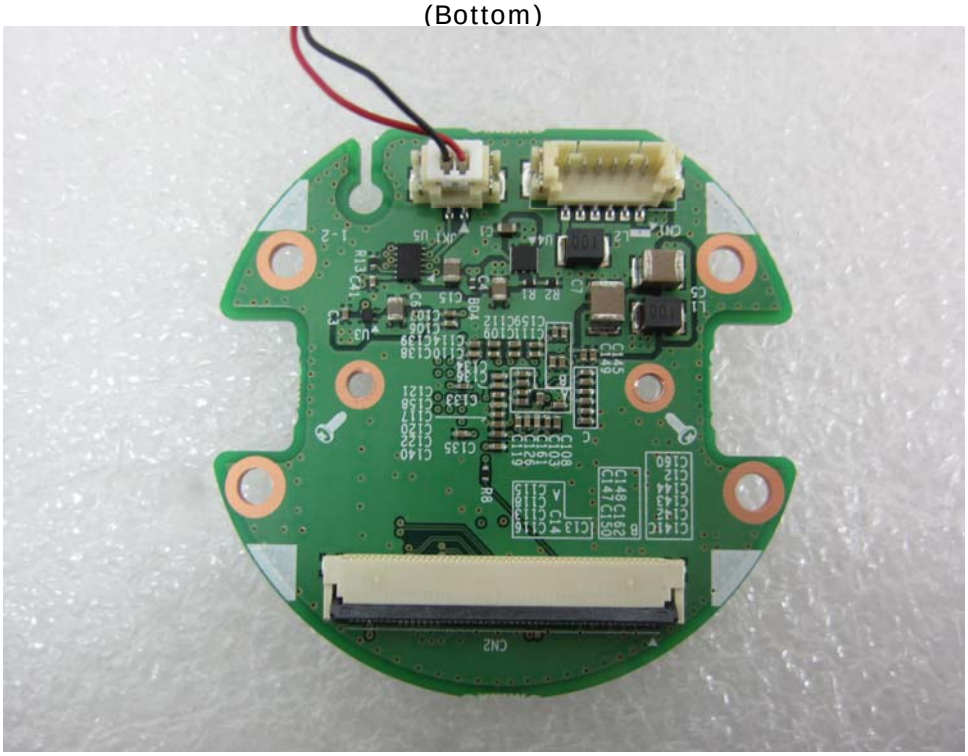

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label and Location



NETWORK CAMERA

Model No : XNV-8040RP

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in of China

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.