



Network

Dome

# XNV-8030R

5M H.265 IR Dome Camera



## Key Features

- Built-in 3.7mm/4.6mm/7mm fixed lens
- Max. 30fps@all resolutions (H.265/H.264)
- Loitering, Directional detection, Fog detection
- Digital auto tracking, Sound classification, Heatmap
- People counting, Queue management, Tampering
- Motion detection, Handover
- Hallway view, WiseStreamII support
- IR viewable length 30m, IP67/IP66, IK10

## XNV-8030R

5M H.265 IR Dome Camera



### Specifications

| Video                         |                       |                                                                                                                                                               |
|-------------------------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Imaging Device                | Size                  | 1/1.8"                                                                                                                                                        |
|                               | Type                  | CMOS                                                                                                                                                          |
| Resolution                    |                       | 2560x1920, 2560x1440, 2048x1536, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240 |
| Max. Framerate                | H.265/H.264           | 30fps/25fps(60Hz/50Hz)                                                                                                                                        |
|                               | MJPEG                 | 30fps                                                                                                                                                         |
| Min. Illumination (Lux)       | Color(1/30sec, 30IRE) | 0.16                                                                                                                                                          |
|                               | BW(1/30sec, 30IRE)    | 0.016                                                                                                                                                         |
| Video Out                     |                       | CVBS: 1.0 Vp-p / 75Ω composite for installation,<br>USB: Micro USB Type B. Preview and installation ONLY. Requires WiFi dongle.                               |
| Lens                          |                       |                                                                                                                                                               |
| Focal Length (mm)             |                       | 4.6                                                                                                                                                           |
| Max Aperture Ratio (F number) | Wide                  | 1.6                                                                                                                                                           |
| Angular Field of View         | Horizontal            | 77.9°                                                                                                                                                         |
|                               | Vertical              | 57.9°                                                                                                                                                         |
|                               | Diagonal              | 98.7°                                                                                                                                                         |
| Min. Object Distance          |                       | 0.4m(1.31ft)                                                                                                                                                  |
| Lens Type                     |                       | Fixed iris                                                                                                                                                    |
| Pan / Tilt / Rotate           |                       |                                                                                                                                                               |
| Pan / Tilt / Rotate Range     | Pan                   | 0°~354°                                                                                                                                                       |
|                               | Tilt                  | 0°~67°                                                                                                                                                        |
|                               | Rotate                | 0°~355°                                                                                                                                                       |
| Operational                   |                       |                                                                                                                                                               |
| Day & Night                   |                       | Auto(ICR)                                                                                                                                                     |
| Backlight Compensation        |                       | BLC, HLC, WDR, SSDR                                                                                                                                           |
| Wide Dynamic Range (dB)       |                       | 120                                                                                                                                                           |
| Digital Noise Reduction       |                       | SSNR V                                                                                                                                                        |

## Operational

|                                          |                |                                                                                                                                                              |
|------------------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Digital Image Stabilization              |                | Support                                                                                                                                                      |
| Defog                                    |                | Support                                                                                                                                                      |
| Motion Detection                         | Quantity       | 8ea                                                                                                                                                          |
|                                          | Shape          | 8point Polygonal zones                                                                                                                                       |
| Privacy Masking                          | Quantity       | 32ea                                                                                                                                                         |
|                                          | Shape          | Polygonal zones                                                                                                                                              |
|                                          | Color / Option | Gray, Green, Red, Blue, Black, White, Mosaic                                                                                                                 |
| Gain Control                             |                | Low, Middle, High                                                                                                                                            |
| White Balance                            |                | ATW, AWC, Manual, Indoor, Outdoor                                                                                                                            |
| LDC                                      |                | Support                                                                                                                                                      |
| Electronic Shutter                       | Mode           | Minimum, Maximum, Anti flicker                                                                                                                               |
|                                          | Speed Range    | 2~1/12,000sec                                                                                                                                                |
| Video Rotation                           |                | Flip, Mirror, Hallway view(90°/270°)                                                                                                                         |
| Alarm Interface                          | In/Out         | Input 1ea, Output 1ea                                                                                                                                        |
| Alarm Triggers                           |                | Analytics, Network disconnect, Alarm input                                                                                                                   |
| Alarm Events When Alarm Trigger Occurred |                | File upload(image): e-mail/FTP,<br>Notification: e-mail,<br>Recording: SD/SDHC/SDXC or NAS recording at event triggers.Alarm output,<br>Handover: PTZ preset |
| Audio In                                 |                | Selectable(mic in/line in)                                                                                                                                   |
| Audio Out                                |                | Line out                                                                                                                                                     |
| Light Type                               |                | IR LED                                                                                                                                                       |
| Light Viewable Length                    | IR             | 30m(98.42ft)                                                                                                                                                 |
| IR Wavelength                            |                | 850nm                                                                                                                                                        |

## Analytics

|                       |        |                                                                                                                                                                                                                                                  |
|-----------------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analytics Events      | Normal | Defocus detection, Motion detection, Tampering, Fog detection, Face detection, Audio detection, Sound classification, Virtual area(Lotering, Intrusion, Enter/Exit, Appear/Disappear), Virtual line(Crossing, Direction) , Digital auto tracking |
| Business Intelligence | Normal | People counting, Queue management, Heatmap                                                                                                                                                                                                       |

## Network

|                   |  |                                                                                                                               |
|-------------------|--|-------------------------------------------------------------------------------------------------------------------------------|
| Ethernet          |  | RJ-45(10/100BASE-T)                                                                                                           |
| Video Compression |  | H.265/H.264: Main/Baseline/High, MJPEG                                                                                        |
| Audio Compression |  | G.711 u-law /G.726 selectable,G.726(ADPCM) 8kHz,G.711 8kHz,<br>G.726: 16kbps,24kbps,32kbps,40kbps,<br>AAC-LC: 48kbps at 16kHz |
| Smart Codec       |  | Manual, WiseStream II                                                                                                         |
| Bitrate Control   |  | H.265/H.264: CBR or VBR,<br>MJPEG: VBR                                                                                        |

## Network

|                                   |                    |                                                                                                                                                                                                                      |
|-----------------------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Streaming                         | Unicast            | Up to 20 users                                                                                                                                                                                                       |
|                                   | Multicast          | Support                                                                                                                                                                                                              |
|                                   | Multiple Streaming | Up to 10 profiles                                                                                                                                                                                                    |
| Protocol                          |                    | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMPv2, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), PIM-SM |
| Application Programming Interface | ONVIF              | S, G, T                                                                                                                                                                                                              |
|                                   | Others             | SUNAPI(HTTP API), Hanwha Vision Open Platform                                                                                                                                                                        |

## Security

|                        |                                        |
|------------------------|----------------------------------------|
| User authentication    | Digest authentication                  |
| Network authentication | IEEE 802.1X(EAP-TLS, EAP-LEAP)         |
| Secure Communication   | HTTPS, SRTP                            |
| Access Control         | IP-based access control                |
| Audit                  | Access / System / Event Log management |

## General

|              |                    |                                 |
|--------------|--------------------|---------------------------------|
| Memory       | RAM                | 1GB                             |
|              | Flash              | 256MB                           |
| Edge Storage | Micro SD/SDHC/SDXC | Max. 256GB x 2slot(Total 512GB) |

## Environmental & Electrical

|                     |             |                                        |
|---------------------|-------------|----------------------------------------|
| Operating Condition | Temperature | -30°C~+55°C(-22°F~+131°F)              |
|                     | Humidity    | 0~90% RH(non-condensing)               |
|                     | Others      | Start up should be done at above -20°C |
| Storage Condition   | Temperature | -50°C~+60°C(-58°F~+140°F)              |
|                     | Humidity    | 0~90% RH(non-condensing)               |
| Input Voltage       |             | PoE(IEEE802.3af, Class3), 12VDC        |
| Power Consumption   | PoE         | Max 9.00W                              |
|                     | 12VDC       | Max 8.00W                              |

## Mechanical

|                    |                            |
|--------------------|----------------------------|
| Color              | Ivory                      |
| Material           | Aluminum                   |
| Product Dimensions | Ø120.0x97.5mm(Ø4.72x3.84") |
| Product Weight     | 615g(1.36 lb)              |

## Certifications & Standards

|             |                                                |
|-------------|------------------------------------------------|
| Environment | IEC 60529 IP66, IEC 60529 IP67, IEC 62262 IK10 |
|-------------|------------------------------------------------|


# XNV-8030R

5M H.265 IR Dome Camera



**CAD**

Unit: mm [inch]

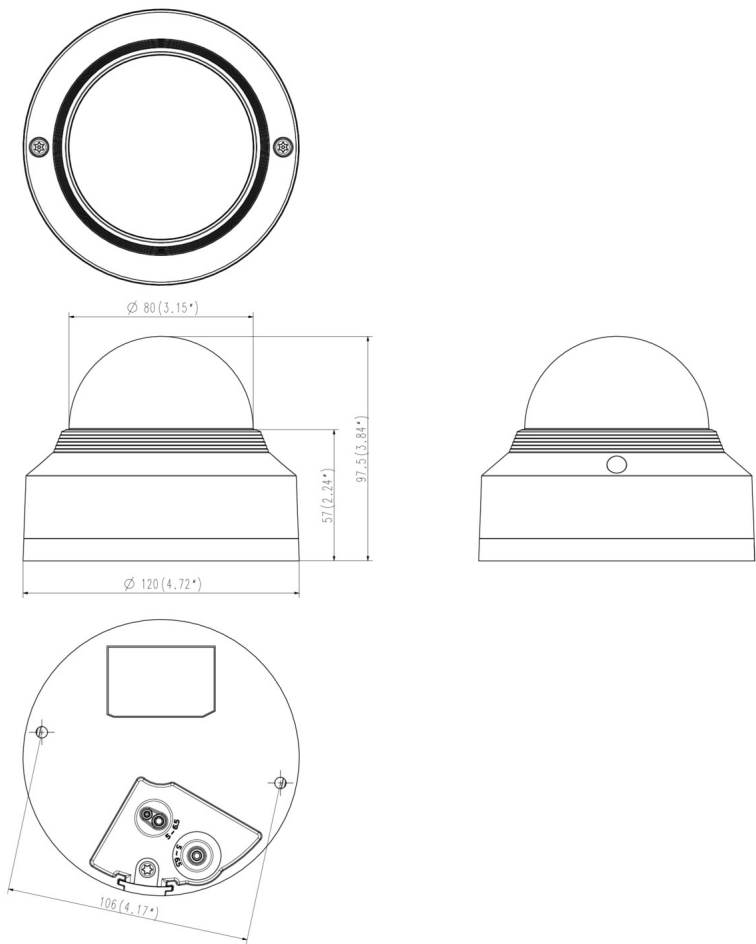

XNV-6010/6020  
UNIT : mm[inch]