



# TEST REPORT



Report No. : KES-EM252922

Page 1 / 30

**KES Co., Ltd.**

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea  
Tel : +82-31-425-6200, Fax : +82-31-341-3838

## 1. Client

- Name : Hanwha Vision Co., Ltd.
- Address : 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

## 2. Sample Description

- Product item : NETWORK CAMERA
- Model name : XNV-A6084R
- Variant model : -
- Manufacturer etc. : HANWHA VISION VIETNAM COMPANY LIMITED
- Manufacturer address : Lot O-2, Que Vo Industrial Zone Extended Area, Nam Son Ward, Bac Ninh Province, Vietnam
- Manufacturer etc. : D-TECH CO.,LTD.
- Manufacturer address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

3. Date of test : 2025. 08. 26. ~ 2025. 08. 28.

4. Location of Test : Permanent Testing Lab

- Address : 473-21, Gayeo-ro, Yeuju-si, Gyeonggi-do, 12658, Republic of Korea

5. Test method used : FCC 47 CFR Part 15, Subpart B (ANSI C63.4a-2017),  
IC ICES-003 Issue 7 (ANSI C63.4a-2017)

6. Test result : PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test report is not related to KOLAS accreditation.

|             |                    |                      |
|-------------|--------------------|----------------------|
| Affirmation | Tested by          | Technical Manager by |
|             | Name : DongYun Lee | Name : DaeJung,Choi  |

**2025. 09. 19.**

**KES Co., Ltd.**

**REPORT REVISION HISTORY**

| Date          | Test Report No. | Revision History |
|---------------|-----------------|------------------|
| 2025. 09. 19. | KES-EM252922    | Issued           |

*This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.*

**Use of uncertainty of measurement for decisions on conformity (decision rule):**

- ☒ No decision rule is specified by the 1 standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").
- ☐ Other (to be specified, for example when required by the standard or client)



## TABLE OF CONTENTS

|     |                                               |    |
|-----|-----------------------------------------------|----|
| 1   | Laboratory Information .....                  | 4  |
| 1.1 | Test Location.....                            | 4  |
| 1.2 | Laboratory Accreditations and Listings .....  | 4  |
| 2   | Test Summary .....                            | 5  |
| 2.1 | Class and Voltage.....                        | 5  |
| 2.2 | Summary of Test Results .....                 | 5  |
| 2.3 | Remarks when standards applied .....          | 5  |
| 2.4 | Variant Model Differences .....               | 5  |
| 2.5 | Device Modifications .....                    | 5  |
| 3   | General Product Description .....             | 6  |
| 4   | EUT Setup and Operation Mode .....            | 11 |
| 4.1 | EUT Configuration .....                       | 11 |
| 4.2 | System Configuration .....                    | 11 |
| 4.3 | External I/O Cabling .....                    | 12 |
| 4.4 | EUT Operating Mode(s).....                    | 12 |
| 4.5 | Test operating S/W .....                      | 12 |
| 4.6 | Configuration .....                           | 13 |
| 5   | Measurement Procedure.....                    | 14 |
| 6   | Test Item.....                                | 15 |
| 6.1 | Conducted Emissions at Mains Power Ports..... | 15 |
| 6.2 | Radiated Emissions(Below 1 GHz) .....         | 18 |
| 6.3 | Radiated Emissions(Above 1 GHz) .....         | 21 |
| 7   | Test Setup Photos and EUT Photographs .....   | 24 |
| 7.1 | Test Setup Photos .....                       | 24 |
| 7.2 | EUT Photographs .....                         | 27 |
| 7.3 | Label .....                                   | 30 |



## 1 Laboratory Information

### 1.1 Test Location

| Category         | Details                                                           |
|------------------|-------------------------------------------------------------------|
| Address          | 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Republic of Korea |
| Telephone Number | 031-883-5092                                                      |
| Facsimile Number | 031-883-5169                                                      |

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

### 1.2 Laboratory Accreditations and Listings

| Country       | Agency  | Scope of Accreditation                                                                                                                  | Logo                                                                                                                           |
|---------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| KOREA         | RRA     | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>KR0100                                 |
| International | KOLAS   | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>KT489                                 |
| USA           | FCC     | 3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.                                            | <br>KR0100                                |
| Canada        | ISED    | 3 m & 10 m Semi-Anechoic Chamber and Conducted test site                                                                                | <br>23298                                 |
| JAPAN         | VCCI    | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)                                                                          | <br>C-20136, T-20137,<br>R-20181, G-20176 |
| Europe        | TÜV SÜD | EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) | <br>CARAT 001633 0008                     |



## 2 Test Summary

### 2.1 Class and Voltage

| Test Class | Test Voltage    |
|------------|-----------------|
| Class A    | AC 120 V, 60 Hz |

### 2.2 Summary of Test Results

| Regulation                                  |                  |             |        |
|---------------------------------------------|------------------|-------------|--------|
| 47 CFR Part 15, Subpart B, ICES-003 Issue 7 |                  |             |        |
| Test Item                                   | Test Standard    | Test Result | Remark |
| Conducted Emissions at Mains Power Ports    | ANSI C63.4a-2017 | PASS        | -      |
| Radiated Emissions(Below 1 GHz)             |                  | PASS        | -      |
| Radiated Emissions(Above 1 GHz)             |                  | PASS        | -      |
| * N/A: Not Applicable                       |                  |             |        |

### 2.3 Remarks when standards applied

N/A

### 2.4 Variant Model Differences

N/A

### 2.5 Device Modifications

N/A



### 3 General Product Description

| Division                                   |                           | Specificity                                      |
|--------------------------------------------|---------------------------|--------------------------------------------------|
| Internal maximum operating/clock frequency |                           | 3.2 GHz                                          |
| Power                                      | Rated power supply        | PoE                                              |
|                                            | Test Power                | AC 120 V, 60 Hz                                  |
| I/O Ports                                  | User port                 | RJ-45 1 EA, Micro SD Card Slot 1 EA, 7 Pin 1 EA  |
|                                            | Unused/Administrator Port | USB Type-C 1 EA                                  |
| function                                   | Product features          | NETWORK CAMERA                                   |
|                                            | Wireless function         | N/A                                              |
| Components                                 |                           | Main body 1 EA, 7 Pin Cable 1 EA                 |
| Others                                     |                           | Please refer to the specifications listed below. |



|                             |                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------|
| <b>Video</b>                |                                                                                      |
| Imaging Device              | 1/2.8" CMOS                                                                          |
| Resolution                  | 1920x1080, 1280x960, 1280x720, 1024x768, 800x600, 640x480, 640x360, 320x240, 320x180 |
| Max. Framerate              | H.265/H.264: Max. 60fps/50fps(60Hz/50Hz)<br>MJPEG: Max. 30fps                        |
| NETD                        | None                                                                                 |
| Pixel Size                  | None                                                                                 |
| Video Out                   | USB: Micro USB Type C for installation                                               |
| Video Transmission Distance | None                                                                                 |
| <b>Lens</b>                 |                                                                                      |
| Focal Length (Zoom Ratio)   | 2.8~12mm                                                                             |
| Optical Zoom                | None                                                                                 |
| Max. Aperture Ratio         | F1.4(Wide)~F3.6(Tele)                                                                |
| Angular Field of View       | H: 120°(Wide)~27°(Tele)<br>V: 63°(Wide)~15°(Tele)<br>D: 143°(Wide)~32°(Tele)         |
| Min. Object Distance        | 0.5m                                                                                 |
| Focus Control               | Simple focus, Manual                                                                 |
| Lens Type                   | P-iris(IR corrected)                                                                 |
| Mount Type                  | None                                                                                 |
| Optional Lens               | None                                                                                 |
| <b>Pan / Tilt / Rotate</b>  |                                                                                      |
| Pan / Tilt / Rotate Range   | 0°~360° / 0°~75° / 0°~355°                                                           |
| Pan Range                   | None                                                                                 |
| Pan Speed                   | None                                                                                 |
| Tilt Range                  | None                                                                                 |
| Tilt Speed                  | None                                                                                 |
| Rotate Range                | None                                                                                 |
| Sequence                    | None                                                                                 |
| Preset Accuracy             | None                                                                                 |



|                             |                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operational</b>          |                                                                                                                                                                                                                                                                                                                                             |
| Camera Title                | Displayed up to 85 characters                                                                                                                                                                                                                                                                                                               |
| Direction Indicator         | None                                                                                                                                                                                                                                                                                                                                        |
| Day & Night                 | Auto(ICR)                                                                                                                                                                                                                                                                                                                                   |
| Backlight Compensation      | BLC, HLC, WDR, SDR                                                                                                                                                                                                                                                                                                                          |
| Wide Dynamic Range          | 150dB                                                                                                                                                                                                                                                                                                                                       |
| Digital Noise Reduction     | SSNRV, WiseNRⅡ(Based on AI engine/AI-ISP)                                                                                                                                                                                                                                                                                                   |
| Digital Image Stabilization | Support                                                                                                                                                                                                                                                                                                                                     |
| Defog                       | Support                                                                                                                                                                                                                                                                                                                                     |
| Motion Detection            | 8ea, 8point polygonal zones                                                                                                                                                                                                                                                                                                                 |
| Privacy Masking             | 32ea, 8point polygonal zones<br>- Color: gray/green/red/blue/black/white/purple/yellow<br>- Mosaic<br>Dynamic Privacy Mask(Based on AI engine)<br>- Color: gray/green/red/blue/black/white/purple/yellow<br>- Mosaic                                                                                                                        |
| Gain Control                | Off / Max Gain / Manual                                                                                                                                                                                                                                                                                                                     |
| White Balance               | ATW / NarrowATW / AWC / Manual / Indoor / Outdoor                                                                                                                                                                                                                                                                                           |
| LDC                         | Support(Fill/Stretch mode)                                                                                                                                                                                                                                                                                                                  |
| Electronic Shutter Speed    | Minimum / Maximum / Anti flicker(2~1/40,000sec)<br>Prefer shutter control(Based on AI engine)                                                                                                                                                                                                                                               |
| Digital PTZ                 | None                                                                                                                                                                                                                                                                                                                                        |
| Video Rotation              | Flip, mirror, hallway view(90°/270°)                                                                                                                                                                                                                                                                                                        |
| Business Intelligence       | Based on AI engine: People/Vehicle/Crowd/Object counting, Queue management, Heatmap                                                                                                                                                                                                                                                         |
| Serial Interface            | None                                                                                                                                                                                                                                                                                                                                        |
| Alarm I/O                   | 2 configurable I/O ports<br>*Support extra alarm I/O via optional I/O box                                                                                                                                                                                                                                                                   |
| Alarm Triggers              | Analytics, Network disconnection, Alarm input, App event, Time schedule, MQTT subscription, Day/Night change, SD/NAS disruption                                                                                                                                                                                                             |
| Alarm Events                | When alarm trigger occurred<br>- File upload(image): e-mail/FTP/SFTP<br>- File upload(video clip): FTP/SFTP<br>- Notification: e-mail<br>- Recording: SD/SDHC/SDXC or NAS recording at event triggers<br>- Alarm output<br>- Handover: PTZ preset, send message by HTTP/HTTPS/TCP<br>- Audio clip playback(WAV, MP3)<br>- MQTT: publication |



|                                  |                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio Streaming                  | None                                                                                                                                                                                                                                                  |
| Audio In                         | Selectable(mic in/line in)                                                                                                                                                                                                                            |
| Audio Out                        | Line out                                                                                                                                                                                                                                              |
| Light Type                       | IR LED                                                                                                                                                                                                                                                |
| Light Viewable Length            | WiseIR 40m(131.23ft)                                                                                                                                                                                                                                  |
| IR Viewable Length               | None                                                                                                                                                                                                                                                  |
| IR Illuminator (Optional)        | None                                                                                                                                                                                                                                                  |
| IR Radiation angle               | None                                                                                                                                                                                                                                                  |
| IR LED                           | None                                                                                                                                                                                                                                                  |
| IR Wavelength                    | 850nm                                                                                                                                                                                                                                                 |
| IR Operation                     | None                                                                                                                                                                                                                                                  |
| Water Removal                    | None                                                                                                                                                                                                                                                  |
| Auto Tracking                    | None                                                                                                                                                                                                                                                  |
| Coaxial Protocol                 | None                                                                                                                                                                                                                                                  |
| Color Palettes                   | None                                                                                                                                                                                                                                                  |
| <b>Radiometry</b>                |                                                                                                                                                                                                                                                       |
| Temperature Detect Range         | None                                                                                                                                                                                                                                                  |
| Temperature Accuracy             | None                                                                                                                                                                                                                                                  |
| Temperature Detection            | None                                                                                                                                                                                                                                                  |
| Additional                       | None                                                                                                                                                                                                                                                  |
| <b>Network</b>                   |                                                                                                                                                                                                                                                       |
| Ethernet                         | Metal shielded RJ-45(10/100BASE-T)                                                                                                                                                                                                                    |
| Video Compression                | H.265/H.264: Main/Baseline/High<br>MJPEG                                                                                                                                                                                                              |
| Audio Compression                | G.711(PCM): 8kHz(64Kbps)<br>G.726(ADPCM): 8kHz(16/24/32/40Kbps)<br>AAC-LC: 16(48Kbps)<br>OPUS: 48kHz                                                                                                                                                  |
| Smart Codec                      | WiseStream(Based on AI engine)                                                                                                                                                                                                                        |
| Video Quality Adjustment         | None                                                                                                                                                                                                                                                  |
| Bitrate Control                  | H.264/H.265: CBR or VBR<br>MJPEG: VBR                                                                                                                                                                                                                 |
| Streaming                        | Unicast(20 users) / Multicast<br>Multiple streaming(Up to 5 profiles, 3 virtual channel support)                                                                                                                                                      |
| Protocol                         | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS,<br>SSL/TLS, DHCP, FTP/SFTP, SMTP(StartTLS), ICMP, IGMP, SNMPv1/v2c/v3(MIB-2),<br>ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), CDP, MQTT,<br>Syslog |
| SIP support (VoIP, Peer-to-peer, | Support(TBD)                                                                                                                                                                                                                                          |
| Security                         | None                                                                                                                                                                                                                                                  |



|                                       |                                                                                                                                                                                 |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Security</b>                       |                                                                                                                                                                                 |
| OS / Firmware Protect                 | Encrypted Firmware, Secure boot, Signed Firmware                                                                                                                                |
| User authentication                   | Digest Authentication, Prevent brute-force attack                                                                                                                               |
| Secure Communication                  | HTTPS, SRTP, WSS(Websocket secure)                                                                                                                                              |
| Access Control                        | IP-based access control, MAC-based access control, Auto logout                                                                                                                  |
| Data Protect                          | Encryption Credentials, Encrypt compress for live recording file export                                                                                                         |
| Audit                                 | Access / System / Event Log management                                                                                                                                          |
| Device ID                             | Device Certificate(Hanwha vision Root CA)                                                                                                                                       |
| Secure Storage                        | Secure element, SDcard partition encrypt                                                                                                                                        |
| Security Certificate                  | ETSI EN 303 645, Secure element(FIPS 140-3 level3, CC EAL6+)                                                                                                                    |
| <b>General</b>                        |                                                                                                                                                                                 |
| Webpage Language                      | English, Korean, Simplified Chinese, Traditional Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek      |
| Web Viewer                            | None                                                                                                                                                                            |
| Edge Storage                          | Micro SD/SDHC/SDXC 1slot 1TB                                                                                                                                                    |
| Memory                                | 4GB RAM, 8GB eMMC                                                                                                                                                               |
| <b>Environmental &amp; Electrical</b> |                                                                                                                                                                                 |
| Operating Temperature / Humidity      | -40°C~+55°C(-40°F~+131°F)<br>+74°C(+165°F)(MAX) based on NEMA-TS 2(2.2.7)<br>* Start up should be done at above -30°C<br>0~100%RH(Condensing)<br>Humidity control with AIR vent |
| Storage Temperature / Humidity        | -50°C~+60°C(-58°F~+140°F) / 0~90% RH                                                                                                                                            |
| Wind Load                             | None                                                                                                                                                                            |
| Certification                         | IP66/IP67, NEMA4X, IK10, NEMA-TS 2(2.2.7.2-6, 2.2.8, 2.2.9)                                                                                                                     |
| Input Voltage                         | PoE(IEEE802.3af, Class3)                                                                                                                                                        |
| Power Consumption                     | PoE: Max. 10.2W, typical 5.0W<br>Support Wisepower<br>- Power monitoring(Max./Current/Avg.)<br>- ECO mode                                                                       |
| <b>Mechanical</b>                     |                                                                                                                                                                                 |
| Color / Material                      | White / Aluminum<br>Bubble: Hard-coated dome<br>Recycled plastic: 4.49%                                                                                                         |
| RAL Code                              | RAL9003                                                                                                                                                                         |
| Product Dimensions / Weight           | ø160x118mm(6.30x4.65"), 1,243g(2.74lb)                                                                                                                                          |
| Compatible Conduit hole / Gang        | 12.7mm(1/2")(M20)<br>Single, double, 4" octagon, 4" square                                                                                                                      |



## 4 EUT Setup and Operation Mode

### 4.1 EUT Configuration

| Product Name   | Model Number     | Serial Number | Manufacturer                                            | Remarks |
|----------------|------------------|---------------|---------------------------------------------------------|---------|
| NETWORK CAMERA | XNV-A6084R       | -             | HANWHA VISION<br>VIETNAM COMPANY<br>LIMITED             | EUT     |
| Laptop         | NT550XDZ         | -             | Samsung Electronics                                     | -       |
| Laptop Adapter | A13-040N2A       | -             | CHICONY POWER<br>TECHNOLOGY<br>(Chongqing) CO.,<br>LTD. | -       |
| Micro SD Card  | -                | -             | SanDisk                                                 | -       |
| PoE Injector   | PT-PSE109GBRO-AH | -             | Dongguan PROCET<br>Network Technology<br>Co.,Ltd        | -       |
| Headset        | K550             | -             | Britz®                                                  | -       |
| LED Alarm      | PRO-SL           | -             | SENSOR PRO                                              | -       |
| Button Alarm   | -                | -             | -                                                       | -       |
| Smart Phone    | -                | -             | -                                                       | -       |

### 4.2 System Configuration

| Product Name | Model Number | Serial Number | Manufacturer | Remarks |
|--------------|--------------|---------------|--------------|---------|
| -            | -            | -             | -            | -       |



### 4.3 External I/O Cabling

| Start                |                    | End            |                    | Cable Spec. |        |
|----------------------|--------------------|----------------|--------------------|-------------|--------|
| Product Name         | I/O Port           | Product Name   | I/O Port           | Length(m)   | Shield |
| NETWORK CAMERA (EUT) | RJ-45(PoE)         | PoE Injector   | RJ-45(PoE)         | 3.1         | U      |
|                      | Micro SD Card Slot | Micro SD Card  | Micro SD Card Slot | -           | -      |
|                      | Alarm OUT          | LED Alarm      | Alarm IN           | 3.2         | U      |
|                      | Alarm IN           | Button Alarm   | Alarm OUT          | 3.1         | U      |
|                      | 3.5 mm (Audio IN)  | Headset        | 3.5 mm (Audio OUT) | 1.4         | U      |
|                      | 3.5 mm (Audio OUT) |                | 3.5 mm (Audio IN)  | 1.4         | U      |
| PoE Injector         | RJ-45(LAN)         | Laptop         | RJ-45(LAN)         | 1.5         | U      |
| Laptop               | 3.5 mm             | Smart Phone    | 3.5 mm             | 1.0         | U      |
|                      | DC Jack            | Laptop Adapter | DC Jack            | 1.4         | U      |

\* Unshielded=U, Shielded=S

### 4.4 EUT Operating Mode(s)


| Category | Mode      | Operating                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mode 1   | Operation | <ul style="list-style-type: none"><li>- Monitoring EUT Using Web Viewer, Ping Test</li><li>- When the Button Alarm is pressed, make sure the Alarm is working</li><li>- Uploaded the 1 kHz tone sound to the Web Viewer and checked if the sound is output to the headset.</li><li>- After the test, the recorded video stored on the Micro SD Card was checked and the microphone motion was also confirmed.</li></ul> |

### 4.5 Test operating S/W

| Name       | Version | Manufacture Company     |
|------------|---------|-------------------------|
| Web Viewer | -       | Hanwha Vision Co., Ltd. |



## 4.6 Configuration

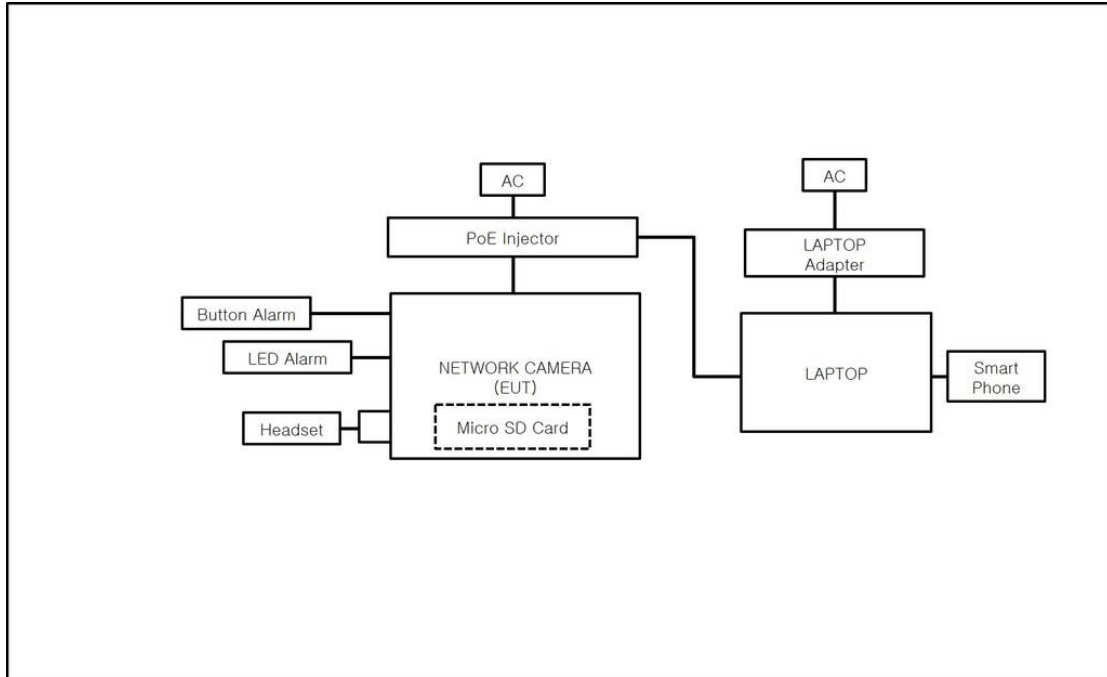

Mode 1



## 5 Measurement Procedure

### - Conducted Emissions

The conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP".

### - Radiated Electric Field Emissions

The test was done at a SEMI ANECHOIC CHAMBER with quasi-peak detector. The final test data was measured using a Quasi-Peak detector below 1 GHz at 10 m or 3 m distance and a Peak and Average detector above 1 GHz at 3 m distance. Test was proceeded worst case test mode and cable configuration. Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency.

Measurement procedures was In accordance with ANSI C63.4 or CISPR 32.

## ◆ Calculation

### - Conducted Emissions

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

### - Radiated Emissions(Below 1 GHz)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

### - Radiated Emissions(Above 1 GHz)

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(PK/CAV) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



## 6 Test Item

### 6.1 Conducted Emissions at Mains Power Ports

#### 6.1.1 Test Equipment


| Equipment Name             | Model Number | Manufacturer    | Serial No. | Cal. Date  | Next Cal. Date | Used |
|----------------------------|--------------|-----------------|------------|------------|----------------|------|
| SHIELD ROOM #6             | -            | DYMSTEC         | -          | -          | -              | ■    |
| EMC32 Measurement Software | EMC32        | R&S             | 9.12.00    | -          | -              | ■    |
| EMI TEST RECEIVER          | ESR3         | Rohde & Schwarz | 101783     | 2024-11-06 | 2025-11-06     | ■    |
| LISN                       | ENV216       | Rohde & Schwarz | 101786     | 2025-01-09 | 2026-01-09     | ■    |
| ARTIFICIAL MAINS NETWORK   | ESH2-Z5      | Rohde & Schwarz | 100450     | 2024-11-06 | 2025-11-06     | ■    |
| PULSE LIMITER              | ESH3-Z2      | Rohde & Schwarz | 101915     | 2024-11-06 | 2025-11-06     | ■    |

#### 6.1.2 Test Location : SHIELD ROOM #6

#### 6.1.3 Test Conditions :

| Temperature      | Relative Humidity    |
|------------------|----------------------|
| (27.1 ~ 27.1) °C | (55.9 ~ 55.9) % R.H. |

#### 6.1.4 Diagram of test setup

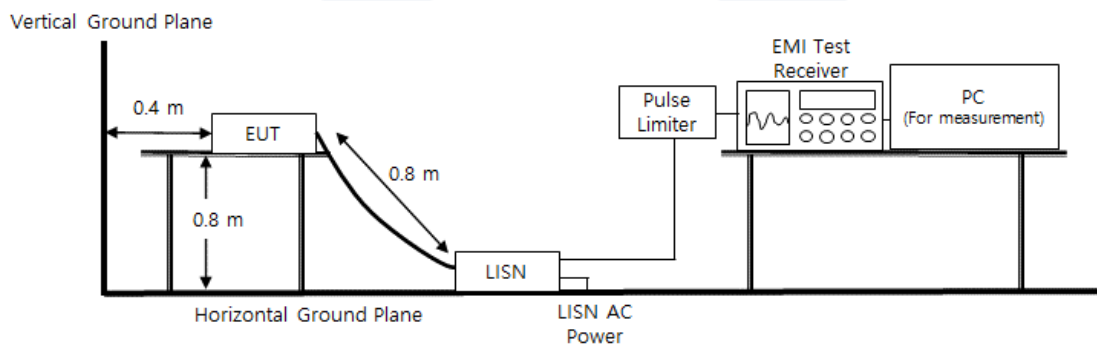




### 6.1.5 Test Result

- Test Date : 2025-08-26
- Test Mode : Mode 1

## Test Report

Test Description: Conducted Emission  
Job No.: KES-EM252922  
Phase: L  
Mode:  
Operator Name: KES

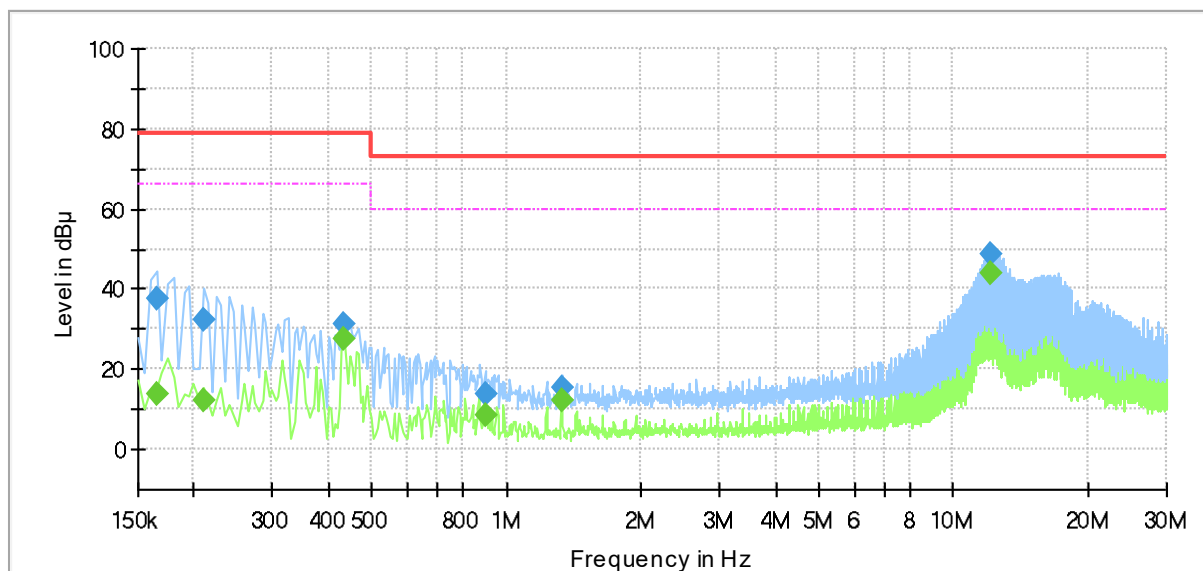

### Final\_Result

| Frequency (MHz) | QuasiPeak (dB μV) | CAverage (dB μV) | Limit (dB μV) | Margin (dB) | Meas. Time | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|-------------------|------------------|---------------|-------------|------------|-----------------|------|------------|
| 0.165000        | 37.37             | —                | 79.00         | 41.63       | 1000.0     | 9.000           | L1   | 19.5       |
| 0.165000        | —                 | 13.67            | 66.00         | 52.33       | 1000.0     | 9.000           | L1   | 19.5       |
| 0.210000        | —                 | 12.03            | 66.00         | 53.97       | 1000.0     | 9.000           | L1   | 19.5       |
| 0.210000        | 32.50             | —                | 79.00         | 46.50       | 1000.0     | 9.000           | L1   | 19.5       |
| 0.435000        | —                 | 27.42            | 66.00         | 38.58       | 1000.0     | 9.000           | L1   | 19.6       |
| 0.435000        | 31.23             | —                | 79.00         | 47.77       | 1000.0     | 9.000           | L1   | 19.6       |
| 0.895000        | —                 | 8.76             | 60.00         | 51.24       | 1000.0     | 9.000           | L1   | 19.6       |
| 0.895000        | 13.56             | —                | 73.00         | 59.44       | 1000.0     | 9.000           | L1   | 19.6       |
| 1.330000        | —                 | 12.15            | 60.00         | 47.85       | 1000.0     | 9.000           | L1   | 19.6       |
| 1.330000        | 15.13             | —                | 73.00         | 57.87       | 1000.0     | 9.000           | L1   | 19.6       |
| 12.085000       | —                 | 44.07            | 60.00         | 15.93       | 1000.0     | 9.000           | L1   | 20.1       |
| 12.085000       | 48.80             | —                | 73.00         | 24.20       | 1000.0     | 9.000           | L1   | 20.1       |



Report No. : KES-EM252922


Page 17 / 30

○ Test Date : 2025-08-26

● Test Mode : Mode 1

## Test Report

Test Description: Conducted Emission  
Job No.: KES-EM252922  
Phase: N  
Mode:  
Operator Name: KES

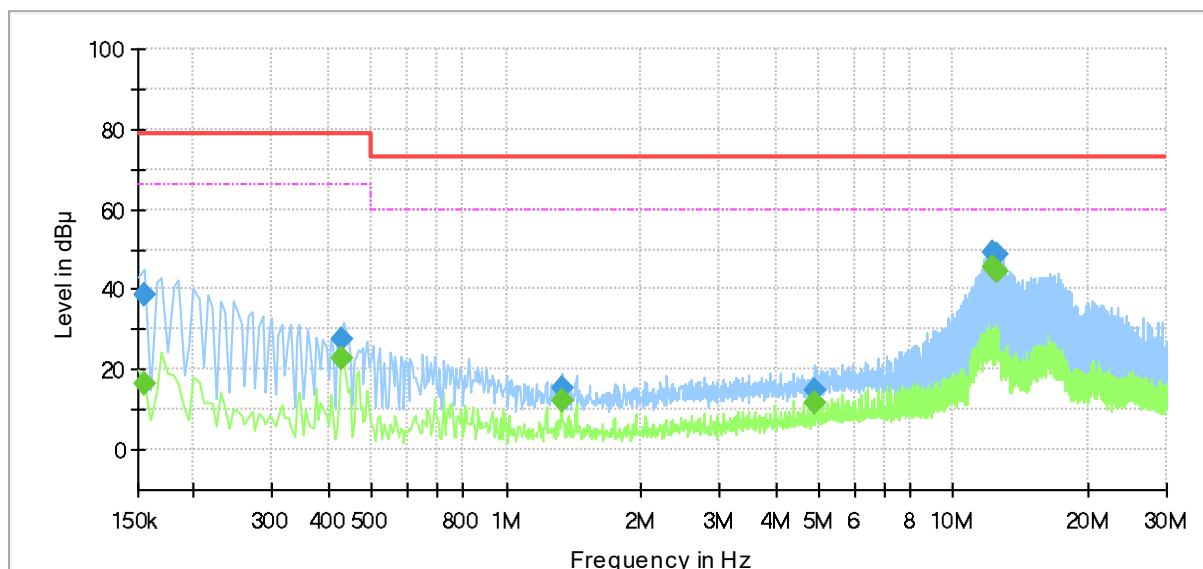

### Final\_Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|------------|-----------------|------|------------|
| 0.155000        | ---              | 16.43           | 66.00        | 49.57       | 1000.0     | 9.000           | N    | 19.5       |
| 0.155000        | 38.45            | ---             | 79.00        | 40.55       | 1000.0     | 9.000           | N    | 19.5       |
| 0.430000        | ---              | 22.63           | 66.00        | 43.37       | 1000.0     | 9.000           | N    | 19.5       |
| 0.430000        | 27.66            | ---             | 79.00        | 51.34       | 1000.0     | 9.000           | N    | 19.5       |
| 1.330000        | ---              | 12.33           | 60.00        | 47.67       | 1000.0     | 9.000           | N    | 19.6       |
| 1.330000        | 15.19            | ---             | 73.00        | 57.81       | 1000.0     | 9.000           | N    | 19.6       |
| 4.915000        | ---              | 11.49           | 60.00        | 48.51       | 1000.0     | 9.000           | N    | 19.9       |
| 4.915000        | 15.08            | ---             | 73.00        | 57.92       | 1000.0     | 9.000           | N    | 19.9       |
| 12.290000       | ---              | 45.65           | 60.00        | 14.35       | 1000.0     | 9.000           | N    | 20.1       |
| 12.290000       | 49.45            | ---             | 73.00        | 23.55       | 1000.0     | 9.000           | N    | 20.1       |
| 12.495000       | ---              | 44.42           | 60.00        | 15.58       | 1000.0     | 9.000           | N    | 20.1       |
| 12.495000       | 48.91            | ---             | 73.00        | 24.09       | 1000.0     | 9.000           | N    | 20.1       |

#### 6.1.6 Remark

Complies with the test requirements.



## 6.2 Radiated Emissions(Below 1 GHz)

### 6.2.1 Test Equipment


| Equipment Name                 | Model Number | Manufacturer    | Serial No. | Cal. Date  | Next Cal. Date | Used |
|--------------------------------|--------------|-----------------|------------|------------|----------------|------|
| SEMI ANECHOIC CHAMBER #4(10 m) | -            | DYMSTEC         | -          | -          | -              | ■    |
| EP5/RE Software                | EP5/RE       | TOYO            | 6.0.0      | -          | -              | ■    |
| EMI TEST RECEIVER              | ESU26        | Rohde & Schwarz | 100551     | 2025-02-13 | 2026-02-13     | ■    |
| AMPLIFIER                      | SCU 01       | Rohde & Schwarz | 100603     | 2024-11-06 | 2025-11-06     | ■    |
| BILOG ANTENNA                  | VULB 9168    | SCHWARZBEC K    | 9168-461   | 2024-05-09 | 2026-05-09     | ■    |
| ATTENUATOR                     | 6806.17.A    | HUBER+SUHNER    | -          | 2025-02-13 | 2026-02-13     | ■    |

6.2.2 Test Location : SEMI ANECHOIC CHAMBER #4(10 m) Measurement Distance : □ 3 m, ■ 10 m

### 6.2.3 Test Conditions :

| Temperature      | Relative Humidity    |
|------------------|----------------------|
| (26.2 ~ 26.6) °C | (52.7 ~ 53.1) % R.H. |


### 6.2.4 Diafram of test setup

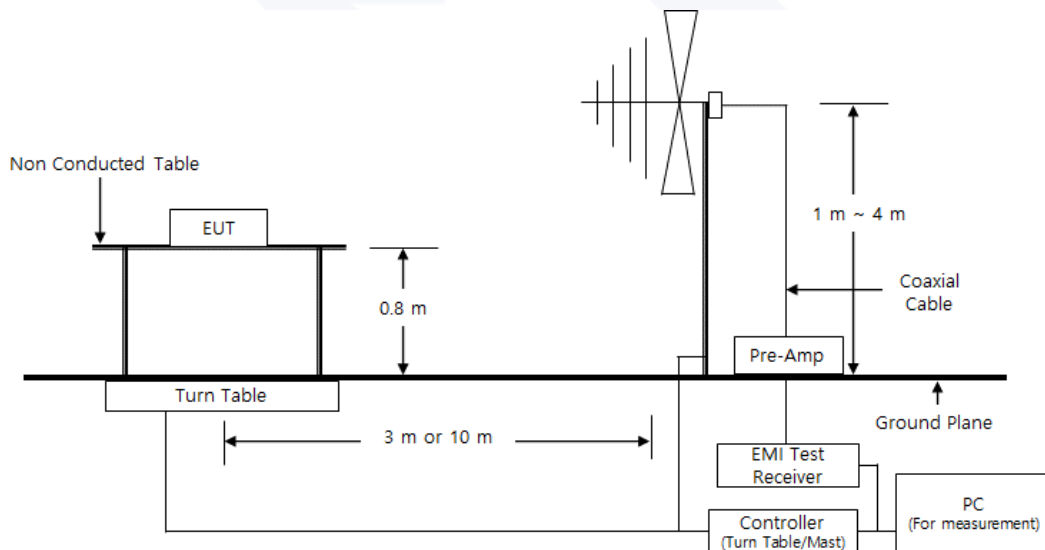



## 6.2.5 Test Result

- Test Date : 2025-08-26
- Test Mode : FCC

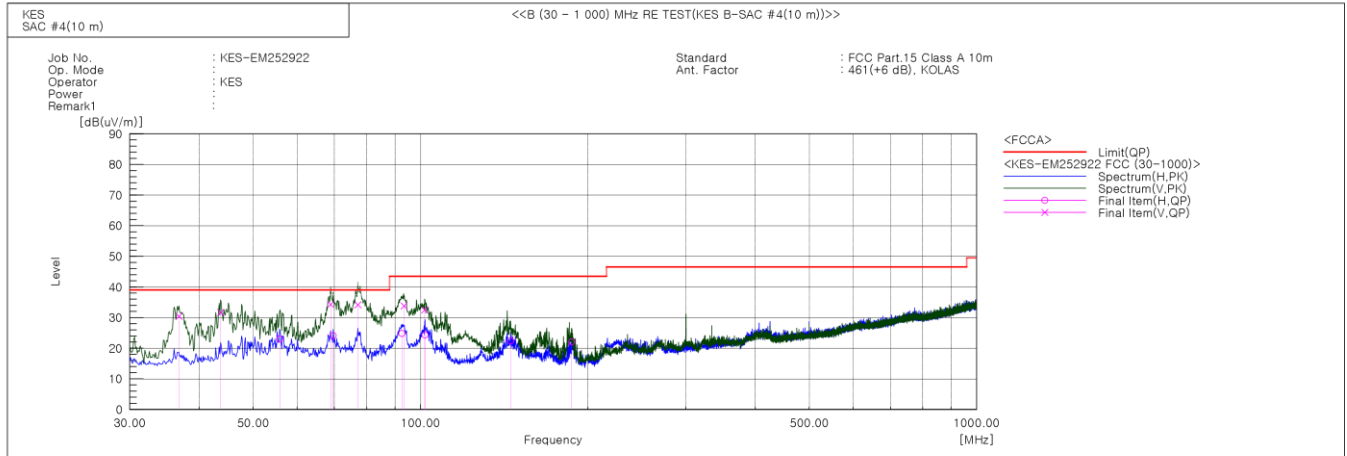

### Final Result

| No. | Frequency [MHz] | (P) | Reading QP [dB(uV)] | c.f [dB(1/m)] | Result QP [dB(uV/m)] | Limit QP [dB(uV/m)] | Margin QP [dB] | Height [cm] | Angle [deg] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-------------|--------|
| 1   | 36.790          | V   | 52.6                | -22.2         | 30.4                 | 39.0                | 8.6            | 105.0       | 289.0       |        |
| 2   | 43.701          | V   | 53.2                | -21.5         | 31.7                 | 39.0                | 7.3            | 103.0       | 296.0       |        |
| 3   | 55.826          | H   | 44.1                | -21.1         | 23.0                 | 39.0                | 16.0           | 391.0       | 156.0       |        |
| 4   | 68.921          | V   | 56.8                | -22.5         | 34.3                 | 39.0                | 4.7            | 160.0       | 274.0       |        |
| 5   | 69.649          | H   | 46.8                | -22.7         | 24.1                 | 39.0                | 14.9           | 396.0       | 297.0       |        |
| 6   | 77.166          | V   | 59.1                | -24.9         | 34.2                 | 39.0                | 4.8            | 153.0       | 175.0       |        |
| 7   | 92.565          | H   | 50.8                | -26.0         | 24.8                 | 43.5                | 18.7           | 399.0       | 297.0       |        |
| 8   | 93.414          | V   | 59.7                | -25.9         | 33.8                 | 43.5                | 9.7            | 151.0       | 266.0       |        |
| 9   | 101.780         | V   | 57.1                | -24.6         | 32.5                 | 43.5                | 11.0           | 123.0       | 124.0       |        |
| 10  | 101.901         | H   | 48.9                | -24.6         | 24.3                 | 43.5                | 19.2           | 398.0       | 100.0       |        |
| 11  | 145.309         | H   | 42.0                | -19.6         | 22.4                 | 43.5                | 21.1           | 385.0       | 194.0       |        |
| 12  | 186.898         | H   | 43.5                | -21.5         | 22.0                 | 43.5                | 21.5           | 390.0       | 108.0       |        |

※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.




Report No. : KES-EM252922

Page 20 / 30

○ Test Date : 2025-08-26

● Test Mode : IC

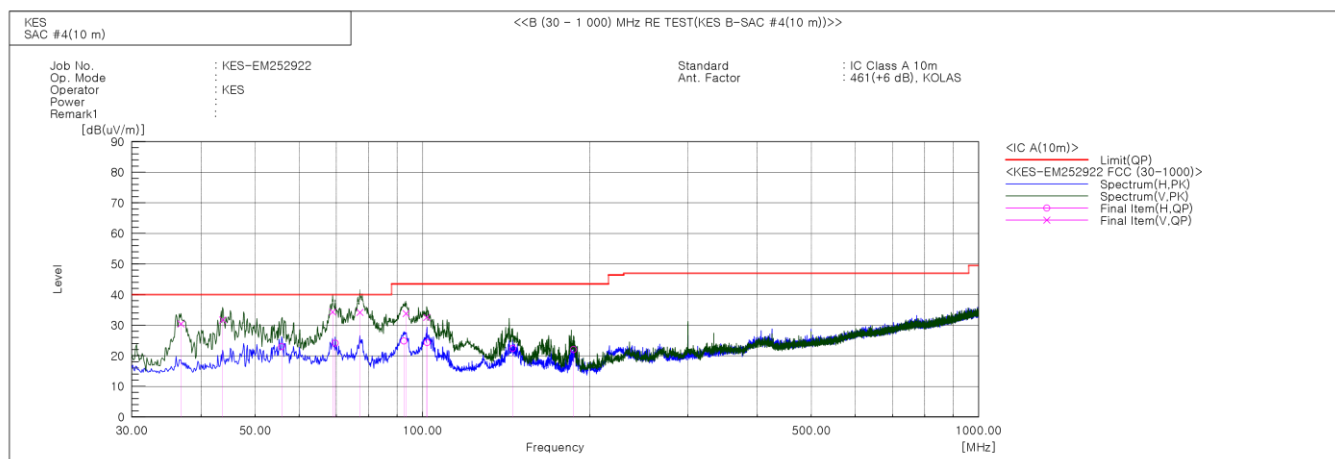

#### Final Result

| No. | Frequency [MHz] | (P) | Reading QP [dB(μV)] | c.f [dB(1/m)] | Result QP [dB(μV/m)] | Limit QP [dB(μV/m)] | Margin QP [dB] | Height [cm] | Angle [deg] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-------------|--------|
| 1   | 36.790          | V   | 52.6                | -22.2         | 30.4                 | 40.0                | 9.6            | 105.0       | 289.0       |        |
| 2   | 43.701          | V   | 53.2                | -21.5         | 31.7                 | 40.0                | 8.3            | 103.0       | 296.0       |        |
| 3   | 55.826          | H   | 44.1                | -21.1         | 23.0                 | 40.0                | 17.0           | 391.0       | 156.0       |        |
| 4   | 68.921          | V   | 56.8                | -22.5         | 34.3                 | 40.0                | 5.7            | 160.0       | 274.0       |        |
| 5   | 69.649          | H   | 46.8                | -22.7         | 24.1                 | 40.0                | 15.9           | 396.0       | 297.0       |        |
| 6   | 77.166          | V   | 59.1                | -24.9         | 34.2                 | 40.0                | 5.8            | 153.0       | 175.0       |        |
| 7   | 92.565          | H   | 50.8                | -26.0         | 24.8                 | 43.5                | 18.7           | 399.0       | 297.0       |        |
| 8   | 93.414          | V   | 59.7                | -25.9         | 33.8                 | 43.5                | 9.7            | 151.0       | 266.0       |        |
| 9   | 101.780         | V   | 57.1                | -24.6         | 32.5                 | 43.5                | 11.0           | 123.0       | 124.0       |        |
| 10  | 101.901         | H   | 48.9                | -24.6         | 24.3                 | 43.5                | 19.2           | 398.0       | 100.0       |        |
| 11  | 145.309         | H   | 42.0                | -19.6         | 22.4                 | 43.5                | 21.1           | 385.0       | 194.0       |        |
| 12  | 186.898         | H   | 43.5                | -21.5         | 22.0                 | 43.5                | 21.5           | 390.0       | 108.0       |        |

※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.

#### 6.2.6 Remark

Complies with the test requirements.



### 6.3 Radiated Emissions(Above 1 GHz)

#### 6.3.1 Test Equipment


| Equipment Name           | Model Number | Manufacturer    | Serial No.  | Cal. Date  | Next Cal. Date | Used |
|--------------------------|--------------|-----------------|-------------|------------|----------------|------|
| SEMI ANECHOIC CHAMBER #5 | -            | SY Corporation  | -           | -          | -              | ■    |
| ES10/RE Software         | ES10/RE      | TOYO            | 2022.01.000 | -          | -              | ■    |
| EMI TEST RECEIVER        | ESU26        | Rohde & Schwarz | 100552      | 2025-02-13 | 2026-02-13     | ■    |
| PREAMPLIFIER             | 8449B        | HP              | 3008A00538  | 2025-04-30 | 2026-04-30     | ■    |
| ATTENUATOR               | 8491B        | HP              | 23094       | 2025-02-13 | 2026-02-13     | ■    |
| HORN ANTENNA             | BBHA 9120D   | SCHWARZBEC K    | 9120D-1802  | 2024-11-04 | 2025-11-04     | ■    |

#### 6.3.2 Test Location : SEMI ANECHOIC CHAMBER #5

#### 6.3.3 Test Conditions :

| Temperature      | Relative Humidity    |
|------------------|----------------------|
| (25.1 ~ 25.3) °C | (56.2 ~ 56.4) % R.H. |


#### 6.3.4 Diagram of test setup

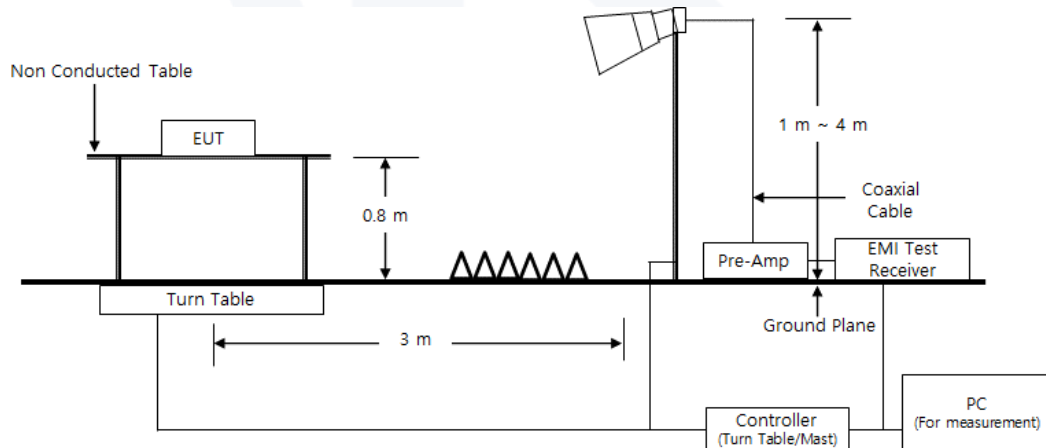



### 6.3.5 Test Result

- Test Date : 2025-08-28
- Test Mode : Mode 1

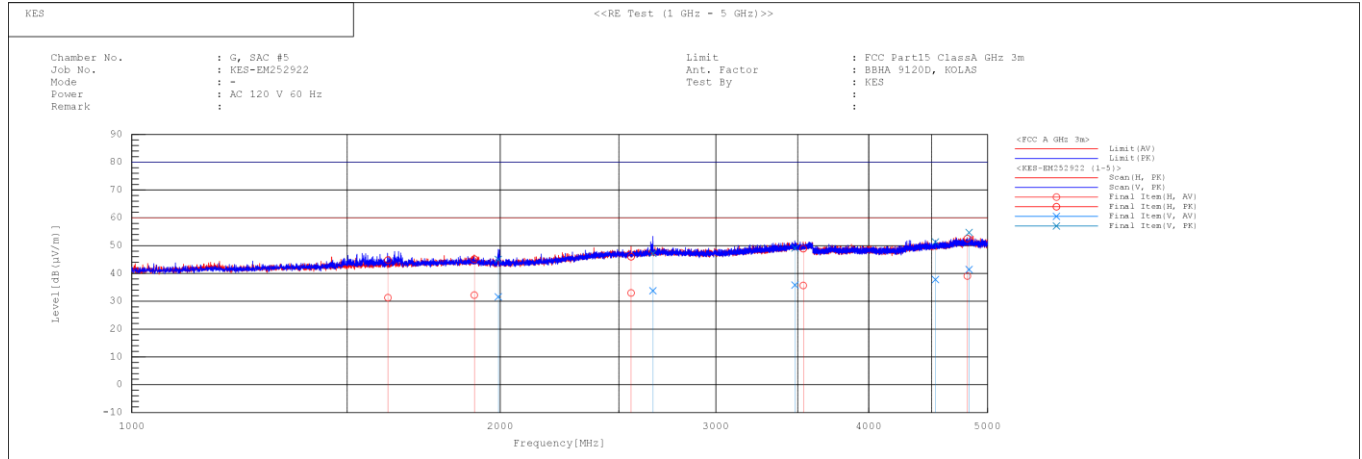

#### Final Result

| No. | Frequency [MHz] | Pol | Reading AV [dB(μV)] | Reading PK [dB(μV)] | c.f [dB(1/m)] | Result AV [dB(μV/m)] | Result PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Limit PK [dB(μV/m)] | Margin AV [dB] | Margin PK [dB] | Height [cm] | Angle [deg] |
|-----|-----------------|-----|---------------------|---------------------|---------------|----------------------|----------------------|---------------------|---------------------|----------------|----------------|-------------|-------------|
| 1   | 1619.228        | H   | 29.7                | 43.2                | 1.6           | 31.3                 | 44.8                 | 60.0                | 80.0                | 28.7           | 35.2           | 120.0       | 130.5       |
| 2   | 1904.420        | H   | 29.5                | 42.5                | 2.7           | 32.2                 | 45.2                 | 60.0                | 80.0                | 27.8           | 34.8           | 107.0       | 178.1       |
| 3   | 1992.823        | V   | 28.8                | 42.2                | 2.8           | 31.6                 | 45.0                 | 60.0                | 80.0                | 28.4           | 35.0           | 154.0       | 204.0       |
| 4   | 2557.643        | H   | 27.7                | 40.7                | 5.3           | 33.0                 | 46.0                 | 60.0                | 80.0                | 27.0           | 34.0           | 223.0       | 224.6       |
| 5   | 2665.668        | V   | 28.2                | 41.6                | 5.6           | 33.8                 | 47.2                 | 60.0                | 80.0                | 26.2           | 32.8           | 117.0       | 250.6       |
| 6   | 3480.914        | V   | 28.3                | 41.6                | 7.5           | 35.8                 | 49.1                 | 60.0                | 80.0                | 24.2           | 30.9           | 156.0       | 194.7       |
| 7   | 3535.211        | H   | 28.1                | 41.3                | 7.6           | 35.7                 | 48.9                 | 60.0                | 80.0                | 24.3           | 31.1           | 395.0       | 332.3       |
| 8   | 4534.393        | V   | 27.0                | 40.5                | 10.8          | 37.8                 | 51.3                 | 60.0                | 80.0                | 22.2           | 28.7           | 111.0       | 222.7       |
| 9   | 4813.525        | H   | 27.4                | 40.8                | 11.7          | 39.1                 | 52.5                 | 60.0                | 80.0                | 20.9           | 27.5           | 202.0       | 350.4       |
| 10  | 4830.672        | V   | 29.6                | 42.9                | 11.8          | 41.4                 | 54.7                 | 60.0                | 80.0                | 18.6           | 25.3           | 158.0       | 83.2        |

※ The data is the result of measured by the detector in PK and CISPR Average on the Peak graph.

※ The Average of the test data is the cispr average result.



Report No. : KES-EM252922

Page 23 / 30

○ Test Date : 2025-08-28

● Test Mode : Mode 1

(5 ~ 16) GHz

PK

| Frequency<br>(MHz) | Reading<br>PK (dBuV) | Polarization | Height<br>( m ) | ANT Factor<br>(dB) | Cable Loss<br>(dB) | Preamp<br>Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) |
|--------------------|----------------------|--------------|-----------------|--------------------|--------------------|--------------------------|--------------------|-------------------|----------------|
| 6 894.100          | 41.300               | V            | 1.000           | 35.790             | 9.970              | 34.690                   | 52.370             | 80.000            | 27.630         |
| 6 934.320          | 40.100               | H            | 1.000           | 35.980             | 9.970              | 34.680                   | 51.370             | 80.000            | 28.630         |

Cispr-AV

| Frequency<br>(MHz) | Reading<br>CISPR AV<br>(dBuV) | Polarization | Height<br>( m ) | ANT Factor<br>(dB) | Cable Loss<br>(dB) | Preamp<br>Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) |
|--------------------|-------------------------------|--------------|-----------------|--------------------|--------------------|--------------------------|--------------------|-------------------|----------------|
| 6 894.100          | 27.500                        | V            | 1.000           | 35.790             | 9.970              | 34.690                   | 38.570             | 60.000            | 21.430         |
| 6 934.320          | 27.200                        | H            | 1.000           | 35.980             | 9.970              | 34.680                   | 38.470             | 60.000            | 21.530         |

※ No spurious emission were detected above 16 GHz

### 6.3.6 Remark

Complies with the test requirements.



## 7 Test Setup Photos and EUT Photographs


### 7.1 Test Setup Photos



<Conducted Emissions at Mains Power Ports - Front>




<Conducted Emissions at Mains Power Ports - Rear>

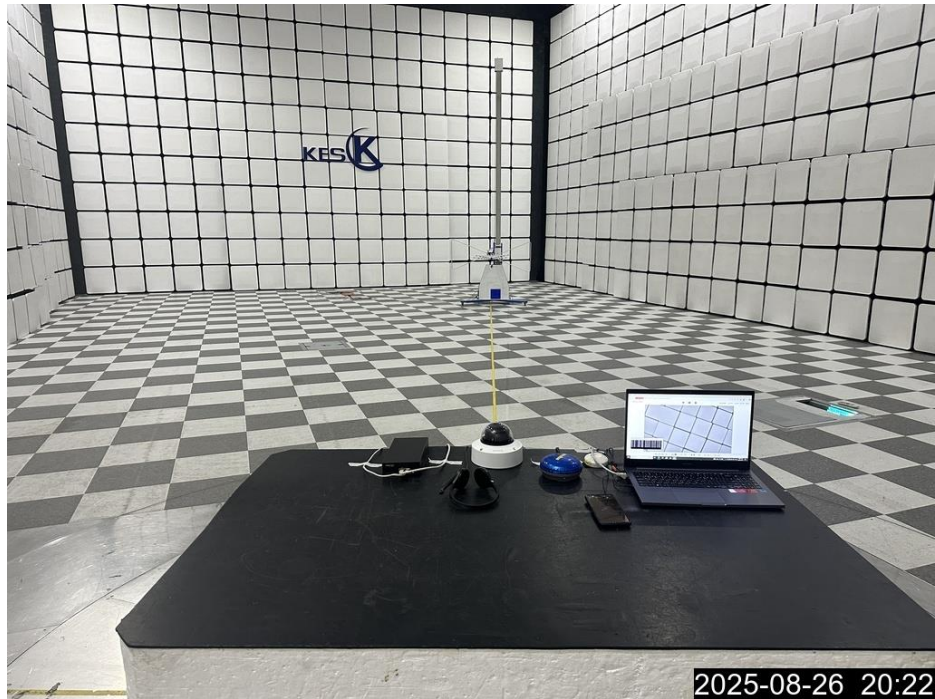


<Radiated Emissions(Below 1 GHz) - Front>



<Radiated Emissions(Below 1 GHz) - Rear>

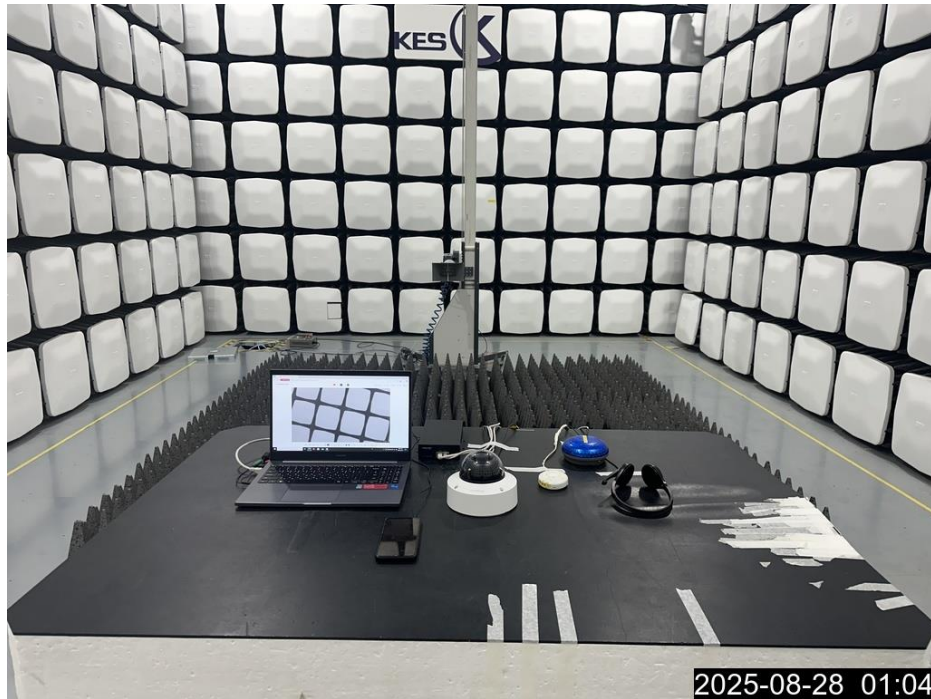

<Radiated Emissions(Above 1 GHz) - Front>

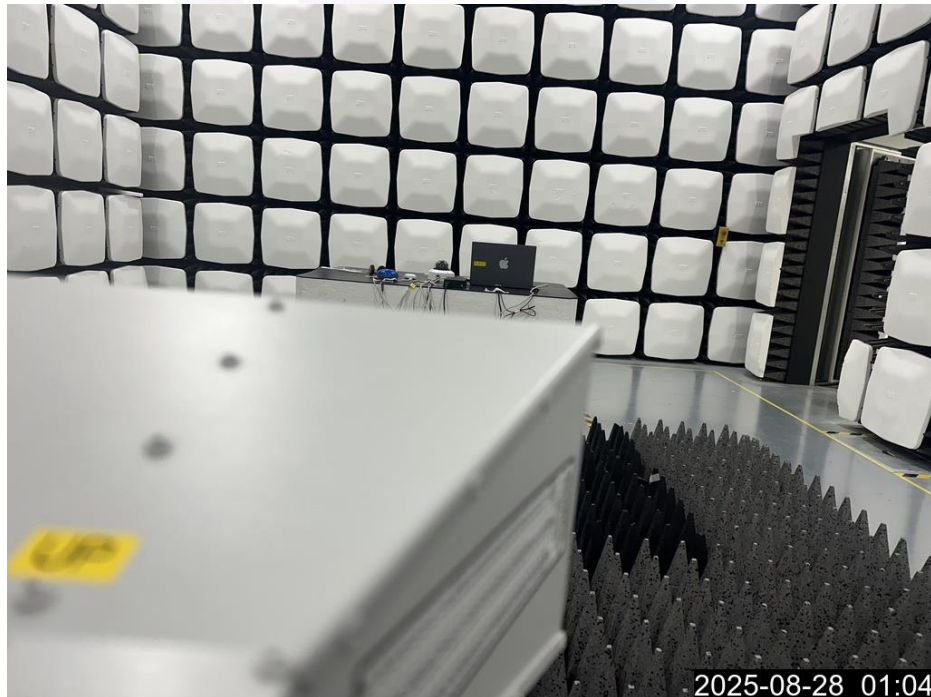

<Radiated Emissions(Above 1 GHz) - Rear>




## 7.2 EUT Photographs



<EUT External Photographs - Top>



<EUT External Photographs - Bottom>

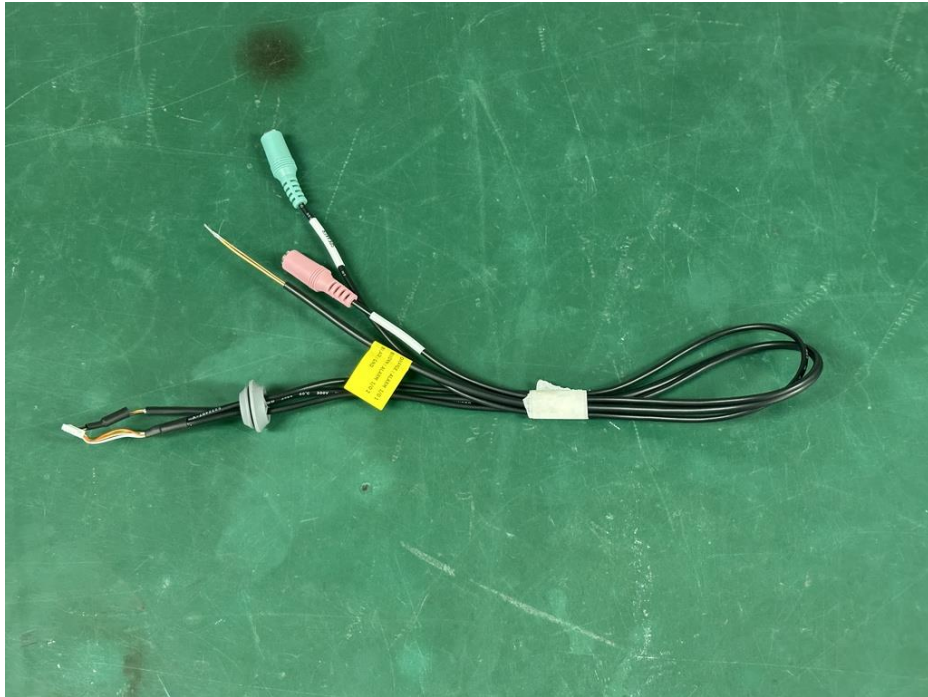

<Components>



<EUT Internal Photographs>



### 7.3 Label

|                                                                                                                                                                                                                                                                                                                                                                                |                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                               | Name : Hanwha Vision Co., Ltd.<br>Product item : NETWORK CAMERA<br>Model name : XNV-A6084R |
| This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.                                                                                            |                                                                                            |
| The above label is only an example. The specific format is left to the manufacturer to decide, as long as the label includes the required information, in accordance with ICES-Gen. The requirements specified in ICES-Gen shall apply. An example ISED compliance label, to be placed on each unit of an equipment model (or in the user manual, if allowed), is given below: |                                                                                            |
| CAN ICES-003(A) / NMB-003(A)                                                                                                                                                                                                                                                                                                                                                   |                                                                                            |

The End.