

TEST REPORT

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (1) / (31) pages

1. Applicant

- Name : Hanwha Vision Co., Ltd
- Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488 KOREA
- Date of Receipt : Feb. 04, 2026

2. Manufacturer

- Name : Hanwha Vision Co., Ltd

3. Use of Report :

For submission to customer

4. Test sample / Model :

NETWORK CAMERA / XNV-A8014R

5. Date(s) of test :

Mar. 03, 2026 ~ Mar. 15, 2026

6. Test Standard (Method) used :

NEMA TS-2:2021 2.2.7.3 Test C ~ 2.2.7.8 Test H,
NEMA TS-2 2.2.8, NEMA TS-2 2.2.9

7. Testing Environment :

Temperature: (25 ± 10) °C, Humidity: (50 ± 25) % R.H.
Pressure: (96 ± 10) kPa

8. Test Results :

Refer to the test results

9. Location of Test :

☒ Permanent Testing Lab ☐ On Site Testing
(5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-
do, Republic of Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by	Technical Manager
	Name: HongBeom Jeon (Signature)	Name: HoHyun Lee (Signature)

Remark. This report is not related to ISO/IEC 17025, KOLAS accreditation and relevant regulation.

Mar. 19, 2026

CTK Co., Ltd.



**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (2) / (31) pages

Table of Contents

1. Testing laboratory	4
1.1 Testing laboratory information.....	4
1.2 Testing laboratory accreditation status.....	4
2. Sample description and equipment information	5
2.1 Sample description	5
2.2 Equipment information	5
2.3 Pre-test sample images.....	6
2.4 Testing equipment images.....	7
2.5 Sample appearance.....	8
3. NEMA TS-2:2021 2.2.7.3 Test C ~ 2.2.7.8 Test H	9
3.1 Test date and environmental conditions	9
3.2 Test C: Low-Temperature Low-Voltage Tests [2.2.7.3].....	9
3.3 Test D: Low-Temperature High-Voltage Tests [2.2.7.4]	9
3.4 Test E: High-Temperature High-Voltage Tests [2.2.7.5].....	9
3.5 Test F: High-Temperature Low-Voltage Tests [2.2.7.6]	10
3.6 Test G: Test Termination [2.2.7.7].....	10
3.7 Test H: Appraisal of Equipment Under Test [2.2.7.8].....	10
3.8 Test Profile.....	11
3.9 Test Setup and During test sample images	12
3.10 Test result	13
3.11 Test Data.....	14
3.12 Post-test operation and function	15

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (3) / (31) pages

4. Resonant search, Endurance Test [NEMA TS-2:2021 2.2.8]	16
4.1 Test date and environmental conditions	16
4.2 Resonant search [NEMA TS-2:2021 2.2.8.3]	16
4.3 Endurance Test [NEMA TS-2:2021 2.2.8.4]	17
4.4 Test Setup and During test sample images	18
4.5 Test result [NEMA TS-2:2021 2.2.8.3]	19
4.6 Test result [NEMA TS-2:2021 2.2.8.4]	19
4.7 Test Data.....	20
4.8 Post-test operation and function	23
5. Shock(impact) Test [NEMA TS-2:2021 2.2.9]	24
5.1 Test date and environmental conditions	24
5.2 Test conditions and methods.....	24
5.3 Test Setup and During test sample images	25
5.4 Test result [NEMA TS-2:2021 2.2.9].....	26
5.5 Test Data.....	27
5.6 Post-test operation and function	30
5.7 Post-test sample images	31

 CTK Co., Ltd. 5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	REPORT No.: CTK-2026-00728 Page (4) / (31) pages	
--	---	--

1. Testing laboratory

1.1 Testing laboratory information

Lab. Name	CTK Co., Ltd.
Representative	Young Joseph Seungwon
Address	5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea
Tel.	+82-31-339-9970
Fax.	+82-31-624-9501
E-Mail	all.youngin@element.com
Website	www.elementkorea.kr

1.2 Testing laboratory accreditation status

Country	Classification	Accreditation Number	Logo
International	KOLAS	TESTING NO. KT119	

※ CTK Co., Ltd. is an independent third-party testing laboratory and is not affiliated with the manufacturer (Hanwha Vision Co., Ltd.) or any of its parent or subsidiary companies.

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (5) / (31) pages

2. Sample description and equipment information

2.1 Sample description

Sample Name	Model Name	S/N	Date of Manufacture	Quantity	Comment
Network Camera	XNV-A8014R	ZW4Z70GL10000FY	2026.01	1 EA	-

2.2 Equipment information

Testing equipment	Model Name	Manufacturer	Manufacturing Number	Next Cal. Date
Temperature & Humidity Chamber	ARS-0390-AE	ESPEC	4120200057	Aug. 21, 2026
Vibration Testing System	LT1010	FAMTECH	D2012335	-
Vibration Testing System	GT1000M	FAMTECH	D1803072-1	-
Acceleration sensor	8703A250M5	KISTLER	5722241	Jun. 05, 2026

※ All test equipment used for this testing was calibrated in accordance with the manufacturer's requirements, and the calibration ranges cover the measurement values recorded in this report.



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (6) / (31) pages

2.3 Pre-test sample images

2.3.1 Test sample



Top



Bottom



Front



Rear



Left side



Right side



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (7) / (31) pages

2.4 Testing equipment images

2.4.1 Test equipment



Temperature & Humidity Chamber



Vibration Testing System



Vibration Testing System




8703A250M5



8703A250M5

2.5 Sample appearance

Enclosure dimensions [unit: mm]

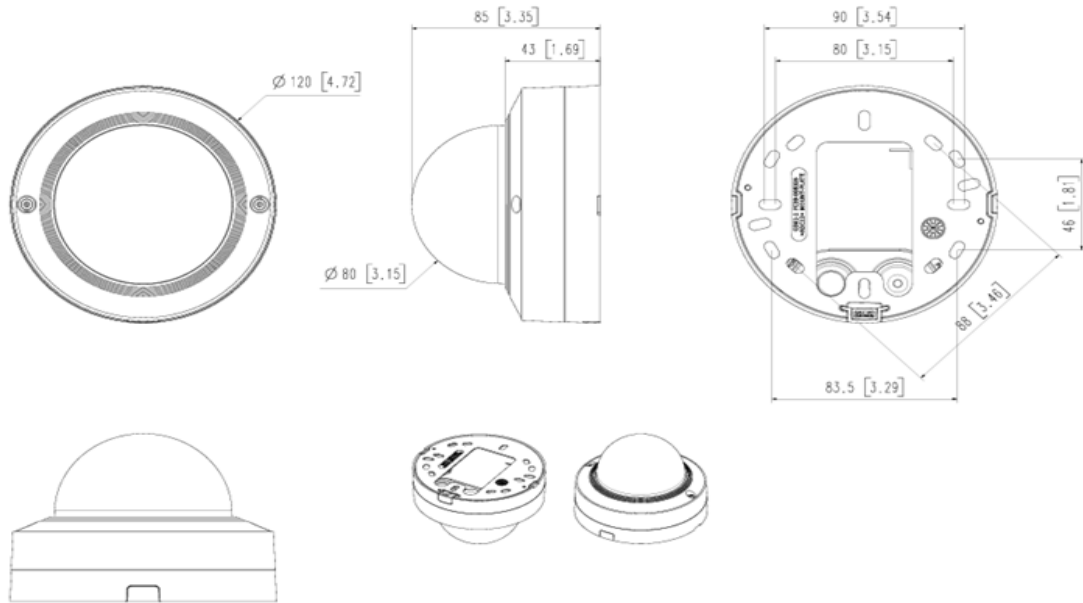

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (9) / (31) pages

3. NEMA TS-2:2021 2.2.7.3 Test C ~ 2.2.7.8 Test H

3.1 Test date and environmental conditions

3.1.1 Test date: Mar. 13, 2026 ~ Mar. 15, 2026

Measured Environmental Conditions

Item	Temperature (°C)	Humidity (% R.H.)	Pressure (kPa)
Measurement	23.6	30.6	98.2

3.2 Test C: Low-Temperature Low-Voltage Tests [2.2.7.3]

3.2.1 Definition of Test Conditions.

- 1) Environmental Chamber Door: Closed.
- 2) Temperature: -34 °C (-30 °F).
- 3) Low Voltage: 89 VAC.
- 4) Humidity Control: Off

3.2.2 While at room temperature, adjust the input voltage to 89 VAC and verify that the test sample is still operable.

3.2.3 With the test sample cycling, lower the test chamber to -34 °C (-30 °F) at a rate not exceeding 17 °C (30 °F) per hour. Allow the test sample to cycle for a minimum of 5 hours at -34 °C (-30 °F) with the humidity controls in the off position. Then operate the test switches as necessary to determine that all functions are operable.

3.2.4 Power shall then be removed from the test sample for a minimum period of 5 hours. Upon restoration of power, the test sample shall go through its prescribed start-up sequence and then resume cycling.

3.3 Test D: Low-Temperature High-Voltage Tests [2.2.7.4]

3.3.1 Definition of Test Conditions.

- 1) Environmental Chamber Door: Closed.
- 2) Temperature: -34 °C (-30 °F).
- 3) Low Voltage: 135 VAC.
- 4) Humidity Control: Off

3.3.2 While at -34 °C (-30 °F) and with humidity controls off, adjust the input voltage to 135 VAC and allow the test sample to cycle for one hour. Then operate the test switches as necessary to determine that all functions are operable.

3.4 Test E: High-Temperature High-Voltage Tests [2.2.7.5]

3.4.1 Definition of Test Conditions.

- 1) Environmental Chamber Door: Closed.

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (10) / (31) pages

- 2) Temperature: 74 °C (165 °F).
- 3) Low Voltage: 135 VAC.
- 4) Humidity Control: In accordance with the humidities given in Table 2-1.

- 3.4.2 With the test sample cycling, raise the test chamber to 74 °C (165 °F) at a rate not to exceed 17 °C (30 °F) per hour. Verify the input voltage is 135 VAC.
- 3.4.3 Set the humidity controls to not exceed 95 % relative humidity over the temperature range of 4.4 °C (40 °F) to 43.3 °C (110 °F). When the temperature reaches 43 °C (109 °F), readjust the humidity control to maintain constant absolute humidity 43 °C (109 °F) wet bulb (see relative humidities shown in Table 2-1). Verify that the test sample continues to cycle satisfactorily during the period of temperature increase and at established levels of relative humidity.
- 3.4.4 Allow the test sample to cycle for a minimum of 15 hours at 74 °C (165 °F) and 18 % relative humidity. Then operate the test switches as necessary to determine that all functions are operable.

3.5 Test F: High-Temperature Low-Voltage Tests [2.2.7.6]

- 3.5.1 Definition of Test Conditions.
 - 1) Environmental Chamber Door: Closed.
 - 2) Temperature: 74 °C (165 °F).
 - 3) Low Voltage: 89 VAC.
 - 4) Humidity Control: 18 % relative humidity and 43 °C (109 °F) wet bulb.
- 3.5.2 Adjust the input voltage to 89 VAC and proceed to operate the test switches to determine that all functions are operable. With the test sample at 74 °C (165 °F) and 18 % relative humidity, 43 °C (109 °F) wet bulb.

3.6 Test G: Test Termination [2.2.7.7]

- 3.6.1 Program the test sample to cycle.
- 3.6.2 Adjust the input voltage to 120 VAC.
- 3.6.3 Set the controls on the environmental chamber to return to room temperature, 15 °C (60 °F) to 27 °C (80 °F), with the humidity controls in the off position. The rate of temperature change shall not exceed 17 °C (30 °F) per hour.
- 3.6.4 Verify the test sample continues to cycle properly.
- 3.6.5 Allow the test sample to stabilize at room temperature for one hour. Proceed to operate the test switches to determine that all functions are operable.

3.7 Test H: Appraisal of Equipment Under Test [2.2.7.8]

- 3.7.1 The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation.



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (11) / (31) pages

3.8 Test Profile

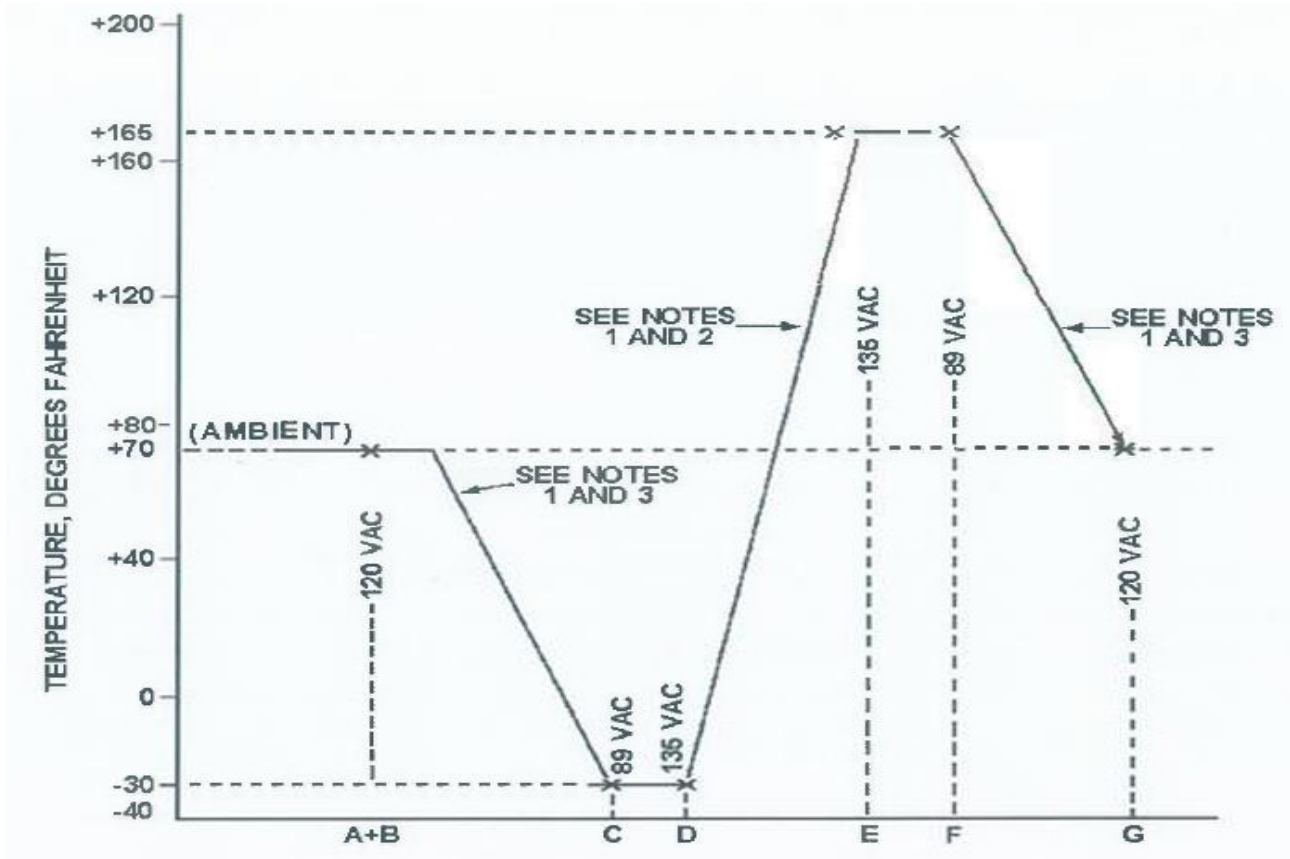


Table 2-1



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (12) / (31) pages

3.9 Test Setup and During test sample images

3.9.1 Evidence of test setting



**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (13) / (31) pages

3.10 Test result

3.10.1 Test result table

Test method	Evaluation Criteria	Test Results	Comment
Test C [2.2.7.3]	Functional operation	Pass	-
Test D [2.2.7.4]	Functional operation	Pass	
Test E [2.2.7.5]	Functional operation	Pass	
Test F [2.2.7.6]	Functional operation	Pass	
Test G [2.2.7.7]	Functional operation	Pass	
Test H [2.2.7.8]	Functional operation	Pass	
	Mechanical inspection	Pass	-

※ Refer to the sample operation after the completion of testing in section 3.12.




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (14) / (31) pages

3.11 Test Data

3.11.1 Test Data (Axis)

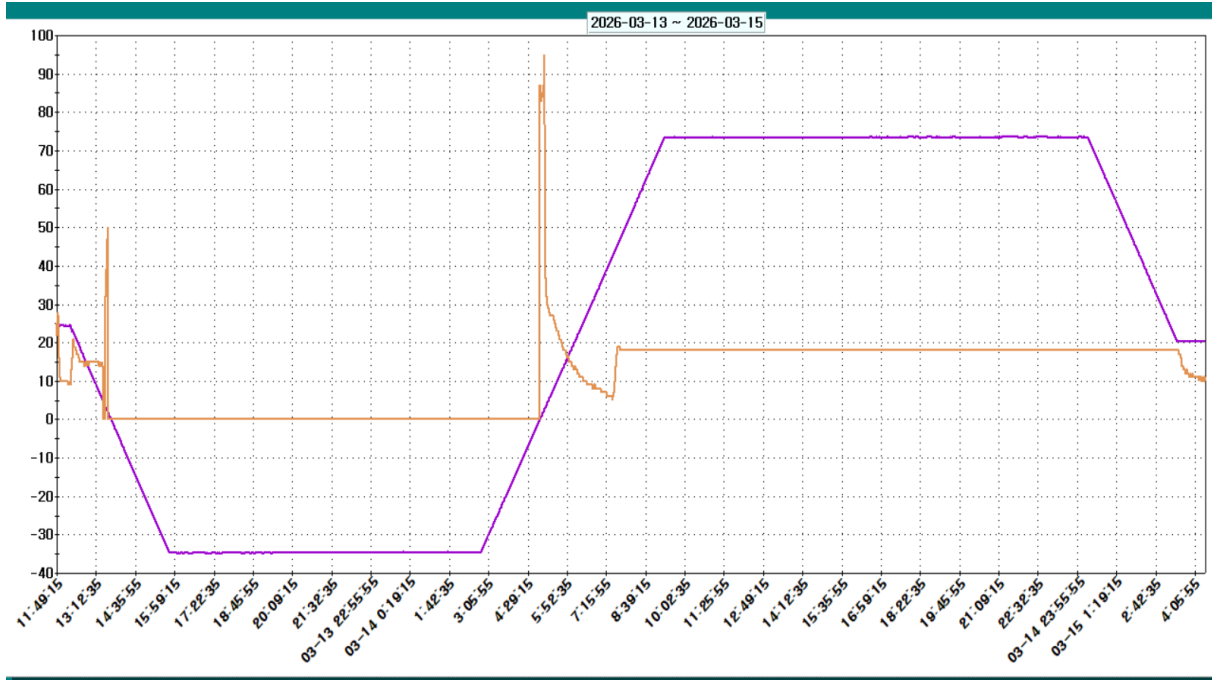

Temperature Data




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00728
Page (15) / (31) pages

3.12 Post-test operation and function


3.12.1 Test sample operation and function

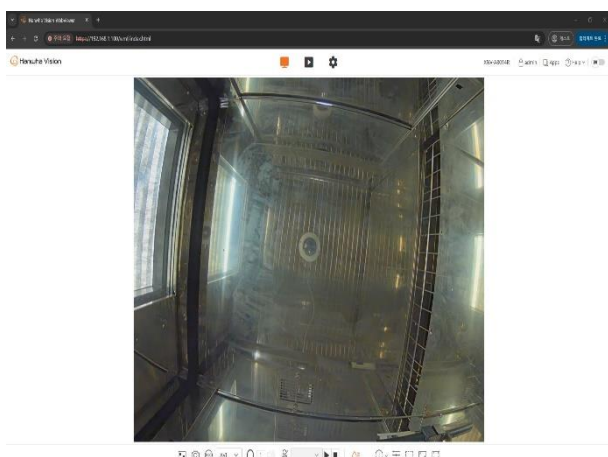


Test C [2.2.7.3] (-34 °C, 89 VAC)

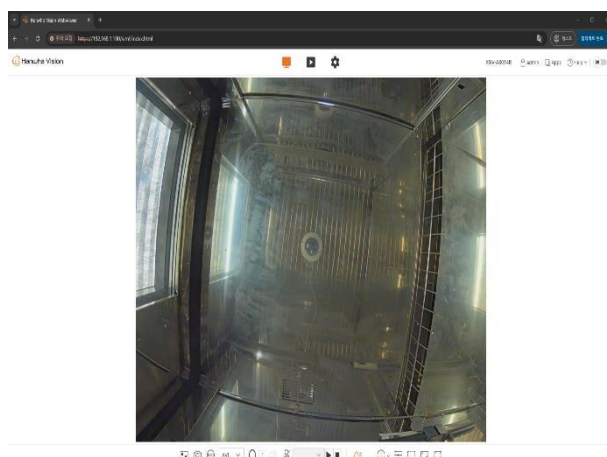


Test D [2.2.7.4] (-34 °C, 135 VAC)

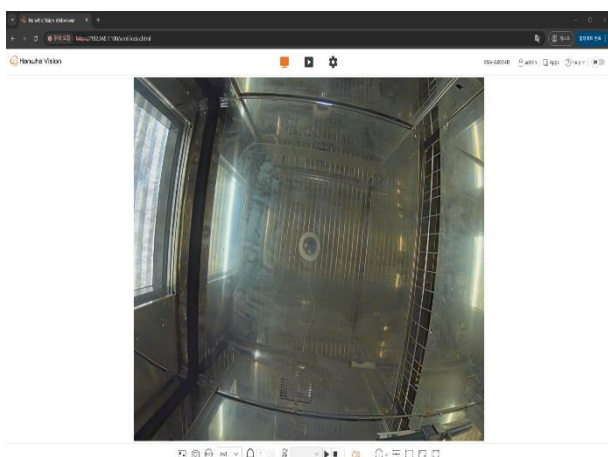


Test E [2.2.7.5] (74 °C, 135 VAC)

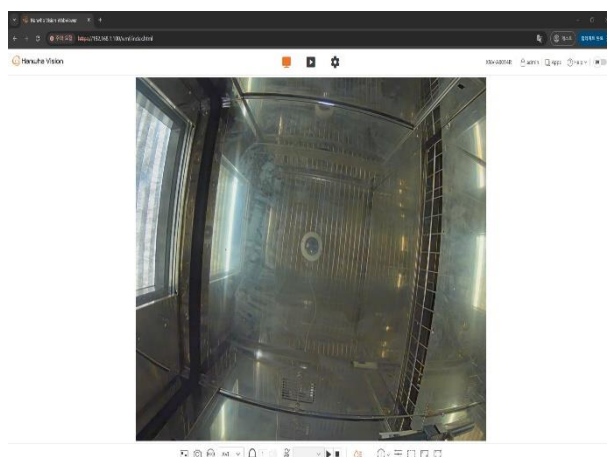

Test F [2.2.7.6] (74 °C, 89 VAC)

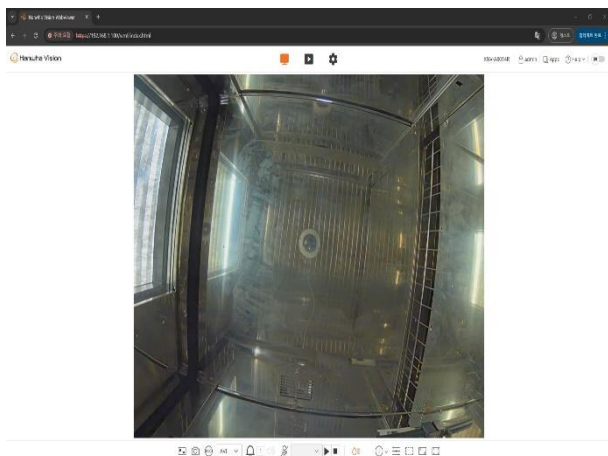

Test G [2.2.7.7] (21 ± 6) °C, 120 VAC)

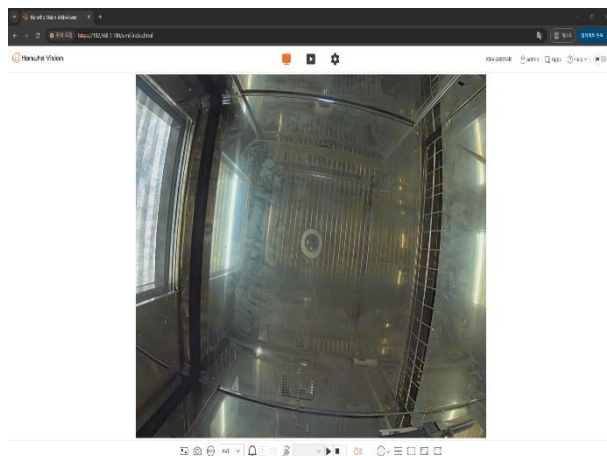

Test H [2.2.7.8] (21 ± 6) °C, 120 VAC)

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (16) / (31) pages

4. Resonant search, Endurance Test [NEMA TS-2:2021 2.2.8]

4.1 Test date and environmental conditions

4.1.1 Test date: Mar. 03, 2026 ~ Mar. 10, 2026

4.1.2 Measured Environmental Conditions

Item	Temperature (°C)	Humidity (% R.H.)	Pressure (kPa)
Measurement	22.3	29.8	98.9

4.2 Resonant search [NEMA TS-2:2021 2.2.8.3]

4.2.1 Sample status: unpackaged / not in operation

4.2.2 Applied waveform: Sine

4.2.3 Frequency (Hz): (5~30) Hz

4.2.4 Double amplitude displacement (inch): 0.015 inch

4.2.5 Sweep rate: 12.5 min

4.2.6 Applicable axis: X, Y, Z

4.2.7 Test methods

- 1) With the test sample securely fastened to the test table, set the test table for a double amplitude displacement of 0.015 inch.
- 2) Cycle the test table over a search range from 5 to 30 Hz and back within a period of 12.5 minutes.
- 3) Conduct the resonant frequency search in each of the three mutually perpendicular planes.
- 4) Note and record the resonant frequency determined from each plane.
 - ※ In the event of more than one resonant frequency in a given plane, record the most severe resonance.
 - ※ If resonant frequencies appear equally severe, record each resonant frequency.
 - ※ If no resonant frequency occurs for a given plane within the prescribed range, 30 Hz shall be recorded.

4.2.8 Evaluation items

- 1) The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation.

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (17) / (31) pages

4.3 Endurance Test [NEMA TS-2:2021 2.2.8.4]

4.3.1 Sample status: unpackaged / not in operation

4.3.2 Applied waveform: Sine

4.3.3 Frequency (Hz): 30 Hz or 3.2 Test results

4.3.4 Acceleration(G): 0.5 G

4.3.5 Applicable axis: X, Y, Z

4.3.6 Test methods

- 1) Vibrate the test sample in each plane at its resonant frequency for a period of 1 hour at an amplitude resulting in 0.5 g acceleration.
- 2) When more than one resonant frequency has been recorded in accordance with Section 3.2 Test method 4, the test period of 1 hour shall be divided equally between the resonant frequencies.
- 3) The total time of the endurance test shall be limited to 3 hours, 1 hour in each of three mutually perpendicular planes.

4.3.7 Evaluation items

- 1) The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation.

4.4 Test Setup and During test sample images


4.4.1 Evidence of test setting (NEMA TS-2:2021 2.2.8)



X axis



Y axis

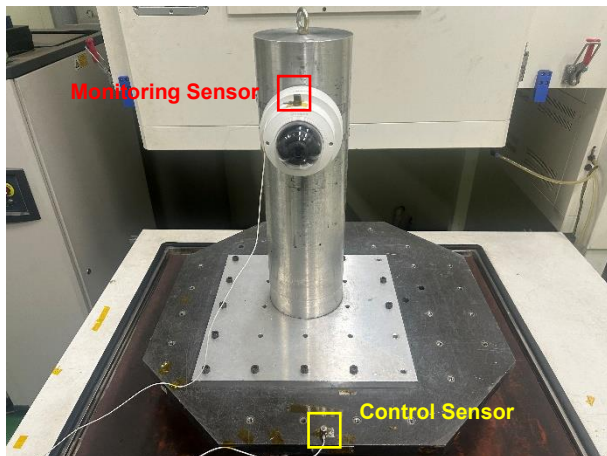

Z axis

※ The control sensors for the X and Y axes are mounted on the vibration plate.

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (19) / (31) pages

4.5 Test result [NEMA TS-2:2021 2.2.8.3]**4.5.1 Test result table**

Axis	Resonant Frequency (Hz)	Comment
X	-	No resonance detected.
Y	-	No resonance detected.
Z	-	No resonance detected.

4.6 Test result [NEMA TS-2:2021 2.2.8.4]**4.6.1 Test result table**

Evaluation Criteria	Test Results	Comment
Functional operation	Pass	-
Mechanical inspection	Pass	-

※ Refer to the sample operation after the completion of testing in section 4.6.




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (20) / (31) pages


4.7 Test Data

4.7.1 Test Data (X,Axes)

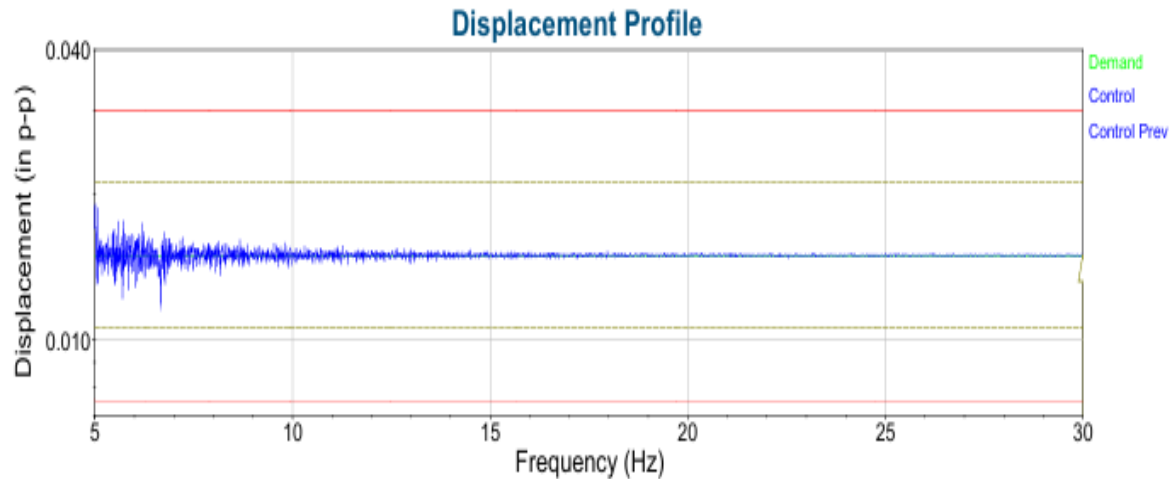

3 03, 2026 15:12:37	Level 1) 100 %	Output: 0.04576 Volts peak	NEMA TS-2 2.2.8
Demand: 0.015 in	Level Time: 0:12:30	Frequency: 30 Hz	
Control: 0.01504 in	Total Time: 0:12:36	End of Sweep Test	

Resonant search Test (X Axis)

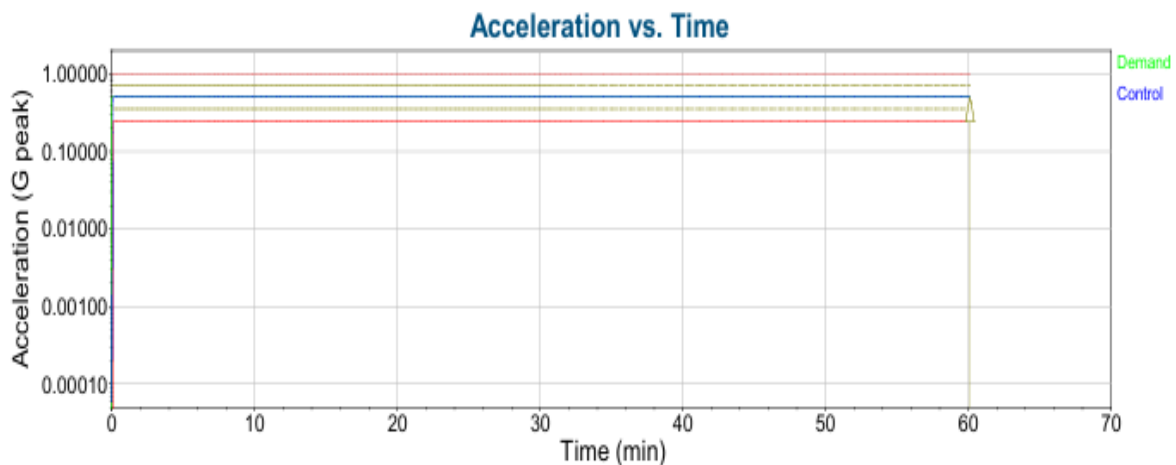

3 03, 2026 12:36:03	Level 1) 100 %	Output: 0.03313 Volts peak	NEMA TS-2 2.2.8 내구
Demand: 0.5 G	Level Time: 1:00:00	Frequency: 30 Hz	
Control: 0.5003 G	Total Time: 1:00:08	End of Timed Test	

Endurance Test (X Axis)




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00728
Page (21) / (31) pages

4.7.2 Test Data (X,Axes)

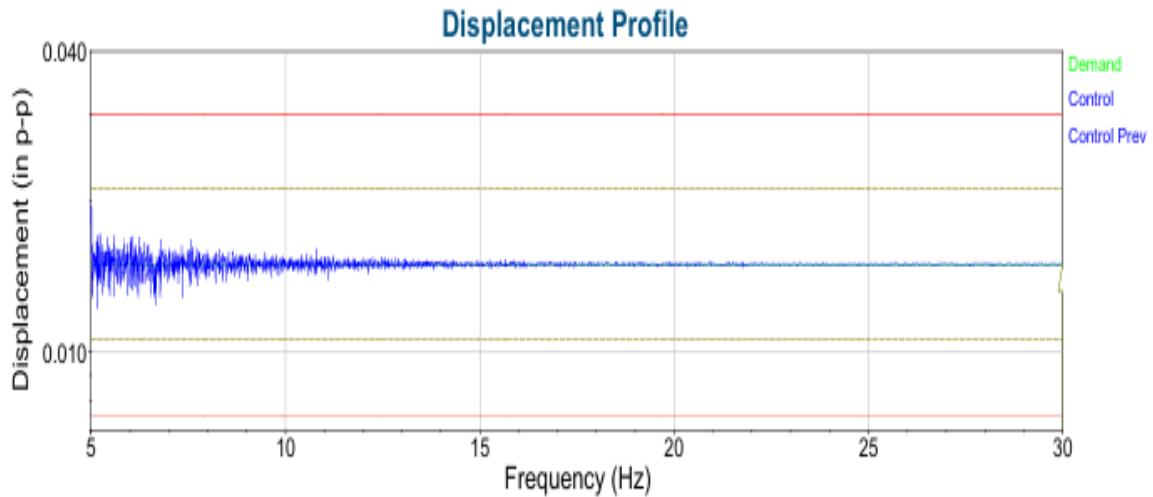

3 03, 2026 13:52:01	Level 1) 100 %	Output: 0.04563 Volts peak	NEMA TS-2 2.2.8
Demand: 0.015 in	Level Time: 0:12:30	Frequency: 30 Hz	
Control: 0.01501 in	Total Time: 0:12:36	End of Sweep Test	

Resonant search Test (Y Axis)

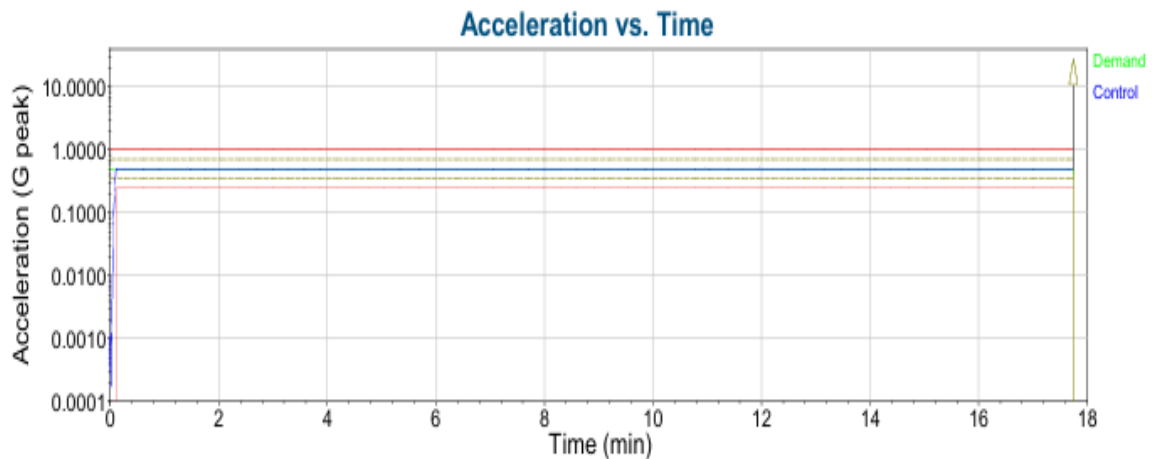

3 03, 2026 11:33:33	Level 1) 100 %	Output: 0.02492 Volts peak	NEMA TS-2 2.2.8 내구
Demand: 0.5 G	Level Time: 1:00:00	Frequency: 30 Hz	
Control: 27.32 G	Total Time: 1:00:00	Control Plus Abort	

Endurance Test (Y Axis)




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00728
Page (22) / (31) pages

4.7.3 Test Data (Z Axis)

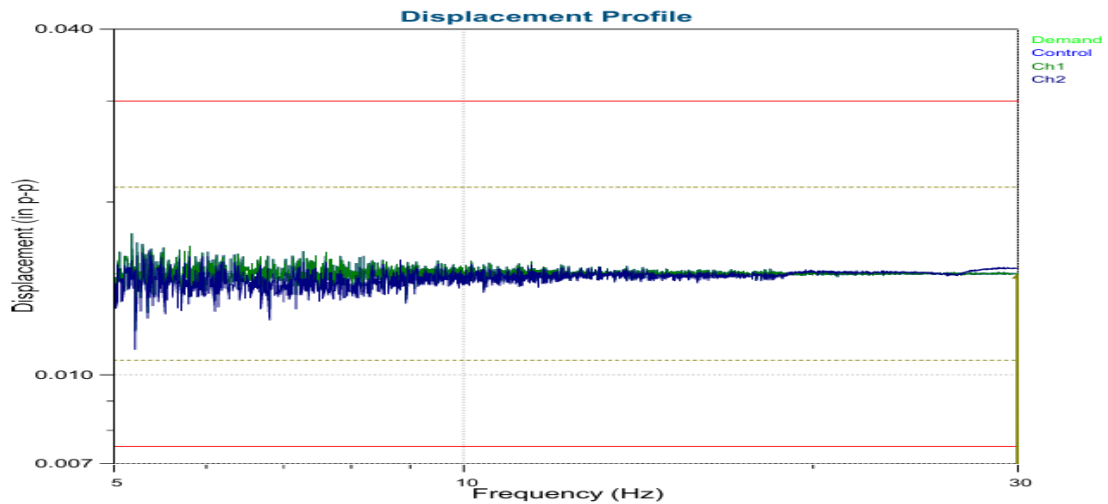

3 10, 2026 17:36:39 Level 1) 100 % Output: 0 Volts peak 한화비전 NEMA-TS 공진테
Demand: 0.015 in Level Time: 0:12:30 Frequency: 29.98 Hz
Control: 4.608e-06 in Total Time: 0:12:38 End of Timed Test

Resonant search Test (Z Axis)

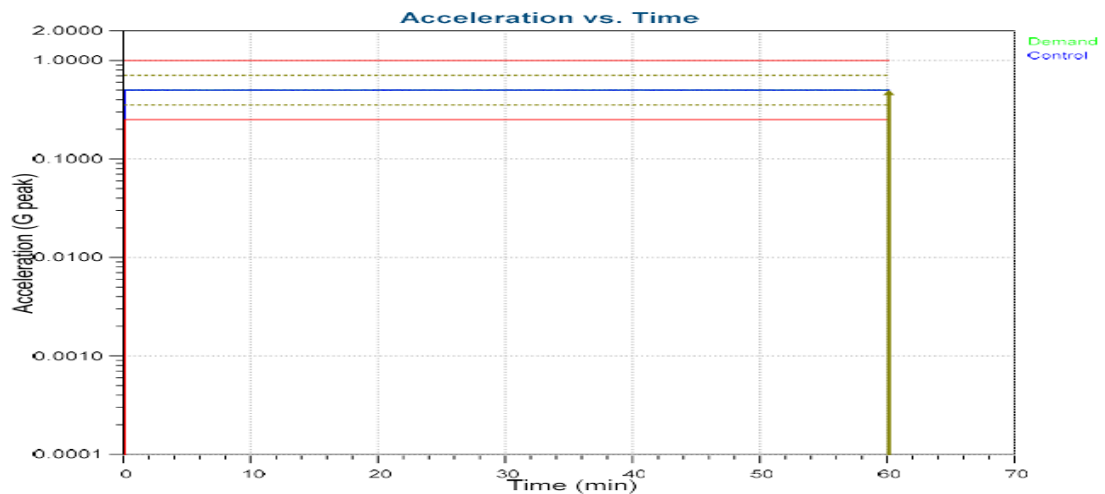

3 10, 2026 18:39:4 Level 1) 100 % Output: 0.06975 Volts peak 20251021 한화비전 NEMA-TS 공진
Demand: 0.5 G Level Time: 1:00:00 Frequency: 30 Hz
Control: 0.4978 G Total Time: 1:00:00 End of Timed Test

Endurance Test (Z Axis)




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00728
Page (23) / (31) pages

4.8 Post-test operation and function


4.8.1 Test sample operation and function

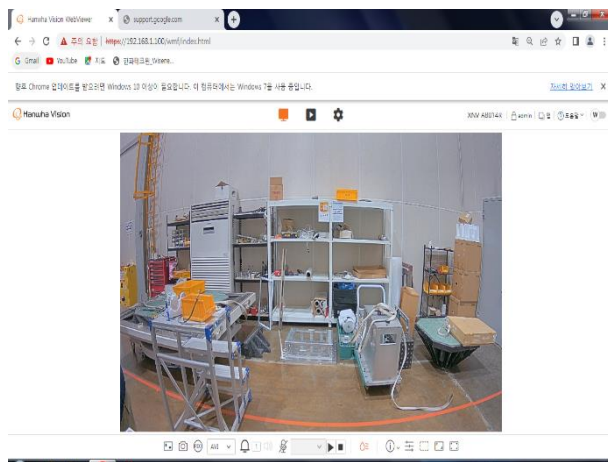


Upright X axis

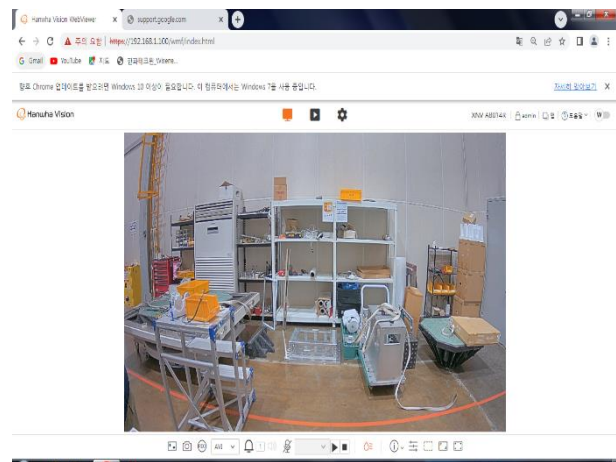


Canted X axis

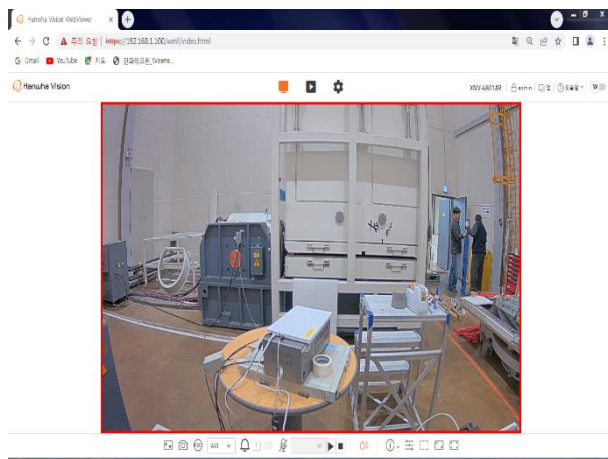


Upright Y axis

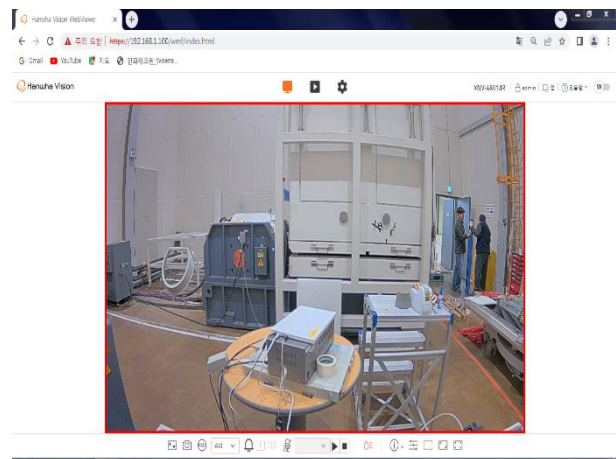

Canted Y axis

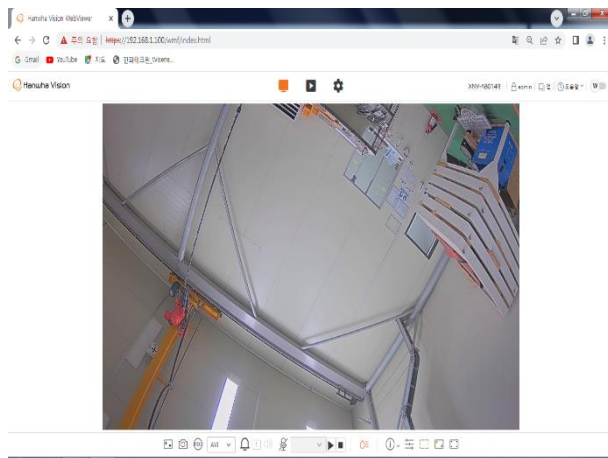

Upright Z axis

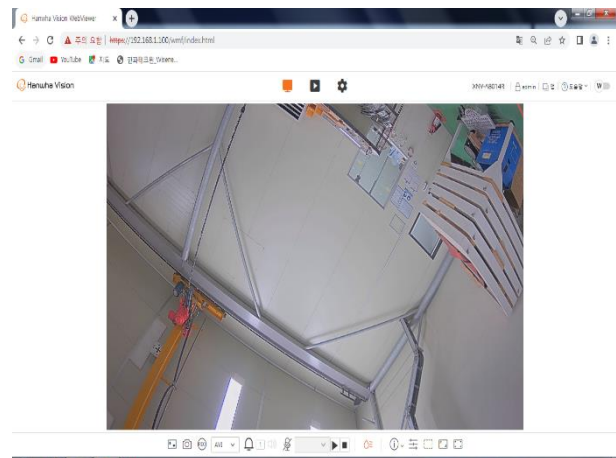

Canted Z axis

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (24) / (31) pages

5. Shock(impact) Test [NEMA TS-2:2021 2.2.9]

5.1 Test date and environmental conditions

5.1.1 Test date: Mar. 03, 2026 ~ Mar. 10, 2026

5.1.2 Measured Environmental Conditions

Item	Temperature (°C)	Humidity (% R.H.)	Pressure (kPa)
Measurement	22.3	29.8	98.9

5.2 Test conditions and methods

5.2.1 Sample status: unpackaged / not in operation

5.2.2 Applied waveform: Half sine

5.2.3 Acceleration(G): 10 G

5.2.4 Nominal duration (ms): 11

5.2.5 Applicable axis: X, Y, Z

5.2.6 Number of impacts: 1 per direction (total 6)

5.2.7 Evaluation items

- 1) The test sample shall be checked to determine that it is functionally operable in all modes of its prescribed operation

5.3 Test Setup and During test sample images


5.3.1 Evidence of test setting (NEMA TS-2:2021 2.1.10)



X axis



Y axis

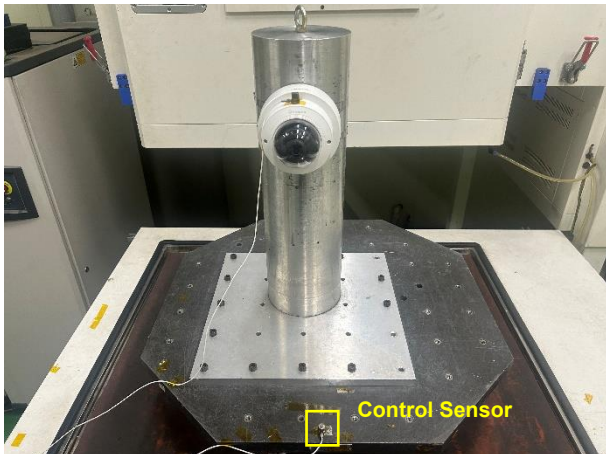

Z axis

※ The control sensors for the X and Y axes are mounted on the vibration plate.

**CTK Co., Ltd.**

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (26) / (31) pages

5.4 Test result [NEMA TS-2:2021 2.2.9]

5.4.1 Test result table

Evaluation Criteria	Test Results	Comment
Functional operation	Pass	-
Mechanical inspection	Pass	-

※ Refer to the sample operation after the completion of testing in section 5.6.




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (27) / (31) pages


5.5 Test Data

5.5.1 Mechanical shock data ($\pm$ X Axis)

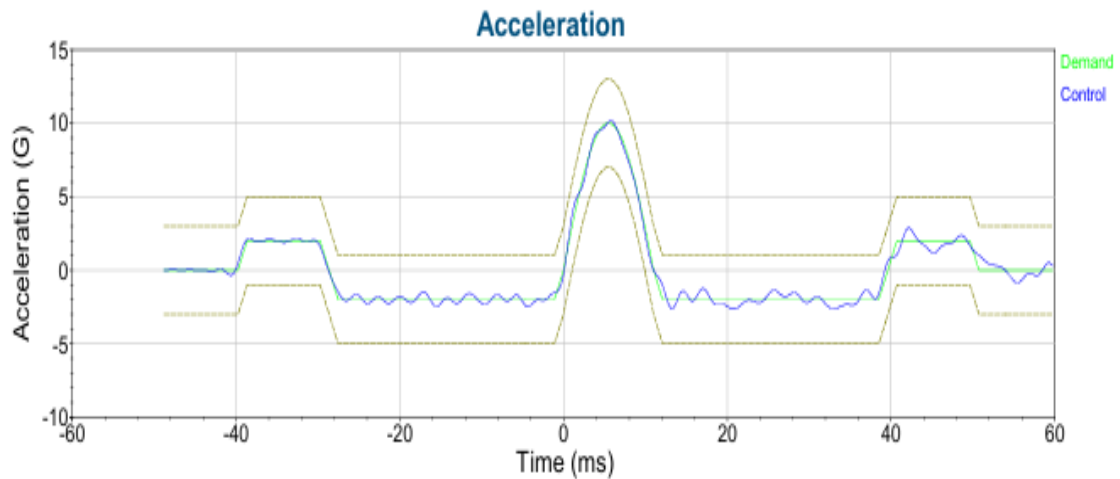

3 03, 2026 16:15:55 Level 1) 100 % Output: 0.5018 Volts peak NEMA TS-2 2.2.9
Demand: 10 G
Control: 10.15 G Pulse: 1 of 1 Running

Mechanical Chock data +X Axis

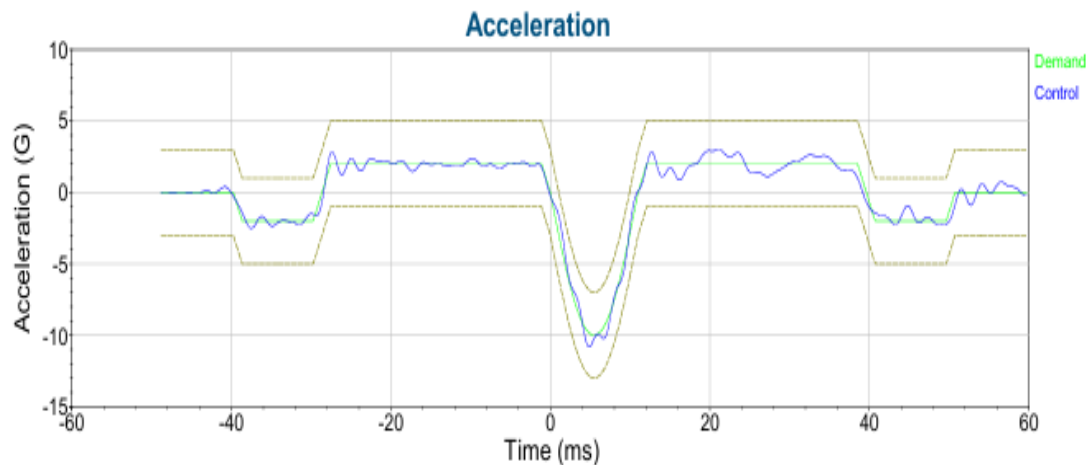

3 03, 2026 16:16:00 Level 2) 100 % Output: 0.5018 Volts peak NEMA TS-2 2.2.9
Demand: 10 G
Control: 10.82 G Pulse: 1 of 1 End of Test

Mechanical Chock data -X Axis




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00728
Page (28) / (31) pages

5.5.2 Mechanical shock data ($\pm Y$ Axis)

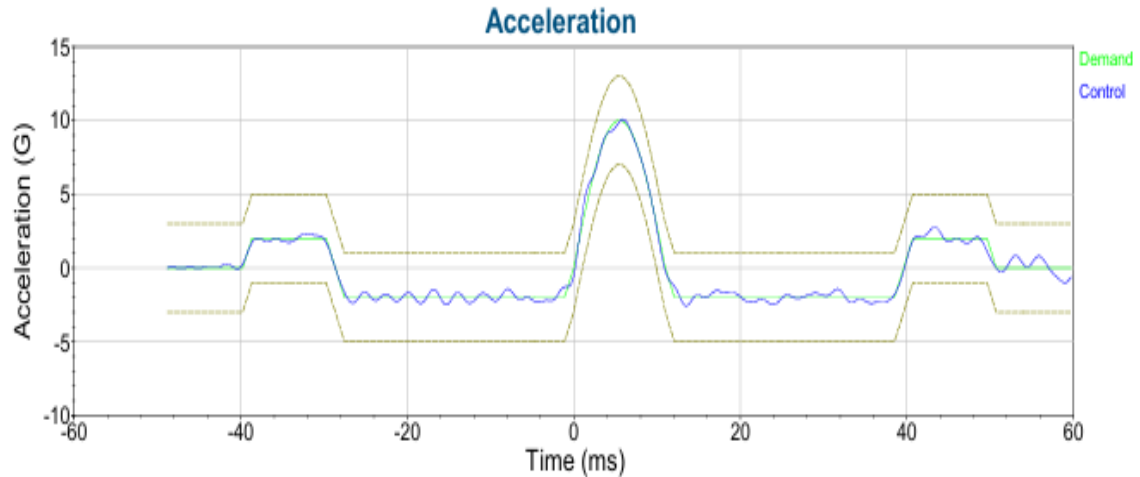

3 03, 2026 14:54:45 Level 1) 100 % Output: 0.5273 Volts peak NEMA TS-2 2.2.9
Demand: 10 G
Control: 10.08 G Pulse: 1 of 1 Running

Mechanical Chock data +Y Axis

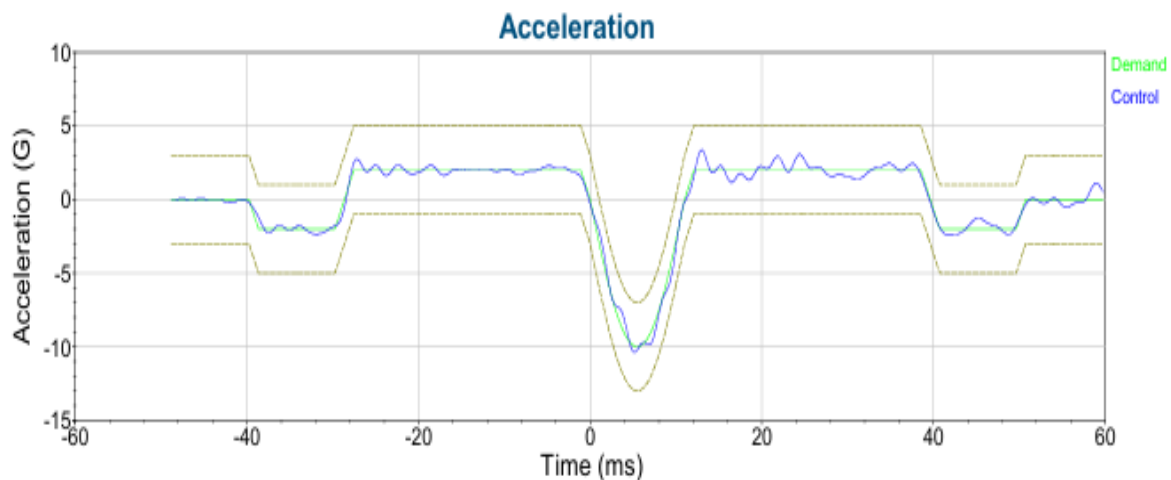

3 03, 2026 14:54:50 Level 2) 100 % Output: 0.5331 Volts peak NEMA TS-2 2.2.9
Demand: 10 G
Control: 10.39 G Pulse: 1 of 1 End of Test

Mechanical Chock data -X Axis




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (29) / (31) pages

5.5.3 Mechanical shock data ($\pm Z$ Axis)

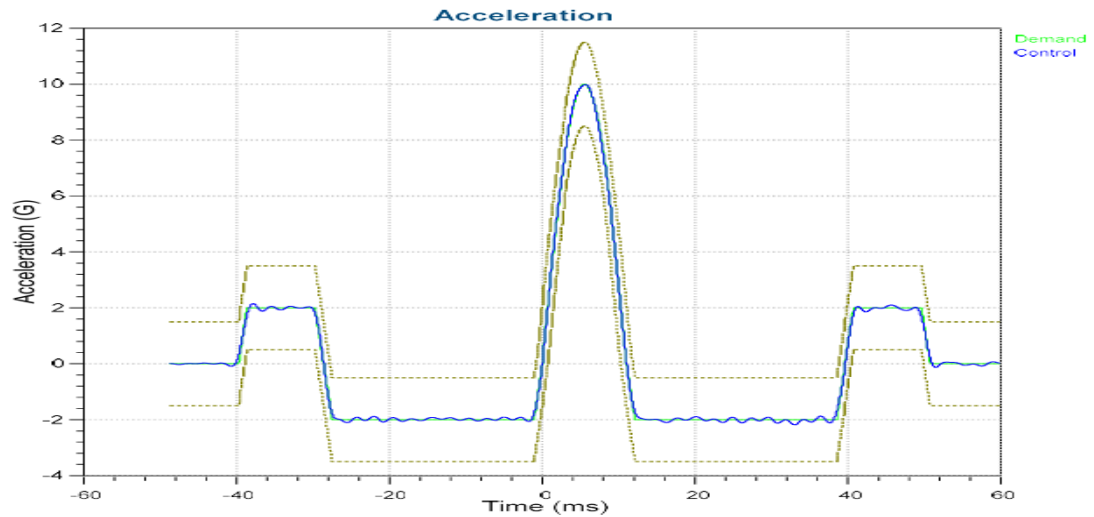


3 10, 2026 17:38:39 Level 1) 100 % Output: 0.9531 Volts peak 251021 NEMA TS-2 2.2.9

Demand: 10 G

Control: 9.982 G Pulse: 1 of 1 Running

Mechanical Chock data +Z Axis

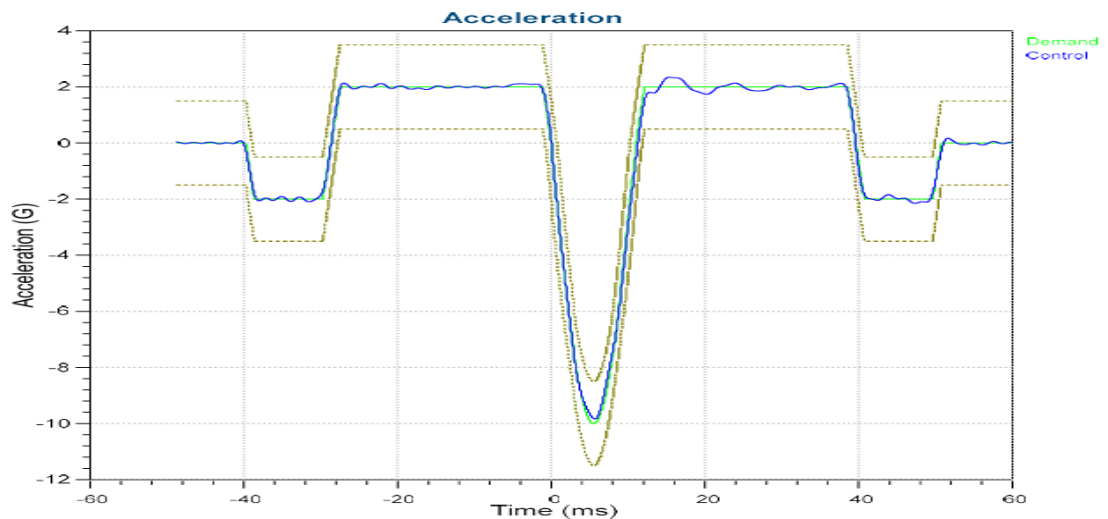

3 10, 2026 17:38:52 Level 2) 100 % Output: 0.9504 Volts peak 251021 NEMA TS-2 2.2.9

Demand: 10 G

Control: 9.838 G Pulse: 1 of 1 End of Test

Mechanical Chock data -Z Axis




CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00728
Page (30) / (31) pages

5.6 Post-test operation and function


5.6.1 Test sample operation and function

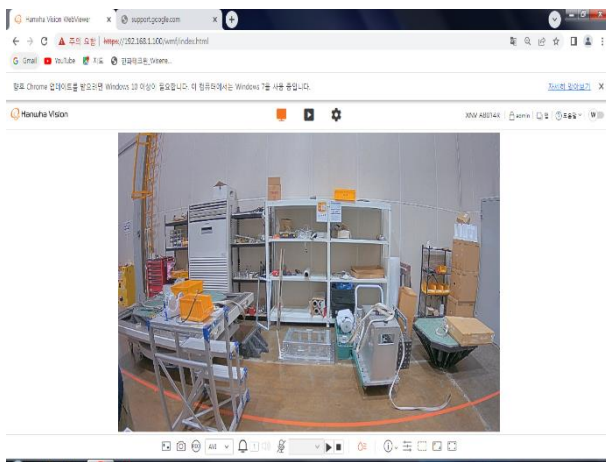


Upright X axis

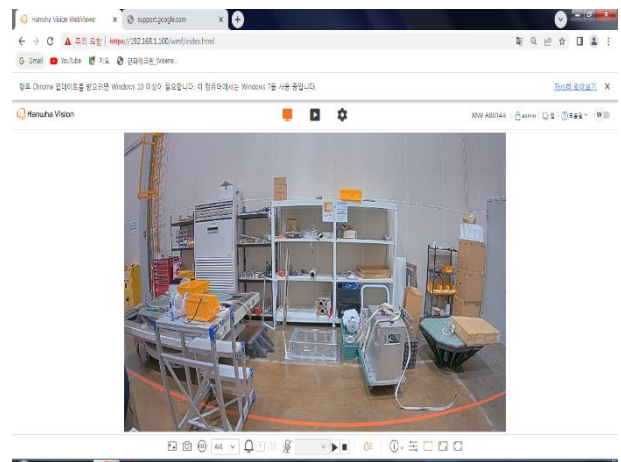


Canted X axis

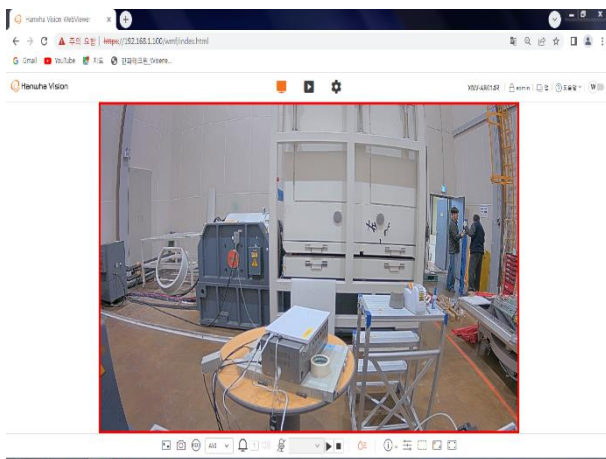


Upright Y axis

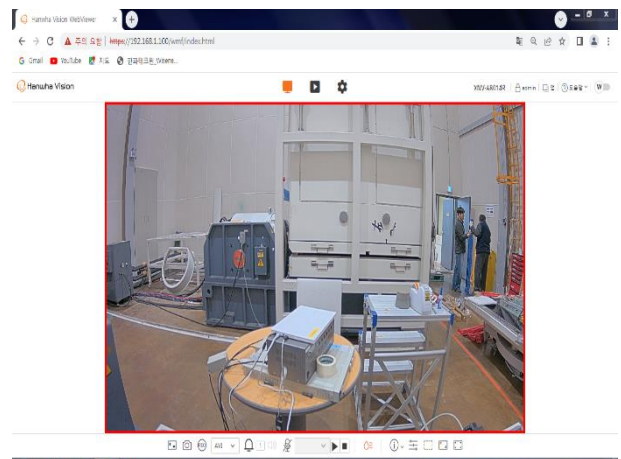

Canted Y axis

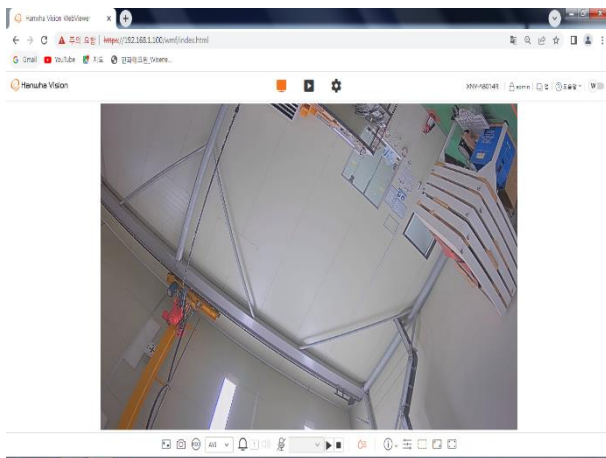

Upright Z axis

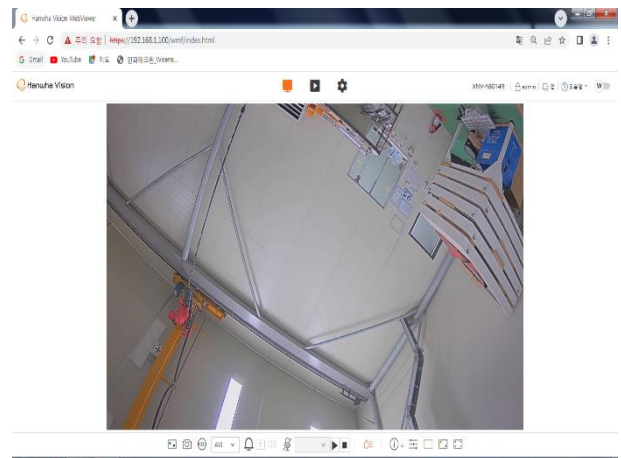

Canted Z axis



CTK Co., Ltd.

5 Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Republic of Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00728
Page (31) / (31) pages

5.7 Post-test sample images

5.7.1 Test sample



Top



Bottom



Front



Rear



Left side



Right side

- End -