



EMC TEST REPORT

Test Report No. : KES-EM-21T1128
Date of Issue : Nov. 25, 2021
Product name : NETWORK CAMERA
Model/Type No. : XNZ-L6320A
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : **Supplier's Declaration of Conformity**
Date of Receipt : Nov. 12, 2021
Test date : Nov. 14, 2021 ~ Nov. 15, 2021
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T1128
Page (2) of (38)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 25, 2021	KES-EM-21T1128	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T1128

Page (3) of (38)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	8
1.8	Configuration.....	9
1.9	Remarks when standards applied	10
1.10	Calibration Details of Equipment Used for Measurement	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Radiated Electric Field Emissions(Below 1 GHz)	13
2.3	Radiated Electric Field Emissions(Above 1 GHz)	14
APPENDIX A – TEST DATA.....		15
Conducted Emissions at Mains Power Ports.....		15
Radiated Electric Field Emissions(Below 1 GHz)		19
Radiated Electric Field Emissions(Above 1 GHz)		23
Test Setup Photos and Configuration		25
Conducted Emissions at Mains Power Ports.....		25
Radiated Electric Field Emissions(Below 1 GHz)		27
Radiated Electric Field Emissions(Above 1 GHz)		29
EUT External Photographs		31
EUT Internal Photographs		32

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.0 General Product Description

Main Specifications of EUT are:

	XNZ-L6320A
Video	
Imaging Device	1/2.8" CMOS
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Frame rate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Min. Illumination	Color: 0.05Lux(1/30sec, F1.6) BW: 0.005Lux(1/30sec, F1.6)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(Ni), 720x576(P), for installation
Lens	
Focal Length (Zoom Ratio)	4.4~142.6mm(32x) motorized varifocal
Max. Aperture Ratio	F1.6(Wide) ~ F4.4(Tele)
Angular Field of View	H: 64.66°(Wide)~2.29°(Tele) / V: 38.08°(Wide)~1.30°(Tele)
Min. Object Distance	1.5m(4.92ft)
Focus Control	Auto, One shot AF
Lens Type	DC auto iris
Pan / Tilt / Rotate	
Camera Title	Displayed up to 85 characters
Direction Indicator	Support
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SSOR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR-V
Digital Image Stabilization	Support
Defog	Support
Motion Detection	Bea, 8point polygonal zones
Privacy Masking	32ea, rectangular Support - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	OFF / LOW / MID / HIGH
White Balance	ATW / AWC / Manual / Indoor / Outdoor / Mercury / Sodium
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Video Rotation	Flip, Mirror
Analytics	Defocus detection, Directional detection, Fog detection, Face detection, Motion detection, Digital auto tracking, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Sound classification
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm events	File upload via FTP and E-Mail Notification via E-Mail SD/SDHC/SDXC or NAS recording at Event Triggers Alarm output Handover
Audio In	Selectable(Mic in/Line in), Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max. output level: 1Vrms
Network	
Ethernet	Metal shielded RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG G.711 u-law / G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz
Audio Compression	Manual(See area), WiseStream II
Smart Codec	H.264/H.265: CBR or VBR MJPEG: VBR
Bitrate Control	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles)
Streaming	IPV4, IPV6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UdpP, Bonjour, LLDP, SRTP
Protocol	HTTP(S) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device certificate(Hanwha Techwin Root CA)
Security	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
Application Programming Interface	
General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Edge Storage	Micro SD/SDHC/SDXC 1slot 256GB
Memory	1024MB RAM, 256MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	-10°C ~ +55°C(-14°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH
Input Voltage	PoE(IEEE802.3af, Class3), 12VDC
Power Consumption	PoE: Max 7.5W, Typ 5.0W 12VDC: Max 5.7W, Typ 3.7W
Mechanical	
Color / Material	Black / Metal
Product Dimensions / Weight	72x63.9x135.4mm(2.83x2.52x5.33"), 480g(1.06 lb)
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	Wide: 64.2m(199.1ft) / Tele: 1921.3m(6303.4ft)
Observe (63PPM/ 19PPF)	Wide: 24.3m(79.6ft) / Tele: 768.5m(2521.4ft)
Recognize (125PPM/ 38PPF)	Wide: 12.1m(39.8ft) / Tele: 384.3m(1260.7ft)
Identify (250PPM/ 76PPF)	Wide: 6.1m(19.9ft) / Tele: 192.1m(630.3ft)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V, 60 Hz (DC Adapter) ☒ PoE (PoE Adapter)

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNZ-L6320A	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T1128
Page (6) of (38)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	P95G001	9JM8HT2	DELL INC.	-
Notebook Adapter	LA65NS2-01	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	
DC Adapter	2ACB022F	-	ChAnnel Well Technology (Guangzhou) Co.,Ltd.	-
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co., Ltd	-
Button Alarm	-	-	-	-
LED Alarm	PRO-SL	-	SENSOR PRO	-
LED Alarm Adapter	CS-1202000	-	-	-
Controller	SPC-1010	C50E67WG10100 F	SamSung Techwin Co.,Ltd.	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
SmartPhone	A1429	-	Apple	-
Micro SD Card	-	-	Sandisk	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T1128
Page (7) of (38)

1.6 External I/O Cabling

■ DC Adapter Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	DC Jack (2 Pin)	DC Adapter	DC Jack (2 Pin)	1.2	U
	RJ-45 (LAN)	Notebook	RJ-45	3.0	U
	Alarm In (2 Pin)	Button Alarm	2 Pin	3.0	U
	Alarm Out (2 Pin)	LED Alarm	2 Pin	3.0	U
	RS-485 (2 Pin)	Controller	2 Pin	3.0	U
	Audio In (3.5 mm)	SmartPhone	3.5 mm	1.3	U
	Audio Out (3.5 mm)	Speaker	3.5 mm	1.8	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
Notebook	DC Jack	Notebook Adapter	DC Jack	2.3	S
LED Alarm	DC Jack	LED Alarm Adapter	DC Jack	1.5	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Adapter Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45	3.0	U
	Alarm In (2 Pin)	Button Alarm	2 Pin	3.0	U
	Alarm Out (2 Pin)	LED Alarm	2 Pin	3.0	U
	RS-485 (2 Pin)	Controller	2 Pin	3.0	U
	Audio In (3.5 mm)	SmartPhone	3.5 mm	1.3	U
	Audio Out (3.5 mm)	Speaker	3.5 mm	1.8	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
PoE Adapter	RJ-45 (LAN)	Notebook	RJ-45	1.0	U
Notebook	DC Jack	Notebook Adapter	DC Jack	2.3	S
LED Alarm	DC Jack	LED Alarm Adapter	DC Jack	1.5	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test Mode	operating
DC Adapter / PoE Adapter	Checked that the camera video output was working properly in the web viewer and used the ping test to verify that the network behavior was working properly. Check the normal operation of Button Alarm, LED Alarm through Web Viewer, Checked whether speaker to 1 kHz Tone is output normally.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.


1.8 Configuration

■ AC Main
 □ DC Main

■ DC Adapter Mode

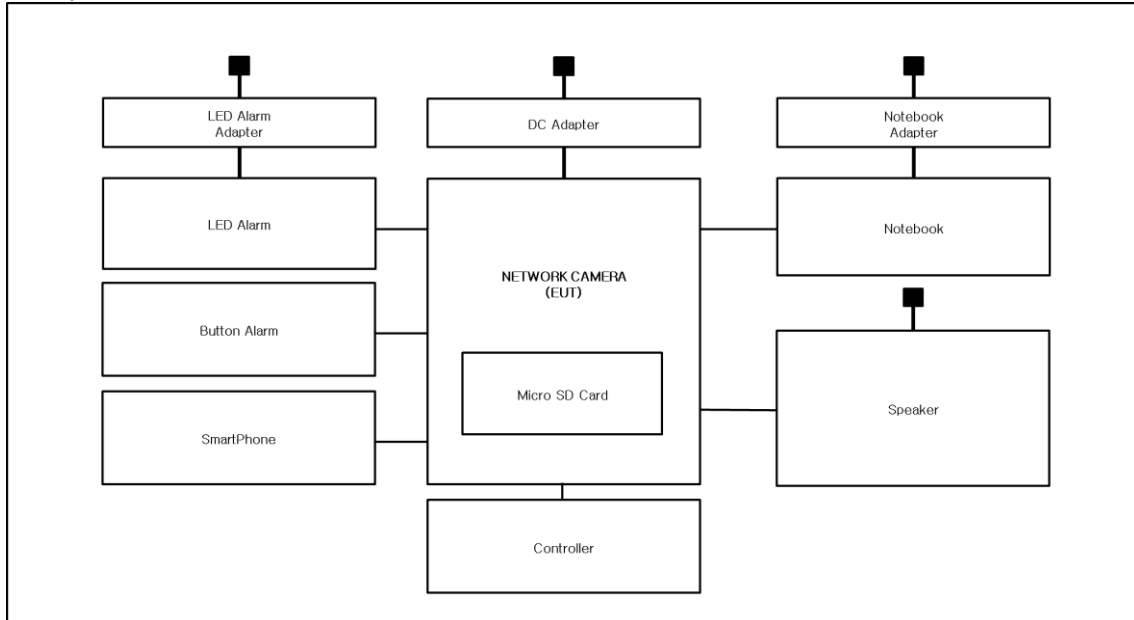

■ PoE Adapter Mode

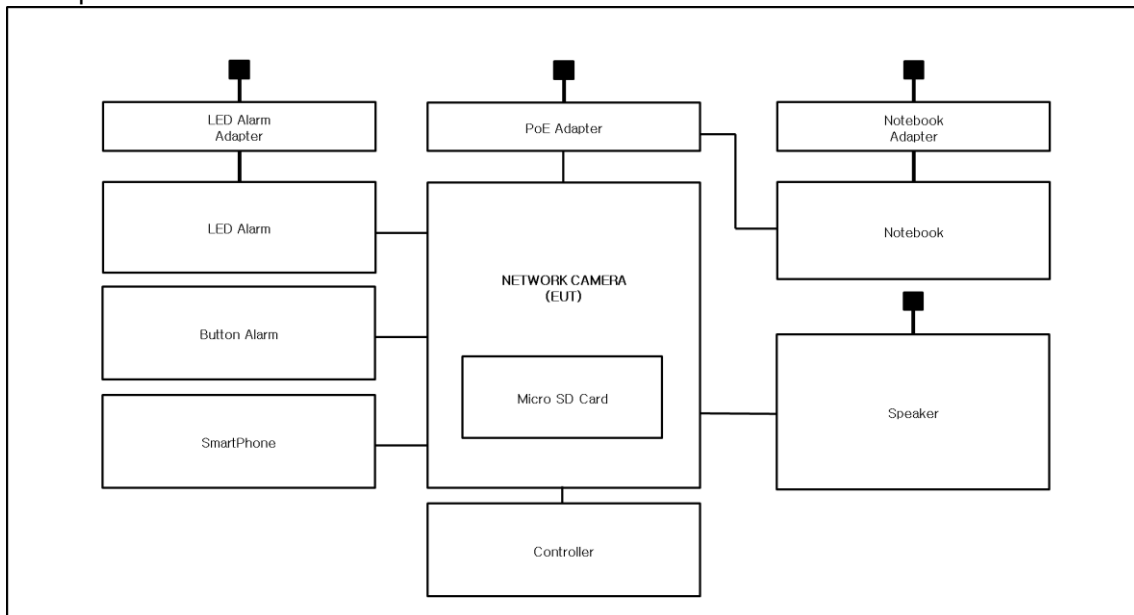

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B

☒ **IC Regulation ICES-003 Issue 7**

☐ CAN/CSA-CISPR 32:17

☐ Class A

☐ Class B

☒ ANSI C63.4a-2017

☒ Class A

☐ Class B



2.1 Conducted Emissions at Mains Power Ports

Test Date

Nov. 15, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: (23,0 ± 0,1) °C

Relative Humidity: (44,1 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Nov. 15, 2021

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (22,6 ± 0,1) °C
Relative Humidity: (44,5 ± 0,2) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Nov. 14, 2021

Test Location

SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	PREAMPLIFIER	8449B	AGILENT	3008A01742	12, 29, 2021
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 14, 2021

Test Conditions

Temperature: (22,9 ± 0,2) °C

Relative Humidity: (44,9 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ DC Adapter Mode

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: XNZ-L6320A
Phase:
Mode: DC Adapter
Operator Name: KES

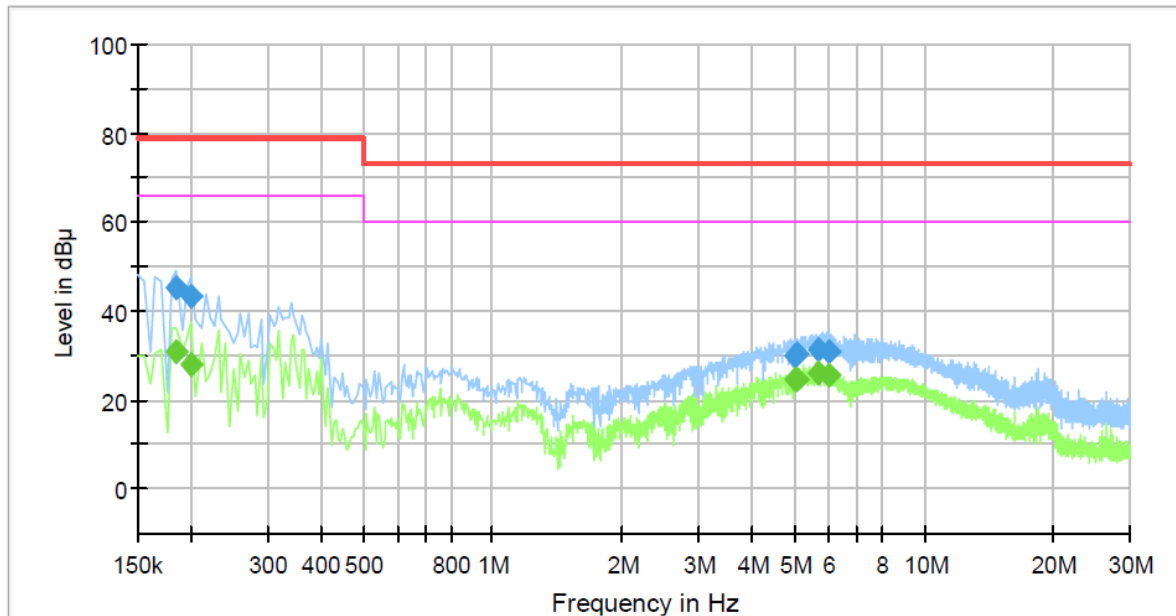

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.185000	---	30.65	66.00	35.35	1000.0	9.000	L1	19.5
0.185000	45.41	---	79.00	33.59	1000.0	9.000	L1	19.5
0.200000	---	27.96	66.00	38.04	1000.0	9.000	L1	19.5
0.200000	43.43	---	79.00	35.57	1000.0	9.000	L1	19.5
5.005000	---	24.59	60.00	35.41	1000.0	9.000	L1	19.7
5.005000	30.04	---	73.00	42.96	1000.0	9.000	L1	19.7
5.080000	---	24.73	60.00	35.27	1000.0	9.000	L1	19.7
5.080000	30.21	---	73.00	42.79	1000.0	9.000	L1	19.7
5.710000	---	25.87	60.00	34.13	1000.0	9.000	L1	19.6
5.710000	31.33	---	73.00	41.67	1000.0	9.000	L1	19.6
5.990000	---	25.53	60.00	34.47	1000.0	9.000	L1	19.6
5.990000	31.02	---	73.00	41.98	1000.0	9.000	L1	19.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T1128
Page (16) of (38)

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: XNZ-L6320A
Phase:
Mode: DC Adapter
Operator Name: KES

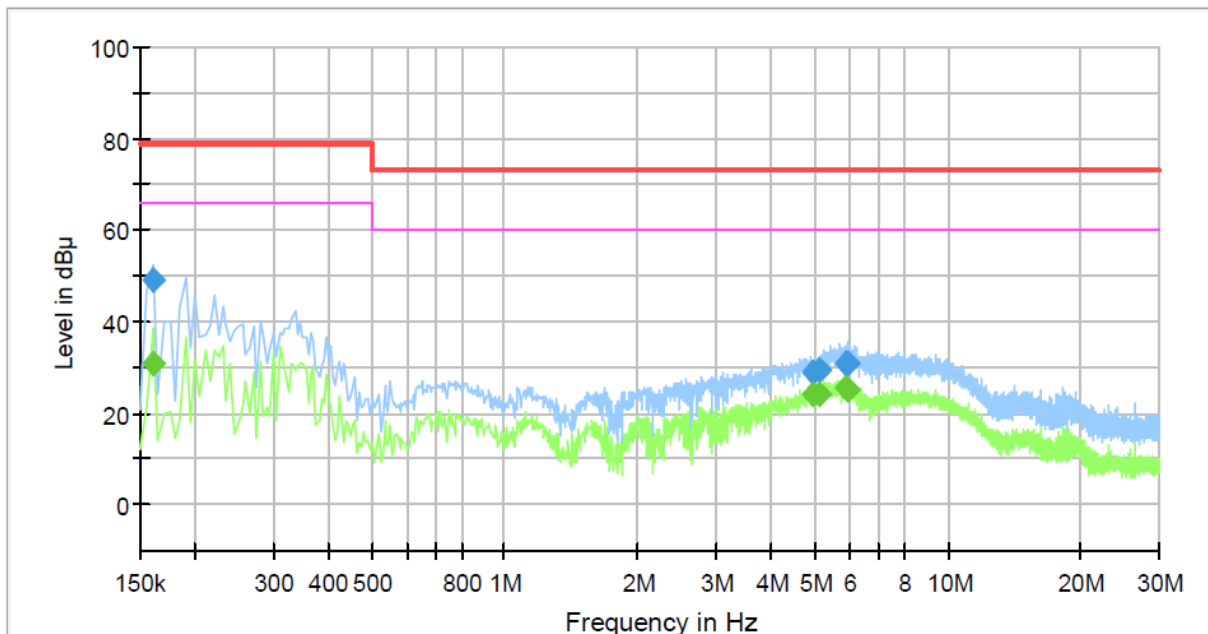

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	30.78	66.00	35.22	1000.0	9.000	N	19.4
0.160000	48.91	---	79.00	30.09	1000.0	9.000	N	19.4
4.945000	---	24.04	60.00	35.96	1000.0	9.000	N	19.7
4.945000	28.78	---	73.00	44.22	1000.0	9.000	N	19.7
5.110000	---	24.17	60.00	35.83	1000.0	9.000	N	19.7
5.110000	29.22	---	73.00	43.78	1000.0	9.000	N	19.7
5.855000	---	25.38	60.00	34.62	1000.0	9.000	N	19.6
5.855000	31.05	---	73.00	41.95	1000.0	9.000	N	19.6
5.945000	---	25.09	60.00	34.91	1000.0	9.000	N	19.5
5.945000	30.76	---	73.00	42.24	1000.0	9.000	N	19.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-21T1128
Page (17) of (38)

■ PoE Adapter Mode

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: XNZ-L6320A
Phase:
Mode: PoE Adapter
Operator Name: KES

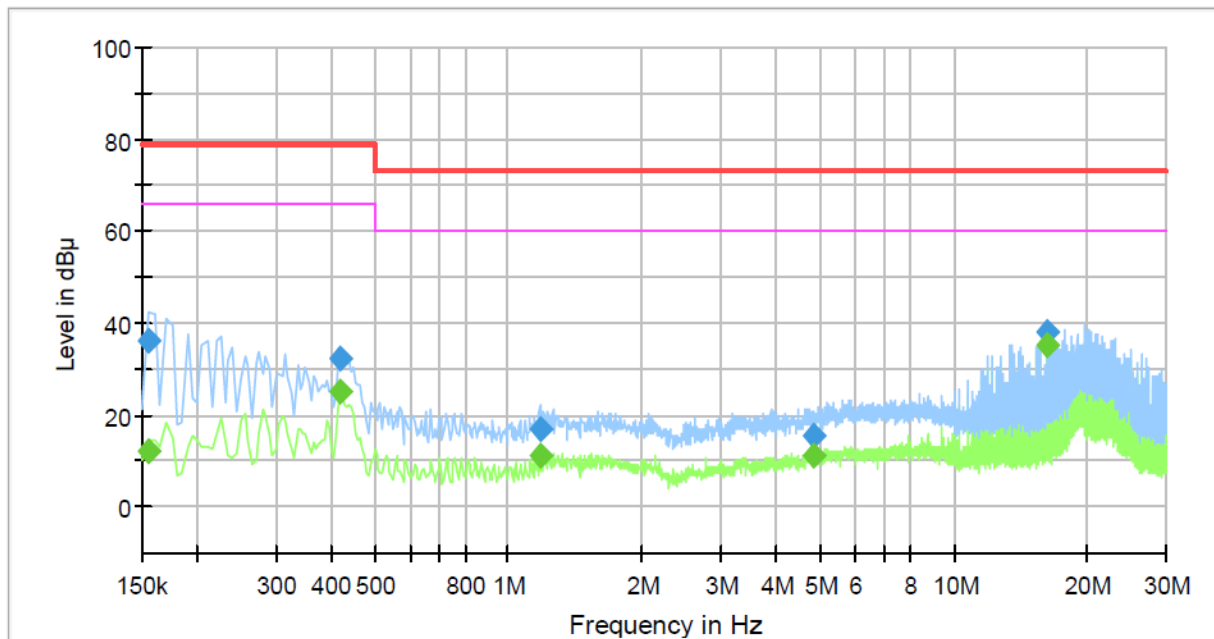

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	12.15	66.00	53.85	1000.0	9.000	L1	19.5
0.155000	36.08	---	79.00	42.92	1000.0	9.000	L1	19.5
0.420000	---	24.93	66.00	41.07	1000.0	9.000	L1	19.7
0.420000	32.28	---	79.00	46.72	1000.0	9.000	L1	19.7
1.175000	---	11.00	60.00	49.00	1000.0	9.000	L1	20.1
1.175000	17.12	---	73.00	55.88	1000.0	9.000	L1	20.1
4.840000	---	11.30	60.00	48.70	1000.0	9.000	L1	19.7
4.840000	15.64	---	73.00	57.36	1000.0	9.000	L1	19.7
16.230000	---	35.07	60.00	24.93	1000.0	9.000	L1	19.9
16.230000	38.09	---	73.00	34.91	1000.0	9.000	L1	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T1128
Page (18) of (38)

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: XNZ-L6320A
Phase:
Mode: PoE Adapter
Operator Name: KES

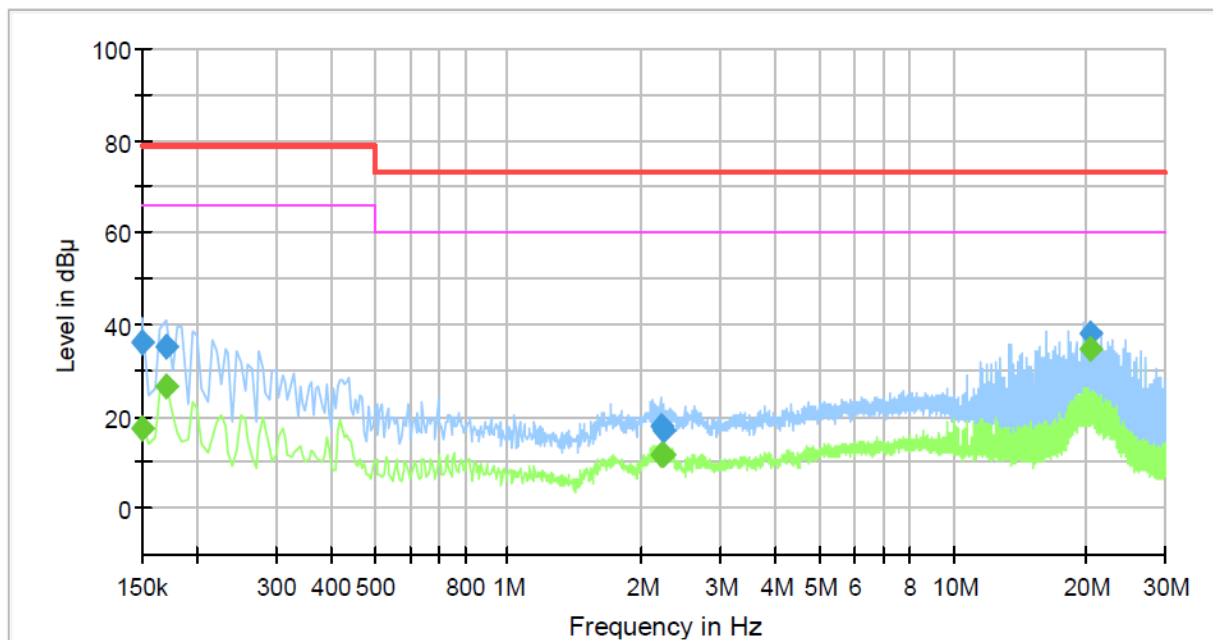

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	17.52	66.00	48.48	1000.0	9.000	N	19.4
0.150000	35.93	---	79.00	43.07	1000.0	9.000	N	19.4
0.170000	---	26.52	66.00	39.48	1000.0	9.000	N	19.4
0.170000	35.33	---	79.00	43.67	1000.0	9.000	N	19.4
2.200000	---	11.77	60.00	48.23	1000.0	9.000	N	20.3
2.200000	18.04	---	73.00	54.96	1000.0	9.000	N	20.3
2.225000	---	11.50	60.00	48.50	1000.0	9.000	N	20.3
2.225000	16.66	---	73.00	56.34	1000.0	9.000	N	20.3
20.260000	---	34.55	60.00	25.45	1000.0	9.000	N	20.2
20.260000	38.18	---	73.00	34.82	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T1128
Page (19) of (38)

Radiated Electric Field Emissions(Below 1 GHz)

- 47 CFR Part 15, Subpart B

■ DC Adapter Mode

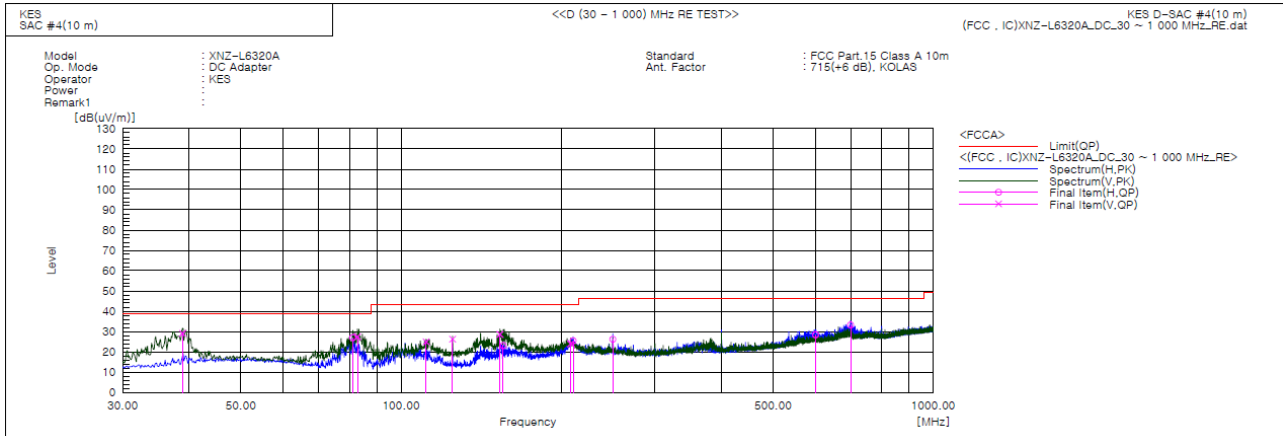

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.866	V	52.4	-23.3	29.1	39.0	9.9	122.0	288.0	
2	81.168	H	54.6	-27.6	27.0	39.0	12.0	400.0	338.0	
3	82.861	V	54.7	-27.2	27.5	39.0	11.5	105.0	94.0	
4	111.463	V	47.4	-22.4	25.0	43.5	18.5	100.0	113.0	
5	124.956	V	51.2	-24.9	26.3	43.5	17.2	136.0	117.0	
6	153.311	V	53.7	-25.0	28.7	43.5	14.8	138.0	155.0	
7	155.615	H	47.9	-24.8	23.1	43.5	20.4	368.0	133.0	
8	208.359	V	44.6	-20.6	24.0	43.5	19.5	111.0	192.0	
9	210.541	H	46.1	-20.6	25.5	43.5	18.0	400.0	133.0	
10	249.948	H	45.4	-19.2	26.2	46.5	20.3	388.0	129.0	
11	600.966	H	36.9	-8.5	28.4	46.5	18.1	257.0	132.0	
12	698.936	H	40.7	-7.4	33.3	46.5	13.2	400.0	281.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T1128
Page (20) of (38)

■ PoE Adapter Mode

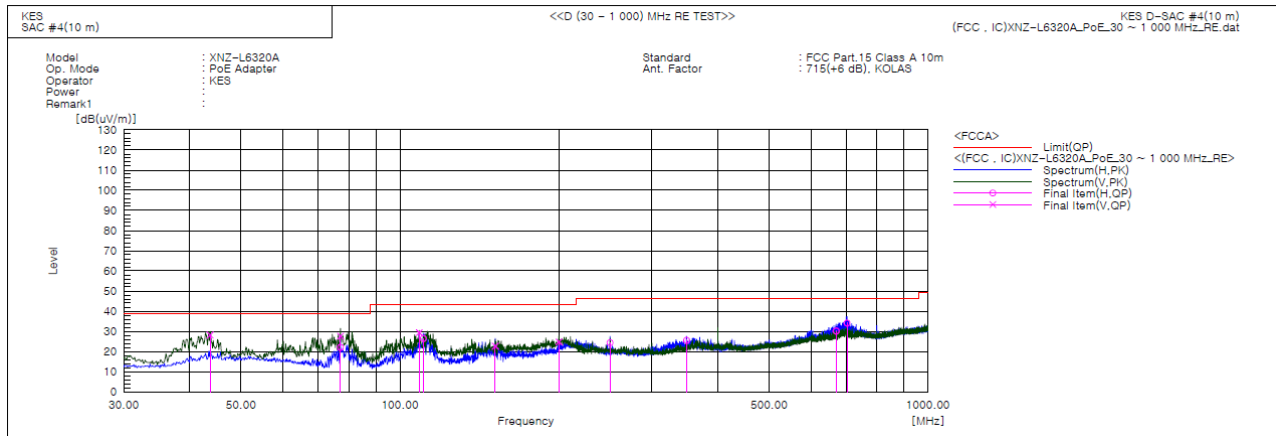

Final Result

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		QP		QP	QP	QP			
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[deg]	
1	43.709	V	49.9	-21.8	28.1	39.0	10.9	112.0	249.0	
2	58.615	V	17.2	-21.8	-4.6	39.0	43.6	100.0	279.0	
3	77.153	V	55.2	-27.5	27.7	39.0	11.3	109.0	101.0	
4	77.176	H	49.6	-27.5	22.1	39.0	16.9	400.0	136.0	
5	108.813	V	51.8	-22.4	29.4	43.5	14.1	100.0	234.0	
6	110.753	H	48.9	-22.4	26.5	43.5	17.0	375.0	177.0	
7	151.493	V	47.8	-25.1	22.7	43.5	20.8	139.0	238.0	
8	199.993	V	45.6	-20.8	24.8	43.5	18.7	113.0	185.0	
9	249.948	H	43.6	-19.2	24.4	46.5	22.1	400.0	121.0	
10	348.888	H	41.0	-15.4	25.6	46.5	20.9	311.0	161.0	
11	669.958	H	38.0	-7.8	30.2	46.5	16.3	245.0	132.0	
12	702.453	H	41.5	-7.4	34.1	46.5	12.4	400.0	349.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T1128
Page (21) of (38)

- IC Regulation ICES-003 Issue 7

■ DC Adapter Mode

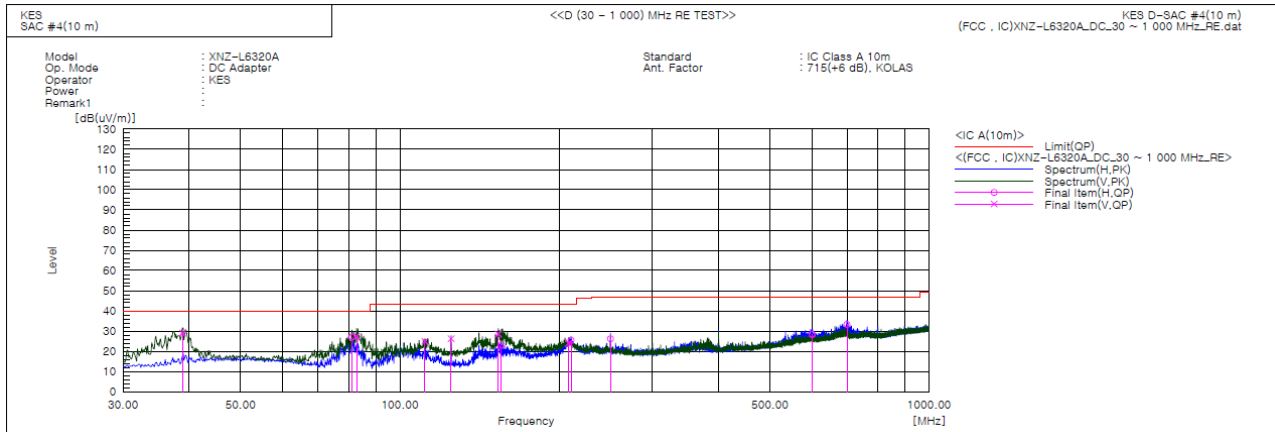


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.866	V	52.4	-23.3	29.1	40.0	10.9	122.0	288.0	
2	81.168	H	54.6	-27.6	27.0	40.0	13.0	400.0	338.0	
3	82.861	V	54.7	-27.2	27.5	40.0	12.5	105.0	94.0	
4	111.463	V	47.4	-22.4	25.0	43.5	18.5	100.0	113.0	
5	124.956	V	51.2	-24.9	26.3	43.5	17.2	136.0	117.0	
6	153.311	V	53.7	-25.0	28.7	43.5	14.8	138.0	155.0	
7	155.615	H	47.9	-24.8	23.1	43.5	20.4	368.0	133.0	
8	208.359	V	44.6	-20.6	24.0	43.5	19.5	111.0	192.0	
9	210.541	H	46.1	-20.6	25.5	43.5	18.0	400.0	133.0	
10	249.948	H	45.4	-19.2	26.2	47.0	20.8	388.0	129.0	
11	600.966	H	36.9	-8.5	28.4	47.0	18.6	257.0	132.0	
12	698.936	H	40.7	-7.4	33.3	47.0	13.7	400.0	281.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



PoE Adapter Mode

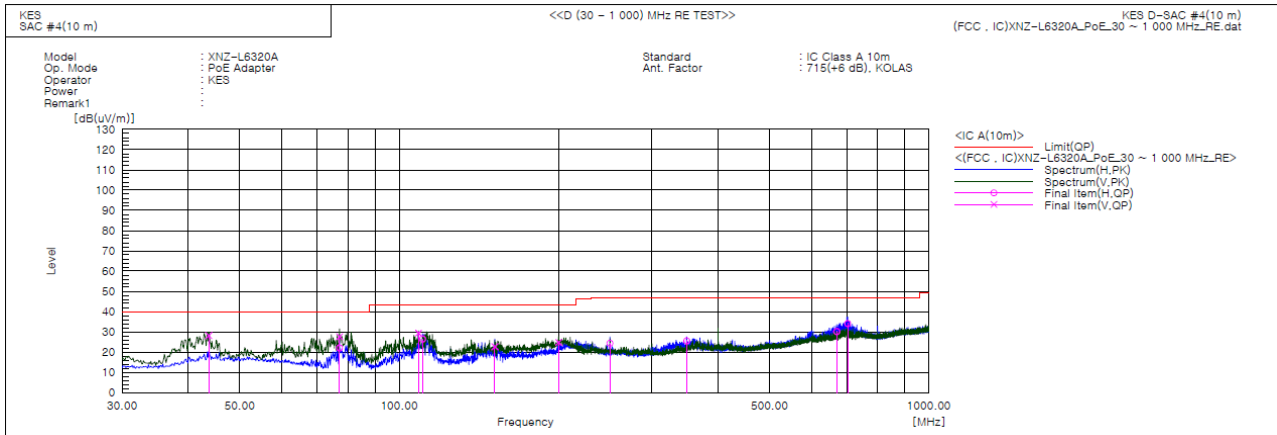

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	43.709	V	49.9	-21.8	28.1	40.0	11.9	112.0	249.0	
2	58.615	V	17.2	-21.8	-4.6	40.0	44.6	100.0	279.0	
3	77.153	V	55.2	-27.5	27.7	40.0	12.3	109.0	101.0	
4	77.176	H	49.6	-27.5	22.1	40.0	17.9	400.0	136.0	
5	108.813	V	51.8	-22.4	29.4	43.5	14.1	100.0	234.0	
6	110.753	H	48.9	-22.4	26.5	43.5	17.0	375.0	177.0	
7	151.493	V	47.8	-25.1	22.7	43.5	20.8	139.0	238.0	
8	199.993	V	45.6	-20.8	24.8	43.5	18.7	113.0	185.0	
9	249.948	H	43.6	-19.2	24.4	47.0	22.6	400.0	121.0	
10	348.888	H	41.0	-15.4	25.6	47.0	21.4	311.0	161.0	
11	669.958	H	38.0	-7.8	30.2	47.0	16.8	245.0	132.0	
12	702.453	H	41.5	-7.4	34.1	47.0	12.9	400.0	349.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]


Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamplifier Factor), Margin: Margin value



Radiated Electric Field Emissions(Above 1 GHz)

■ DC Adapter Mode

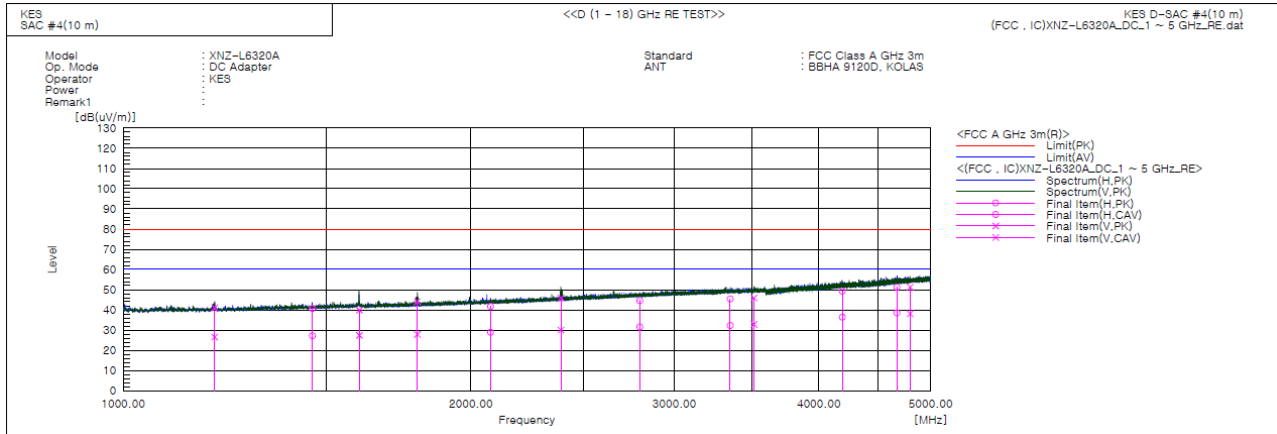

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1199.511	V	43.9	29.4	-2.8	41.1	26.6	80.0	60.0	38.9	33.4	137.0	222.0	
2	1457.914	H	41.9	28.4	-1.2	40.7	27.2	80.0	60.0	39.3	32.8	344.0	203.0	
3	1600.964	V	40.3	27.8	-0.4	39.9	27.4	80.0	60.0	40.1	32.6	111.0	263.0	
4	1797.099	V	43.5	27.3	0.6	44.1	27.9	80.0	60.0	35.9	32.1	100.0	263.0	
5	2079.387	H	39.6	26.8	2.1	41.7	28.9	80.0	60.0	38.3	31.1	200.0	97.0	
6	2392.557	V	42.1	26.3	3.8	45.9	30.1	80.0	60.0	34.1	29.9	168.0	297.0	
7	2800.591	H	38.7	25.6	5.9	44.6	31.5	80.0	60.0	35.4	28.5	400.0	279.0	
8	3353.566	H	37.3	24.2	8.1	45.4	32.3	80.0	60.0	34.6	27.7	281.0	130.0	
9	3515.791	V	37.5	24.3	8.5	46.0	32.8	80.0	60.0	34.0	27.2	150.0	92.0	
10	4193.096	H	37.0	24.1	12.3	49.3	36.4	80.0	60.0	30.7	23.6	355.0	312.0	
11	4675.243	H	36.9	24.1	14.4	51.3	38.5	80.0	60.0	28.7	21.5	330.0	58.0	
12	4798.362	V	36.3	23.1	15.0	51.3	38.1	80.0	60.0	28.7	21.9	100.0	349.0	



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T1128

Page (24) of (38)

PoE Adapter Mode

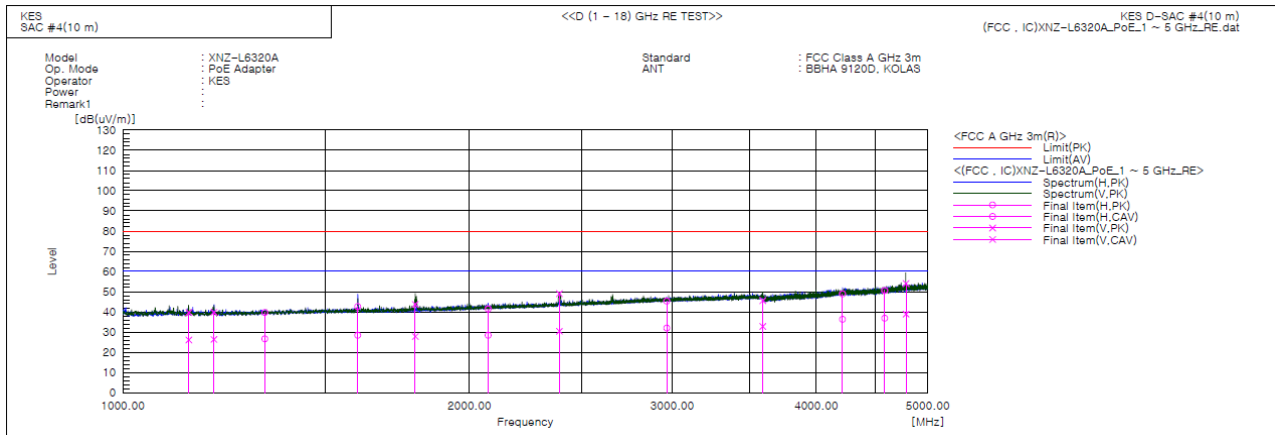

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1140.910	V	42.9	29.3	-3.2	39.7	26.1	80.0	60.0	40.3	33.9	166.0	227.0	
2	1199.714	V	42.6	29.2	-2.8	39.8	26.4	80.0	60.0	40.2	33.6	103.0	254.0	
3	1328.336	H	41.7	28.7	-2.0	39.7	26.7	80.0	60.0	40.3	33.3	400.0	201.0	
4	1599.120	H	43.1	28.8	-0.4	42.7	28.4	80.0	60.0	37.3	31.6	377.0	171.0	
5	1794.552	V	43.2	27.3	0.6	43.8	27.9	80.0	60.0	36.2	32.1	111.0	261.0	
6	2075.844	H	39.5	26.4	2.0	41.5	28.4	80.0	60.0	38.5	31.6	358.0	82.0	
7	2393.634	V	45.3	26.6	3.8	49.1	30.4	80.0	60.0	30.9	29.6	100.0	239.0	
8	2966.119	H	38.6	25.3	6.7	45.3	32.0	80.0	60.0	34.7	28.0	400.0	205.0	
9	3594.806	V	36.9	24.1	8.7	45.6	32.8	80.0	60.0	34.4	27.2	135.0	57.0	
10	4216.208	H	36.5	23.9	12.4	48.9	36.3	80.0	60.0	31.1	23.7	400.0	41.0	
11	4587.635	H	36.7	23.0	13.9	50.6	36.9	80.0	60.0	29.4	23.1	389.0	138.0	
12	4785.867	V	39.2	24.0	14.9	54.1	38.9	80.0	60.0	25.9	21.1	100.0	261.0	

◆ Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV)[dB(uV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ DC Adapter Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


■ PoE Adapter Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Radiated Electric Field Emissions(Below 1 GHz)

■ DC Adapter Mode

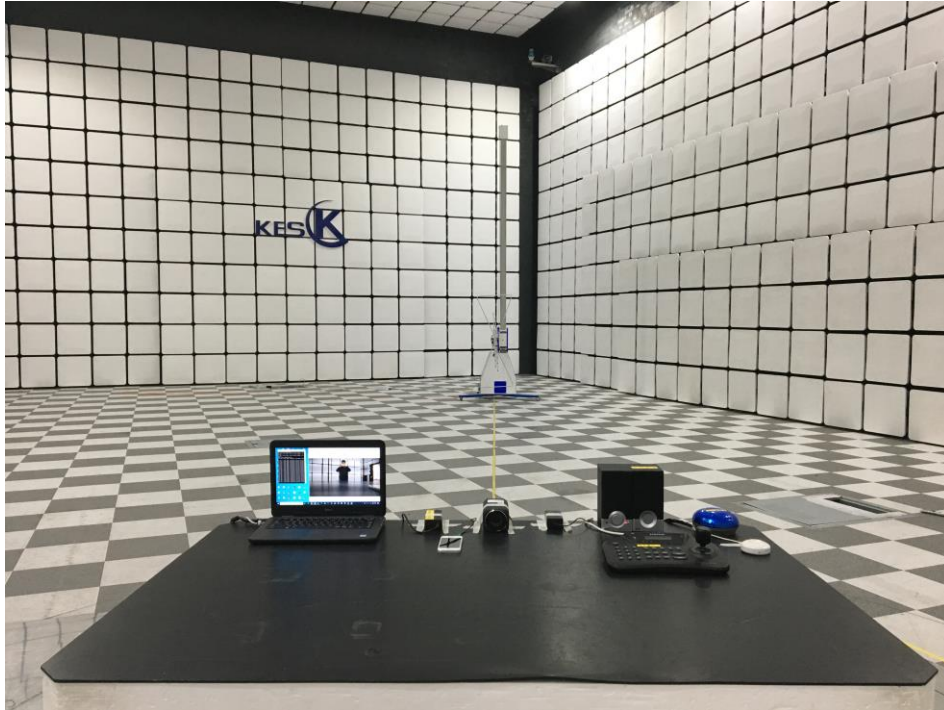

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Adapter Mode

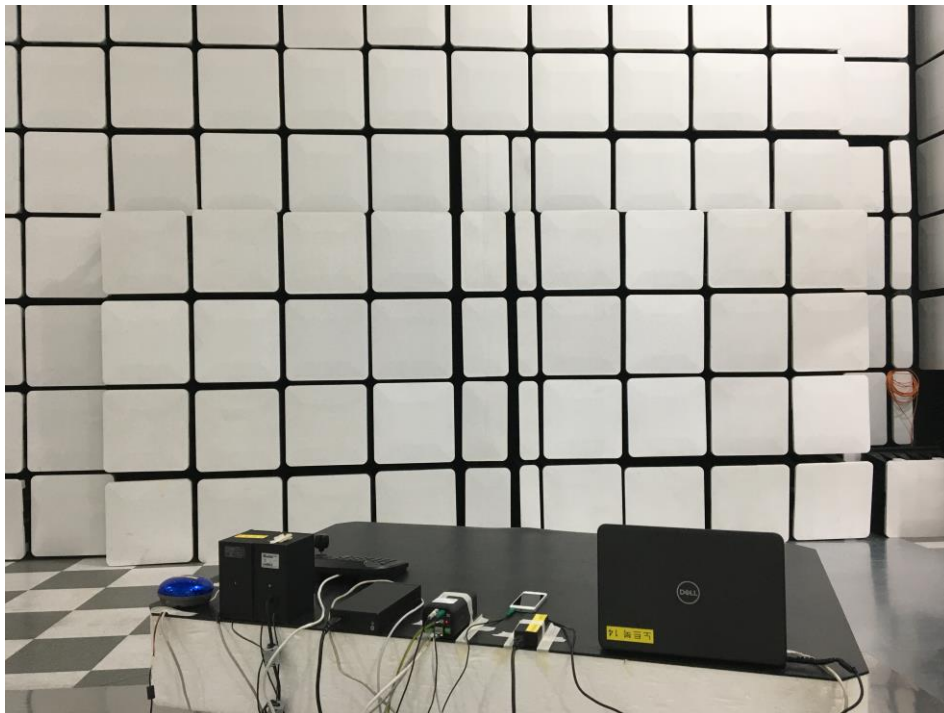

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Radiated Electric Field Emissions(Above 1 GHz)

■ DC Adapter Mode

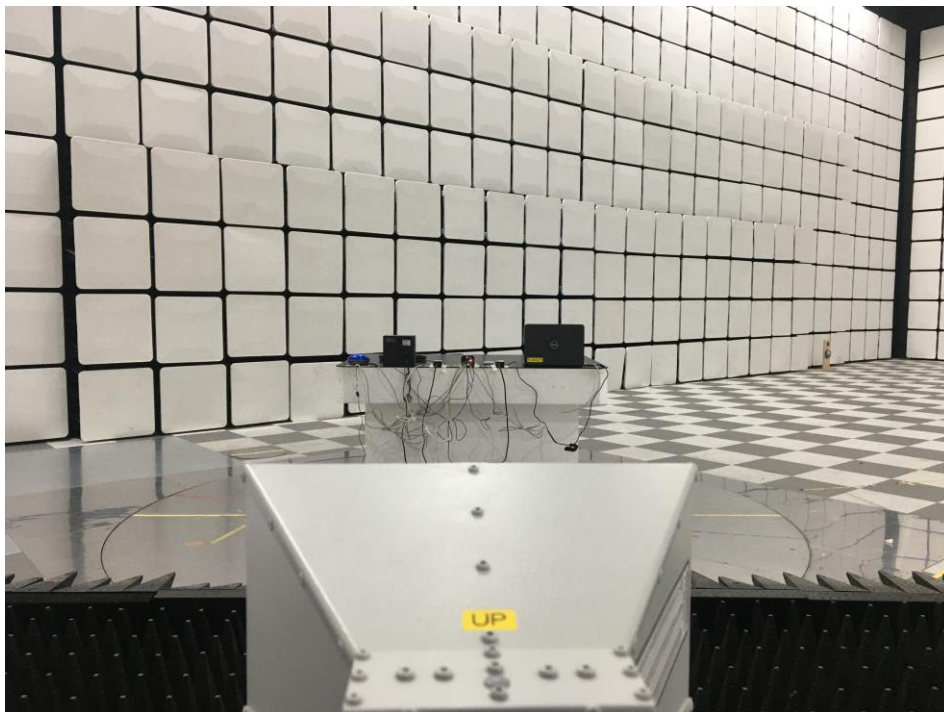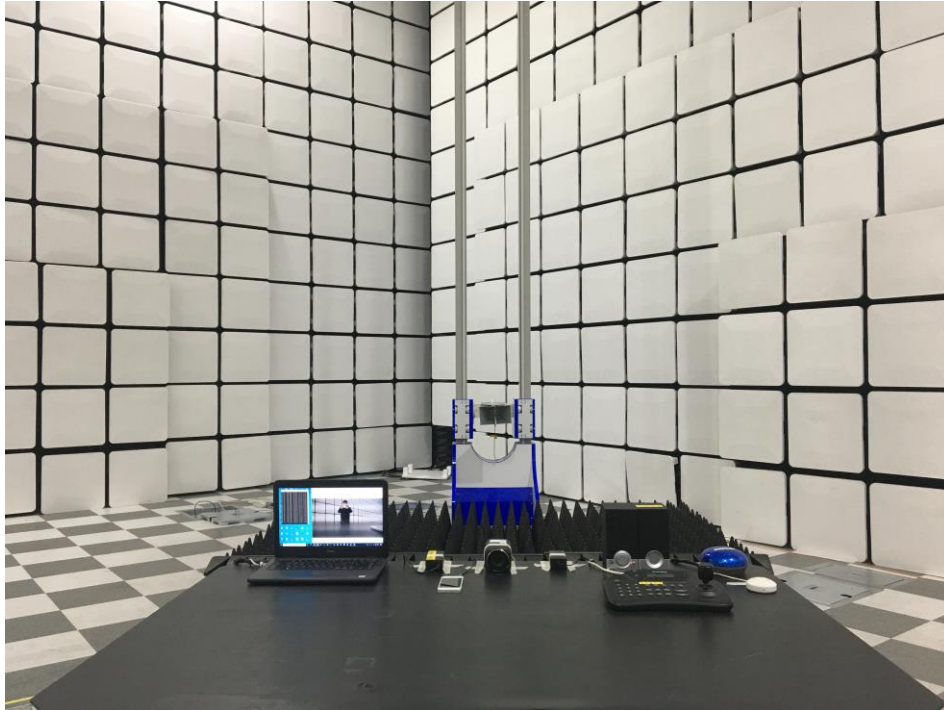

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Adapter Mode

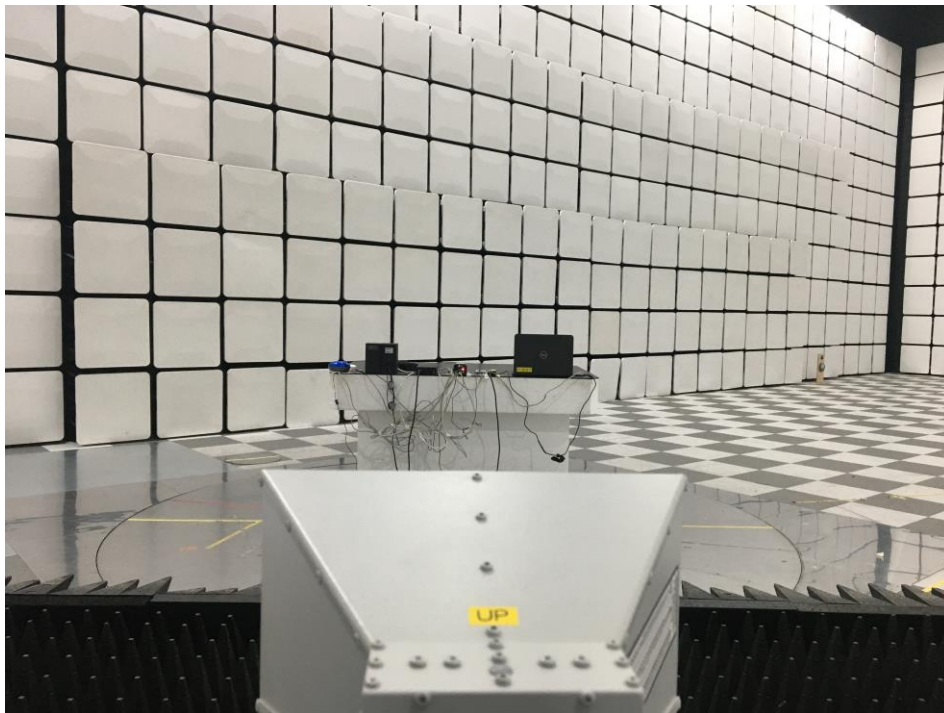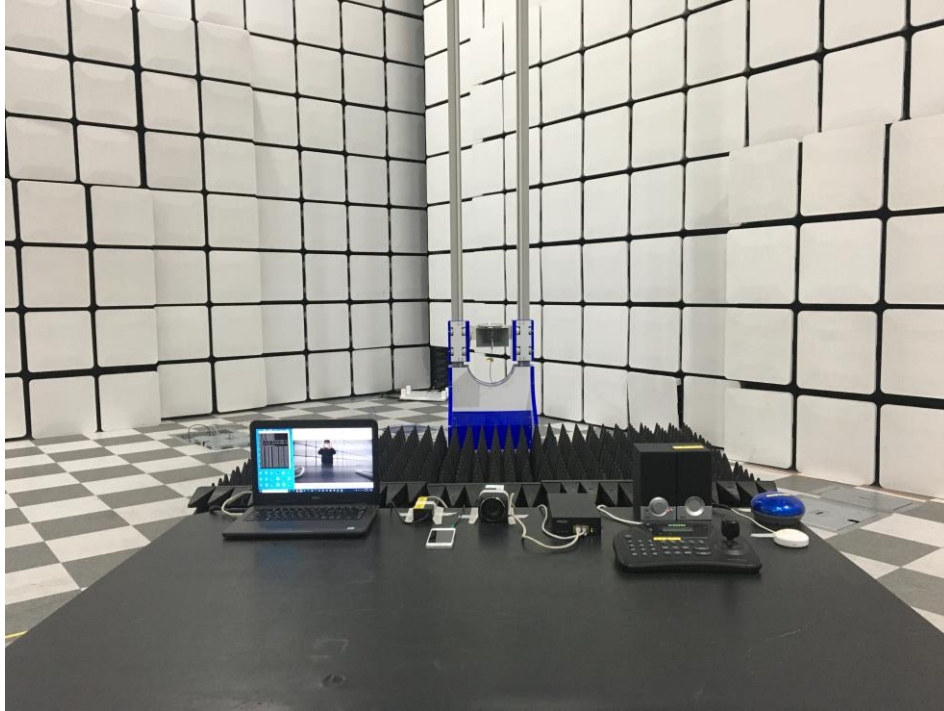

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 1

(Top)

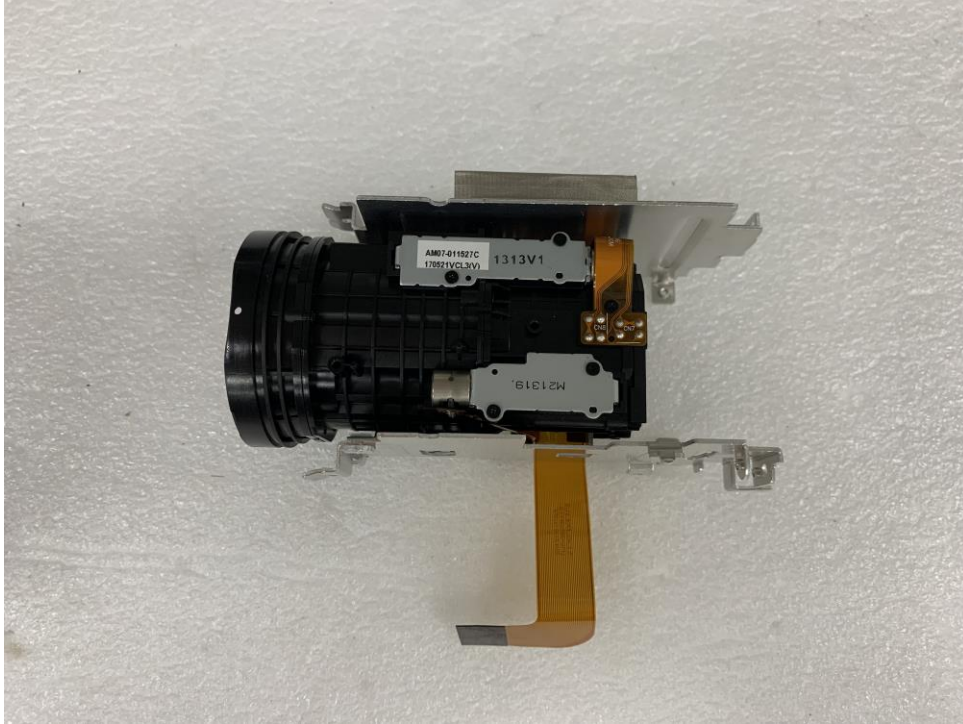


(Bottom)

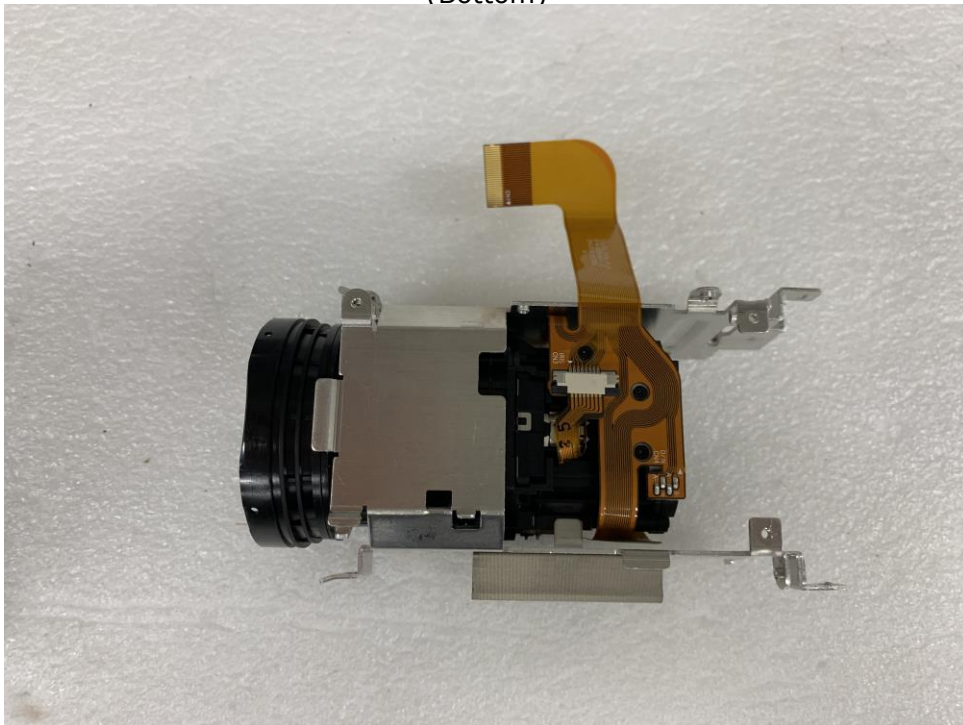

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 2

(Top)

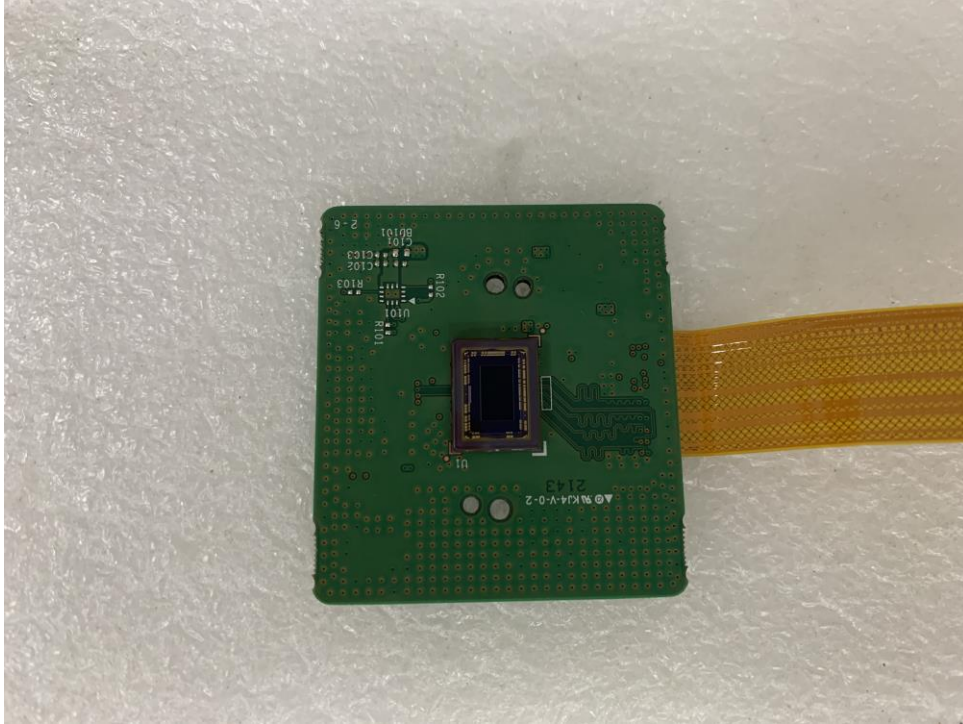

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 3

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 4

(Top)

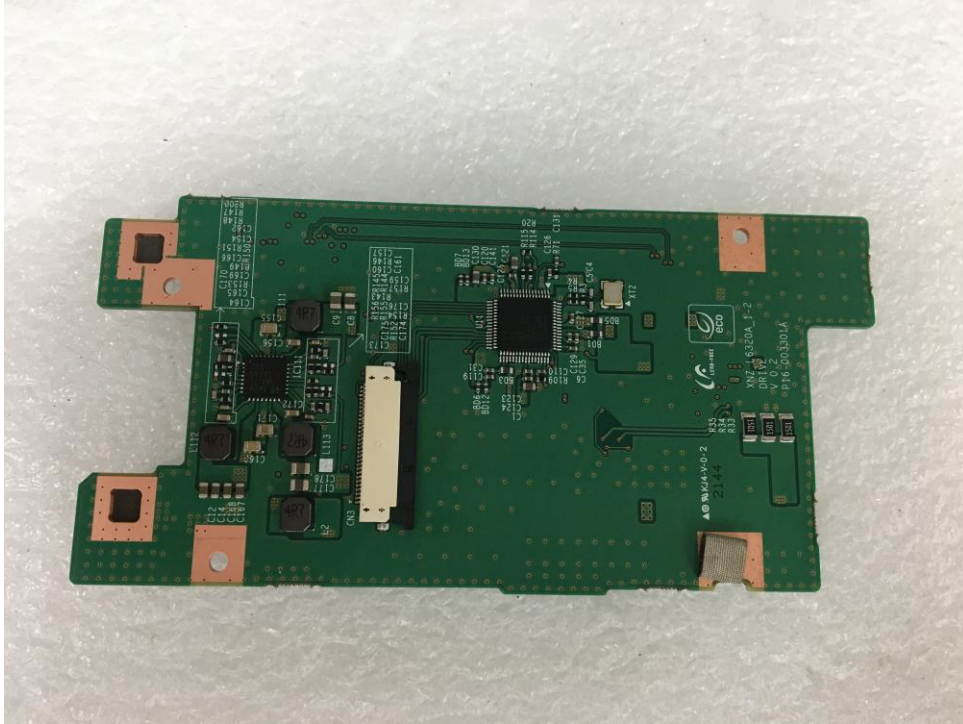


(Bottom)

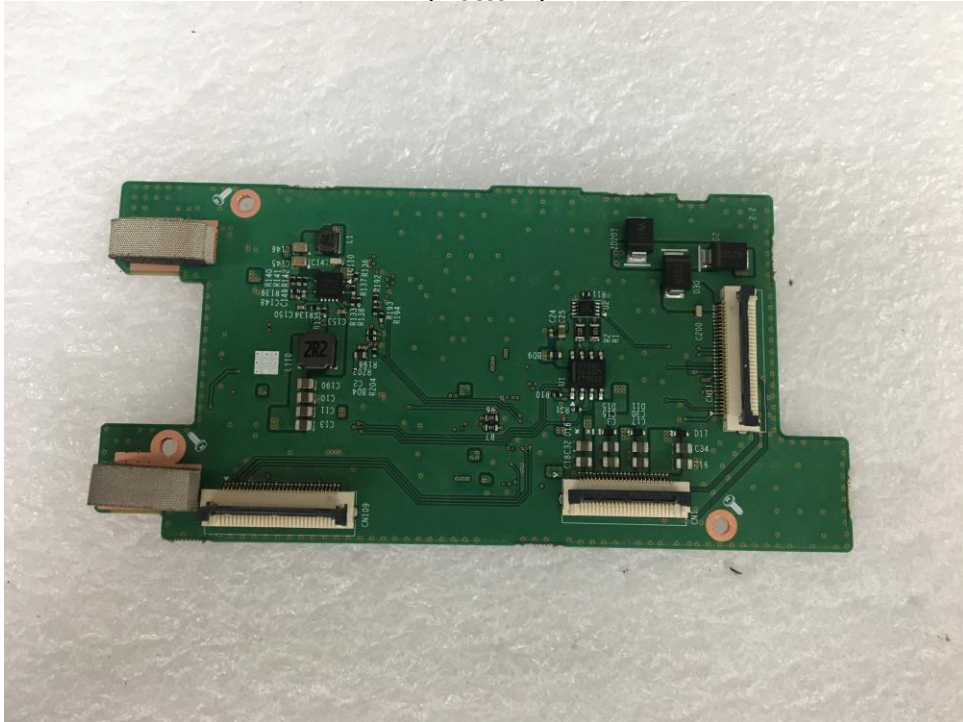


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board 5

(Top)

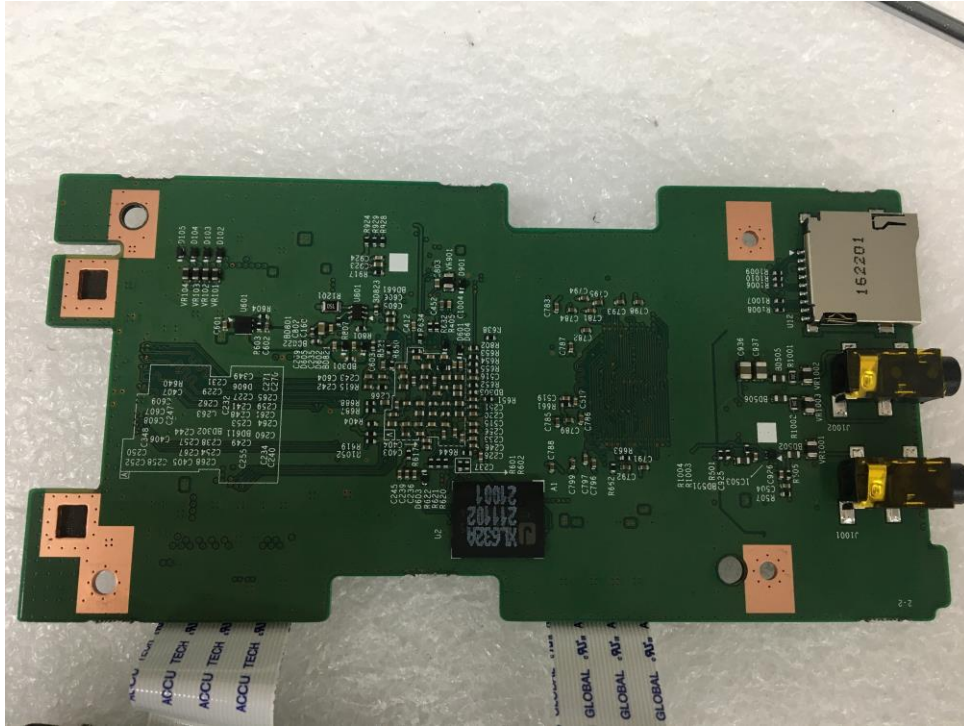

(Bottom)

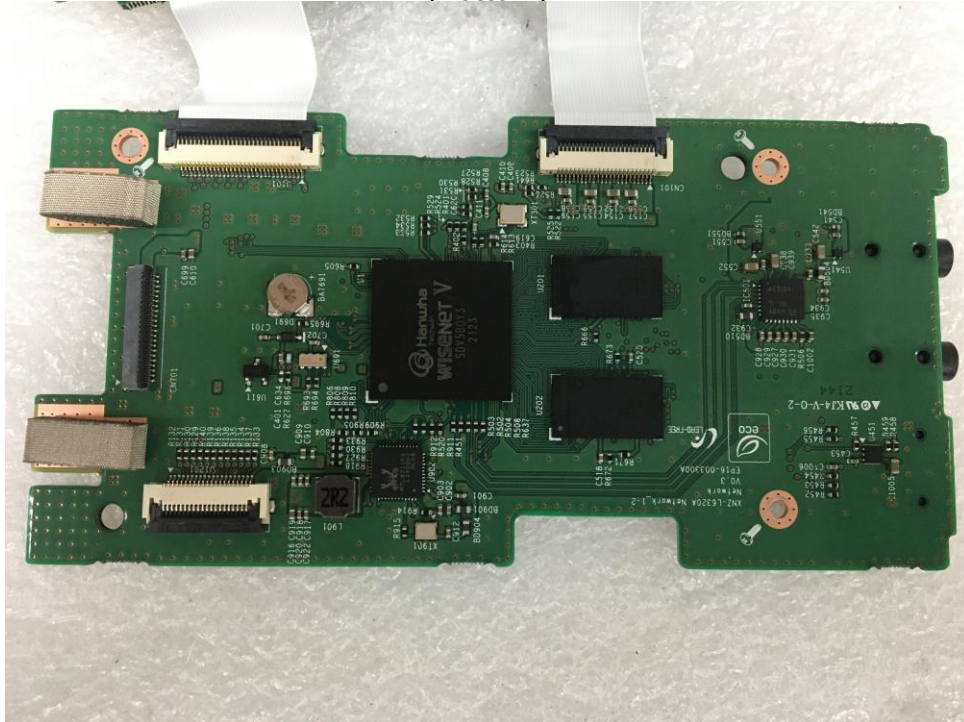

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

Label Photographs



CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.