

DECLARATION OF CONFORMITY

We; Hanwha Techwin Co., Ltd.

DECLARE UNDER OUR SOLE RESPONSIBILITY THAT THE PRODUCT;

Report No: KES-E1-16T0272

Type of equipment: NETWORK CAMERA

Model Name: XRN-1610SP

Variant Model: -

Applicant: Hanwha Techwin Co., Ltd.

Address: 1204,Changwon-daero, Seongsan-gu, Chang-won-si, Gyeongsangnam-do,Korea

Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co.,Ltd.

Address: No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin, 300385, People's Republic of China

Test standards : AS/NZS CISPR22:2009+A1:2010

Classification: C-Tick

The above equipment was tested by EMC compliance Testing Laboratory for with the requirements of C-tick Rules and Regulations. The results of testing in this report apply to the product / system which was tested only.

Jun. 21. 2016

(Date of issue)

(Name and signature of authorized person)



EMC TEST REPORT For C-TICK

Test Report No. : KES-E1-16T0272
Date of Issue : Jun. 21, 2016
Product name : NETWORK VIDEO RECORDER
Model/Type No. : XRN-1610SP
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co.,Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
Date of Receipt : Jun. 02, 2016
Test date : Jun. 13, 2016 - Jun. 14, 2016
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Yung Suk, Song
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0272
Page (2) of (35)

REPORT REVISION HISTORY

Date	Revision	Page No
Jun. 21, 2016	KES-E1-16T0272	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	7
1.8	Configuration.....	8
1.9	Calibration Details of Equipment Used for Measurement	9
1.10	Test Facility	9
1.11	Laboratory Accreditations and Listings	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Conducted Emissions at Telecommunication Ports.....	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A – TEST DATA.....		16
Conducted Emissions at Mains Power Ports.....		16
Conducted Emissions at Telecommunication Ports		18
Radiated Electric Field Emissions(Below 1 GHz)		20
Radiated Electric Field Emissions(Above 1 GHz)		21
Test Setup Photos and Configuration		25
Conducted Voltage Emissions		25
Conducted Telecommunication Emissions		26
Radiated Electric Field Emissions(Below 1 GHz)		27
Radiated Electric Field Emissions(Above 1 GHz)		28
EUT External Photographs		29
EUT Internal Photographs		30



1.0 General Product Description

Main Specifications of EUT are:

Model		XRN-1611S	
Display			
Network Camera	Inputs	Max. 16CH	
	Resolution	CIF ~ 12MP	
	Fish-Eye Devarping	N/A (processed on Web / CMS)	
	Protocols	Samsung, ONVIF	
Live	Local Display	1x HDMI / 1x VGA Dual Monitor	
	Multi-Channel Display	[Local Monitor] 1 / 4 / 8 / 9 / 13 / 16 / Auto Sequence [Web] 1 / 4 / 9 / 16 / Auto Sequence	
	Performance	[Local Monitor] 12MP (30fps) 8MP (120fps) 5MP (180fps), 3MP (240fps), 2MP (480fps), 720p (480fps), D1 (480fps) [Web] 5MP (30fps), 3MP (60fps), 2MP (120fps), 720p (240fps), D1 (480fps)	
Performance			
Operating System	Embedded	Linux	
Record	Compression	H.265, H.264, MJPEG	
	Recording Bandwidth	128Mbps	
	Resolution	CIF ~ 12MP	
	Type	Manual, Schedule(Continuous Event), Event (Pre/Post)	
	Event Trigger	- Alarm Input(8) - Video Loss - Camera Event(Sensor, MD, Video Analytics) - VA Event(Tampering, Enter/Exit, Passing/Virtual-Line, Appearing/Disappearing, Face Detection, Audio Detection) - Defocus Camera Event	
	Event Action	e-Mail, PTZ Preset, Alarm Out, Buzzer, Monitor Out	
Search & Play	Playback Bandwidth	32Mbps (16ch simultaneously)	
	Performance	Max. 3 Users (Remote 3)	
	Mode	Date & Time(Calendar) Event Log list Text Search(POS, ANPR)	
	Simultaneous playback	Up to 16CH (Local, Network)	
	Resolution	CIF ~ 12MP	
	Fish-Eye Devarping	N/A (processed on Web / CMS)	
	Playback Control	Fast Stop, Forward Backward, Move one step up/down	
Storage	Default Built-in	0TB ~ 8TB (TBD, dependent on region)	
	Internal	4 SATA	
	Hot Swap	N/A	
	External(DAS)	1 e-SATA	
	External(NAS, iSCSI)	iSCSI	
	Max Capacity	Internal (32TB=4x8TB)	
	RAID	N/A	
Backup	File backup	BU/EXE(USB), JPG/AVI/Web, CMS)	
	Function	Max. 16CH Play, Date-Time/Title display	
Sensor	I/O	8/4 (I/O 3EA, NC/NC 1EA)	
Audio	Input	16CH (network)	
	Compression	G.711, G.726, AAC(16/48KHz)	
	Audio Communication	2-Way (pass-through between camera and SSM)	
Network			
Protocol		TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, DHCP(Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF Profile S, SUNAPI(Server, Client)	
DDNS		Pols DDNS	
Transmission Bandwidth		Max. 256Mbps (iSCSI off) (128Mbps, iSCSI on)	
Max Remote Users		Search(3) / Live unicast(10) / Live multicast(20)	
IP Version		IPv4/v6	
Security		User access Log IP Filtering 802.1x Encryption(ID/PW, Recording, Transmission, Backup)	
Language	GUI	(1) English, (2) French, (3) German, (4) Italian, (5) Spanish, (6) Russian, (7) Turkish, (8) Polish, (9) Dutch, (10) Swedish, (11) Czech, (12) Portuguese, (13) Danish, (14) Romanian, (15) Serbian, (16) Croatian, (17) Hungarian, (18) Greek, (19) Norwegian, (20) Finnish, (21) Korean, (22) Chinese, (23) Japanese, (24) Thai	
	Web	(1) English, (2) French, (3) German, (4) Italian, (5) Spanish, (6) Russian, (7) Turkish, (8) Polish, (9) Dutch, (10) Swedish, (11) Czech, (12) Portuguese, (13) Danish, (14) Romanian, (15) Serbian, (16) Croatian, (17) Hungarian, (18) Greek, (19) Norwegian, (20) Finnish, (21) Korean, (22) Chinese, (23) Japanese	
OS		Supported OS : Windows XP(service pack 2 or above), Vista, 7, 8, 10, Mac OS X(10.7 or above)	
Web Browser		Non-plugin Webviewer Supported Browser: Google Chrome 47, MS Edge 20 WMF : 1CH LIVE(800x600), SETUP Plug-in Webviewer Supported Browser: MS Explore 11, Mozilla Firefox 43, Apple Safari 9 * Mac OS X only	
Viewer Software	Type	SSM, Webviewer, Smart Viewer, iPols Mobile	
	CMS Support	Support SDK/CGI(SUNAPI)	
Smart phone	Support Model	I-Phone, Android	
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)	
	Control	Live(16ch) : Multi-Profile Support Playback(1ch, Max 2MP)	
	Max. Remote Users	Search (3), Live Unicast (10), Multicast (20)	
Functions			
Camera Setup	Register	1) PnP mode 2) Manual mode	
	Setup items	1) IP Address, Add Profile Edit, Bitrate, Compression, GOP, Quality 2) Camera Event Setup - MD - VA : Tampering, Enter/Exit, Passing/Virtual-Line, Appearing/Disappearing, Face Detection, Audio Detection 3) Video Setup/Simple Focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS 4) Fisheye Devarping, Halfway View Setup, Camera Webpage	
Camera Control	PoE	1) Monitor PoE Power consumption 2) On/Off Control for each PoE camera 3) Remote Reset for each PoE camera	
	Time Sync	NTP Time Protocol for PoE Camera (Time sync based on NTP time)	
Easy Configuration		Setup Wizard (Language, Date/Time, Network, Auto Camera Configuration) * selectable between PnP and Manual mode	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 110 Vac ☒ 230 Vac ☐ PoE ☐ 12 Vdc

Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK VIDEO RECORDER	XRN-1610SP	-	Tianjin Samsung Techwin Opto-Electronic Co.,Ltd.	E.U.T
Mouse	-	-	-	-
HDD	WD10PURX	WCC4J4EX436	WD	-
POWER	DPS-280AB-6 A	HIED1609002094	Delta Electronics Power(Dongguan) Co., Ltd.	-

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-16T0272
Page (6) of (35)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Monitor 1	LS23C340	ZXPCHTMF B01032M	SAMSUNG	-
Monitor adapter 1	A2514_DPN	CN07BN4400591BSK2 8F6NF841	11ssan Elecom(shen yang) Co., Ltd	-
Monitor 2	SMT-2232	C95V67VF900025B	Weihai Daewoo Electronics Co., Ltd.	-
Notebook	LG15N54	410NZET022292	LG	-
Adapter	ADP-90WH B	84ZW19F1557	DELTA ELECTRONICS(JIANGS U) LTD.	-
Camera	SND-L6013RN	-	SAMSUNG TECHWIN CO.,LTD.	-
Speaker	-	-	MASS	-
Alarm 1	SIP-1201DD DO	C53R67JZ301878 L	SAMSUNG TECHWIN CO.,LTD.	-
Alarm 2	SIE-0001 DO	C54167JB601268 F	SAMSUNG TECHWIN CO.,LTD.	-
External HDD	MDT-US2528	-	-	-
3.0 USB Memory	-	-	Transcend	16GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK VIDEO RECORDER (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	D-SUB	Monitor 1	D-SUB	1.5	S
	HDMI	Monitor 2	HDMI	1.7	S
	Audio Out	Speaker	Audio OUT	1.2	U
	USB	Mouse	USB	1.2	U
	RJ-45	Camera	RJ-45	4.0	S
	Alarm IN	Alarm 1	Alarm IN	3.0	U
	Alarm OUT	Alarm 2	Alarm OUT	3.0	U
	e-SATA	External HDD	e-SATA	0.5	U
	3.0 USB	3.0 USB Memory	3.0 USB	-	-

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

Test mode	Normal operating
OP	Tested by checking the movement whether it works well or not, with executing Ping test in a Notebook and outputting an image to a monitor after arrangement E.U.T with peripheral device as follows.

1.8 Configuration

■ AC Main
□ DC Main

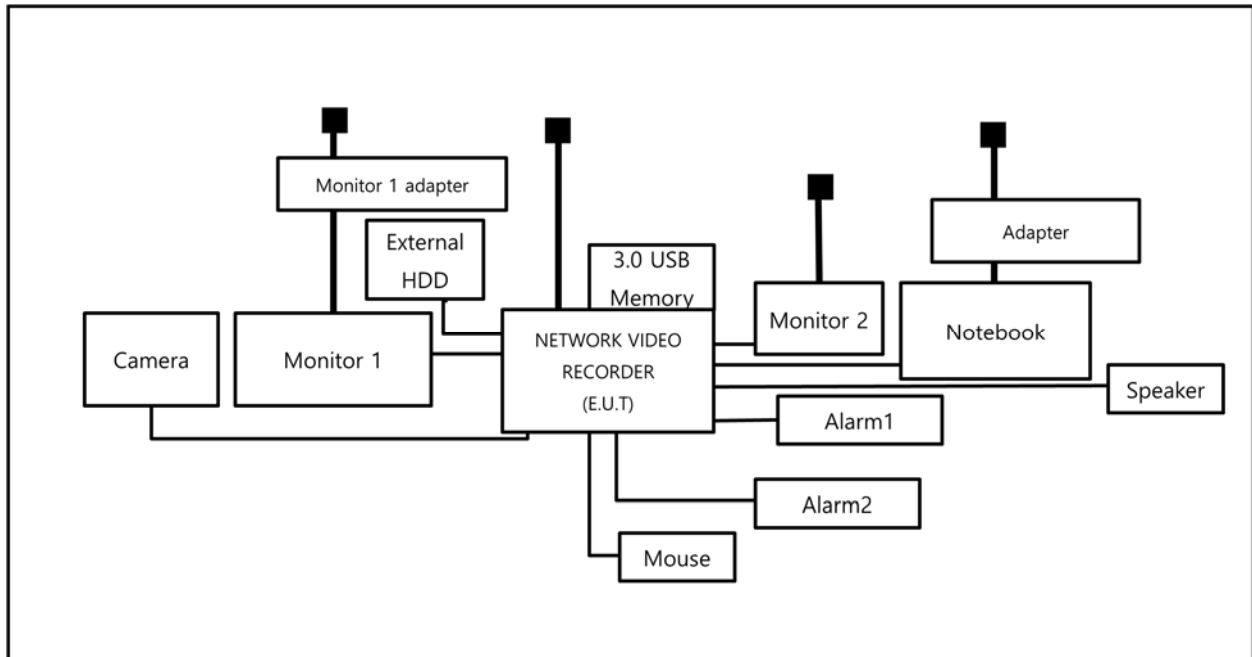

1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-29 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013

☐ VCCI V-3/2013.04

☐ Class A

☐ Class B

☒ AS/NZS CISPR22:2009 +A1:2010

☒ Class A

☐ Class B

☐ 47 CFR Part 15, Subpart B / ANSI C63.4-2009

☐ Class A

☐ Class B

☐ IC Regulation ICES-003 : 2012
/ ANSI C63.4-2014

☐ Class A

☐ Class B

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0272
Page (11) of (35)

☐ **R&TTE- Directive 1999/5/EC**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



2.1 Conducted Emissions at Mains Power Ports

Test Date

Jun. 13, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 04, 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	Electro wave Shieldroom	-	AONE SHIELD	-	-

Test Conditions

Temperature: 27,8 °C

Relative Humidity: 50,1 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Jun. 13, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02. 04. 2017
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04. 01. 2017
☒	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04. 01. 2017
☐	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08. 14. 2016
☒	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: 27,8 °C

Relative Humidity: 50,1 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jun. 13, 2016

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R&S	101781	05, 03, 2017
☒	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	9163-715	04, 14, 2018
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	1070/1080	EMCO	-	-
☒	Turn Table	-	DAEIL EMC	-	-

Test Conditions

Temperature: 28,1 °C

Relative Humidity: 68,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jun. 03, 2016

Test Location

Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESU26	R&S	100551	04, 18, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10. 23. 2016
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05. 07. 2017
☒	Semi Anchoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-

Test Conditions

Temperature: 29,2 °C
Relative Humidity: 51,5 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Conducted Emission
Model No.: XRN-1610SP
Mode
Operator Name: KES

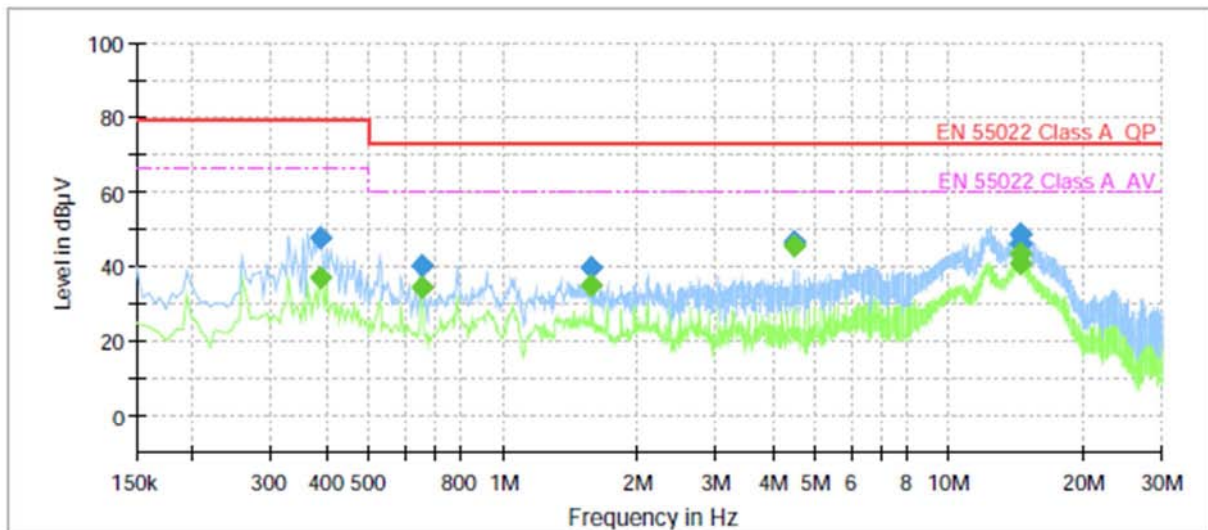

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.390000	---	37.19	66.00	28.81	1000.0	9.000	L1	9.7
0.390000	47.39	---	79.00	31.61	1000.0	9.000	L1	9.7
0.655000	---	34.37	60.00	25.63	1000.0	9.000	L1	9.7
0.655000	40.41	---	73.00	32.59	1000.0	9.000	L1	9.7
1.575000	---	34.69	60.00	25.31	1000.0	9.000	L1	9.7
1.575000	39.59	---	73.00	33.41	1000.0	9.000	L1	9.7
4.460000	---	45.78	60.00	14.22	1000.0	9.000	L1	9.8
4.460000	46.69	---	73.00	26.31	1000.0	9.000	L1	9.8
14.435000	---	43.42	60.00	16.58	1000.0	9.000	L1	10.0
14.435000	48.66	---	73.00	24.34	1000.0	9.000	L1	10.0
14.445000	---	40.76	60.00	19.24	1000.0	9.000	L1	10.0
14.445000	46.07	---	73.00	26.93	1000.0	9.000	L1	10.0



KES Co., Ltd.


C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0272
Page (17) of (35)

[NEUTRAL]

Common Information

Test Description: Conducted Emission
Model No.: XRN-1610SP
Mode
Operator Name: KES

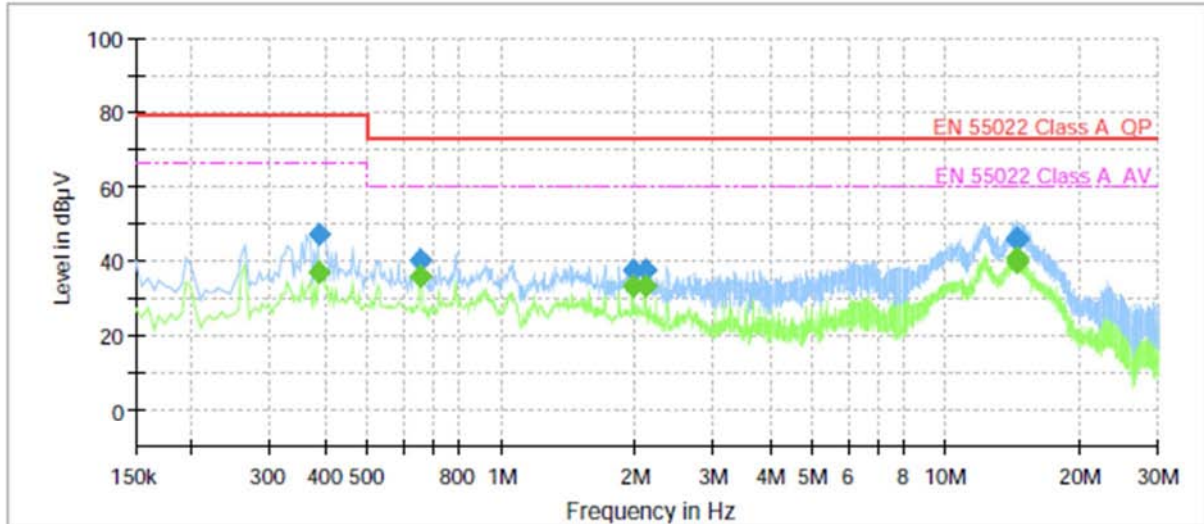

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.390000	---	37.32	66.00	28.68	1000.0	9.000	N	9.6
0.390000	47.16	---	79.00	31.84	1000.0	9.000	N	9.6
0.655000	---	36.22	60.00	23.78	1000.0	9.000	N	9.7
0.655000	40.48	---	73.00	32.52	1000.0	9.000	N	9.7
1.970000	---	33.59	60.00	26.41	1000.0	9.000	N	9.7
1.970000	37.47	---	73.00	35.53	1000.0	9.000	N	9.7
2.100000	---	33.57	60.00	26.43	1000.0	9.000	N	9.7
2.100000	37.54	---	73.00	35.46	1000.0	9.000	N	9.7
14.380000	---	40.64	60.00	19.36	1000.0	9.000	N	10.1
14.380000	46.00	---	73.00	27.00	1000.0	9.000	N	10.1
14.435000	---	39.90	60.00	20.10	1000.0	9.000	N	10.1
14.435000	45.78	---	73.00	27.22	1000.0	9.000	N	10.1


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Emissions at Telecommunication Ports

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XRN-1610SP
Mode	10 Mbps
Operator Name:	KES

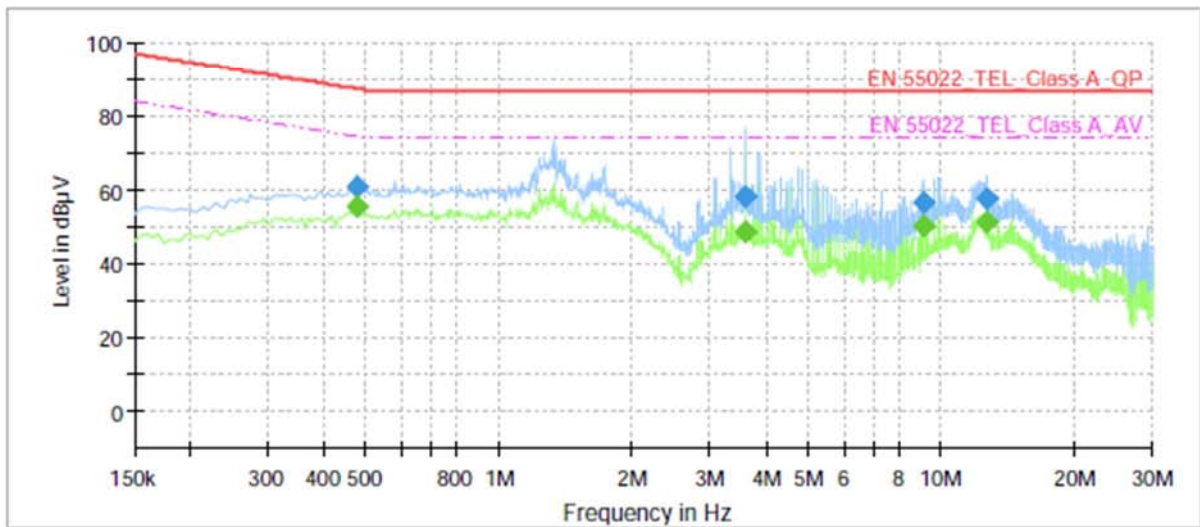


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.475000	---	55.72	74.43	18.71	1000.0	9.000	Single Line	10.0
0.475000	60.66	---	87.43	26.77	1000.0	9.000	Single Line	10.0
3.605000	---	48.46	74.00	25.54	1000.0	9.000	Single Line	9.8
3.605000	58.47	---	87.00	28.53	1000.0	9.000	Single Line	9.8
9.075000	---	50.21	74.00	23.79	1000.0	9.000	Single Line	10.1
9.075000	56.40	---	87.00	30.60	1000.0	9.000	Single Line	10.1
12.605000	---	51.33	74.00	22.67	1000.0	9.000	Single Line	10.1
12.605000	57.59	---	87.00	29.41	1000.0	9.000	Single Line	10.1

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XRN-1610SP
Mode	100 Mbps
Operator Name:	KES

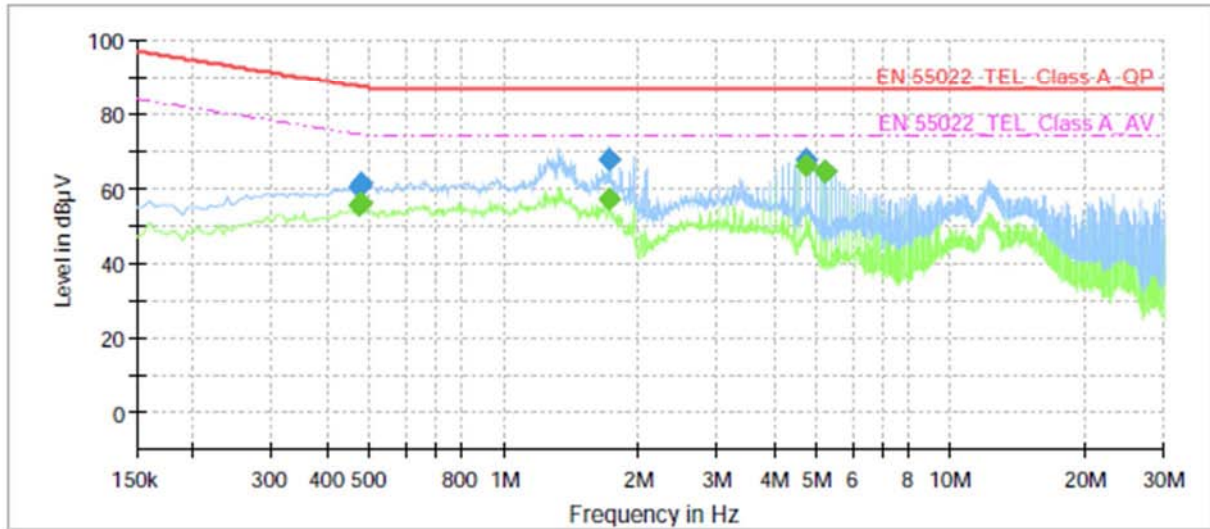

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.470000	---	55.43	74.51	19.08	1000.0	9.000	Single Line	9.5
0.470000	60.34	---	87.51	27.17	1000.0	9.000	Single Line	9.5
0.475000	---	56.22	74.43	18.21	1000.0	9.000	Single Line	9.5
0.475000	61.19	---	87.43	26.24	1000.0	9.000	Single Line	9.5
1.715000	---	56.94	74.00	17.06	1000.0	9.000	Single Line	9.3
1.715000	68.00	---	87.00	19.00	1000.0	9.000	Single Line	9.3
4.725000	---	66.16	74.00	7.84	1000.0	9.000	Single Line	9.4
4.725000	67.76	---	87.00	19.24	1000.0	9.000	Single Line	9.4
5.250000	---	64.34	74.00	9.66	1000.0	9.000	Single Line	9.4
5.250000	64.83	---	87.00	22.17	1000.0	9.000	Single Line	9.4

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0272
Page (20) of (35)


Radiated Electric Field Emissions(Below 1 GHz)

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
149.04	14.27	V	1.00	8.18	2.46	24.91	40.00	15.09
350.31	15.18	H	4.00	14.49	3.89	33.56	47.00	13.44
400.39	13.11	V	1.00	15.58	4.22	32.91	47.00	14.09
425.19	15.50	H	4.00	16.01	4.40	35.91	47.00	11.09
446.18	12.45	V	1.00	16.37	4.56	33.38	47.00	13.62
625.05	10.04	H	4.00	19.38	5.67	35.09	47.00	11.91

* H : Horizontal, V : Vertical


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)

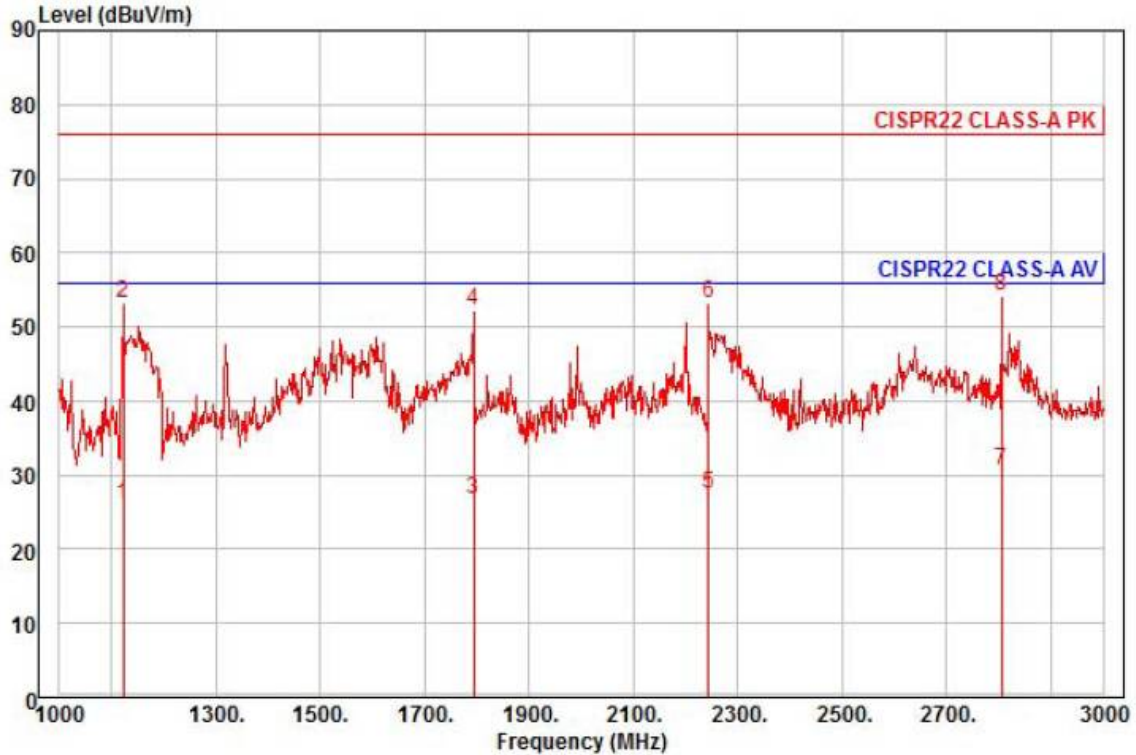

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XRN-1610SP
Mode :
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1122.00	34.80	24.39	6.86	40.06	353	56.00	-30.01	horizontal	Average
2	1122.00	62.00	24.39	6.86	40.06	353	76.00	-22.81	horizontal	Peak
3	1794.00	30.73	27.06	8.78	39.73	71	56.00	-29.16	horizontal	Average
4	1794.00	56.21	27.06	8.78	39.73	71	76.00	-23.68	horizontal	Peak
5	2244.00	29.06	28.48	9.72	39.77	71	56.00	-28.51	horizontal	Average
6	2244.00	54.90	28.48	9.72	39.77	71	76.00	-22.67	horizontal	Peak
7 av	2806.00	30.22	29.85	10.76	40.10	63	56.00	-25.27	horizontal	Average
8 pp	2806.00	53.80	29.85	10.76	40.10	63	76.00	-21.69	horizontal	Peak

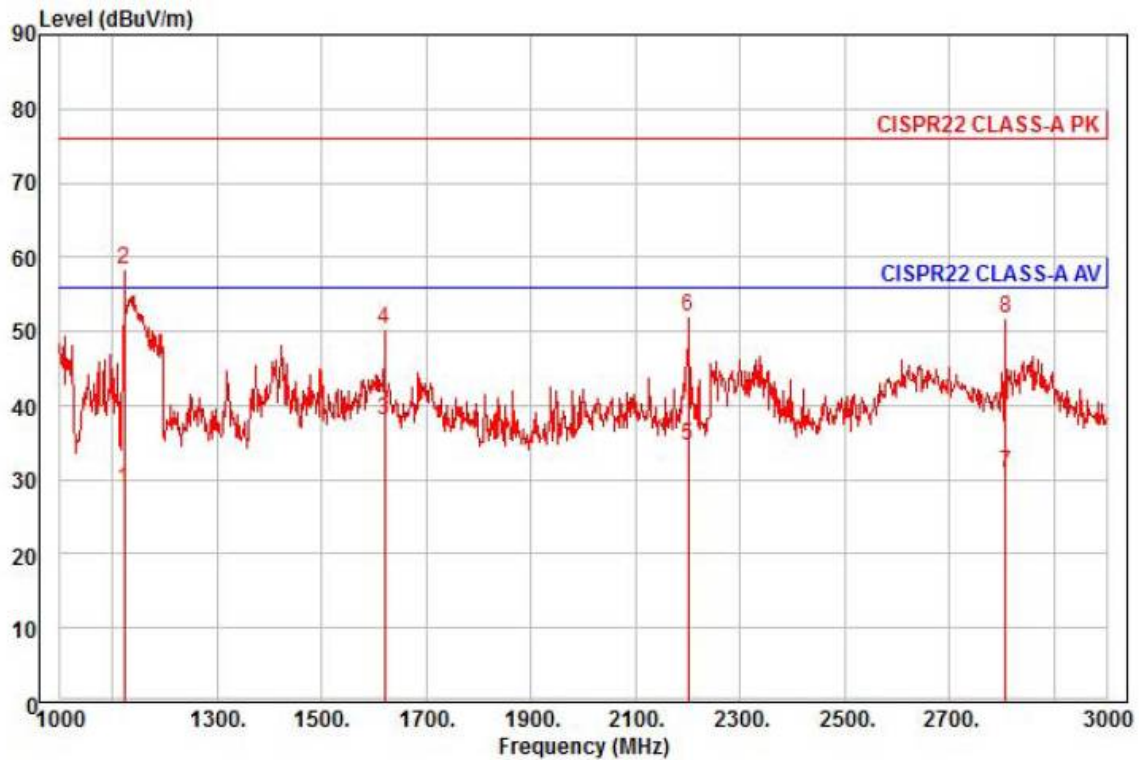

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XRN-1610SP
Mode :
Memo :


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1122.00	37.51	24.39	6.86	40.06	18	56.00	-27.30	vertical	Average
2 pp	1122.00	67.24	24.39	6.86	40.06	18	76.00	-17.57	vertical	Peak
3 av	1620.00	43.23	26.37	8.31	39.82	47	56.00	-17.91	vertical	Average
4	1620.00	55.30	26.37	8.31	39.82	47	76.00	-25.84	vertical	Peak
5	2200.00	36.18	28.37	9.66	39.75	36	56.00	-21.54	vertical	Average
6	2200.00	53.63	28.37	9.66	39.75	36	76.00	-24.09	vertical	Peak
7	2808.00	30.29	29.86	10.76	40.10	27	56.00	-25.19	vertical	Average
8	2808.00	51.13	29.86	10.76	40.10	27	76.00	-24.35	vertical	Peak



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:
KES-E1-16T0272
Page (23) of (35)

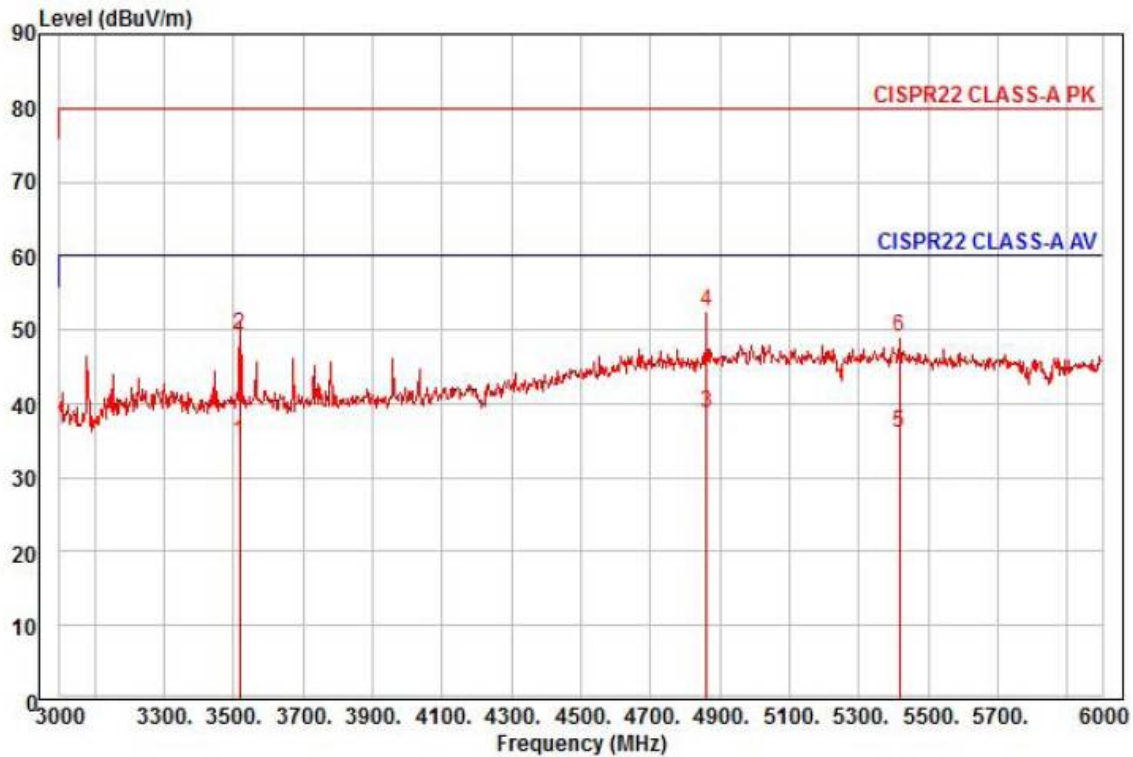

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XRN-1610SP
Mode :
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3519.00	31.38	31.20	12.55	40.31	351	60.00	-25.18	horizontal	Average
2	3519.00	45.96	31.20	12.55	40.31	351	80.00	-30.60	horizontal	Peak
3 pp	4860.00	27.24	36.92	15.08	40.41	214	60.00	-21.17	horizontal	Average
4 pk	4860.00	40.79	36.92	15.08	40.41	214	80.00	-27.62	horizontal	Peak
5	5418.00	23.66	36.88	15.82	40.35	33	60.00	-23.99	horizontal	Average
6	5418.00	36.73	36.88	15.82	40.35	33	80.00	-30.92	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

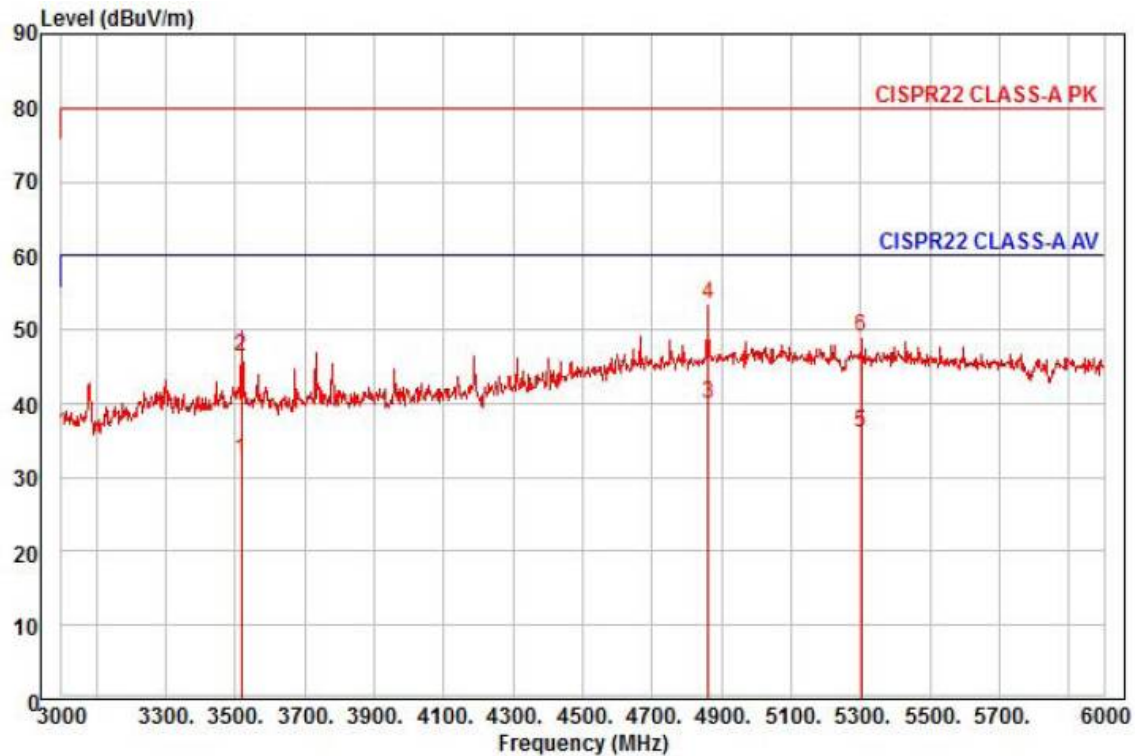


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : XRN-1610SP
Mode :
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3519.00	28.95	31.20	12.55	40.31	195	60.00	-27.61	vertical	Average
2	3519.00	43.00	31.20	12.55	40.31	195	80.00	-33.56	vertical	Peak
3 pp	4860.00	28.38	36.92	15.08	40.41	169	60.00	-20.03	vertical	Average
4 pk	4860.00	41.82	36.92	15.08	40.41	169	80.00	-26.59	vertical	Peak
5	5301.00	23.67	37.11	15.69	40.37	134	60.00	-23.90	vertical	Average
6	5301.00	36.60	37.11	15.69	40.37	134	80.00	-30.97	vertical	Peak

Test Setup Photos and Configuration

Conducted Voltage Emissions

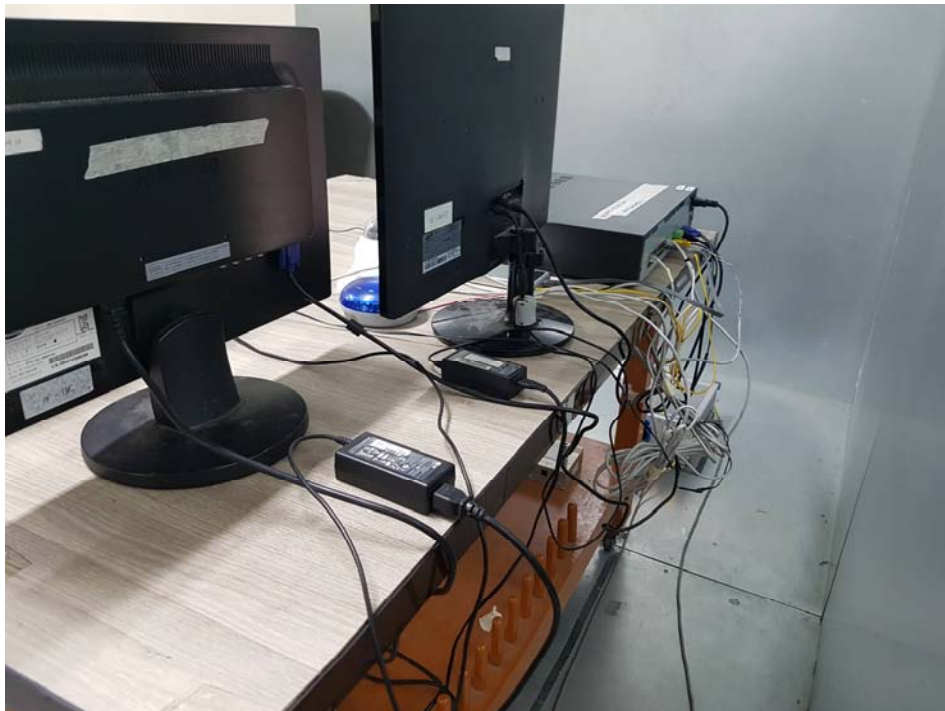

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Telecommunication Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Board 1

(Top)

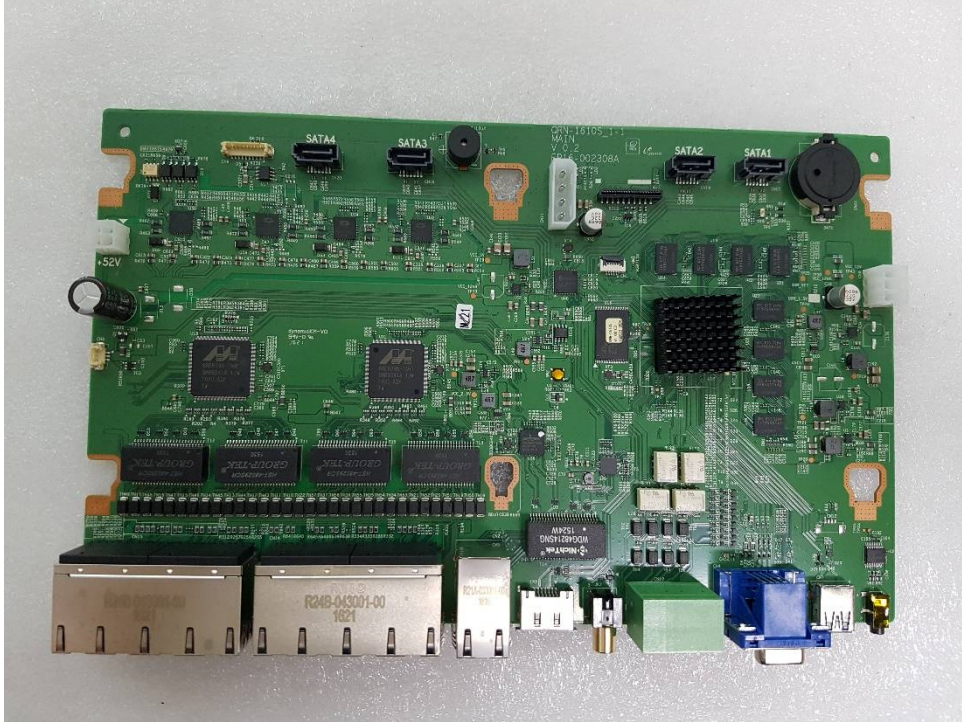

(Bottom)

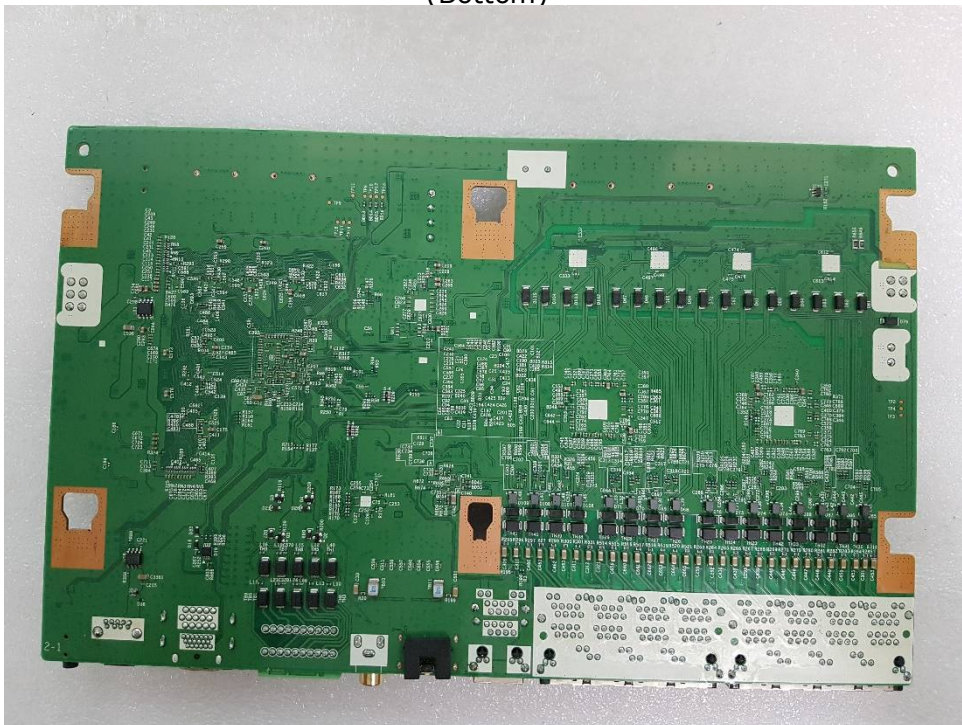

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Board 2

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Board 3


(Top)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Power

(Top)

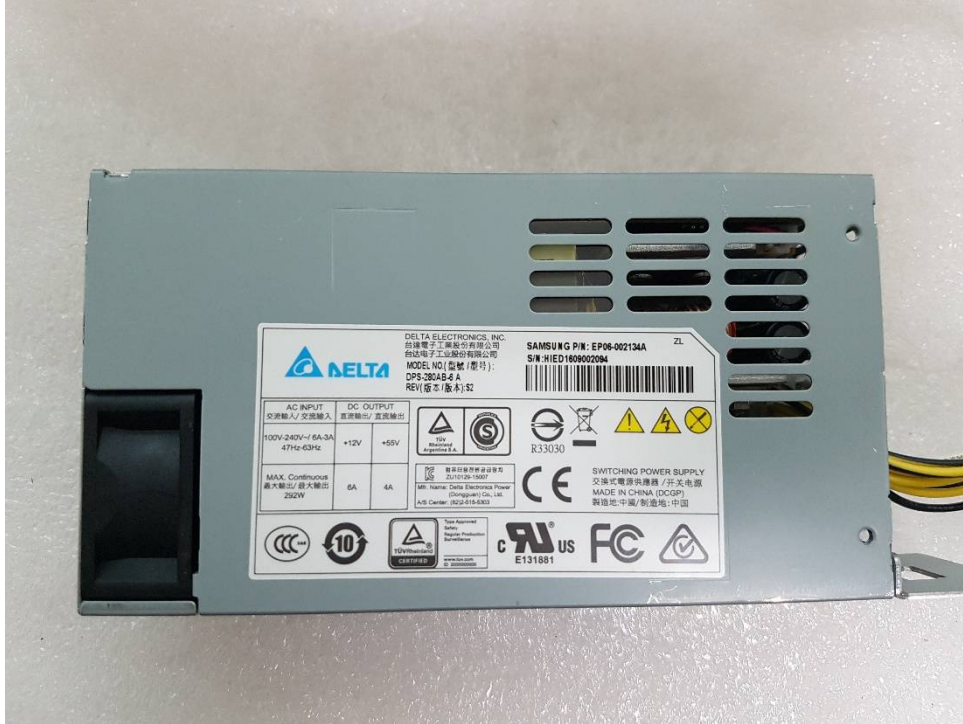

(Bottom)

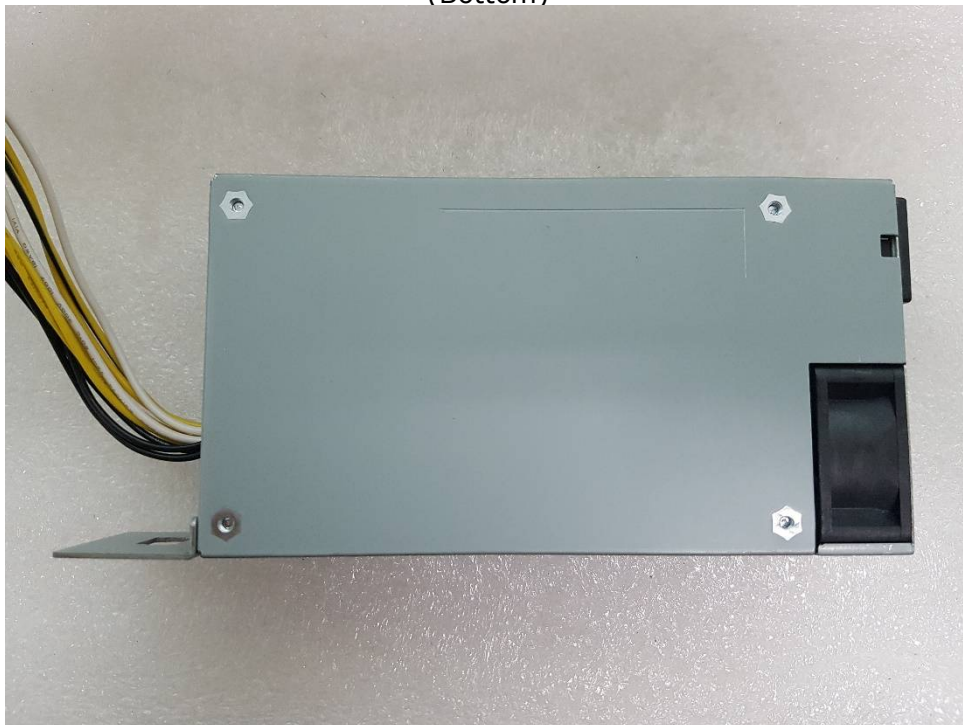

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – HDD

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.