

XRN-1620SB1

NVR de 16 canales 32MP 140Mbps H.265 hasta 80TB Busqueda IA PoE+

Key Features

- Hasta 16 canales, resolución 32 MP
- Grabación con cámara de red a 140 Mb/s máx.
- Salida HDMI
- Interfaz de usuario intuitiva
- Compatible con búsqueda IA al funcionar con cámaras Wisenet IA
- Admite evento dinámico: nueva función de evento de cámaras disponible sin actualización de software
- Gestión de marcadores (hasta 100)
- Compatible con compresión H.265, H.264 y MJPEG
- 4 unidades SATA (hasta 24 TB)
- 16 puertos ethernet PoE+

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

XRN-1620SB1

NVR de 16 canales 32MP 140Mbps
H.265 hasta 80TB Busqueda IA PoE+





Specifications

Display

Network camera	Inputs	Max. 16CH
	Resolution	32MP ~ CIF
	Protocols	SUNAPI, ONVIF
Decoding	Local Display	FHD : HDMI & VGA Dual monitor UHD : HDMI Single monitor
	Multi Screen Display	[Local Monitor] - Dynamic layout, Virtual channel view - Clone mode : Up to 16 Division - Expand mode : Up to 9 Division [Web] 1/ 2H/ 2V/ 3V/ 4/ 6/ 8/ 9
	Resolution	[Local Monitor] FHD Clone mode : 32M(15fps, H.265 Only), 12M(30fps, H.265 Only), 8.3M(2ch@25fps), 1080p(8ch@30fps), D1(16ch@30fps) UHD Single mode : 32M(15fps, H.265 Only), 12M(30fps, H.265 Only), 8.3M(2ch@25fps), 1080p(8ch@30fps), D1(9ch@30fps) FHD Expand mode : 32M(12fps, H.265 Only), 12M(25fps, H.265 Only), 8.3M(30fps), 1080p(3ch@30fps), D1(8ch@25fps) Clone/Single mode : Up to 25fps when displaying more than 10CH

Performance

Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 140Mbps
	Resolution	32MP ~ CIF
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event, User Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out, FTP, SUNAPI Command, Shutdown
Search & Play	Playback Bandwidth	Max. 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 64CH(Local 16CH, Remote 16CH per user)
	Fisheye Dewarping	CMS
	Mode	Date & Time(Calendar), Event list, Text Search, Smart Search
	Resolution	CIF ~ 32MP (Up to H.264 9MP, H.265 32MP)
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Performance

Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 4ea(Max. 24TB)
	RAID	RAID-1
Backup	File backup	BU/Exe/AVI(GUI), JPG/AVI(Network)
	Function	Multi channel(Up to 16CH) Play, Date-Time/Title display

Network

Protocol		IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Hanwha DDNS
Transmission Bandwidth		Max. 140Mbps
Audio	Input/Output	16 CH(network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access Log, 802.1x, Encryption Device certificate(Hanwha Techwin Root CA), Signed firmware
Web viewer	Supported OS	Windows 10, macOS 10.13
	Supported browser	Google Chrome, Microsoft Edge, Mac Safari
Viewer Software		WAVE, SSM, Webviewer, Smart Viewer, Wisenet mobile Support CGI(SUNAPI) for integration to 3'rd party VMS

Function

Camera Setup	Register	Auto, Manual
	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup (4, 8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS),, Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer, SPC-2000
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live 16CH(Multi-Profile Support), Playback 4CH
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	Failover	N+1
	ARB	Support
Easy configuration		P2P(QR code)

Interface

Front	Indicator	HDD, Alarm, Power, Record, Backup, Network

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Interface

Storage	OK
HDMI	1EA 3840x2160 30Hz
VGA	1920x1080 30Hz
Audio	Out 1EA (3.5mm Audio Jack)
Ethernet	PoE+ RJ-45 16EA (LAN, 10/100), RJ-45 2ea (LAN/WAN 1Gbps)
Alarm	In 4EA, Out 2EA
USB	3EA(Front 2 x USB 2.0, Rear 1 x USB 3.0)
Power inlet	AC 1EA

System

Log	Log List	Max. 100,000 (System Log, Event Log each)
System Control		Mouse, Keyboard, Web, Controller (SPC-2000)
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese

Environmental

Operating Temperature	0°C to +40°C(32°F to 104°F)
Operating Humidity	20% ~ 85% RH

Electrical

Power Input	100 ~ 240 VAC ±10%, 50/60Hz
Power Consumption	Max. 310W
PoE Budget	200W

Mechanical

Color / Material	Black / Metal
Dimension	440.0 x 89.8 x 428.4 mm (17.32 x 3.54 x 16.87 inch)
Weight	5.76Kg(12.70lb)

Intelligent Analysis

AI Search	Object Attribute	Compatible with Hanwha AI Cameras

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

XRN-1620SB1


NVR de 16 canales 32MP 140Mbps
H.265 hasta 80TB Busqueda IA PoE+





CAD

Unit: mm [inch]

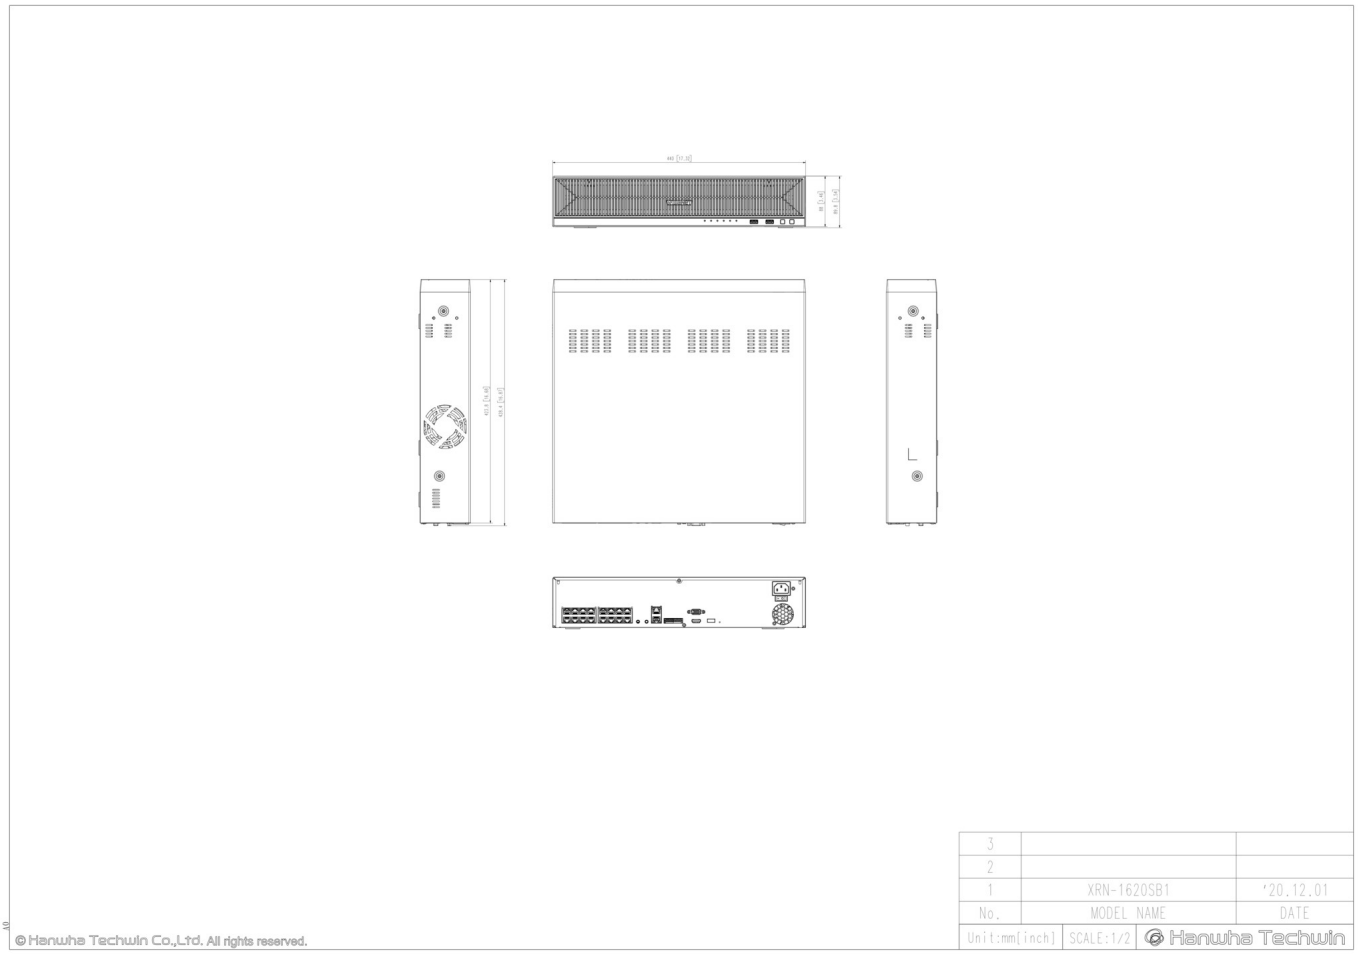

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.