

XRN-420S

NVR de 4 canales 8MP 50Mbps H.265 hasta 6TB PoE+

Key Features

- Hasta 4 canales, resolución 8 MP
- Grabación con cámara de red a 50 Mb/s máx.
- Salida HDMI
- Fácil conexión mediante el servicio P2P (conexión con código QR) con la aplicación Wisenet Mobile (para Android e IOS) y Wisenet Viewer gratuito.
- Compatible con compresión H.265, H.264 y MJPEG
- 1 unidad SATA (hasta 6 TB)
- 4 puertos ethernet PoE+

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

XRN-420S

NVR de 4 canales 8MP 50Mbps
H.265 hasta 6TB PoE+



Specifications

Display

Network camera	Inputs	Max. 4CH
	Resolution	8MP ~ CIF
	Protocols	SUNAPI, ONVIF
Decoding	Local Display	HDMI, VGA
	Multi Screen Display	[Dual Monitor] 1/ 2V/ 2H/ 3V/ 4/ Sequence [Web] 1/ 2V/ 2H/ 3V/ 4
	Resolution	[Local Monitor] 8M(30fps), 1080p(4ch@30fps), 720P(4ch@30fps), D1(4ch@30fps), [Local Monitor] FHD Clone mode : 32M(15fps, H.265 Only), 12M(30fps, H.265 Only), 8.3M(2ch@25fps), 1080p(8ch@30fps), D1(16ch@30fps) UHD Single mode : 32M(15fps, H.265 Only), 12M(30fps, H.265 Only), 8.3M(2ch@25fps), 1080p(8ch@30fps), D1(9ch@30fps) FHD Expand mode : 32M(12fps, H.265 Only), 12M(25fps, H.265 Only), 8.3M(30fps), 1080p(3ch@30fps), D1(8ch@25fps)

Performance

Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 50Mbps
	Resolution	8MP ~ CIF
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event
	Event Action	Record/Go to preset, Alarm output, E-mail, Mobile push notification, Monitor event, Shutdown, FTP, User coding
Search & Play	Playback Bandwidth	Max. 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 16CH(Local 4CH, Remote 4CH per user)
	Fisheye Dewarping	CMS
	Mode	Date & Time(Calendar), Event list, Text Search, Smart Search
	Resolution	CIF ~ 8MP
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Performance

Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 1ea(Max 6TB)
Backup	File backup	BU/Exe(GUI), JPG/AVI(Network)
	Function	Multi channel(Up to 4CH) Play, Date-Time/Title display

Network

Protocol		IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Hanwha DDNS
Transmission Bandwidth		Max. 64Mbps
Audio	Input/Output	4 CH(network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access Log, 802.1x, Encryption Device certificate(Hanwha Techwin Root CA), Signed firmware
Web viewer	Supported OS	Windows 10, macOS 10.13
	Supported browser	Google Chrome, Microsoft Edge, Mac Safari
Viewer Software		WAVE, SSM, Webviewer, Smart Viewer, Wisenet mobile Support CGI(SUNAPI) for integration to 3'rd party VMS

Function

Camera Setup	Register	Auto, Manual
	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup (4, 8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS),, Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live 4CH(Multi-Profile Support), Playback 4CH
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	Failover	N+1
	ARB	Support
Easy configuration		P2P(QR code)

Interface

Front	Indicator	Power, Record, Network
Storage		OK

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Interface

Reset	Support
HDMI	1EA 3840x2160 30Hz
VGA	1EA 1920x1080 30Hz
Audio	Out 1EA
Ethernet	PoE+ RJ-45(LAN, 10/100) 4ea, RJ-45 1ea (WAN, 1Gbps)
Alarm	In 4EA, Out 2EA
USB	2EA(Front 1 x USB 2.0, Rear 1 x USB 2.0)
Power inlet	DC Adaptor

System

Log	Log List	Max. 100,000 (System Log, Event Log each)
System Control		Mouse, Web
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese

Environmental

Operating Temperature	0°C to +40°C(32°F to 104°F)
Operating Humidity	20% ~ 85% RH

Electrical

Power Input	100 ~ 240 VAC ±10%, 50/60Hz
Power Consumption	Max. 67W(1HDD, PoE On)
PoE Budget	50W

Mechanical

Color / Material	Black / Metal
Dimension	300.0 x 47.1 x 208.4 mm (11.81 x 1.85 x 8.20 inch)
Weight	1.06Kg(2.33lb)

Intelligent Analysis

AI Search	Object Attribute	Compatible with Hanwha AI Cameras

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

XRN-420S


NVR de 4 canales 8MP 50Mbps
H.265 hasta 6TB PoE+





CAD

Unit: mm [inch]

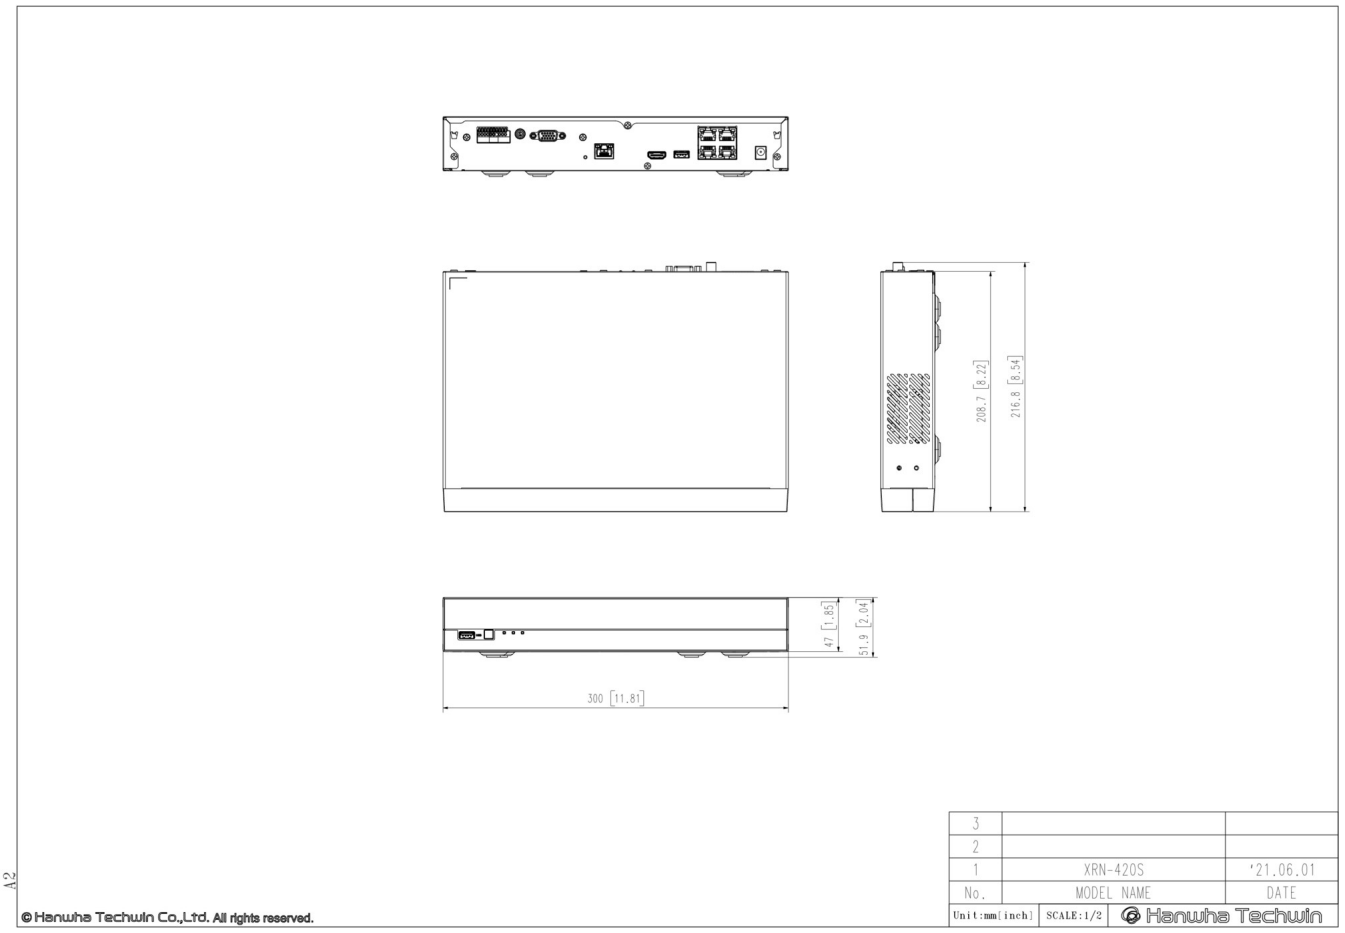

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.