



XRN-426S-2T

NVR DE 4 CANALES

Key Features

- Hasta 4 canales, cada canal compatible con cámaras de hasta 8 MP máx.
- Códecs H.265, H.264 y MJPEG
- Búsqueda con Inteligencia Artificial: Atributo de objeto (cuando se integra con la cámara de Hanwha con IA)
- Grabación de cámaras de red hasta 40 Mb/s
- 4 puertos PoE (LAN, 10/100)
- SSD de 2 TB preinstalado
- Monitor local HDMI
- Compatible con ARB
- Compatible con servicio P2P (conexión con código QR)

XRN-426S-2T

NVR DE 4 CANALES



Specifications

Visualización

Cámara IP	Entradas	Max. 4CH
	Resolución	8MP ~ CIF
	Protocolos	SUNAPI, ONVIF
Decodificación	Pantalla local	HDMI1: 3840x2160 (30Hz)
	Visualización en multipantalla	Dynamic layout, Virtual channel view, Up to 4 Div. [Web] 1/ 2H/ 2V/ 3V/ 4
	Resolución	[Local Monitor] 8M(30fps), 1080p(4ch@30fps), 720P(4ch@30fps), D1(4ch@30fps)

Rendimiento

Sistema Operativo	Integrado	Linux
Grabación	Compresión	H.265, H.264, MJPEG
	Ancho de banda de grabación	Max. 40Mbps
	Resolución	8MP ~ CIF
	Modo	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Activador de eventos	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event, User Event
	Acción de evento	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out, FTP, SUNAPI Command, Shutdown
Búsqueda y reproducción	Ancho de banda de reproducción	Max. 32Mbps
	Usuario	Max. 4 Users (Local 1, Remote 3)
	Reproducción simultánea	Max. 16CH(Local 4CH, Remote 4CH per user)
	Modo	Time/Event/Text/Export/ARB/Bookmark
	Resolución	CIF ~ 8MP
	Control de reproducción	Fast/Slow Forward / Backward, Move one step Up / Down
Almacenamiento	Discos duros compatibles	Pre-installed 2TB SSD
	Ranura de disco duro	M.2 SSD 1EA
Respaldo	Respaldo de archivos	Recorder/SEC/AVI/JPG(Local), AVI/PNG(Network)
	Función	Multi channel(Up to 4CH) Play, Date-Time/Title display

Red

Protocolo		IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Hanwha DDNS
Ancho de banda de transmisión		Max. 80Mbps
Audio	Entrada / salida	4CH (network)/output (Set)
	Compresión	G.711, G.726, AAC(16/48KHz)
	Comunicación por audio	2-Way
Usuarios remotos máx.		Search(3), Live Unicast(10), Multicast(20)
Seguridad		IP address filtering, User access Log, 802.1x, TLS, Encryption Device certificate(Hanwha Techwin Root CA), Signed firmware
Visor web	S.O. compatibles	Windows10 or higher, macOS 13.5.2 or higher
	Navegadores compatibles	Google Chrome, Microsoft Edge, Mac Safari
Software de visualización		WAVE, SSM, Webviewer, Wisenet Viewer, Wisenet mobile Support CGI(SUNAPI) for integration to 3'rd party VMS

Función

Configuración de la cámara	Registro	Auto, Manual
	Elemento	IP address, Add profile edit, Bitrate, Camera MD setup (4, 8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smartphone	Modelos compatibles	iOS, Android
	Protocolos compatibles	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live: Multi-Profile Support, Multi Channel Playback
	Máx. Usuarios remotos	Search(3), Live Unicast(10)
Redundancia	Recuperación de fallos	N+1
	ARB	Support
Configuración sencilla		P2P(QR code)

Interfaz

Frontal	Indicador	Power, Record, Network
HDMI		1EA 3840x2160(30Hz)
Audio		Out 1EA (RCA output)
Ethernet		PoE RJ-45(LAN, 10/100) 4ea, RJ-45 1ea (WAN, 1Gbps)
Alarma		In 4EA, Out 2EA
USB		2EA(Front 2 x USB 2.0), Support for Wi-Fi dongle for Install
Entrada alimentación		DC Adaptor

Sistema

Registro	Lista de registro	Max. 100,000 (System Log, Event Log each)
Control del sistema		Mouse(include wireless), Keyboard(include wireless), Web
Idioma		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese

Medioambiental

Temperatura de funcionamiento	0°C to +40°C(32°F to 104°F)
Humedad de funcionamiento	20% ~ 85% RH

Eléctrico

Entrada de alimentación	54VDC/1.67A
Consumo de corriente	Max. 68W(PoE On)
Consumo de corriente sin PoE	18W
PoE Budget	50W

Mecánico

Color / Material	Black / Metal & Plastic
Dimensiones	200.0 x 140.0 x 42.0 mm (7.87 x 5.51 x 1.65 inch)
Peso	0.66Kg(1.45lb)

Análisis inteligente

Búsqueda Inteligencia Artificial	Atributo de objeto	Compatible with Hanwha AI Cameras
----------------------------------	--------------------	-----------------------------------


XRN-426S-2T

NVR DE 4 CANALES



CAD

Unit: mm [inch]

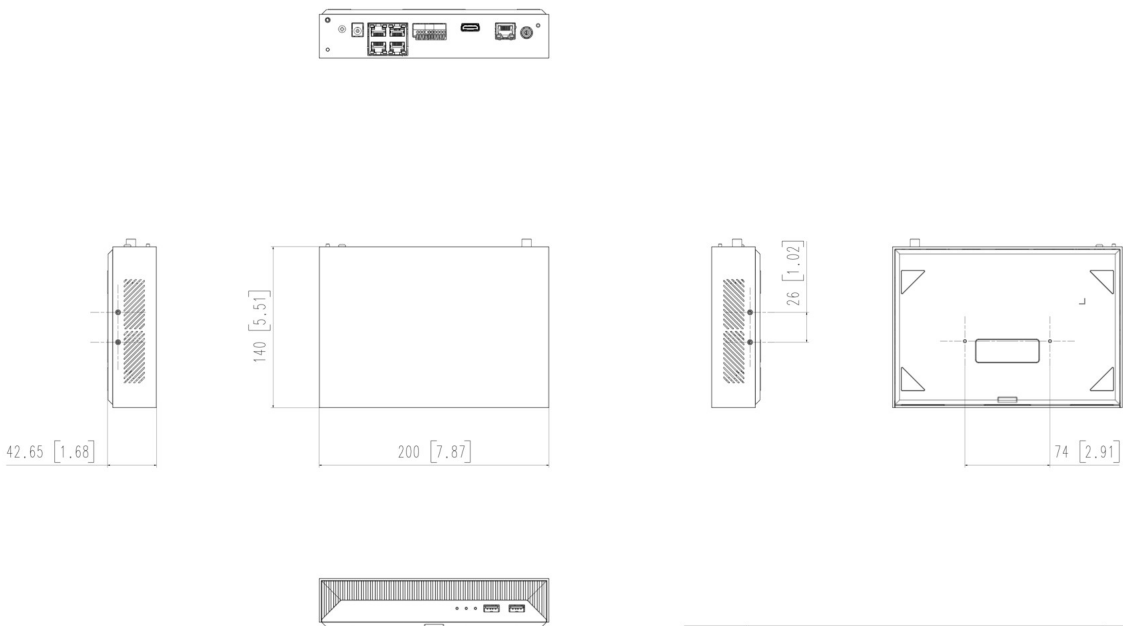

1	XRN-426S	'23.10.04
No.	MODEL NAME	DATE
Unit:mm[inch]	SCALE:1/1	 Hanwha Vision

© Hanwha Vision Co.,Ltd. All rights reserved.